

## TOWARDS THRESHOLD KEY EXCHANGE PROTOCOLS

D. N. Kolegov, Y. R. Khalniyazova, D. A. Varlakov

*BI.ZONE, Tomsk State University, Tomsk, Russia***E-mail:** dnkolegov@gmail.com, yulia.khalniyazova@gmail.com, dsurv@yandex.ru

Threshold schemes exist for many cryptographic primitives like signatures, key derivation functions, and ciphers. At the same time, practical key exchange protocols based on Diffie-Hellman (DH) or ECDSA primitives are not designed or implemented in a threshold setting. In this paper, we implement popular key exchange protocols in a threshold manner and show that this approach can be used in practice. First, we introduce two basic threshold DH key agreement schemes that provide enhanced security features in comparison with the classic DH primitive: dealerless distributed key generation, threshold shared key computation, and private key shares refreshing. We implemented the proposed DH schemes within WireGuard protocol to demonstrate its effectiveness, efficiency and usability in practice. The open question is security of the proposed schemes and their instantiating from the elliptic curves used in key agreement protocols: NIST curves, Russian GOST curves, and Curve25519. Second, we propose an idea of implementing TLS in a threshold setting that can be used instead of Keyless SSL/TLS technology, and provide the measurements of TLS key exchanges based on threshold ECDSA. Even if we don't provide any formal definitions, security analysis and mathematical proofs, we believe that the ideas and mechanisms suggested in this paper can be interesting and useful. The main intention of the paper is to start discussions and raise awareness of the challenges and problems arising when moving to threshold key exchange protocols.

**Keywords:** *threshold cryptography, threshold Diffie-Hellman, threshold ECDSA, Keyless SSL, WireGuard*

## 1. Introduction

Using threshold cryptography, one can protect a cryptographic key by splitting it into  $n$  shares which are stored separately. Any subset of  $t + 1$  parties each of which holds a key share can perform a cryptographic operation using the key without ever exercising or reconstructing it. At the same time, a subset of  $t$  parties cannot perform such operations or get any information on the key.

We use the advantages of the threshold cryptography to strengthen DH-based key agreement and ECDSA signature, which are widely used to establish shared secrets in cryptographic protocols such as TLS and WireGuard.

Unfortunately, we were not able to find practical and implemented threshold DH primitives so we develop and present two basic threshold DH schemes.

Naive threshold DH scheme is a simple  $n$ -out-of- $n$  additive secret sharing scheme. It allows sharing a key among exactly  $n$  parties so that no less than  $n$  parties can perform an operation using the key. Threshold DH scheme is based on the Shamir's secret sharing scheme and distributed key generation from [1] and can be used with an arbitrary threshold value. Both schemes consist of three protocols: a distributed key generation protocol used to generate a public key and the corresponding private shares, an exchange protocol used

to perform a DH operation, and a re-sharing protocol used to update the private shares. It should be noted, that the shared private key is never reconstructed during these protocols.

### 1.1. P r e l i m i n a r i e s

In the paper we mostly adopt the notation from [1].

A commitment scheme allows to commit to a value keeping it secret with ability to reveal the value later. Let  $Com(M)$  be a commitment algorithm with an input message  $M$ . It outputs a commitment string  $C(M)$  and decommitment string  $D(M)$  which is kept secret until opening time. We denote an output of the commitment algorithm as  $[KGC, KGD]$  and  $[EXC, EXD]$  when used in the keygen and exchange protocols respectively.

### 1.2. O u r C o n t r i b u t i o n s

In this paper, we work towards threshold key exchanges using DH and ECDSA primitives. We claim the following main contributions:

- we present two threshold DH key agreement schemes;
- we consider security of instantiating threshold DH on different elliptic curves;
- we introduce the idea of TLS based on threshold ECDSA that can be used to reach the same security goals as Keyless SSL.

## 2. Threshold Diffie-Hellman

### 2.1. N a i v e D i f f i e - H e l l m a n S c h e m e

Naive threshold DH scheme is a trivial secret sharing scheme with threshold value  $t = n - 1$ . A private key is generated in a distributed dealerless way, so that summing of all key shares gives the key. One of the features of the distributed key generation approach compared to key sharing through a dealer is that the generated key depends on input of many parties.

#### *Key Generation Protocol*

The key generation protocol is used to share a private key between parties and compute the corresponding public key. To get the public key, each party computes its own public share and sums up all of the public shares received from parties. Input parameters for each party are a group of points on an elliptic curve  $E$  with a base point  $G$  of prime order  $q$ .

- 1) Each party selects  $x_i \in_R Z_q$ ; computes  $X_i = x_i * G$ ,  $[KGC_i, KGD_i] = Com(X_i)$  and broadcasts  $KGC_i$ .
- 2) Each party broadcasts  $KGD_i$ . The public key is set to  $X = \sum_i X_i$ .

#### *Exchange Protocol*

The goal of the exchange protocol is to compute a shared secret with DH. In the same fashion as in the key generation protocol, each party computes its own part of the shared secret using its private share and sums all of the pieces to get the shared secret. Each party is provided with the remote party's public key  $Y$  at the beginning of the protocol.

- 1) Each party computes  $S_i = x_i * Y$ ,  $[EXC_i, EXD_i] = Com(S_i)$  and broadcasts  $EXC_i$ .
- 2) Each party broadcasts  $EXD_i$ . The DH shared secret is set to  $S = \sum_i S_i$ .

#### *Re-sharing Protocol*

Re-sharing protocol provides an ability to redistribute private shares, change the number of parties  $n$  or threshold value  $t$ , so that the public key is not changed. There are two sets of parties involved: old committee members hold private shares at the moment, new committee members will hold new private shares after the protocol completion.

- 1) Each old party  $P_i$  generates a new set of additive shares from its private share  $x_i = \sum_j z_{ij}$  and broadcasts the public key  $X$ .
- 2) Each new party notifies the old parties of its readiness for the next stage.
- 3) Each old party  $P_i$  sends the private share  $z_{ij}$  to the new party  $P'_j$ .
- 4) Each new party  $P'_j$  takes the sum of the shares received during the previous stage to be its private share  $x'_j = \sum_i z_{ij}$ .

## 2.2. Threshold Diffie-Hellman Scheme

We now give consideration to the  $(t, n)$ -threshold DH scheme based on the distributed key generation protocol from [1], which itself is based on Feldman's VSS scheme. Input parameters for parties are a group of points on an elliptic curve  $E$  with a base point  $G$  of prime order  $q$ .

### *Key Generation Protocol*

- 1) Each party  $P_i$  selects  $u_i \in_R Z_q$ ; computes  $[KGC_i, KGD_i] = Com(y_i)$ , where  $y_i = u_i * G$ , and broadcast  $KGC_i$ .
- 2) Each party  $P_i$  broadcasts  $KGD_i$ . The party  $P_i$  performs a  $(t, n)$  Feldman's VSS of the value  $u_i$ . The public key is set to  $y = \sum_i y_i$ . Each party adds the private shares received during Feldman's VSS protocols. The resulting values  $x_i$  are a  $(t, n)$  Shamir's secret sharing of the secret key  $x = \sum_i u_i$ .

### *Exchange Protocol*

The exchange protocol is similar to the one from the naive DH scheme.

- 1) Each party  $P_i$  computes Lagrangian coefficient  $\lambda_i$  and  $w_i = \lambda_i * x_i$ , which maps the share into a  $(t-1, t)$  share of  $x$ . The party computes  $S_i = w_i * Y$ ,  $[EXC_i, EXD_i] = Com(S_i)$  and broadcasts  $EXC_i$ .
- 2) Each party broadcasts  $EXD_i$ . The DH shared secret is set to  $S = \sum_i S_i$ .

### *Re-sharing Protocol*

- 1) Each old party  $P_i$  performs a  $(t, n)$  Feldman's VSS of the value  $\lambda_i * x_i$ , broadcasts verification data and the old public key  $X$ .
- 2) Each new party notifies the old parties of its readiness for the next stage.
- 3) Each old party sends the private shares to the new parties.
- 4) Each new party takes the sum of the private shares received during the previous stage to be its new private share.

## 3. Instantiating Threshold Diffie-Hellman Schemes

### 3.1. Threshold Diffie-Hellman on Curve25519

Curve25519 is an elliptic curve designed specifically for elliptic-curve Diffie-Hellman protocol (ECDH). Due to its high security and efficient scalar multiplication algorithm, it is widely adopted in modern cryptographic protocols such as TLS 1.3 and WireGuard.

Curve25519 specification requires [2] setting certain bits of the scalar before scalar multiplication operation to prevent attacks (see e.g. 3.1, 3.1) against ECDH.

```

1 private_key[0]  &= 248
2 private_key[31] &= 127
3 private_key[31] |= 64

```

Listing 1. Little-endian bit clamping

Although it is not an issue for the private key shares in our threshold DH schemes, one may consider the absence of bit clamping harmful for security of the virtual party's private key.

#### *Small Subgroup Attack Considerations*

The first bit clamping operation sets to zero three of the least significant bits, so that the scalar is a multiple of the curve co-factor. It is aimed to protect the scalar from a small subgroup attack which allows an attacker to know three of the least significant bits of the scalar. In case of clamped scalars, all of these bits are equal to zero. This method is simple and fast, but is not convenient for non-classic schemes. Moreover, it is arguable how critical for security properties is the disclosure of three of the least significant bits.

The following considerations were taken into account and employed [5, 6]:

- successful small-subgroup attack will either result in a point known to the attacker (if the scalar is known to be divisible by the curve cofactor), or worse it may give the attacker information about the scalar. If the scalar is a private key, then leaking a few bits is a minor problem [5];
- making scalar a multiple of cofactor isn't that important for traditional X25519 DH, since a small-subgroup attack would only leak a few low bits of the scalar [6].

In our schemes, a public key is equal to the sum of public shares (possibly multiplied by the corresponding Lagrangian coefficient), which do not leak any information on the bits of the corresponding scalar, since generated private shares are multiples of the cofactor by definition of Curve25519 secret keys.

#### *Side Channel Attacks considerations*

The fast scalar multiplication algorithm is based on a mechanism called Montgomery ladder and uses only one coordinate of a point. One of the first steps of the Montgomery ladder mechanism is to find the most significant bit of the scalar. By the time the search took, an attacker can guess the position of this bit. Having the chosen bit set for all of the scalars, we make sure that the timing attack won't work.

In our threshold schemes, as in the private key is never reconstructed, and therefore can not be targeted by the timing attack.

#### *Point Addition and Coordinate Sign*

Unlike the scalar multiplication operation, the algorithm for point addition that uses only one coordinate of the point doesn't exist. For classic DH protocols it is not an issue, since point addition is not used in such protocols. However, the threshold DH scheme implies usage of point addition. To address this problem, we use the corresponding Edwards curve.

It is known that for every Montgomery curve there exists Edwards twisted curve, such that points on a Montgomery curve can be converted to the points on the corresponding Edwards twisted curve and vice versa. To convert the point, we need to know both of the point coordinates, which is not possible in case of Curve25519, since all of the existing implementations use single coordinate scalar multiplication mechanism.

However, we can recover the second coordinate by its sign. The coordinate is said to be positive, if it is multiple of two, and negative otherwise. From the curve equation we can derive two possible values of the second coordinate. Since those values have different parity, we can choose the right coordinate if we know its sign.

#### *Baby Sharks Attack Consideration*

An adversary who controls at least one of the parties could inject a small order element into the public key or shared secret by sending a low order point instead of the actual share. To prevent that, we adopt the technique from [4].

The main idea is to multiply each received group element by the cofactor and then multiply it by the inverse of cofactor to sanitize the low order group element.

### 3.2. Threshold Diffie-Hellman on NIST curves

We use NIST's P-256 curve as a default curve for computations. P-256 lacks of a cofactor or any other specialities that could affect the schemes and hence are a handy default choice for instantiating.

### 3.3. Threshold Diffie-Hellman with GOST curves

We have successfully tested the way to instantiate our scheme with GOST curves by "thresholdizing" the VKO functionality which is used to establish a shared key in GOST schemes. However, a complete implementation of the threshold DH scheme with the GOST curves stays a matter of future research.

## 4. Evaluation Platform Architecture

To evaluate the developed threshold schemes and their using within key exchange protocols we developed an evaluation platform (EP) which supports threshold DH and ECDSA schemes.

It should be noted, that we didn't focus on fault tolerance, so the platform is not even crash fault-tolerant.

The platform consists of agents, broker and hub (see Fig. 1). Agents are parties of threshold computation following specific protocols and storing key shares. The purpose of the platform is to coordinate agents, manage access to them and provide a communication channel between them.

Broker is a component coordinating and orchestrating the agents. If a customer wants to perform a threshold computation, he connects to the broker, authenticates himself using SPIFFE and TLS and requests the operation. Broker authenticates and authorizes requests, chooses corresponding agents to perform the computation and retransmits the request to them. After the computation is done, agents send the result to the broker which eventually resends it to the customer.

Hub implements a broadcast channel used by agents. Hub provides private rooms, each message sent to the room is simply broadcasted to everyone in the room. After all agents have received a computation request, they also have the unique secret request ID which is used to open a dedicated room on the hub. Hub records sent messages and resends the history to a new participant. History is erased when the computation is finished. P2P channels are emulated by encrypting messages.

The components of our platform are designed to be easily replaceable. More precisely, we wanted to have opportunity to rewrite particular component in different languages to see how it affects performance. For this purpose, we described every protocol of interactions between components as a gRPC [14] service in Protobuf language. It allowed us to be focused on implementing domain logic and not to care much about transport layer issues, (de)serialization, etc. Protobuf specifications can be easily compiled to most popular languages including Go and Rust.

## 5. Threshold Diffie-Hellman Evaluation

We implemented the proposed threshold DH schemes in Go over the NIST P256 and Curve25519 curves, performed tests on the EP and compared the time spent on DH operation for the classic and threshold schemes. For measurements, we used the schemes with parameters  $t = 2$  and  $n = 3$  for both curves.

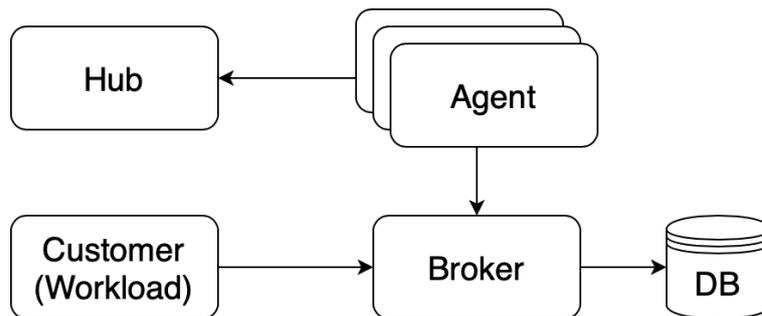


Figure 1. Components and their relation

Scheme	Operation	P-256	Curve25519	Network parameters
Classic DH	Key generation	12.861 $\mu$ s	100ns	—
	DH	52.5 $\mu$ s	68.942 $\mu$ s	
Naive DH	Key generation protocol	2.258ms	21.997ms	Local
		21.324ms	34.557ms	LAN
		250.288ms	154.237ms	WAN
		1.61s	1.235s	Longhaul
	Exchange protocol	2.31ms	32.602ms	Local
		18.151ms	44.634ms	LAN
		245.41ms	165.386ms	WAN
		1.604s	841.412ms	Longhaul
Threshold DH	Key generation protocol	3.183ms	58.15ms	Local
		28.968ms	78.546ms	LAN
		365.94ms	315.555ms	WAN
		2.407s	2.076s	Longhaul
	Exchange protocol	3.728ms	20.734ms	Local
		19.56ms	33.235ms	LAN
		245.143ms	153.001ms	WAN
		1.604s	832.781ms	Longhaul

Table 1

### Comparison of the computation time for classic and threshold schemes

We measured the time spent on DH computations on four different sets of network parameters which are described in the table 2.

## 6. WireGuard with Threshold Diffie-Hellman

In this section, we propose an idea of threshold WireGuard [7] using threshold DH operation for a long-term (static) key. The same idea can be used for TLS 1.2 or any other key exchange protocol employing DH with long-term keys. It would allow us to protect long-term keys without traditional HSM/TEE technologies.

Intuitively, threshold WireGuard is WireGuard protocol in which one or both parties can use a threshold DH scheme for operations with the corresponding private static key and traditional DH for operations with the corresponding private ephemeral key.

To implement threshold WireGuard we need a threshold version of X25519 function. The original WireGuard protocol cannot use a threshold X25519 function directly due to

	bandwidth, Mb/s	latency, ms	MTU, bytes
LAN	100	2	1500
WAN	20	30	1500
Longhaul	1000	200	9000

Table 2

**Network parameters**

Curve25519 peculiarities: it uses only one coordinate of a point. Because of this we have to adopt one of the following options.

The first is to change the WireGuard messages and semantics to send public keys in the format containing both coordinates or the first coordinate only and the sign of the second coordinate. In this case, the implementation will not be compatible with the WireGuard codebase but this is suitable for a custom WireGuard protocols like Ru-WireGuard [8].

The second is to send the second coordinate sign in the "reserved" field. This approach might be used if we have to be compatible with the original WireGuard protocol implementations (e.g., wireguard-go, wireguard-linux, boringtun, etc.).

The third is to create a separate key exchange mechanism using a threshold DH scheme and emitting a shared secret established by threshold DH. This secret then will be set as a pre-shared secret (PSK) value in the original WireGuard. There are several approaches of how this can be engineered:

- set up a WireGuard tunnel, then run a second key exchange through it, then put the result in the WireGuard's PSK variable and perform a rehandshake;
- run a special threshold PSK protocol within NoiseIK pattern where peers establish a PSK using threshold DH and then will use it as the PSK for the main WireGuard.

In this work we used and implemented the last approach. So let's illustrate it (see Fig. 2). We have Alice, Bob and WireGuard hub. Alice and Bob communicate with each other via the hub using WireGuard protocol. Hub employs a threshold DH within WireGuard to secure its static private key. Hub has the basic WireGuard keys and additional keys for threshold PSK protocol. Due to the fact that the model of the key distribution is the same (NoiseIK), Alice and Bob know hub's WireGuard static public key. Hub's private key is shared between parties (agents) implementing threshold DH scheme. When Alice connects to the hub she runs a threshold handshakes where the hub will use threshold DH to compute a shared secret on his static private key and Alice will use the same static public key. Then Alice and hub put the secret established on the threshold handshake into PSK. After the PSK has been computed, Alice runs the original WireGuard handshake with the hub using that PSK.

## 7. TLS with Threshold ECDSA

In this section, we consider how a threshold ECDSA scheme can be used in TLS to implement Keyless SSL approach invented and widely used by Cloudflare [12, 13] to protect long-term cryptographic keys.

The basic idea of Keyless SSL is to use a special key server controlled by a customer to perform cryptographic operations on the private key needed to perform a TLS handshake. The key server returns a message containing the result of cryptographic operation (RSA decryption of premaster secret or ECDSA signature on randoms for DH) on the private key.

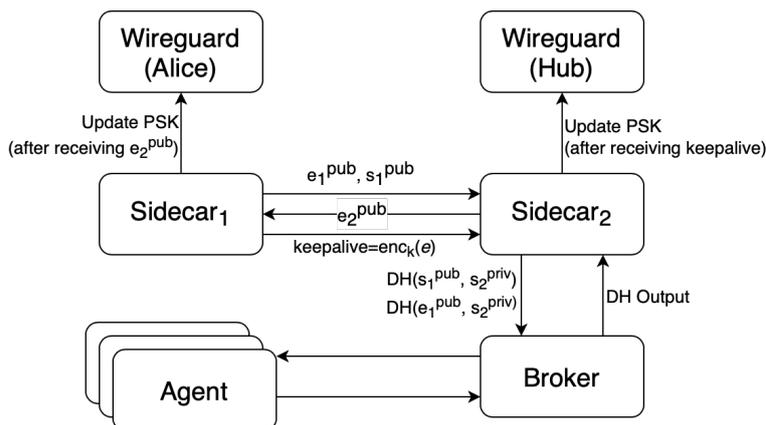


Figure 2. Running threshold PSK protocol between Alice and Hub

We suggest that TLS with threshold schemes can be used instead of Keyless SSL/TLS to reach the same goals.

There are several threshold ECDSA schemes which allow to distribute a secret key among  $n$  parties and require  $t + 1$  of them to be cooperative to sign a digest: Gennaro-Goldfeder 18 (GG18) [1], Lindell 17 [9], etc.

Consider an HTTP server working over TLS with ECDSA-based cipher suite. Its owner would like to protect a private key and remove a single point of failure: (s)he can distribute the secret among  $n$  parties. For example, a web server might be hosted on a VPS and the owner wants to be sure that the private key cannot be accessed by provider. In this case, a private key may be distributed using (1, 2) scheme: the first party can be hosted on the same machine where the HTTP server is and the second one can be deployed on another cloud or in the customer's network. Only both parties being cooperative can perform signing needed to finish a TLS handshake so none of providers can access the private key.

Clearly, threshold signing will be slower as it requires several machines to do computations and talk to each other over a network, but thanks to resumption mechanism once established secure channel can be reused, so for client it is a one-time delay.

We chose to use GG18 protocol to perform threshold ECDSA as it was separately implemented and audited in Rust and Go. We implemented two kind of agents for our EP: based on `tss-lib` [10] in Go and `multi-party-ecdsa` [11] in Rust. To measure their performance we deployed 6 virtual machines: 3 agents, broker (which coordinates the agents) and a web server hosting a static page and a client (see Fig. 3). Every virtual machine had dedicated 4 CPU cores (Intel(R) Xeon(R) Gold 6142 CPU @ 2.60GHz) and 2 GB RAM.

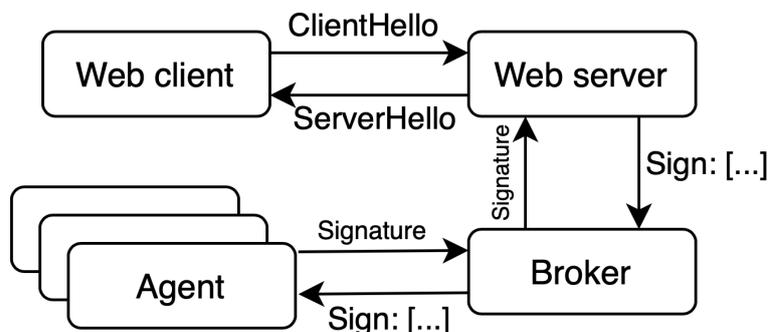


Figure 3. Deployed machines and their communications in order to perform TLS handshake

We measured server average response time (from sending request to receiving response) and looked at how it changes under load by increasing number of concurrent requests. We tried different  $(t, n)$  parameters:  $(1, 2)$ ,  $(1, 3)$ ,  $(2, 3)$ . The measurements are illustrated at Fig. 4 and Fig. 5 shows the impact of using multi-paty-ecdsa comparing to tss-lib.

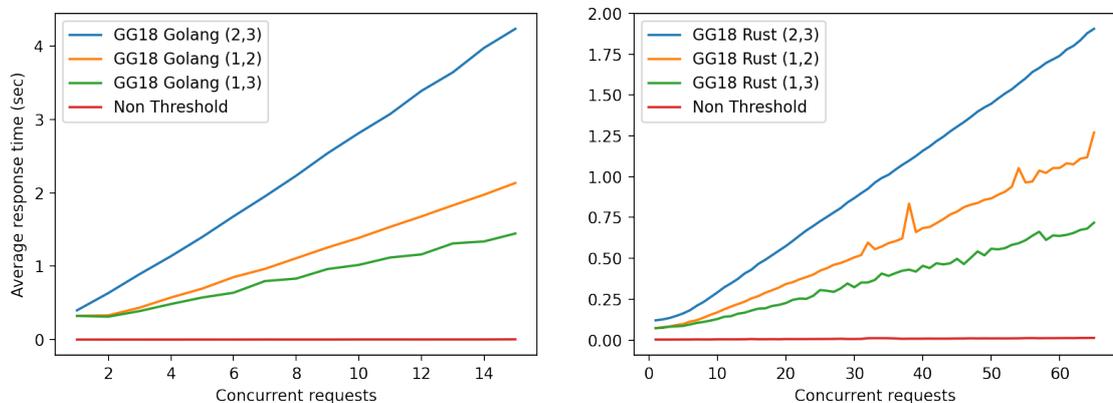


Figure 4. Web server performance in different configurations

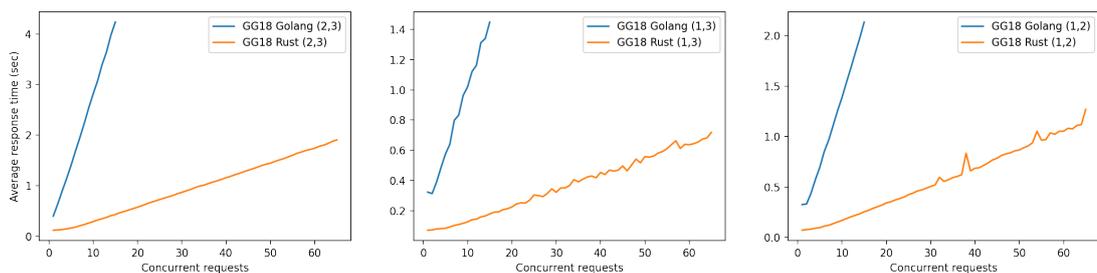


Figure 5. Comparison Rust & Go performance

## 8. Future Research

The main question is the security of proposed threshold DH schemes and their instantiations on Curve25519, GOST and NIST curves. For example, a malicious adversary could sabotage the generation of a session key by sending inconsistent public shares during the key generation and exchange protocols. As a result the session key computed by the remote party won't match the session key computed by the local set of parties. If this is the case, one of the possible solutions is to make all the exchange parties to reveal their private shares and check the consistency of the shares. In most cases, this will allow to detect a corrupted party and take appropriate actions. We note that approaches to handle this situation in a more efficient and reliable way stays a matter of future research.

## 9. Conclusion

There are many ways to use threshold cryptography in practice. One may split the key to prevent key leakage, apply it to achieve fault-tolerance or enable voting functionality. We have presented two threshold DH schemes, used one of them to implement WireGuard with threshold DH and implemented TLS with threshold ECDSA. The results and measurements show that threshold key exchange protocols can be used in practical cryptographic systems.

## REFERENCES

1. *Gennaro R. and Goldfeder S.* Fast Multiparty Threshold ECDSA with Fast Trustless Setup. <https://eprint.iacr.org/2019/114>
2. *Daniel J. Bernstein.* Curve25519: new Diffie-Hellman speed records. <https://cr.yp.to/ecdh/curve25519-20060209.pdf>
3. *Paul Feldman.* A Practical Scheme for Non-interactive Verifiable Secret Sharing. <http://www.cs.umd.edu/~gasarch/TOPICS/secretsharing/feldmanVSS.pdf>
4. Baby Sharks. Injecting small order points to threshold EdDSA. <https://medium.com/zengo/baby-sharks-a3b9ceb4efe0>
5. Decaf:Eliminating cofactors through point compression. <https://eprint.iacr.org/2015/673.pdf>
6. Ed25519 "clamping" and its effect on hierarchical key derivation. <https://www.mail-archive.com/curves@moderncrypto.org/msg00858.html>
7. *Jason Donenfeld.* WireGuard: Next Generation Kernel Network Tunnel. <https://www.wireguard.com/papers/wireguard.pdf>
8. Ru-WireGuard Reference Implementation with GOST Cryptographic Primitives. <https://github.com/bi-zone/ruwireguard-go>
9. *Yehuda Lindell.* Fast Secure Two-Party ECDSA Signing. <https://eprint.iacr.org/2017/552>
10. tss-lib: Golang Package Implementing Multi-Party Threshold Signature Scheme. <https://github.com/binance-chain/tss-lib>
11. multi-party-ecdsa: Rust Crate Implementing Multi-Party Threshold Signature Scheme. <https://github.com/binance-chain/tss-lib>
12. *D. Stebila, N. Sullivan.* An Analysis of TLS Handshake Proxying. 2015 IEEE Trustcom/BigDataSE/ISPA 1, 279-286
13. Nick Sullivan. Keyless SSL: The Nitty Gritty Technical Details. <https://blog.cloudflare.com/keyless-ssl-the-nitty-gritty-technical-details/>
14. gRPC: A High Performance, Open Source Universal RPC framework. <https://grpc.io/>

**KOLEGOV Denis Nikolaevich** — PhD, Principal Research Engineer, BI.ZONE; Associate professor, Tomsk State University, Tomsk. E-mail: [dnkolegov@gmail.com](mailto:dnkolegov@gmail.com)

**KHALNIYAZOVA Yulia Rinatovna** — Research Engineer, BI.ZONE, Tomsk. E-mail: [yulia.khalniyazova@gmail.com](mailto:yulia.khalniyazova@gmail.com)

**VARLAKOV Denis Andreevich** — Research Engineer, BI.ZONE, Tomsk. E-mail: [dsurv@yandex.ru](mailto:dsurv@yandex.ru)