

When Is Generalizable Reinforcement Learning Tractable?

Dhruv Malik Yuanzhi Li Pradeep Ravikumar

Machine Learning Department
Carnegie Mellon University
Pittsburgh, PA 15213

April 15, 2021

Abstract

Agents trained by reinforcement learning (RL) often fail to generalize beyond the environment they were trained in, even when presented with new scenarios that seem very similar to the training environment. We study the query complexity required to train RL agents that can generalize to multiple environments. Intuitively, tractable generalization is only possible when the environments are similar or close in some sense. To capture this, we introduce *Strong Proximity*, a structural condition which precisely characterizes the relative closeness of different environments. We provide an algorithm which exploits Strong Proximity to provably and efficiently generalize. We also show that under a natural weakening of this condition, which we call *Weak Proximity*, RL can require query complexity that is exponential in the horizon to generalize. A key consequence of our theory is that even when the environments share optimal trajectories, and have highly similar reward and transition functions (as measured by classical metrics), tractable generalization is impossible.

1 Introduction

Reinforcement learning (RL) is the dominant paradigm for sequential decision making in modern machine learning, and has achieved success in a variety of domains such as competitive gaming [M⁺15, S⁺17] and robotic control [GHLL17, HPZ⁺18]. Despite this success, there are many issues that prevent RL from being regularly used in the real world. For example, RL methods typically train agents in a single environment, and then test their performance in the same environment. In such cases, an agent can memorize behavior that achieves high reward, without acquiring the true behavior that the system designer desires. This has raised concerns about RL agents overfitting to a single environment, instead of learning a meaningful skill [FMB18].

Indeed, a long line of work has noted the brittleness of RL agents: slight changes in the environment, such as those incurred by modeling errors or errors in the design of a simulator, or slight perturbations of the agent’s trajectory, can lead to catastrophic declines in performance [RLTK17, ZBP18, HIB⁺18]. Furthermore, although RL agents can solve complex tasks, they often struggle to transfer the skills they learned in one task to perform well in a different but similar task [RZF⁺19, YQH⁺19]. Yet in the high dimensional real world, it is reasonable to expect that RL agents will see scenarios that are at least slightly different from the specific scenarios they were trained on.

We illustrate a simple example of how overfitting to a single environment may cause an agent to be rewarded for behavior that deviates from what the system designer might truly desire. In

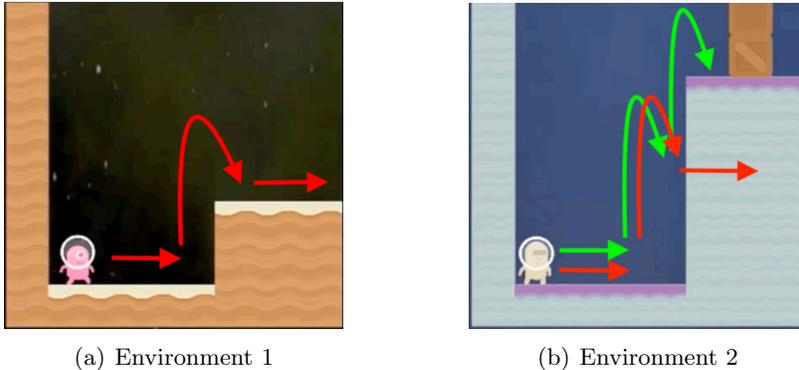


Figure 1: Two environments from the CoinRun benchmark. The trajectory colored red depicts a trajectory that is optimal for the first environment but fails for the second environment. The trajectory colored green is the optimal behavior for the agent in the second environment.

Figure 1, we visualize two environments from the CoinRun generalization benchmark [CKH⁺19]. In each of these environments, the agent must clear the wall by walking right and jumping right. It can only obtain reward once it clears the wall. In the first environment, we depict a trajectory in red which allows the agent to succeed. But if the agent memorizes this trajectory, then it will fail in the second environment by crashing into the wall. This demonstrates how an agent may fail to *learn* to clear walls if it overfits to the first environment.

Hence, a desirable property of systems trained by RL is that of *generalization*, broadly defined as the ability to discern the correct notion of behavior and perform well in semantically similar environments. There are a variety of notions of generalization, and we focus on two popular generalization settings. The *Average Performance Setting* assumes there is an underlying distribution over the environments that an agent might encounter. The goal is to optimize for an agent that performs well on average across this distribution of environments [PGK⁺18, NPH⁺18, CKH⁺19]. The *Meta Reinforcement Learning* setting is closely related [FAL17, CNL⁺19, RZF⁺19]. Here an agent first learns from a suite of training environments sampled from a distribution. Then at test time the agent must leverage this experience to adapt to a new environment sampled from the same distribution, via only a few queries on the new environment.

Of course, both notions of generalization are impossible to achieve efficiently in general, as can be seen by considering a set of wholly distinct environments that share no structure. Hence, key to both lines of inquiry is the premise that the environments are structurally similar. For example, a robot may face the differing tasks of screwing a bottle cap and turning a doorknob, but both tasks involve turning the wrist [RZF⁺19]. The hope is that if the environments are sufficiently similar, then RL can exploit this structure to efficiently discover policies that generalize.

Yet, it remains unclear what kind of structure is necessary, and what it means for different environments to be close or similar. Motivated by this, we ask the following question:

What are the structural conditions on the environments that permit efficient generalization, and which algorithm can provably discover this structure?

This question underlies the analysis of our paper. We focus on the tabular setting, a relatively idealized setting where each environment shares a finite state-action space, that is a necessary prerequisite before tackling the more difficult general settings. We study several natural conditions,

such as when the environments share policies that satisfy different notions of optimality, and when the environments all have similar transition dynamics and reward functions. Towards answering the above question, we make the following contributions.

Our Contributions. We introduce *Strong Proximity* — a structural condition that constrains the environments to be sufficiently similar, by requiring each environment to share a (nearly) optimal policy. We provide an algorithm which exploits Strong Proximity to provably and efficiently generalize, when the environments share deterministic dynamics. Notably, successful generalization in this regime does not require any explicit constraints on the similarity of the reward functions. This is because the shared (nearly) optimal policy is (nearly) optimal with respect to *every* state in the state space of the environments, even though we only desire high value as measured with respect to a fixed initial state. This implicitly constrains the reward functions to be similar enough for tractable generalization.

We also study a natural weakening of this property, which we call *Weak Proximity*. Weak Proximity requires each environment to share a policy which is only optimal with respect to the initial state, rather than all states. Here we demonstrate that in order to generalize, one can still require query complexity that is exponential in the horizon length. This holds even when we additionally and explicitly constrain the environments to have shared deterministic dynamics (with highly similar rewards), and also when we additionally and explicitly constrain the environments to share a reward function (with highly similar transition dynamics). Consequentially, we are able to show that a classical metric for measuring the relative closeness of MDPs is not the right metric for the modern RL generalization settings.

Organization. The remainder of this paper is organized as follows. In Section 2, we discuss prior work that has tackled the generalization problem in RL. In Section 3, we formally present our settings of interest and state the problem that is our object of study. In Section 4, we present our algorithm and theoretical results. We conclude and discuss avenues for future work in Section 5. All proofs are presented in Appendices A, B and C.

2 Related Work

In this section we discuss prior work related to the generalization problem in RL.

The Simulation Lemma. There are a number of works which define notions of statistical distance between Markov decision processes (MDPs), and measure the relative value of policies when deployed in different MDPs that are close under such metrics. The “Simulation Lemma”, which uses total variation distance between transition distributions and the ℓ_∞ norm of the difference of reward functions as this metric, is a well known formalization of this and has been extremely useful in much classical prior work [KK99, KS02, BT03, KKL03, AN05]. Although these works do not directly tackle the generalization setting, their analyses typically construct an approximate MDP that is “near” the true MDP in the sense that it models the true MDP sufficiently well under the aforementioned metric. Solving this approximate MDP then corresponds to solving the true MDP. These analyses are hence certainly related to the generalization problem, and it is natural to consider whether such a metric would be useful to measure the relative proximity of MDPs in the modern RL generalization settings that we study. We investigate this notion of distance, although we note that

we do not use it for our algorithmic development. Indeed, our results show that such a metric is not the correct way to measure variation in MDPs for the RL settings that are the focus of our paper.

Transfer Learning. We do not directly study the transfer learning setting in our paper. However, it is certainly related to the RL generalization problem, and we expect our theory to be generally useful for future studies of transfer learning. The transfer learning setting typically assumes there is one or a few source MDPs, and the goal is to use knowledge from these source MDPs to improve performance in a target MDP. We refer the interested reader to [TS09] for an excellent survey of some classical approaches for this problem, as well as [PBS16, NPH⁺18] for exciting applications. The thrust of these works is empirical in nature, and shows the potential of transfer learning.

Jiang [Jia18] studies the problem of transferring a policy learned in a source MDP to a target MDP. Jiang [Jia18] demonstrates that even when the two MDPs differ in only a single state-action pair, solving this problem can require sample complexity that scales with the size of the state space. Jiang [Jia18] then presents an efficient algorithm, under an optimistic assumption: let ψ denote the states where the transition distributions of the MDPs differ, then the optimal value in the source MDP should stay high whenever we replace the dynamics of states in ψ with the true dynamics. The various metrics we use to measure variation in MDPs are all different than the one considered by Jiang [Jia18]. Feng et al. [FYY19] study the same setting as Jiang [Jia18]. Their notion of statistical distance between MDPs is very similar to the one used in the “Simulation Lemma” which we discussed above [KK99, KS02, BT03, KKL03, AN05]. They show that when this statistical distance is small then efficient transfer can be achieved. Wang et al. [WZXS19] also study a transfer setting where there is a single training MDP, and bound the gap between the value achieved in the training MDP and the testing MDP, under strong smoothness assumptions on the transition and reward functions. We do not study such smoothness assumptions. We note that this setting of transferring from a single source MDP to a single target MDP, studied by [Jia18, FYY19, WZXS19], is (in general) distinct from the settings we study.

Multitask Learning. There are a variety of different notions of multitask learning, and we do not study such settings explicitly. For instance, some forms of multitask learning involve learning a policy that is allowed to depend on the task at hand [YQH⁺19]. Separately, Lazaric and Ghavamzadeh [LG10] study a Bayesian setting where different tasks share a common feature map. Each task is associated with a different weight vector that is sampled independently from a (common) Gaussian distribution, and the value function for the task is defined as a linear function of the common feature map and the task’s weight vector. Brunskill and Li [BL13] study a multitask setting where there is a sequence of tasks, and show that solving the entire sequence of tasks can require sample complexity that is significantly smaller than if one solved each task agnostically without transfer. They assume a known finite bound on the number of possible tasks, but in our setting the number of tasks could be infinite. Furthermore, their algorithm operates in two phases, and in the first phase their sample complexity bound can scale exponentially with the horizon. Although we do not study such multitask settings explicitly, our theory is broadly relevant for multitask learning, and we expect our analysis to extend straightforwardly to specific types of multitask settings.

Average Performance & Meta RL Settings. In our paper, we directly focus on these two settings, and survey related work for each.

In the average performance setting, there is a fixed distribution over MDPs, and the goal is to

identify a policy which achieves maximal value in expectation over this distribution. There is a growing body of work which studies this problem. Packer et al. [PGK⁺18] create a distribution over environments by varying parameters that control environment dynamics. They find that vanilla deep RL methods often generalize better than specialized schemes created specifically for generalization. In similar vein, Cobbe et al. [CKH⁺19] design the CoinRun benchmark for generalization, which contains a distribution over side scroller game environments. They find that training on more environments improves generalization, but that even on very large training sets state of the art deep RL methods can fail to generalize. Cobbe et al. [CHHS20] extend this idea to procedurally generate a suite of different benchmarks, each of which can be used to measure generalization. They convincingly demonstrate that training agents that generalize requires extraordinarily large sample complexity, and that there is a significant gap between training and test performance even for state of the art methods. The thrust of these works is wholly empirical. On the theoretical side, [SJT⁺20] study a related setting where there is a single underlying MDP which is used to generate a distribution over MDPs by systematically modifying the observation that is provided to the agent (in lieu of the actual state). A training sample of MDPs is sampled from this distribution. They demonstrate that when the MDP is a linear quadratic regulator (LQR) and the training cost is minimized via gradient descent, this is not sufficient to minimize the population cost. We do not study LQR, nor the scenario where the agent receives a noisy observation (in lieu of the actual state), since this effectively generates a partially observed MDP (POMDP) family and makes the problem more complex. Instead we focus on the simpler setting where the MDPs have finite state-action spaces, and the agent always has complete information about the state it is in.

The meta RL setting is closely related. There is a fixed distribution over MDPs. An agent first learns from a suite of training environments sampled from this distribution. Then at test time the agent must leverage this experience to adapt to a new environment sampled from the same distribution, via only a few queries on the new environment. There has been a surge of interest in this setting in recent years [FAL17, CNL⁺19, RZF⁺19]. While introducing the popular benchmark MetaWorld, Yu et al. [YQH⁺19] empirically show that state of the art methods can struggle to successfully complete tasks at test time (via only a small number of samples), even though individual tasks seen during training are all tractable and are drawn from the same distribution as the test task. Likewise, Mendonca et al. [MGK⁺19] observe empirically that successful meta RL can require enormous sample complexity during training time. From a theoretical angle, the convergence properties of most of these algorithms remains unclear. A notable exception is the recent work of Fallah et al. [FMO20] who showed that a variant of the MAML algorithm [FAL17], appropriately modified for meta RL, converges to a first order stationary point. Even more recently, Wang et al. [WCYW20] show that MAML when deployed in the meta RL setting converges to a first order stationary point that is optimal for the training objective. We note that in the worst case, the query complexity bounds of both these analyses of MAML scale exponentially with the horizon, and these works make no discussions of structural conditions which ensure tractable meta RL.

3 Problem Formulation

Notation & Preliminaries. Before describing the settings we are interested in, we establish notation and briefly review some preliminaries. Throughout this paper, we shall always use M to denote a Markov decision process (MDP). Recall that an undiscounted finite horizon MDP M is specified by a set of states \mathcal{S} , a set of actions \mathcal{A} , a transition function \mathcal{T} which maps from

state-action pairs to a distribution over states, a reward function R which maps state-action pairs to nonnegative real numbers, and a finite planning horizon H . All MDPs we consider have finite state-action spaces, and are undiscounted¹. If we need to refer to the transition or reward function of a specific MDP M , then we shall denote this via \mathcal{T}_M or R_M . We will denote a distribution over MDPs as \mathcal{D} . A policy maps each state to a corresponding distribution over actions, and shall typically be denoted by π . The total expected reward accumulated by policy π when initialized at state s in MDP M is given by $\mathbb{E} \left[\sum_{h=0}^{H-1} R(s_h, a_h) \mid \pi, s_0 = s \right]$ and will be denoted by $V_M^s(\pi)$. So $V_M^s(\pi)$ is the value of the policy π in MDP M with respect to initial state s . For convenience, we assume that the cumulative reward collected by any trajectory from any initial state s in any MDP M is always bounded by 1. Hence the value of any policy in any MDP lies in the interval $[0, 1]$. The notation $\text{TV}(P, Q)$ denotes the total variation distance between probability distributions P and Q .

We briefly comment that in general, the cardinality of the state space \mathcal{S} can scale exponentially with the length of the horizon H . We are interested in algorithms whose query complexity scales polynomially in H and $|\mathcal{A}|$. Such algorithms are hence not allowed to query all states in an MDP.

3.1 Problem Settings

Tabular MDPs. Throughout the paper, our exclusive focus is on tabular MDPs with finite state and action spaces. Without loss of generality, we shall only consider MDPs that are tree-like with H levels. This is equivalent to saying that the state space \mathcal{S} of the MDP is isomorphic to the augmented state space $\mathcal{S} \times \{0, 1 \dots H - 1\}$, where $(s, h) \in \mathcal{S} \times \{0, 1 \dots H - 1\}$ denotes that one is at state s with $H - h$ timesteps left. This assumption is primarily for notational simplicity. All our results hold for generic MDPs. To see this, simply note we can always redefine the state space \mathcal{S} of an MDP to be the augmented state space $\mathcal{S} \times \{0, 1 \dots H - 1\}$, so that the new MDP is now tree-like. We observe that the set of tree-like MDPs still encompasses a very broad and natural class of problems, including (for example) the exponentially difficult binary tree instances that have been well studied in prior literature [RD19, DKWY20, WDYS20].

Remark 1 *Modern RL problems often deal with MDPs with infinite & high dimensional state spaces, and require learning a feature map to ensure tractability. We do not address these scenarios, and only consider the tabular setting. As is typical in RL literature [SJ19, WDYK20, PW21], this is a necessary first step before analyzing complex MDPs, and the role of function approximation and feature extraction.*

We now formally establish the problem settings of interest which we alluded to in Section 1.

Average Performance Setting. There is a fixed distribution \mathcal{D} over a family of MDPs. One can sample MDPs from the distribution \mathcal{D} . The algorithm is allowed to query the states in the sampled MDPs, to learn some common structure between all the MDPs. The goal is to solve the following stochastic optimization problem

$$\max_{\pi} \mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi)], \tag{1}$$

where s_0 is a fixed initial state shared by each MDP supporting \mathcal{D} .

¹Our results straightforwardly extend to discounted and infinite horizon MDPs.

Meta Reinforcement Learning Setting. There is a fixed distribution \mathcal{D} over a family of MDPs. At training time, one can sample MDPs from \mathcal{D} . The algorithm is allowed to query the states in the sampled MDPs, to learn some common structure between all the MDPs. Then at test time, an MDP M_{test} is sampled from the same distribution \mathcal{D} . The goal of this algorithm is to learn a subroutine, which with probability at least $\frac{9}{10}$ over the selection of M_{test} , can solve

$$\max_{\pi} V_{M_{\text{test}}}^{s_0}(\pi), \quad (2)$$

significantly more efficiently than if one was trying to solve M_{test} without having seen any training MDPs. Note again that s_0 is a fixed initial state shared by each MDP supporting \mathcal{D} .

See [PGK⁺18, CKH⁺19, CHHS20, SJT⁺20] and [FAL17, CNL⁺19, RZF⁺19, YQH⁺19] for prior works that study these two respective settings. Popular related settings are Multitask Learning and Transfer Learning. As mentioned in Section 2, there a variety of different notions of multitask learning so we avoid discussing these explicitly, although our results are broadly relevant for multitask learning and can be straightforwardly adapted in specific instances. Similarly, our results are broadly relevant for transfer learning and can be adapted in specific instances.

Remark 2 *For both settings, our results hold in the case when there is an initial state distribution that is supported on a set whose cardinality is at most polynomial in H and $|\mathcal{A}|$. This extension is via a standard technique, see for instance [DKWY20]. We focus on the case with a single initial state s_0 for simplicity.*

Having established the problem settings of interest, we now turn to describing our query model. Simply put, we use the standard RL setup, with an additional query cost incurred by sampling from \mathcal{D} .

Query Model. In our query model, sampling an MDP from \mathcal{D} incurs a query cost of one. An algorithm is allowed to interact with any individual MDP under the standard RL framework by choosing an action at a state and observing the next state and reward, which also incurs a query cost of one. A naive way to solve either setting, would be to sample a large set of MDPs from \mathcal{D} and simply query all states within each MDP. In the worst case however, such a strategy can require a number of queries that is exponential in the horizon H , since the size of the state space can scale exponentially with H . We shall be interested in algorithms which ensure that we can solve these problems in a number of queries that is polynomial in H and the cardinality of \mathcal{A} . If an algorithm provably accomplishes this, then we shall call such an algorithm *efficient* or *tractable*. We comment that in general, an algorithm that queries each state in the state space of an MDP is not efficient.

Remark 3 *One may choose to measure the query complexity of sampling from \mathcal{D} versus interacting with an individual MDP using different values, and require that the total complexity of each is polynomial. Our results easily extend to this setting. Furthermore, our lower bounds hold under a strengthened query model where sampling from \mathcal{D} incurs zero query cost, and the agent is allowed a generative model to transit to any state.*

Without any conditions on \mathcal{D} , solving either the Average Performance Setting or the Meta RL setting even approximately can be extremely intractable in the worst case. For instance, this will occur when the MDPs supporting \mathcal{D} are wholly distinct, and do not share any structure. This will also occur when solving any individual MDP supporting \mathcal{D} cannot be done efficiently.

Nevertheless, most real problems have significant structure. In practice, one often deals with MDPs which share some meaningful structure [CKH⁺19, RZF⁺19]. For instance, the MDPs might all have transition distributions which are close in a suitable probability metric. Similarly, the reward functions of different MDPs might be close in an appropriate norm, or each MDP might share a set of optimal trajectories. One often also deals with scenarios where each individual MDP is efficiently solvable [PGK⁺18, YQH⁺19]. In such cases, it is reasonable to expect that generalization is tractable. We shall be interested in formalizing the conditions which precisely characterize when efficient generalization is possible. We will particularly focus on conditions which capture shared structure of the MDPs and the tractability of individual MDPs. We are now in a position to formally state the problem that we consider throughout this paper.

Which conditions on \mathcal{D} allow us to solve the Average Performance and Meta RL settings efficiently, and which algorithm can provably accomplish this?

3.2 Strong & Weak Proximity

As mentioned above, we require certain conditions to ensure that our settings of interest are tractable. We are particularly interested in the case when the MDPs supporting \mathcal{D} share meaningful structure and are close in some sense, and when each individual MDP is tractable. To capture the notion of similar structure, we observe that MDPs are defined by their reward and transition functions. So it is natural to impose conditions which hold directly on the rewards and transitions. It is reasonable to expect that when transitions and rewards of different MDPs are close in an appropriate metric, then efficient generalization is possible. To this end, we state the following condition.

Condition 1 (Similar Rewards & Transitions) *The distribution \mathcal{D} satisfies this condition with parameters $\xi_r, \xi_{tr} \geq 0$ when:*

- (a) *Each MDP supporting \mathcal{D} shares the same state and action space, denoted \mathcal{S} and \mathcal{A} respectively.*
- (b) *For any M_i, M_j supporting \mathcal{D} and any state-action pair $(s, a) \in \mathcal{S} \times \mathcal{A}$ we have $|R_{M_i}(s, a) - R_{M_j}(s, a)| \leq \xi_r$.*
- (c) *For any M_i, M_j supporting \mathcal{D} and any state-action pair $(s, a) \in \mathcal{S} \times \mathcal{A}$ we have $\text{TV}(\mathcal{T}_{M_i}(s, a), \mathcal{T}_{M_j}(s, a)) \leq \xi_{tr}$.*

The parameters ξ_r, ξ_{tr} in Condition 1 naturally measure the variation between different MDPs, respectively using the absolute difference of rewards and the total variation distance between transition distributions as a metric. We emphasize that conditions of this form are canonical. Indeed, this form of measuring variation between MDPs is well studied and has yielded fruitful research in the classical RL literature [KK99, KS02, BT03, KKL03, AN05].

With this condition in hand, we use it to formally establish our Strong Proximity condition. Note that Strong Proximity strictly strengthens Condition 1.

Condition 2 (Strong Proximity) *The distribution \mathcal{D} satisfies Strong Proximity with parameters $\alpha, \beta, \xi_r, \xi_{tr} \geq 0$ when:*

- (a) *The distribution \mathcal{D} satisfies Condition 1 with parameters $\xi_r, \xi_{tr} \geq 0$.*

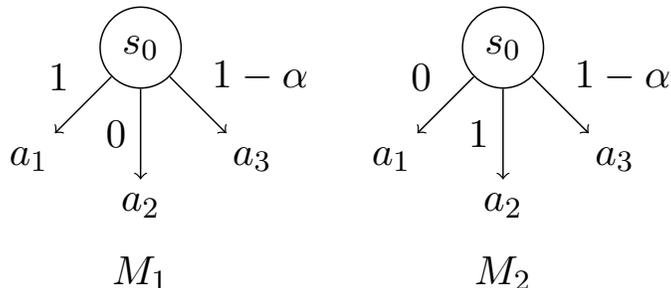


Figure 2: A simple example of two unit horizon MDPs M_1, M_2 . Here \mathcal{D} is the uniform distribution over M_1 and M_2 , and satisfies condition (b) of Strong Proximity. The circle represents the initial state s_0 , which is the only state. The arrows represent actions a_1, a_2 and a_3 . The numbers adjacent to the arrows are the rewards obtained by taking the corresponding action. Here, α is some small positive number. So in M_1 , the reward function is defined by $R_{M_1}(s_0, a_1) = 1$, $R_{M_1}(s_0, a_2) = 0$ and $R_{M_1}(s_0, a_3) = 1 - \alpha$. And in M_2 , the reward function is defined by $R_{M_2}(s_0, a_1) = 0$, $R_{M_2}(s_0, a_2) = 1$ and $R_{M_2}(s_0, a_3) = 1 - \alpha$.

- (b) *There exists a deterministic policy π^* which is a near optimal policy for each MDP. Concretely, the policy π^* satisfies*

$$V_M^s(\pi^*) \geq \max_{\pi} V_M^s(\pi) - \alpha,$$

for each state s and each MDP M .

- (c) *There exists an oracle \widehat{V} , which takes as input a state s and MDP M , and outputs $\widehat{V}(s, M) = \widehat{V}_M^s$ that satisfies*

$$\widehat{V}_M^s \geq \max_{\pi} V_M^s(\pi) - \beta,$$

in a number of queries that is polynomial in H and $|\mathcal{A}|$.

We now explain our motivation behind the Strong Proximity condition. Condition (a) of Strong Proximity simply requires that Condition 1 holds, which ensures that the rewards and transitions are close in an appropriate metric. Condition (b) of Strong Proximity requires that there is a policy π^* which is (nearly) optimal when deployed in *any* MDP M from *any* initial state s . This is our metric for capturing structure that MDPs can share. The parameter α quantifies the suboptimality of this shared policy. Since this condition imposes the strong constraint that the shared policy is nearly optimal from *every* state, we have named this condition Strong Proximity. In Figure 2, we depict a very simple example of two unit horizon MDPs which define a distribution \mathcal{D} satisfying condition (b) of Strong Proximity. Note that although the two MDPs have different optimal policies (prescribing a_1 and a_2 respectively), they *share a nearly optimal policy*, which prescribes a_3 .

We now turn to condition (c) of Strong Proximity, which postulates the existence of an oracle \widehat{V} that can efficiently find an approximation \widehat{V}_M^s of the optimal value in *any* individual MDP M given *any* initial state s . The number β quantifies the suboptimality of this approximation. We discuss how to implement \widehat{V} . In practice, one might obtain such an oracle by running a standard RL algorithm (such as a policy gradient method) from the given initial state in the MDP, and finding a policy whose value (with respect to that state) is approximately optimal. To see the necessity of this, note that if we cannot even (approximately) solve individual MDPs in \mathcal{D} efficiently, then there is no reason to expect that we can solve the harder problems in Eq. (1) and Eq. (2). Indeed, in

the design of state of the art generalization benchmarks, one typically requires that solving any individual MDP supporting \mathcal{D} is within reach of standard RL methods [PGK⁺18, YQH⁺19]. We also comment that in certain cases, a user might have access to domain knowledge allowing them to implement \widehat{V} at particular states without having to solve an entire RL problem.

In Section 4 we provide an algorithm which efficiently generalizes given Strong Proximity. Notice however, that in the definition of our problem settings in Eq. (1) and Eq. (2), we only desire high value as measured with respect to a single fixed initial state s_0 that is shared by each MDP. But Strong Proximity requires a shared policy that is nearly optimal when initialized at *any* state in any MDP. It is natural to wonder whether we can efficiently generalize, under a weakened version of Strong Proximity where the shared policy is optimal only with respect to the initial state. To this end, we formulate the following condition, which we call Weak Proximity. Note that Weak Proximity is still strictly stronger than Condition 1.

Condition 3 (Weak Proximity) *The distribution \mathcal{D} satisfies Weak Proximity with parameters $\xi_r, \xi_{tr}, k \geq 0$ when:*

- (a) *The distribution \mathcal{D} satisfies Condition 1 with parameters $\xi_r, \xi_{tr} \geq 0$.*
- (b) *There exists a deterministic policy π^* which for any MDP M satisfies*

$$V_M^{s_0}(\pi^*) = \max_{\pi'} V_M^{s_0}(\pi').$$

- (c) *There exists a (fixed and known) algorithm and a (fixed and known) $k > 0$, such that given any MDP M and any state s , this algorithm can identify π which satisfies*

$$V_M^s(\pi) = \max_{\pi'} V_M^s(\pi'),$$

in $\mathcal{O}(|\mathcal{A}|H^k)$ queries. Moreover if we sample M from \mathcal{D} , but do not query any MDP supporting \mathcal{D} beforehand, then any algorithm that can find π satisfying

$$V_M^{s_0}(\pi) \geq \max_{\pi'} V_M^{s_0}(\pi') - \frac{1}{4},$$

with probability at least $\frac{3}{4}$ over the selection of M , requires $\Omega(|\mathcal{A}|H^k)$ queries on M .

Let us briefly compare Weak Proximity with Strong Proximity. Condition (a) remains identical. But condition (b) of Weak Proximity only requires that there is a shared policy which provides optimal value (with respect to the fixed s_0), as opposed to the shared policy in condition (b) of Strong Proximity which is uniformly (nearly) optimal for *any* state. One can equivalently think of the policy described in condition (b) of Weak Proximity as a shared optimal trajectory. Note that when condition (b) of Strong Proximity is true with parameter $\alpha = 0$, then Weak Proximity (b) is strictly weaker than Strong Proximity (b).

We now turn to condition (c) of Weak Proximity. It requires that given any MDP and any initial state, one can efficiently optimize to find a policy (or trajectory) which provides optimal value for that MDP, with respect to the given initial state. Moreover, the algorithm which does this is known a priori to the user. Note that this algorithm is one possible way to implement the oracle \widehat{V} with parameter $\beta = 0$, which shows that Weak Proximity (c) is only stronger than Strong

Proximity (c). Furthermore, this algorithm is information theoretically optimal in the sense that if we only revealed that the MDP is sampled from \mathcal{D} , but were not allowed to query MDPs supporting \mathcal{D} before this, then the query complexity used by this algorithm is necessary for *any* method.

In short, the key difference between Strong Proximity and Weak Proximity is that Strong Proximity ensures the existence of a shared policy which is (near) optimal given *any* initial state, whereas Weak Proximity only guarantees the existence of a shared policy which is optimal with respect to the (common) initial state s_0 . In Section 4 we shall demonstrate that in contrast to Strong Proximity, Weak Proximity is not sufficient to guarantee efficient generalization. This demonstrates the necessity of a shared policy which is (nearly) optimal from any given initial state, to ensure tractable generalization.

4 Main Results

We shall present our main results in two subsections. In Section 4.1, we study the case when the MDPs supporting \mathcal{D} share a deterministic transition function but can have arbitrarily varying reward functions. We formulate and describe Algorithm 1, and provide a theorem which guarantees its efficiency under Strong Proximity. We also give a theoretical result which suggests this algorithm is nearly information theoretically optimal under the oracle \hat{V} defined in condition (c) of Strong Proximity. Finally we prove that Weak Proximity is not sufficient to guarantee efficient generalization. In Section 4.2, we study the case when the MDPs supporting \mathcal{D} share a reward function, but have varying transition functions. We again provide a lower bound which shows that Weak Proximity is not sufficient to guarantee efficient generalization.

4.1 Deterministic Systems With A Shared Transition Function

Before stating our results, we formally state our condition for deterministic systems.

Condition 4 (Deterministic MDPs) *Each MDP supporting \mathcal{D} has a deterministic transition function.*

Note that if \mathcal{D} satisfies Condition 4 and Condition 1 with $\xi_{\text{tr}} = 0$, then each MDP supporting \mathcal{D} must share a deterministic transition function. Of course, this remains true if \mathcal{D} satisfies Condition 4 in addition to Strong Proximity or Weak Proximity with $\xi_{\text{tr}} = 0$, since both Strong Proximity and Weak Proximity are each strictly stronger than Condition 1. We comment that most of the popular RL generalization benchmarks [CKH⁺19, CHHS20, YQH⁺19] primarily utilize deterministic environments, and hence we devote special attention to this deterministic setting. Our primary contribution is an algorithm which, for either the Average Performance or the Meta RL setting, provably and efficiently generalizes under Strong Proximity and Condition 4. Our algorithm is formally defined in Algorithm 1.

We briefly describe Algorithm 1. Note that by condition (a) of Strong Proximity, each MDP supporting \mathcal{D} has a common state-action space $\mathcal{S} \times \mathcal{A}$. Also observe from Eq. (1) and Eq. (2) that there is a single fixed initial state s_0 , where the algorithm starts. Via condition (c) of Strong Proximity, we can query the oracle \hat{V} to obtain $\hat{V}_{M_i}^{s'}$ during intermediate steps of the algorithm. Since the transitions are assumed to be deterministic and shared, taking the same action from a fixed state in any MDP will deterministically lead to an identical next state, regardless of the MDP. The intuition for the method is straightforward. At each timestep, it samples from \mathcal{D} and queries \hat{V} to

Algorithm 1 GenRL

- 1: Inputs: horizon length H , distribution \mathcal{D} , sample size n
 - 2: Initialize π as the empty function
 - 3: **for** $t \in \{0, 1 \dots H - 1\}$ **do**
 - 4: Sample $\{M_i\}_{i=1}^n \stackrel{i.i.d}{\sim} \mathcal{D}$
 - 5: **for** $a \in \mathcal{A}$ **do**
 - 6: Let s' be the child state of s_t when taking action a
 - 7: Query \widehat{V} to obtain $\widehat{V}(s', M_i) = \widehat{V}_{M_i}^{s'}$
 - 8: Store $Q_{i,a} = R_{M_i}(s_t, a) + \widehat{V}_{M_i}^{s'}$
 - 9: **end for**
 - 10: Take action $a_t = \operatorname{argmax}_{a' \in \mathcal{A}} \{\frac{1}{n} \sum_{i=1}^n Q_{i,a'}\}$ and arrive at state s_{t+1}
 - 11: Define $\pi(s_t) = a_t$
 - 12: **end for**
 - 13: **return** π
-

build an estimate of the expected value of each action, where the expectation is with respect to the randomness of \mathcal{D} . It then greedily takes the action with the highest estimated value. The algorithm initializes the trivial empty function π , and incrementally updates this function to eventually define a policy. At each timestep $t \in \{0, 1 \dots H - 1\}$, the algorithm updates π by setting $\pi(s_t) = a_t$, where (s_t, a_t) is the state-action pair visited by the algorithm at timestep t . Note that this algorithm only requires $\Theta(H)$ space to store π , since it is designed for deterministic environments, and state-action pairs not visited over the course of the algorithm’s run will also not be visited while executing π .

Recall that Strong Proximity was defined in terms of the quantities α, β , which respectively were bounds on the suboptimality of the shared policy π^* and the oracle \widehat{V} , as well as in terms of the quantities ξ_r, ξ_{tr} , which respectively quantified the similarity of rewards and transitions as described in Condition 1. We now state our main result, which *upper bounds* the error made by Algorithm 1 and specifies its dependence on the number of samples n in terms of H and $|\mathcal{A}|$.

Theorem 1 *Consider any \mathcal{D} satisfying Condition 4 and Strong Proximity with $\xi_{tr} = 0$ and any $\alpha, \beta, \xi_r \geq 0$. Fix $\epsilon, \delta > 0$, and let π be the output of Algorithm 1 when run with $n = \frac{H^2}{\epsilon^2} \log \left(\frac{2H|\mathcal{A}|}{\delta} \right)$ samples. Then with probability at least $1 - \delta$,*

$$\mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi)] \geq \max_{\pi'} \mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi')] - \epsilon - 3\alpha H - 3\beta H.$$

A formal proof for this theorem is provided in Appendix A. Before that, a few comments on Theorem 1 are in order. First, note that the result directly provides a guarantee for the Average Performance Setting. And it also provides a guarantee for the Meta RL setting, since the policy found by Algorithm 1 will on average perform well for M_{test} , and the user is free to use this policy to warm start any finetuning or adaptation done at test time. Second, recall condition (c) of Strong Proximity ensures that the query complexity of obtaining $\widehat{V}(s, M) = \widehat{V}_M^s$ during the intermediate steps of Algorithm 1 is polynomial in H and $|\mathcal{A}|$. The result of Theorem 1 thus ensures that the total query complexity of Algorithm 1 is polynomial in H and $|\mathcal{A}|$ under the query model outlined in Section 3, so the method is indeed efficient. Third, note that the value of n stated in the result depends only on quantities that are either known a priori or are chosen by the user. This makes Algorithm 1 essentially *parameter free* – in particular, the user does not need to know the values

of $\alpha, \beta, \xi_r, \xi_{tr}$ or any other such unknown quantities to run this method. Fourth, we note that Algorithm 1 and the guarantee of Theorem 1 can be straightforwardly adapted for specific instances of Multitask & Transfer Learning. Finally, we observe that the ξ_r quantity does not appear in the error bound. So ξ_r can be arbitrarily large, and the guarantee of Theorem 1 requires no *explicit* conditions on the reward functions of the MDPs supporting \mathcal{D} , as in the sense of Condition 1. Instead, the *implicit* reward structure induced by the shared nearly optimal policy required by Strong Proximity is enough to ensure efficient generalization.

Recall that α, β are respectively bounds on the suboptimality of the shared policy π^* and the oracle \widehat{V} defined by the Strong Proximity condition, and we expect these to impact the error incurred by Algorithm 1. Note however, that the α, β terms in the error bound of Theorem 1 scale linearly with H . So when either α or β is $\Omega(\frac{1}{H})$, then our bound becomes vacuous. It is natural to question whether this unfortunate scaling is due to a possible suboptimality of Algorithm 1 or some looseness in our analysis. As a (partial) answer to this question, our next result demonstrates that under the oracle \widehat{V} defined in condition (c) of Strong Proximity, *any* algorithm which only uses a polynomial number of queries will incur error that scales as $\Omega(\beta \frac{H}{\log H})$ in the worst case.

Proposition 1 *Let n be the total number of queries that any algorithm is allowed to use. For any $\beta \geq 0$, there exists \mathcal{D} satisfying Condition 4 & Strong Proximity with $\xi_r = \xi_{tr} = \alpha = 0$ and β , such that any (possibly randomized) algorithm will output (with probability at least $\frac{1}{2}$) a policy π satisfying*

$$\mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi)] \leq \max_{\pi'} \mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi')] - \frac{\beta H}{\log(50n)}.$$

The proof of this result is provided in Appendix B.5. This demonstrates that the dependency on β given in the result of Theorem 1 is tight to within a logarithmic factor in H , and cannot be improved beyond this logarithmic factor by a better algorithm or sharper analysis. It remains unclear whether the dependence on α is tight. Isolating this is more difficult, since in any construction α and β become inherently intertwined, and it is unclear to us how to separate the dependencies on these two distinct parameters. We believe this is an interesting direction for future work. Intuitively the dependency on α seems tight — roughly speaking it seems natural that if we are planning over H timesteps, while using the structure induced by π^* to guide our actions, then the suboptimality of α at each timestep leads to a total error blowup of αH . Nevertheless, a formal proof (or otherwise) would be an interesting development.

Thus far, we have established that under Strong Proximity, we can efficiently generalize. We now turn to analyzing whether efficient generalization is possible under Weak Proximity. First recall that Weak Proximity is strictly stronger than Condition 1. Before stating our own result, we first state the following classical result which is well known as The Simulation Lemma [KK99, KS02, BT03, KKL03, AN05]. Recall that ξ_r, ξ_{tr} are the parameters used to satisfy Condition 1.

Lemma 1 *Consider any \mathcal{D} satisfying Condition 1 with $\xi_r, \xi_{tr} \geq 0$. For any policy π and any M_1, M_2 supporting \mathcal{D} , we have that $|V_{M_1}^{s_0}(\pi) - V_{M_2}^{s_0}(\pi)| \leq \xi_r H + \xi_{tr} H$.*

This result is almost identical to the one given by [KKL03], although there are some (very minor) differences in assumptions so we provide a proof in Appendix C for the sake of completeness. We now explain the result of this lemma in the context of our setting. Simply put, this lemma shows that when \mathcal{D} satisfies Condition 1 and ξ_r, ξ_{tr} are each $o(\frac{1}{H})$, then efficient generalization is trivial, at least in problems where H is large and we want to optimize to within a small

constant tolerance. Concretely, take any M supporting \mathcal{D} and use a standard RL method to find π which satisfies $V_M^{s_0}(\pi) \approx \max_{\pi'} V_M^{s_0}(\pi')$. Then Lemma 1 ensures that π also satisfies $V_{M'}^{s_0}(\pi) \gtrsim \max_{\pi'} V_{M'}^{s_0}(\pi') - o(1)$ for any other MDP M' supporting \mathcal{D} . Of course, this implies $\mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi)] \gtrsim \max_{\pi'} \mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi')] - o(1)$ and $V_{M_{\text{test}}}^{s_0}(\pi) \gtrsim \max_{\pi'} V_{M_{\text{test}}}^{s_0}(\pi') - o(1)$.

Since Weak Proximity is strictly stronger than Condition 1, Lemma 1 and all the above statements remain true when \mathcal{D} satisfies Weak Proximity with ξ_r, ξ_{tr} . Naturally then, in our settings it is only interesting to consider problems when at least one of either ξ_r or ξ_{tr} is $\Omega(\frac{1}{H})$. Unfortunately, our next result is a *lower bound* which shows that when ξ_r is $\Theta(\frac{1}{H})$ and $\xi_{\text{tr}} = 0$, then Weak Proximity is not sufficient to ensure efficient generalization in the Average Performance Setting. For the statement of this result, recall that $\xi_r, \xi_{\text{tr}}, k$ are the parameters used to satisfy Weak Proximity.

Theorem 2 *For any $k \geq 3$, there exists \mathcal{D} satisfying Condition 4 & Weak Proximity with $\xi_r = \Theta(\frac{1}{H})$, $\xi_{\text{tr}} = 0$ and k , such that the following holds. Any (possibly randomized) algorithm requires $\Omega(|\mathcal{A}|^H)$ queries to find (with probability at least $\frac{1}{2}$) a policy π satisfying*

$$\mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi)] \geq \max_{\pi'} \mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi')] - \frac{1}{4}.$$

We defer the proof of this theorem to Appendix B.1. Let us briefly discuss the result of Theorem 2, which is stated for the Average Performance Setting. Via condition (b) of Weak Proximity, the conditions of the theorem require that each MDP supporting \mathcal{D} shares a policy that provides optimal value (with respect to s_0). Condition (c) of Weak Proximity ensures that one can efficiently optimize any MDP from any given initial state. Furthermore, condition (a) of Weak Proximity *explicitly* requires that the reward functions are (non-trivially) close, in the sense defined by Condition 1, because $\xi_r = \Theta(\frac{1}{H})$. Despite this significant structure, the theorem demonstrates that one can still require an exponential number of queries to find a policy that generalizes and performs well on expectation over \mathcal{D} . In contrast, the shared policy described by condition (b) of Strong Proximity is optimal from any given initial state, and this *implicitly* imposes enough structure on the reward functions to ensure tractable generalization, as shown by Theorem 1. This is true even though the statement of Theorem 1 required no explicit assumption on ξ_r .

We briefly provide some intuition for the proof of Theorem 2, and why Weak Proximity is not sufficient for efficient generalization. Note that Weak Proximity is satisfied when the MDPs supporting \mathcal{D} share a single trajectory that is optimal. In the worst case, there are $\Omega(|\mathcal{A}|^H)$ possible trajectories in an MDP. In the hard instance used in the proof of Theorem 2, the fact that ξ_r is $\Theta(\frac{1}{H})$ allows us enough degrees of freedom to hide the shared optimal trajectory, so that identifying it is essentially as hard as querying each of the $\Omega(|\mathcal{A}|^H)$ possible trajectories. Such a “needle in a haystack” proof technique is commonplace in the RL literature [RD19, DKWY20, WDYS20]. This intuition suggests that the intrinsic hardness of the problem is due to the exponentially sized state space. Indeed, the lower bound of Theorem 2 holds under the following strengthened query model — sampling from \mathcal{D} incurs *zero* query cost, and the algorithm is allowed to interact with the MDP via a generative model that enables the agent to transit to any state and then query that state. This is readily apparent from a brief examination of the proof.

A similar result holds for the Meta RL setting. Recall that by condition (c) of Weak Proximity, the user has access to an algorithm which can solve M_{test} at test time in $\mathcal{O}(|\mathcal{A}|H^k)$ queries, *even if it does no training*. And this algorithm is optimal, in the sense that *if there there was no training* then any algorithm would require $\Omega(|\mathcal{A}|H^k)$ queries to solve M_{test} . Hence it only makes sense to train, if one can use this training in order to solve M_{test} in $o(|\mathcal{A}|H^k)$ queries. As a corollary to

Theorem 2, we demonstrate that this would require exponential query complexity during training time.

Corollary 1 *For any $k \geq 3$, there exists \mathcal{D} satisfying Condition 4 & Weak Proximity with $\xi_r = \Theta(\frac{1}{H})$, $\xi_{tr} = 0$ and k , such that the following holds. If a (possibly randomized) algorithm at test time can identify π satisfying*

$$V_{M_{\text{test}}}^{s_0}(\pi) \geq \max_{\pi'} V_{M_{\text{test}}}^{s_0}(\pi') - \frac{1}{4}$$

in $o(|\mathcal{A}|H^k)$ queries, with probability at least $\frac{1}{2}$ over the selection of M_{test} (and the randomness of the algorithm), then this algorithm must have required $\Omega(|\mathcal{A}|^H)$ queries at training time.

The proof of this corollary is presented in Appendix B.2. We emphasize that in the construction of the \mathcal{D} used in Theorem 2 and Corollary 1, the algorithm that we provide to satisfy condition (c) of Weak Proximity is a very simple and natural algorithm. Essentially this algorithm greedily picks the action which has the highest one step reward, so it is a shortsighted “horizon one” version of the Monte Carlo Tree Search algorithms that are very popular in practice [KS06, S⁺17]. We believe that with an appropriate choice of features, one could also show that other popular algorithms such as policy gradient or Q-learning satisfy condition (c) of Weak Proximity for our constructed \mathcal{D} . Constructing this appropriate set of features is a very interesting direction for future work.

The results of Theorem 2 and Corollary 1 show that Weak Proximity is not sufficient to ensure tractable generalization. Even though Weak Proximity imposes explicit constraints on the reward functions of different MDPs and requires that each MDP shares a policy providing optimal value, this is not enough structure to ensure tractable generalization. In contrast, Strong Proximity is sufficient, and indeed the result of Theorem 1 shows that no explicit assumptions on the reward functions are required.

Taken together with Lemma 1, these results also suggest that the classical way of measuring variation in MDPs using Condition 1 is certainly not the right metric for measuring variation in the more modern Average Performance and Meta RL settings. On the one hand, when ξ_r is $o(\frac{1}{H})$ then these settings are trivially solvable, as we discussed above. On the other hand, when ξ_r is $\Theta(\frac{1}{H})$ or larger then these settings become exponentially hard, even under the additional Weak Proximity condition. We believe a very interesting direction for future work is to find other metrics on the reward functions which are less brittle, and better characterize variation in MDPs for these modern RL generalization settings.

4.2 Stochastic Systems With A Shared Reward Function

We now turn to the case when the MDPs supporting \mathcal{D} have a shared reward function, but have varying transitions. First recall that if \mathcal{D} satisfies Condition 1 with $\xi_r = 0$ then the MDPs supporting \mathcal{D} share a reward function. Of course, this remains true when \mathcal{D} satisfies Weak Proximity with $\xi_r = 0$, since Weak Proximity is strictly stronger than Condition 1. Also recall from our discussion of Lemma 1 in Section 4.1, that when $\xi_r = 0$, it is only interesting to consider problems when ξ_{tr} is $\Omega(\frac{1}{H})$.

Unfortunately, our next result shows that Weak Proximity with $\xi_r = 0$ and $\xi_{tr} = \Theta(\frac{1}{H})$ is not sufficient to guarantee efficient generalization in the Average Performance Setting. For the statement of this result, recall that ξ_r, ξ_{tr}, k are the parameters used to satisfy Weak Proximity. Since the proof of this result is almost identical to the proof of Theorem 2, we have stated it as a corollary of this theorem.

Corollary 2 *For any $k \geq 3$, there exists \mathcal{D} satisfying Weak Proximity with $\xi_r = 0$, $\xi_{tr} = \Theta(\frac{1}{H})$ and k , such that the following holds. Any (possibly randomized) algorithm requires $\Omega(|\mathcal{A}|^H)$ queries to find (with probability at least $\frac{1}{2}$) a policy π satisfying*

$$\mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi)] \geq \max_{\pi'} \mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi')] - \frac{1}{4}.$$

We defer the proof of this result to Appendix B.3. Let us briefly discuss the result of Corollary 2, which is stated for the Average Performance Setting. Via Weak Proximity, the conditions of the theorem require that each MDP supporting \mathcal{D} shares a policy that provides optimal value (with respect to s_0), and that one can efficiently optimize any MDP from any given initial state. The conditions also require that the transition distributions of different MDPs at any state-action pair are $\Theta(\frac{1}{H})$ close in total variation distance. Despite this significant structure, the corollary demonstrates that one can still require an exponential number of queries to find a policy that generalizes and performs well on expectation over \mathcal{D} .

An analogous result holds for the Meta RL setting. Recall that by condition (c) of Weak Proximity, the user can solve M_{test} at test time in $\Theta(|\mathcal{A}|H^k)$ queries, even without any training. And if there is no training, then any algorithm would require $\Omega(|\mathcal{A}|H^k)$ queries to solve M_{test} . Hence it only makes sense to train, if one can use this training in order to solve M_{test} in $o(|\mathcal{A}|H^k)$ queries.

Corollary 3 *For any $k \geq 3$, there exists \mathcal{D} satisfying Weak Proximity with $\xi_r = 0$, $\xi_{tr} = \Theta(\frac{1}{H})$ and k , such that the following holds. If a (possibly randomized) algorithm at test time can identify π satisfying*

$$V_{M_{\text{test}}}^{s_0}(\pi) \geq \max_{\pi'} V_{M_{\text{test}}}^{s_0}(\pi') - \frac{1}{4}$$

in $o(|\mathcal{A}|H^k)$ queries, with probability at least $\frac{1}{2}$ over the selection of M_{test} (and the randomness of the algorithm), then this algorithm must have required $\Omega(|\mathcal{A}|^H)$ queries at training time.

The proof of this result is presented in Appendix B.4. As in Section 4.1, we emphasize that the algorithm used to satisfy condition (c) of Weak Proximity, for our construction of the \mathcal{D} used in Corollaries 2 and 3, is a very simple greedy algorithm reminiscent of the Monte Carlo Tree Search algorithms that are popular in practice. We conjecture that policy gradient and Q-learning could also be used, given an appropriate choice of feature mapping, and leave this as an interesting avenue for future work.

Again, we note that Corollaries 2 and 3 suggest that the classical way of measuring variation in MDPs using Condition 1 is certainly not the right metric for measuring variation in the more modern Average Performance and Meta RL settings. On the one hand, when ξ_{tr} is $o(\frac{1}{H})$ then these settings are trivially solvable, as we discussed in Section 4.1. On the other hand, when ξ_{tr} is $\Theta(\frac{1}{H})$ or larger then these settings become exponentially hard, even under the additional Weak Proximity condition.

One may well suggest that in full generality, even representing an optimal policy for an MDP with stochastic transitions could require a vector of length $\Omega(|\mathcal{A}|^H)$. Indeed, this is why we cannot provide a general efficient algorithm for this setting. So it only makes sense to consider MDPs where the optimal policy can be efficiently represented. We remark in passing that in our construction of the \mathcal{D} described in Corollaries 2 and 3, any deterministic optimal policy for any MDP supporting \mathcal{D} can be represented by a vector of length $\Theta(H)$. We leave the details to the proofs.

5 Discussion

In this paper, we studied the design of reinforcement learning agents that can generalize, broadly defined as the ability to discern the correct notion of behavior in semantically similar environments. We established the Strong Proximity structural condition, and provided an algorithm which provably generalizes under this condition. We analyzed this algorithm and proved its efficiency, and also described a result which suggests its near optimality. We also studied Weak Proximity, a natural weakening of Strong Proximity, and proved lower bounds which demonstrate that this weakened condition is not sufficient to permit efficient generalization. Our analysis highlights an important distinction between the need for a shared nearly optimal policy to ensure tractable generalization, as opposed to a shared policy which is optimal with respect to the initial state. Our results also demonstrate that highly similar rewards and transitions, as measured by classical metrics, is not sufficient to ensure tractable generalization in the modern Average Performance and Meta RL settings.

A number of open questions remain. We demonstrated that our dependence of the error bound in Theorem 1 on β is tight upto a logarithmic factor in the horizon, but it is unclear whether the dependence on α is tight or not. More generally, we assumed access to an oracle which can approximate the optimal value that one could obtain from an input state and input MDP. The prototypical way to implement such an oracle, in the absence of domain knowledge, would be to actually run a standard RL method (such as policy gradient) in the input MDP. This certainly reveals more information than just the (near) optimal value. For instance, it also reveals an approximately optimal trajectory in the MDP, which gives away more structure about the MDP. It would be interesting to see whether one can design more intelligent algorithms for generalization which explicitly leverage such structure. Another interesting direction is to strengthen the lower bounds described in Theorem 2 and its corollaries. The MDPs defining the hard instance of Theorem 2 can each be individually solved using a simple and natural Monte Carlo Tree Search style algorithm. Nevertheless, we conjecture it is possible to design a feature map which ensures that each individual MDP (in our hard instance) can be solved efficiently using more popular algorithms like policy gradient and Q-learning. Yet another important direction is to examine other measures of the relative closeness of MDPs. We studied several such metrics in this paper, but our effort is far from exhaustive.

Our study was restricted to the tabular setting, but in practice one encounters MDPs with very large state spaces. Such MDPs are typically handled by linear or neural network function approximation. A key direction for future work is to extend our results to this setting, in particular focusing on how to extract a feature representation that is useful for generalizable RL. We view our results as complementary to this setting, and hope that our notion of Strong Proximity will be helpful for characterizing when learning such a feature representation can be done efficiently. From a more empirical viewpoint, it would be very interesting to see whether our theoretically justified algorithm can be used to design a heuristic that works well in practice and can be deployed in realistic scenarios.

Broadly speaking, we believe that the generalization problem in RL is relatively understudied from a theoretical viewpoint, even though there is a long line of empirical work which convincingly demonstrates the importance of this problem. We hope that our paper encourages further studies of the conditions which permit efficient generalization, and the design of principled algorithms for such settings.

Acknowledgements

The authors thank Ruosong Wang and Adarsh Prasad for enlightening discussions and insightful commentary on the nature of the results. The authors also thank Vishwak Srinivasan, Ashwini Pokle, Stephanie Milani and Tanya Marwah for editing an earlier draft of this paper. This material is based upon work supported by the National Science Foundation Graduate Research Fellowship Program under Grant No. DGE1745016. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the authors and do not necessarily reflect the views of the National Science Foundation.

A Upper Bound Proof Details

In this section, we will provide a formal proof of Theorem 1. For ease in presentation, we shall assume throughout that the action space \mathcal{A} for each MDP contains two actions, which we denote a_1 and a_2 . It is easy to extend the proofs to the case when there are many actions. We will often use the notation s_1 and s_2 to denote the child states of a state s when taking actions a_1 and a_2 respectively. We shall also use π_M^* to denote an optimal policy for MDP M . Before proving Theorem 1, we shall state two helpful lemmas. Recall the definition of π^* from Strong Proximity (b).

Lemma 2 *Consider any \mathcal{D} which satisfies Condition 4 & Strong Proximity with $\xi_{\text{tr}} = 0$ and any $\alpha, \beta, \xi_r \geq 0$, and run Algorithm 1 with $n \geq 1$ samples. Assume at timestep t we are at state s_t such that $\pi^*(s_t) = a_1$. We are guaranteed that the event*

$$\frac{1}{n} \sum_{i=1}^n Q_{i,a_1} \geq \frac{1}{n} \sum_{i=1}^n Q_{i,a_2} - \alpha - \beta$$

occurs almost surely. The symmetric statement for $\pi^(s_t) = a_2$ is also true.*

Lemma 3 *Consider any \mathcal{D} which satisfies Condition 4 & Strong Proximity with $\xi_{\text{tr}} = 0$ and any $\alpha, \beta, \xi_r \geq 0$, and run Algorithm 1 with $n = \frac{H^2}{\epsilon^2} \log\left(\frac{2H|\mathcal{A}|}{\delta}\right)$ samples. Assume at timestep t we are at state $s \equiv s_t$. Then the event*

$$\left| \frac{1}{n} \sum_{i=1}^n Q_{i,a_1} - \mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a_1) + V_M^{s_1}(\pi_M^*)] \right| \leq \beta + \frac{\epsilon}{2H}$$

and

$$\left| \frac{1}{n} \sum_{i=1}^n Q_{i,a_2} - \mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a_2) + V_M^{s_2}(\pi_M^*)] \right| \leq \beta + \frac{\epsilon}{2H}$$

occurs with probability at least $1 - \frac{\delta}{H}$.

The proofs of Lemmas 2 and 3 can be found in Appendix A.2 and Appendix A.3 respectively. With these lemmas in hand, we now turn to the proof of Theorem 1.

A.1 Proof Of Theorem 1

First observe that by Strong Proximity (b), we have

$$\mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi^*)] \geq \mathbb{E}_{M \sim \mathcal{D}} \left[\max_{\pi_M} V_M^{s_0}(\pi_M) \right] - \alpha \geq \max_{\pi'} \mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi')] - \alpha.$$

Hence to prove the theorem, it is sufficient to prove that

$$\mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi)] \geq \mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi^*)] - \epsilon - 2\alpha H - 3\beta H,$$

and we shall devote the remainder of the proof to this.

Our proof rests on a key claim, which is that while following Algorithm 1, at each timestep the algorithm recommends an action whose suboptimality (in expectation over all MDPs) relative to the other action is at most $\frac{\epsilon}{H} + 2\alpha + 3\beta$. Concretely, assume the algorithm recommends an action a at state s which transports us to s' . We claim that with high probability at least $1 - \frac{\delta}{H}$,

$$\mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a) + V_M^{s'}(\pi^*)] \geq \mathbb{E}_{M \sim \mathcal{D}} [V_M^s(\pi^*)] - \frac{\epsilon}{H} - 2\alpha - 3\beta. \quad (3)$$

First, we argue why this claim in Eq. (3) is sufficient to prove the theorem. Assume this claim to be true, and denote s_h to be the state achieved by the algorithm after h timesteps and a_h to be the action recommended by the algorithm at timestep h . Then applying a union bound over H timesteps, with high probability at least $1 - \delta$ we are guaranteed that

$$\begin{aligned} \mathbb{E}_{M \sim \mathcal{D}} \left[V_M^{s_H}(\pi^*) + \sum_{h=0}^{H-1} R_M(s_h, a_h) \right] &= \mathbb{E}_{M \sim \mathcal{D}} [R_M(s_{H-1}, a_{H-1}) + V_M^{s_H}(\pi^*)] + \mathbb{E}_{M \sim \mathcal{D}} \left[\sum_{h=0}^{H-2} R_M(s_h, a_h) \right] \\ &\geq \mathbb{E}_{M \sim \mathcal{D}} \left[V_M^{s_{H-1}}(\pi^*) + \sum_{h=0}^{H-2} R_M(s_h, a_h) \right] - \frac{\epsilon}{H} - 2\alpha - 3\beta \\ &\geq \mathbb{E}_{M \sim \mathcal{D}} \left[V_M^{s_{H-2}}(\pi^*) + \sum_{h=0}^{H-3} R_M(s_h, a_h) \right] - \frac{2\epsilon}{H} - 4\alpha - 6\beta \\ &\geq \mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi^*)] - \frac{\epsilon H}{H} - 2\alpha H - 3\beta H \\ &= \mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi^*)] - \epsilon - 2\alpha H - 3\beta H. \end{aligned}$$

Recall Condition 4 and Strong Proximity (a) with $\xi_{\text{tr}} = 0$ constrain the MDPs supporting \mathcal{D} to have shared deterministic transitions and a common state-action space $\mathcal{S} \times \mathcal{A}$, so the above calculations remain valid. So we have found a sequence of actions $\{a_h\}_{h=0}^{H-1}$, which defines a path through the $\mathcal{S} \times \mathcal{A}$ and enables us to arrive at state $s_H \in \mathcal{S}$ with the above property. Of course $V_M^{s_H}(\pi^*)$ is just trivially zero, since the planning horizon is H . So the path $\{a_h\}_{h=0}^{H-1}$ we have found, which defines a deterministic policy denoted by π , satisfies

$$\begin{aligned} \mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi)] &= \mathbb{E}_{M \sim \mathcal{D}} \left[\sum_{h=0}^{H-1} R_M(s_h, a_h) \right] \\ &= \mathbb{E}_{M \sim \mathcal{D}} \left[V_M^{s_H}(\pi^*) + \sum_{h=0}^{H-1} R_M(s_h, a_h) \right] \\ &\geq \mathbb{E}_{M \sim \mathcal{D}} [V_M^{s_0}(\pi^*)] - \epsilon - 2\alpha H - 3\beta H, \end{aligned}$$

which exactly proves the theorem.

Hence it is sufficient to prove the claim in Eq. (3), and we shall devote the remainder to proving this claim. Assume that while running the algorithm we are at some state s . Recall the notation that s_1 and s_2 are the child states of s when taking actions a_1 and a_2 respectively, and recall π_M^* denotes an optimal policy for MDP M . By the result of Lemma 3, we have with probability at least $1 - \frac{\delta}{H}$ that

$$\begin{aligned} & \left| \frac{1}{n} \sum_{i=1}^n Q_{i,a_1} - \mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a_1) + V_M^{s_1}(\pi_M^*)] \right| \leq \beta + \frac{\epsilon}{2H} \\ \text{and} & \left| \frac{1}{n} \sum_{i=1}^n Q_{i,a_2} - \mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a_2) + V_M^{s_2}(\pi_M^*)] \right| \leq \beta + \frac{\epsilon}{2H}. \end{aligned} \quad (4)$$

We condition on this event to verify the claim in Eq. (3).

Now assume WLOG that $\pi^*(s) = a_1$, since the case when $\pi^*(s) = a_2$ is entirely symmetric. By the principle of Bellman optimality, this ensures that for any MDP M we have $R_M(s, a_1) + V_M^{s_1}(\pi^*) = V_M^s(\pi^*)$. Furthermore by the result of Lemma 2,

$$\frac{1}{n} \sum_{i=1}^n Q_{i,a_1} \geq \frac{1}{n} \sum_{i=1}^n Q_{i,a_2} - \alpha - \beta. \quad (5)$$

We now consider two cases. For the first case, assume $\frac{1}{n} \sum_{i=1}^n Q_{i,a_1} > \frac{1}{n} \sum_{i=1}^n Q_{i,a_2}$. Then the algorithm recommends action a_1 and transports us to state s_1 . Recall again by our WLOG assumption that for any MDP M , we have $R_M(s, a_1) + V_M^{s_1}(\pi^*) = V_M^s(\pi^*)$. So we are guaranteed that

$$\mathbb{E} [R_M(s, a_1) + V_M^{s_1}(\pi^*)] = \mathbb{E} [V_M^s(\pi^*)],$$

and so the claim in Eq. (3) is trivially shown to be true in this case.

For the second case, assume $\frac{1}{n} \sum_{i=1}^n Q_{i,a_1} \leq \frac{1}{n} \sum_{i=1}^n Q_{i,a_2}$. Then the algorithm will recommend action a_2 and transport us to state s_2 . But note that by the bound Eq. (5), we have

$$\left| \frac{1}{n} \sum_{i=1}^n Q_{i,a_1} - \frac{1}{n} \sum_{i=1}^n Q_{i,a_2} \right| \leq \alpha + \beta.$$

Combining this with the bound Eq. (4), and the triangle inequality, we have

$$\left| \mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a_1) + V_M^{s_1}(\pi_M^*)] - \mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a_2) + V_M^{s_2}(\pi_M^*)] \right| \leq \alpha + 3\beta + \frac{\epsilon}{H}.$$

Hence we have

$$\begin{aligned} \mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a_2) + V_M^{s_2}(\pi_M^*)] & \geq \mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a_1) + V_M^{s_1}(\pi_M^*)] - \alpha - 3\beta - \frac{\epsilon}{H} \\ & \geq \mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a_1) + V_M^{s_1}(\pi^*)] - \alpha - 3\beta - \frac{\epsilon}{H} \\ & = \mathbb{E}_{M \sim \mathcal{D}} [V_M^s(\pi^*)] - \alpha - 3\beta - \frac{\epsilon}{H}, \end{aligned} \quad (6)$$

where the second inequality follows from the optimality of π_M^* for M and the equality follows from our WLOG assumption and the principle of Bellman optimality. Of course Strong Proximity (b) also guarantees that for any MDP M we have $V_M^{s_2}(\pi^*) \geq V_M^{s_2}(\pi_M^*) - \alpha$. We use this to upper bound the LHS of Eq. (6) and obtain

$$\mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a_2) + V_M^{s_2}(\pi^*)] \geq \mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a_2) + V_M^{s_2}(\pi_M^*)] - \alpha \geq \mathbb{E}_{M \sim \mathcal{D}} [V_M^s(\pi^*)] - 2\alpha - 3\beta - \frac{\epsilon}{H}.$$

This exactly demonstrates the claim in Eq. (3), which as argued earlier, is sufficient to complete the proof of the theorem.

A.2 Proof Of Lemma 2

Let $s \equiv s_t$ and recall that s_1 and s_2 denote the child states obtained by taking actions a_1 and a_2 respectively from state s . The assumption $\pi^*(s) = a_1$ is WLOG, since the case when $\pi^*(s) = a_2$ is entirely symmetric. Now consider any MDP M and recall π_M^* denotes an optimal policy for MDP M . There are two cases to consider.

For the first case, assume there exists π_M^* such that $\pi_M^*(s) = a_1$. Then,

$$R_M(s, a_1) + V_M^{s_1}(\pi_M^*) = V_M^s(\pi_M^*) \geq R_M(s, a_2) + V_M^{s_2}(\pi_M^*) \geq R_M(s, a_2) + V_M^{s_2}(\pi^*) - \alpha,$$

where we used the principle of Bellman optimality.

For the second case, assume there only exists π_M^* such that $\pi_M^*(s) = a_2$. Then,

$$\begin{aligned} R_M(s, a_1) + V_M^{s_1}(\pi_M^*) &\geq R_M(s, a_1) + V_M^{s_1}(\pi^*) \\ &= V_M^s(\pi^*) \\ &\geq V_M^s(\pi_M^*) - \alpha \\ &= R_M(s, a_2) + V_M^{s_2}(\pi_M^*) - \alpha, \end{aligned}$$

where the first inequality follows from the optimality of π_M^* for M , the equalities follow from the principle of Bellman optimality as well as the WLOG assumption that $\pi^*(s) = a_1$, and the second inequality follows from Strong Proximity (b).

So in either case we are guaranteed that

$$R_M(s, a_1) + V_M^{s_1}(\pi_M^*) \geq R_M(s, a_2) + V_M^{s_2}(\pi_M^*) - \alpha.$$

Recall that for action a leading to state s' from state s , we have $Q_{i,a} = R_{M_i}(s, a) + \widehat{V}_{M_i}^{s'}$ by definition. We are then guaranteed by Strong Proximity (c) that

$$R_{M_i}(s, a) + V_{M_i}^{s'}(\pi_{M_i}^*) \geq Q_{i,a} \geq R_{M_i}(s, a) + V_{M_i}^{s'}(\pi_{M_i}^*) - \beta.$$

Hence for any M_i we must have

$$\begin{aligned} Q_{i,a_1} &= R_{M_i}(s, a_1) + \widehat{V}_{M_i}^{s_1} \\ &\geq R_{M_i}(s, a_1) + V_{M_i}^{s_1}(\pi_{M_i}^*) - \beta \\ &\geq R_{M_i}(s, a_2) + V_{M_i}^{s_2}(\pi_{M_i}^*) - \alpha - \beta \\ &\geq R_{M_i}(s, a_2) + \widehat{V}_{M_i}^{s_2} - \alpha - \beta \\ &= Q_{i,a_2} - \alpha - \beta. \end{aligned}$$

Averaging each side of the above inequality over n completes the proof.

A.3 Proof Of Lemma 3

Note that for action a leading to state s' from state s , we have $Q_{i,a} = R_{M_i}(s, a) + \widehat{V}_{M_i}^{s'}$ by definition. We are then guaranteed by Strong Proximity (c) that

$$R_{M_i}(s, a) + V_{M_i}^{s'}(\pi_{M_i}^*) \geq Q_{i,a} \geq R_{M_i}(s, a) + V_{M_i}^{s'}(\pi_{M_i}^*) - \beta.$$

Hence we must have

$$\frac{1}{n} \sum_{i=1}^n (R_{M_i}(s, a) + V_{M_i}^{s'}(\pi_{M_i}^*)) \geq \frac{1}{n} \sum_{i=1}^n Q_{i,a} \geq \frac{1}{n} \sum_{i=1}^n (R_{M_i}(s, a) + V_{M_i}^{s'}(\pi_{M_i}^*)) - \beta.$$

By Hoeffding's bound and our choice of n , we are guaranteed that with probability at least $1 - \frac{\delta}{H}$ that

$$\begin{aligned} & \left| \frac{1}{n} \sum_{i=1}^n (R_{M_i}(s, a_1) + V_{M_i}^{s_1}(\pi_{M_i}^*)) - \mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a_1) + V_M^{s_1}(\pi_M^*)] \right| \leq \frac{\epsilon}{2H} \\ \text{and} & \left| \frac{1}{n} \sum_{i=1}^n (R_{M_i}(s, a_2) + V_{M_i}^{s_2}(\pi_{M_i}^*)) - \mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a_2) + V_M^{s_2}(\pi_M^*)] \right| \leq \frac{\epsilon}{2H}. \end{aligned}$$

So for action a leading to state s' from state s , we can combine the previous two equations via the triangle inequality to obtain

$$\begin{aligned} & \left| \frac{1}{n} \sum_{i=1}^n Q_{i,a} - \mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a) + V_M^{s'}(\pi_M^*)] \right| \\ & \leq \left| \frac{1}{n} \sum_{i=1}^n (R_{M_i}(s, a) + V_{M_i}^{s'}(\pi_{M_i}^*)) - \frac{1}{n} \sum_{i=1}^n Q_{i,a} \right| \\ & \quad + \left| \frac{1}{n} \sum_{i=1}^n (R_{M_i}(s, a) + V_{M_i}^{s'}(\pi_{M_i}^*)) - \mathbb{E}_{M \sim \mathcal{D}} [R_M(s, a) + V_M^{s'}(\pi_M^*)] \right| \\ & \leq \beta + \frac{\epsilon}{2H}. \end{aligned}$$

This completes the proof.

B Lower Bound Proof Details

In this section, we will provide proofs of Theorem 2, Corollaries 1, 2 & 3 and Proposition 1. For ease in presentation, we shall assume throughout that the action space \mathcal{A} for each MDP contains two actions, which we denote a_1 and a_2 . It is easy to extend the proofs to the case when there are many actions. We will often use the notation s_1 and s_2 to denote the child states of a state s when taking actions a_1 and a_2 respectively. We shall also use π_M^* to denote an optimal policy for MDP M . Whenever we require H to be sufficiently large for an algebraic argument to go through, we shall assume so.

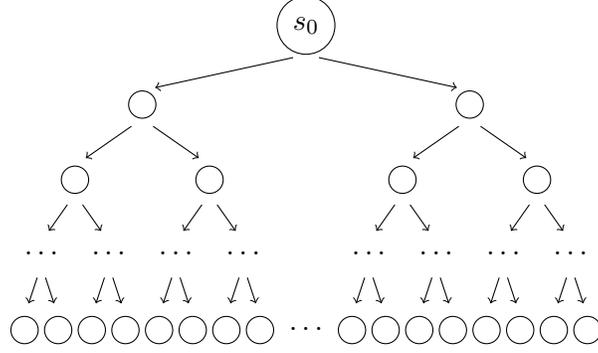


Figure 3: An illustration of the generic binary tree structure used to define the MDPs that support the \mathcal{D} constructed in the proof of Theorem 2.

B.1 Proof Of Theorem 2

Construction Details. Our construction of \mathcal{D} will consist of MDPs whose shared state and action spaces are generically defined by a binary tree. The structure of the binary tree is depicted in Figure 3. The tree is of length H , each node in the tree will define a different state and the edges connecting two nodes define the actions. In this fashion, each state has two actions, which we denote a_1 and a_2 , and taking either action leads deterministically to the corresponding child. Taking any action from states on the final level of the tree exits the MDP. The state s_0 is the root of the tree. We thus have defined the shared state and action space for MDPs supporting \mathcal{D} , and have also defined the shared and deterministic transition dynamics. So Condition 4 is satisfied. Note that to verify Weak Proximity (a), the construction so far implies that the state-action space is shared and the transitions satisfy $\xi_{\text{tr}} = 0$, although we have not yet defined the reward structure so cannot say anything about ξ_r .

To complete the definition of \mathcal{D} , we must complete the definition of each individual MDP supporting \mathcal{D} by defining a reward function for each MDP. We shall do so via the procedure described below. But before that, fix a state s^* on level H , which is selected by sampling uniformly at random from the set of states on level H . Note that the location of s^* will be kept hidden from the user, although we will define \mathcal{D} with reference to a fixed s^* .

Note that there are $2^{\frac{H}{2}-1} - 1$ states s on level $\frac{H}{2}$ such that the subtree rooted at s does not contain s^* . Also note that each subtree rooted at such an s has $2^{\frac{H}{2}-1}$ states on level H . If one were to “view” the final level of a binary tree on paper, as in Figure 3, there is a natural ordering of the states on the final level from left to right. In each subtree rooted at such an s , consider the i th state in this ordering of the states on the final level of that subtree, and denote this i th state as $x_{i,s}$. Then define $\mathcal{S}_i = \cup_s x_{i,s}$. There are a total of $2^{\frac{H}{2}-1}$ such sets \mathcal{S}_i . We will construct $2^{\frac{H}{2}-1}$ MDPs total to support the distribution \mathcal{D} , one for each \mathcal{S}_i . Note that for $i \neq j$, we have $\mathcal{S}_i \cap \mathcal{S}_j = \emptyset$. Note also that \mathcal{S}_i never contains a state which is also in the subtree rooted at level $\frac{H}{2}$ that contains s^* .

Define $\epsilon = \frac{1}{\frac{H}{2} - \log(H^k) - 1}$, and note that ϵ is $\Theta(\frac{1}{H})$. For each \mathcal{S}_i , we will define the MDP M_i by defining R_{M_i} as follows. Fix an \mathcal{S}_i . For each $s \in \mathcal{S}_i$, let s_p denote the unique ancestor of s on level $\frac{H}{2} + \log(H^k) + 1$ of the tree. On the path connecting s_p to s , assign each state-action pair

a reward of ϵ . So the total reward accumulated by following the path from the root through s_p to s and taking either action from s is $\epsilon(\frac{H}{2} - \log(H^k) - 1) = 1$. Also, consider the unique ancestor s_p^* of s^* on level $\frac{H}{2} + \log(H^k) + 1$, and assign each state-action pair along the path s_p^* to s^* a reward of ϵ . So the total reward accumulated by following the path from the root to s^* and taking either action from s^* is $\epsilon(\frac{H}{2} - \log(H^k) - 1) = 1$. Any other state-action pair in the tree is assigned zero reward. This completes the definition of R_{M_i} , and hence the definition of M_i .

Perform this procedure for each of the $2^{\frac{H}{2}-1}$ sets \mathcal{S}_i , to obtain a set which contains $2^{\frac{H}{2}-1}$ such MDPs. The definition of \mathcal{D} is completed by assigning the uniform distribution to this set. The key behind this construction, is that for any MDP supporting \mathcal{D} , each subtree rooted at level $\frac{H}{2}$ contains a single path which provides the optimal unit value. But there is only one path providing unit value that is shared by each MDP, this is the path from the root to s^* . Note that for any M_i , all of the subtrees rooted at states on level $\frac{H}{2}$ are identical, with the exception of the subtree containing s^* .

Verifying Weak Proximity (a). We have already checked above that the state-action space is shared and $\xi_{\text{tr}} = 0$. To see that ξ_r is $\Theta(\frac{1}{H})$, simply note that any state in any MDP supporting \mathcal{D} has reward either 0 or ϵ , and ϵ is $\Theta(\frac{1}{H})$. This verifies Weak Proximity (a).

Verifying Weak Proximity (b). Define π^* to be the deterministic policy which prescribes the path leading from the root to s^* , and at states not along this path it prescribes an arbitrary action. It is then immediate from our above arguments that for any M , $V_M^{s_0}(\pi^*) = \max_{\pi'} V_M^{s_0}(\pi') = 1$, so Weak Proximity (b) is satisfied.

Verifying Weak Proximity (c). Consider the following algorithm, which takes as input an MDP M_i that is known to support \mathcal{D} , but it knows nothing else about M_i (in particular it does not know which \mathcal{S}_i was used to define M_i). It of course does not know anything about the location of s^* other than the fact that s^* was sampled uniformly at random to define \mathcal{D} . It has also not been allowed to query any other MDPs supporting \mathcal{D} . The algorithm begins by picking an arbitrary state s' on level $\frac{H}{2}$. It then queries each state on level $\log(H^k) + 1$ of the subtree rooted at s' (this is level $\frac{H}{2} + \log(H^k) + 1$ of the entire tree). There is a single state s_p on this level which has an action providing reward ϵ , and all other states will give reward zero. When it finds the state s_p on this level providing reward ϵ , it stores the path leading to this state s_p . It then queries each of the two child states of s_p to identify which of these child states lies along the optimal path, which is doable since exactly one of these child states has an action which provides reward ϵ . It greedily takes the action required to arrive at this child, and stores this action. It then repeats this greedy procedure from the child $\Theta(H)$ times until it reaches the final level of the tree. In this manner, if it was given MDP M_i as input then it identifies a path from the root through s' and s_p (or perhaps s_p^*) to either s^* or some state s on level H which satisfies $s \in \mathcal{S}_i$. Let π be the deterministic policy which prescribes this path, and prescribes arbitrary actions for states not along this path, then it is clear $V_{M_i}^{s_0}(\pi) = \max_{\pi'} V_{M_i}^{s_0}(\pi') = 1$. Note also that this same algorithm also immediately can be used to find π satisfying $V_{M_i}^a(\pi) = \max_{\pi'} V_{M_i}^a(\pi')$ for any initial state a . To see this, note that if a is an ancestor of s^* or some $s \in \mathcal{S}_i$, then the described algorithm will identify this and find an appropriate path. If a is not an ancestor of either of these, then the value of this state is zero and the same algorithm can be used to certify this. The sample complexity of this algorithm is the number of queries it took at the beginning to identify s_p in the subtree rooted at s' . Note that there

are $2^{\log(H^k)+1}$ states on level $\log(H^k) + 1$ of the subtree rooted at s' , so the sample complexity of this algorithm is $\mathcal{O}(H^k)$.

To see that this algorithm is information theoretically optimal, note that any algorithm (that is optimal to within the constant $\frac{1}{4}$) must discover a path that has $\Omega(H)$ state-action pairs intersecting with a path that leads either to s^* or to a state $s \in \mathcal{S}_i$. Of course, discovering such a path is equivalent to identifying s^* or the s_p corresponding to $s \in \mathcal{S}_i$. Assume for now the claim that we cannot identify s^* with a polynomial number of samples. Then we need only show that identifying an s_p corresponding to $s \in \mathcal{S}_i$ requires $\Omega(H^k)$ queries. But this is immediate, since all we know is that M_i was sampled from \mathcal{D} , and each subtree (that doesn't contain s^*) rooted at level $\frac{H}{2}$ is identical. So without loss of generality take any subtree (not containing s^*) rooted at level $\frac{H}{2}$, then a priori our prior for the location of s_p in that subtree is exactly the uniform distribution over states on level $\log(H^k) + 1$ of that subtree. So we must query at least half of the $2^{\log(H^k)+1} = \Omega(H^k)$ states on level $\log(H^k) + 1$ of that subtree to identify s_p with non-trivial probability. Conditioned on our claim that it is not easy to identify s^* , this verifies Weak Proximity (c).

With this construction of \mathcal{D} in hand, we return to the proof of Theorem 2, during which we shall also prove the claim we made above about how s^* cannot be identified in a polynomial number of samples. A basic computation reveals that any path through the tree which does not end in s^* , has value (in expectation over \mathcal{D} w.r.t. s_0) at most $\frac{2}{H}$. However, the path through the tree which ends in s^* has value (in expectation over \mathcal{D} w.r.t. s_0) precisely one. The optimal policy (in terms of value in expectation over \mathcal{D} w.r.t. s_0) is hence clearly the deterministic policy which prescribes following the path through the tree that ends in s^* . Hence, any algorithm which can find a policy π satisfying $\mathbb{E}_{M \sim \mathcal{D}}[V_M^{s_0}(\pi)] \geq \max_{\pi'} \mathbb{E}_{M \sim \mathcal{D}}[V_M^{s_0}(\pi')] - \frac{1}{4}$ must be able to identify s^* with non-trivial probability. So to show that finding such a π requires $\Omega(2^H)$ queries, it is sufficient to show that identifying s^* requires $\Omega(2^H)$ queries.

This is immediate from the nature of our construction. Simply observe that any algorithm must query in the subtree rooted at level $\frac{H}{2}$ that contains s^* at least once in order to identify s^* . However, for any MDP there are $2^{\frac{H}{2}-1}$ subtrees on level $\frac{H}{2}$ and all but one of them are identical. Of course, identifying the correct subtree with non-trivial probability requires $\Omega(2^H)$ total queries. This completes the proof.

B.2 Proof Of Corollary 1

We use the same \mathcal{D} that was constructed in the proof of Theorem 2. For any M_i , there are two types of paths that are optimal, the first is through s^* and the others are through the states lying in \mathcal{S}_i . Note that since $M_{\text{test}} \sim \mathcal{D}$ at test time, the location of the optimal paths in M_{test} that do not intersect s^* are sampled uniformly at random. A nearly identical argument to the one used in the proof of Theorem 2 shows that identifying any of these optimal paths that are sampled uniformly at random requires $\Omega(H^k)$ queries. The only difference is that we condition on the event that M_{test} is not the same as any of the MDPs seen during training, which occurs with high probability when we are only allowed a polynomial number of queries during training time. Note that even after conditioning on this event, finding an optimal path (which does not go through s^*) of M_{test} requires $\Omega(H^k)$ queries. This is simply because conditioning on the aforementioned event only changes the probability of the location of such a path by a value which is exponentially small in H , assuming

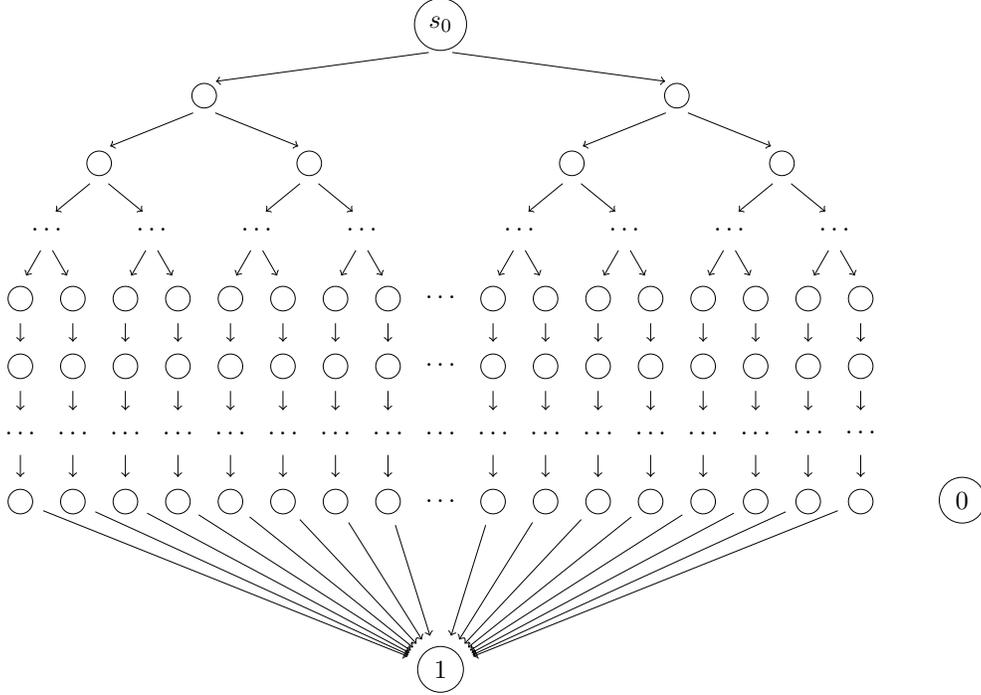


Figure 4: An illustration of the generic structure used to define the MDPs that support the \mathcal{D} constructed in the proof of Corollary 2. Observe that the first half of the structure is a tree, while the second half comprises of linear sequences of states.

again that we used polynomial in H number of queries during training. So we cannot perform any inference to reduce the size of the set of feasible locations of an optimal path (which does not go through s^*). Then we can essentially repeat the same argument used in the proof of Theorem 2. Hence, if an algorithm hopes to solve M_{test} at test time in $o(H^k)$ queries, then during training time it must narrow the possible locations of s^* to a set whose cardinality is polynomial in H . But by the proof of Theorem 2, this would require $\Omega(2^H)$ queries.

B.3 Proof Of Corollary 2

Construction Details. The \mathcal{D} that we construct here is very similar in spirit to the \mathcal{D} that was constructed in the proof of Theorem 2. \mathcal{D} will be supported by MDPs whose shared state and action spaces all share the same generic structure. We depict this generic structure in Figure 4. For the first $\frac{H}{2}$ levels, the structure is defined by a binary tree, where the nodes in the tree represent states. Each state in the tree has two actions. For the next $\frac{H}{2}$ levels, there are numerous linear sequences of states of length $\frac{H}{2}$. Each such sequence emanates from a corresponding state that is a leaf of the tree. These sequences all end in a common state, which we denote $\textcircled{1}$. Each state in the sequence has a single action. The state s_0 is the root of the tree. There is also a state $\textcircled{0}$, which a priori is disconnected from the remainder of the structure. This implies that there is a shared state-action space. For each MDP M supporting \mathcal{D} , we will have that R_M maps $\textcircled{1}$ to one, and maps all other states including $\textcircled{0}$ to zero. Taking any action from $\textcircled{0}$ or $\textcircled{1}$ always exits the MDP for any MDP supporting \mathcal{D} . A priori, the transition function in this generic structure is deterministic. And it is

“natural” in the sense that taking either action from a state in the tree leads to the corresponding child, and taking the action when in the linear sequence of states leads to the next state in the sequence. Of course, we will modify this “a priori natural” transition function in different ways for each MDP.

Let \mathcal{F}_h denote the set of states at level h of this generic structure that we have outlined above. Before constructing \mathcal{D} , first select a state s^* uniformly at random from the $2^{H/2-1}$ states in $\mathcal{F}_{H/2}$. As in the proof of Theorem 2, s^* is hidden from the user.

Note that there are $2^{\frac{H}{4}-1} - 1$ states s on level $\frac{H}{4}$ such that the subtree rooted at s does not contain s^* . Also note that each subtree rooted at such an s has $2^{\frac{H}{4}-1}$ states on level $\frac{H}{2}$ of the entire structure. If one were to “view” the final level of a binary tree on paper, there is a natural ordering of the states on the final level from left to right. In each subtree rooted at such an s such that subtree does not contain s^* , consider the i th state in this ordering of the states on the final level of that subtree (which is the level $\frac{H}{2}$ of the entire structure). Denote this i th state as $x_{i,s}$. Then define $\mathcal{S}_i = \cup_s x_{i,s}$. There are a total of $2^{\frac{H}{4}-1}$ such sets \mathcal{S}_i . We will construct $2^{\frac{H}{4}-1}$ MDPs total to support the distribution \mathcal{D} , one for each \mathcal{S}_i . Note that for $i \neq j$, we have $\mathcal{S}_i \cap \mathcal{S}_j = \emptyset$. Note also that \mathcal{S}_i never contains a state which is also in the subtree rooted at level $\frac{H}{4}$ that contains s^* .

To define each MDP M that supports \mathcal{D} , it is sufficient to define the transition function \mathcal{T}_M for M , since we have already defined the shared state-action space and the shared reward function. Similar to the proof of Theorem 2, for each \mathcal{S}_i construct an MDP M_i as follows:

1. Consider the linear portion of M_i that lies below any state s' satisfying $s' \notin \mathcal{S}_i$ and $s' \neq s^*$. Recall that a priori, the generic structure for any MDP was deterministic, which implies when you are at a state in this linear portion then taking the action deterministically leads to the next state in the sequence. We now modify this so that for any state-action pair along the linear sequence below s' , taking the action takes you to the child with probability $1 - 10/H$, and makes you jump out to state $\textcircled{0}$ with probability $10/H$. Do this for all s' satisfying $s' \notin \mathcal{S}_i$ and $s' \neq s^*$. Leave the linear sequence of states below s^* and any $s \in \mathcal{S}_i$ unchanged, so that the transitions in these two linear sequences remain deterministic.
2. For each $s \in \mathcal{S}_i$, there is a unique path connecting state s to its unique ancestor on level $\frac{H}{4}$. This path defines a sequence of state-action pairs that leads one from level $\frac{H}{4}$ to s . Again recall that a priori, the generic structure for any MDP was deterministic, which implies that taking one of these actions while in the tree deterministically leads you to the corresponding child. Modify the transitions for these state-action pairs along this path of length $\frac{H}{4}$, so that when you take an action, then with probability $1 - 1/H^{k-1}$ the action leads to the child, and with probability $1/H^{k-1}$ it takes you directly to state $\textcircled{1}$. Do this for each $s \in \mathcal{S}_i$. Similarly, consider the path between s^* and its unique ancestor on level $\frac{H}{4}$. Modify the transitions for the state-action pairs along this path so that when you take an action, then with probability $1 - 1/H^{k-1}$ the action leads to the child, and with probability $1/H^{k-1}$ it takes you directly to state $\textcircled{1}$.

We have thus defined \mathcal{T}_{M_i} for each M_i , where each M_i is identified by a particular \mathcal{S}_i . This defines a set containing a total of $2^{\frac{H}{4}-1}$ different MDPs M_i . To complete the definition of \mathcal{D} , simply consider

the uniform distribution over the set of M_i that we have created.

Verifying Weak Proximity (a). We have already established the state-action space for each MDP is shared. Note that by definition each MDP shares a reward function, since $\textcircled{1}$ always provides unit reward and each other state provides zero reward, regardless of the MDP. So we have $\xi_r = 0$. Then observe that when we modified the transitions at states, we changed them by making them lead to states $\textcircled{0}$ or $\textcircled{1}$ with probability at most $\max\{\frac{1}{H^k}, \frac{10}{H}\}$. It remains to note the ℓ_1 characterization of the total variation distance and that $k \geq 3$, implying that $\xi_{\text{tr}} = \Theta(\frac{1}{H})$. This verifies Weak Proximity (a).

Verifying Weak Proximity (b). Observe that following the unique path leading from the root through state s^* till $\textcircled{1}$ always provides value 1, regardless of the MDP. This is because if we take the actions corresponding to this path, then either we hop out to $\textcircled{1}$ while we are in the tree, or we reach the linear sequence from where we deterministically arrive at $\textcircled{1}$. Hence this path is always optimal. In turn, the policy which prescribes this path, while doing something arbitrary at states not along this path, always provides optimal value.

Verifying Weak Proximity (c). To verify this, sample $M_i \sim \mathcal{D}$ and consider the following greedy algorithm. Note that s^* is not revealed a priori, nor do we know the locations of the states in \mathcal{S}_i , and the only information that the user has is that this MDP supports \mathcal{D} . Otherwise this problem trivially does not require any samples to solve. Start at any arbitrary state on level $\frac{H}{4}$ and sample the left action $\mathcal{O}(H^{k-1})$ times and the right action $\mathcal{O}(H^{k-1})$ times. With high probability, one of these actions will lead to the state $\textcircled{1}$ at least once. And of course with unit probability the other action will not lead to $\textcircled{1}$. Simply take the action that has led to $\textcircled{1}$ at least once, and repeat this procedure at the next state. Repeating this procedure until you reach level $H/2$ and union bounding guarantees that with high probability we find a path that leads to either s^* or a state $s \in \mathcal{S}_i$. From here on, one can deterministically follow the linear sequence of states to arrive at $\textcircled{1}$. The policy that prescribes this path then provides the optimal (unit) value for that MDP. The total sample complexity of this method is $\Theta(H^{k-1} \times H) = \Theta(H^k)$. Note also that in similar fashion to Theorem 2, this same algorithm can be used to identify a policy achieving optimal value with respect to any initial state in the tree.

It remains to show that the sample complexity of this algorithm is optimal. Sample $M_i \sim \mathcal{D}$. A basic computation reveals that any path through M_i that does not intersect either s^* or some $s \in \mathcal{S}_i$ has value at most $\frac{1}{20}$. So any algorithm (that is optimal to within the constant $\frac{1}{4}$) must either query to find s^* or must query to find $s \in \mathcal{S}_i$. Assume the claim that finding s^* with a polynomial number of queries is too difficult. So any algorithm must rely on the reward signal obtained by the transitions to $\textcircled{1}$ in the levels between $\frac{H}{4}$ and $\frac{H}{2}$. But it takes $\Omega(H^{k-1})$ samples for a Bernoulli($\frac{1}{H^{k-1}}$) random variable to take unit value with non-trivial probability. Of course, any algorithm using such a signal can only eliminate one half of the tree at a time, so such a signal would have to be used $\Omega(H)$ times. Hence any algorithm requires $\Omega(H^k)$ queries. The verification is completed by using similar arguments as were used in the proof of Theorem 2.

We now complete the proof of Corollary 2. A basic computation shows that for $k \geq 3$ and sufficiently large H , the value (in expectation over \mathcal{D}) of any path is at most $\frac{1}{10}$. But the value of the path

(in expectation over \mathcal{D}) through s^* till ① is one. Hence any algorithm which can find π satisfying $\mathbb{E}_{M \sim \mathcal{D}}[V_M^{s_0}(\pi)] \geq \max_{\pi'} \mathbb{E}_{M \sim \mathcal{D}}[V_M^{s_0}(\pi')] - \frac{1}{4}$ must be able to identify s^* with non-trivial probability. So to show that finding such a π requires $\Omega(2^H)$ queries, it is sufficient to show that identifying s^* requires $\Omega(2^H)$ queries. This is done via identical arguments to the ones used to prove Theorem 2.

B.4 Proof Of Corollary 3

The proof of this corollary is basically identical to the proof of Corollary 1. Briefly, if an algorithm can solve M_{test} with a number of queries at test time that is strictly fewer than $\Omega(H^k)$, then at training time it must have narrowed the possible locations of s^* to a set whose cardinality is polynomial in H . By the proofs of Theorem 2 and Corollary 2, this requires $\Omega(2^H)$ queries during training time.

B.5 Proof Of Proposition 1

Fix any $\beta \geq 0$. It is sufficient to construct a single MDP M with deterministic transitions, and construct an oracle \hat{V} satisfying Strong Proximity (c), and show that any algorithm will output a policy π that satisfies

$$V_M^{s_0}(\pi) \leq \max_{\pi'} V_M^{s_0}(\pi) - \frac{\beta H}{\log(50n)},$$

with probability at least $\frac{1}{2}$. This is because we can define \mathcal{D} to be the point mass on M , so that Strong Proximity (a) and (b) are satisfied trivially with $\alpha = 0$. We will define M as a binary tree, where the states are nodes in the tree, and the (deterministic) actions are described by the edges connecting nodes, which immediately satisfies Condition 4. We will construct the following MDP M by chunking the levels of the tree into blocks. Each block has length $\log(50n)$. To facilitate the definition of the reward function used to define M , we will first assign each state its optimal value, i.e. the value that one could get by following the optimal policy from that state. This will naturally allow us to later define rewards. We will assign these optimal values of the states in a sequential fashion, by considering each subtree rooted at some state on level $h_k = k \log(50n)$, where k is a nonnegative integer.

Start by considering level $h_0 = 0$. Then on level $h_1 = \log(50n)$, pick a single state uniformly at random, denote it s_{h_1, s_0} , and assign it value that satisfies $V^{s_{h_1, s_0}}(\pi^*) = V^{s_0}(\pi^*)$. We will call this state the special state for level h_1 . Let all other states s on level h_1 have value $V^s(\pi^*) = V^{s_0}(\pi^*) - \beta$.

Recursively define the values of the leaves below this level in an identical fashion. To be more concrete, do the following procedure for each state s on level $h_1 = \log(50n)$. Consider all the states in the subtree of s that lie on level $h_2 = 2 \log(50n)$. Pick a single one of these states uniformly at random, denote it $s_{h_2, s}$, and assign it value that satisfies

$$V^{s_{h_2, s}}(\pi^*) = V^s(\pi^*).$$

We will call this state one of the special states for level h_2 . And for all other states $s' \neq s_{h_2, s}$ in the subtree of s that lie on level $h_2 = 2 \log(50n)$, assign them each value that satisfies

$$V^{s'}(\pi^*) = V^s(\pi^*) - \beta.$$

In this fashion, we can assign values for every state that lies on a level $k \log(50n)$ where k is a nonnegative integer. We assume without loss of generality that $\log(50n)$ evenly divides H . Of course, this immediately defines the values for all states in the tree. To actually define rewards which satisfies the structure induced by the values, fix $V_M^{s_0}(\pi^*)$ to be any number, and then simply assign rewards to the leaves of the tree which agree with the assigned values of those leaves. The reward is zero for all states in the tree that are not leaves.

We now define the oracle \widehat{V} . For any state s in the levels h satisfying $h_0 \leq h \leq h_1$, let $\widehat{V}(s) = V^{s_0}(\pi^*) - \beta$. Similarly, consider any state s on level h_1 , and now consider any state $s' \neq s$ in the subtree rooted at s such that $\text{level}(s') \leq h_2$. Then let $\widehat{V}(s') = V^s(\pi^*) - \beta$. Recursively repeat this until we have defined \widehat{V} for each state in the tree. By definition, we have defined \widehat{V} so that it satisfies Strong Proximity (c).

With this construction in hand, the proof is now straightforward to complete. It is sufficient to prove this in the case when an algorithm returns a deterministic policy (or path), since any stochastic policy is a randomization over deterministic paths. We claim that with probability at least $\frac{1}{2}$, the path outputted by the algorithm never intersects *any* of the special states in the *entire* tree. It is sufficient to prove this, because this implies that the path loses β value for a total of $\frac{H}{\log(50n)}$ times, implying that its value is at most

$$V_M^{s_0}(\pi^*) - \frac{\beta H}{\log(50n)}.$$

By symmetry, it is clear that any algorithm which can identify even a single special state anywhere in the tree with non-trivial probability, can be used to identify the special state on level h_1 . Hence, it is sufficient to prove that there is no algorithm which can identify the special state on level h_1 with non-trivial probability. Strengthen the query model (slightly) so that querying a state will return whether it is the special state on level h_1 . But now, observe that we are only allowed to query n states total. And to identify the special state on level h_1 , the algorithm must query most of the states on level h_1 , which is a total of

$$2^{\log(50n)} = 50n$$

states. This implies that it cannot identify the special state on level h_1 with probability at least $\frac{1}{2}$. As discussed above, this is sufficient to complete the proof.

C Auxiliary Proof Details

In this section, we prove Lemma 1, relying heavily on the treatment given in [KKL03]. Let τ denote a trajectory, and let $\mathbb{P}_1^\tau(\tau), \mathbb{P}_2^\tau(\tau)$ denote the probabilities of taking τ in MDPs M_1, M_2 respectively. Let $R_1(\tau), R_2(\tau)$ denote the rewards obtained by following τ in MDPs M_1, M_2 respectively. The penultimate step of the proof of Lemma 4.3 in [KKL03] shows that

$$\sum_{\tau} |\mathbb{P}_1^\tau(\tau) - \mathbb{P}_2^\tau(\tau)| \leq \xi_{\text{tr}} H. \quad (7)$$

The definition of ξ_r and a straightforward application of the triangle inequality reveals that

$$|R_1(\tau) - R_2(\tau)| \leq \sum_{t=0, (s_t, a_t) \in \tau}^{H-1} |R_{M_1}(s_t, a_t) - R_{M_2}(s_t, a_t)| \leq \xi_r H. \quad (8)$$

Again using the triangle inequality, we obtain that

$$\begin{aligned}
\left| V_{M_1}^{s_0}(\pi) - V_{M_2}^{s_0}(\pi) \right| &= \left| \sum_{\tau} (\mathbb{P}_1^{\pi}(\tau) R_1(\tau) - \mathbb{P}_2^{\pi}(\tau) R_2(\tau)) \right| \\
&\leq \left| \sum_{\tau} (\mathbb{P}_1^{\pi}(\tau) R_1(\tau) - \mathbb{P}_1^{\pi}(\tau) R_2(\tau)) \right| + \left| \sum_{\tau} (\mathbb{P}_1^{\pi}(\tau) R_2(\tau) - \mathbb{P}_2^{\pi}(\tau) R_2(\tau)) \right| \\
&\leq \sum_{\tau} \mathbb{P}_1^{\pi}(\tau) |R_1(\tau) - R_2(\tau)| + \left| \sum_{\tau} (\mathbb{P}_1^{\pi}(\tau) R_2(\tau) - \mathbb{P}_2^{\pi}(\tau) R_2(\tau)) \right| \\
&\leq \xi_r H + \left| \sum_{\tau} (\mathbb{P}_1^{\pi}(\tau) R_2(\tau) - \mathbb{P}_2^{\pi}(\tau) R_2(\tau)) \right|,
\end{aligned}$$

where we used the result of Eq. (8). Furthermore,

$$\begin{aligned}
\left| V_{M_1}^{s_0}(\pi) - V_{M_2}^{s_0}(\pi) \right| &\leq \xi_r H + \left| \sum_{\tau} (\mathbb{P}_1^{\pi}(\tau) R_2(\tau) - \mathbb{P}_2^{\pi}(\tau) R_2(\tau)) \right| \\
&\leq \xi_r H + \sum_{\tau} |\mathbb{P}_1^{\pi}(\tau) - \mathbb{P}_2^{\pi}(\tau)| |R_2(\tau)| \\
&\leq \xi_r H + \sum_{\tau} |\mathbb{P}_1^{\pi}(\tau) - \mathbb{P}_2^{\pi}(\tau)| \\
&\leq \xi_r H + \xi_{tr} H,
\end{aligned}$$

where we used the result of Eq. (7) and also our assumption that the reward of any trajectory is always upper bounded by one. This completes the proof.

References

- [AN05] Pieter Abbeel and Andrew Y. Ng. Exploration and apprenticeship learning in reinforcement learning. In *Proceedings of the International Conference on Machine Learning*, pages 1–8, 2005.
- [BL13] Emma Brunskill and Lihong Li. Sample complexity of multi-task reinforcement learning. In *Proceedings of the Conference on Uncertainty in Artificial Intelligence*, 2013.
- [BT03] Ronen I. Brafman and Moshe Tennenholtz. R-max - a general polynomial time algorithm for near-optimal reinforcement learning. *Journal of Machine Learning Research*, 3:213–231, 2003.
- [CHHS20] Karl Cobbe, Chris Hesse, Jacob Hilton, and John Schulman. Leveraging procedural generation to benchmark reinforcement learning. In *Proceedings of the International Conference on Machine Learning*, pages 2048–2056, 2020.
- [CKH⁺19] Karl Cobbe, Oleg Klimov, Chris Hesse, Taehoon Kim, and John Schulman. Quantifying generalization in reinforcement learning. In *Proceedings of the International Conference on Machine Learning*, pages 1282–1289, 2019.

- [CNL⁺19] Ignasi Clavera, Anusha Nagabandi, Simin Liu, Ronald S. Fearing, Pieter Abbeel, Sergey Levine, and Chelsea Finn. Learning to adapt in dynamic, real-world environments through meta-reinforcement learning. In *International Conference on Learning Representations*, 2019.
- [DKWY20] Simon S. Du, Sham M. Kakade, Ruosong Wang, and Lin F. Yang. Is a good representation sufficient for sample efficient reinforcement learning? In *International Conference on Learning Representations*, 2020.
- [FAL17] Chelsea Finn, Pieter Abbeel, and Sergey Levine. Model-agnostic meta-learning for fast adaptation of deep networks. In *Proceedings of the International Conference on Machine Learning*, pages 1126–1135, 2017.
- [FMB18] Jesse Farebrother, Marlos C. Machado, and Michael Bowling. Generalization and regularization in DQN. *arXiv preprint arxiv:1810.00123*, 2018.
- [FMO20] Alireza Fallah, Aryan Mokhtari, and Asuman Ozdaglar. Provably convergent policy gradient methods for model-agnostic meta-reinforcement learning. *arXiv preprint arxiv:2002.05135*, 2020.
- [FYY19] Fei Feng, Wotao Yin, and Lin F. Yang. Does knowledge transfer always help to learn a better policy? *arXiv preprint arxiv:1912.02986*, 2019.
- [GHLL17] Shixiang Gu, Ethan Holly, Timothy Lillicrap, and Sergey Levine. Deep reinforcement learning for robotic manipulation with asynchronous off-policy updates. In *Proceedings of the IEEE International Conference on Robotics and Automation*, 2017.
- [HIB⁺18] Peter Henderson, Riashat Islam, Philip Bachman, Joelle Pineau, Doina Precup, and David Meger. Deep reinforcement learning that matters. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 3207–3214, 2018.
- [HPZ⁺18] T. Haarnoja, V. Pong, A. Zhou, M. Dalal, P. Abbeel, and S. Levine. Composable deep reinforcement learning for robotic manipulation. In *Proceedings of the IEEE International Conference on Robotics and Automation*, pages 6244–6251, 2018.
- [Jia18] Nan Jiang. PAC reinforcement learning with an imperfect model. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 3334–3341, 2018.
- [KK99] Michael Kearns and Daphne Koller. Efficient reinforcement learning in factored mdps. In *Proceedings of the International Joint Conference on Artificial Intelligence*, pages 740–747, 1999.
- [KKL03] Sham Kakade, Michael Kearns, and John Langford. Exploration in metric state spaces. In *Proceedings of the International Conference on Machine Learning*, pages 306–312, 2003.
- [KS02] Michael Kearns and Satinder Singh. Near-optimal reinforcement learning in polynomial time. *Machine Learning*, 49:209–232, 2002.
- [KS06] Levente Kocsis and Csaba Szepesvári. Bandit based monte-carlo planning. In *Proceedings of the European Conference on Machine Learning*, pages 282–293, 2006.

- [LG10] Alessandro Lazaric and Mohammad Ghavamzadeh. Bayesian multi-task reinforcement learning. In *Proceedings of the International Conference on Machine Learning*, pages 599–606, 2010.
- [M⁺15] Volodymyr Mnih et al. Human-level control through deep reinforcement learning. *Nature*, 518:529–533, 2015.
- [MGK⁺19] Russell Mendonca, Abhishek Gupta, Rosen Kralev, Pieter Abbeel, Sergey Levine, and Chelsea Finn. Guided meta-policy search. In *Advances in Neural Information Processing Systems*, pages 9656–9667, 2019.
- [NPH⁺18] Alex Nichol, Vicki Pfau, Christopher Hesse, Oleg Klimov, and John Schulman. Gotta learn fast: A new benchmark for generalization in RL. *arXiv preprint arxiv:1804.03720*, 2018.
- [PBS16] Emilio Parisotto, Jimmy Ba, and Ruslan Salakhutdinov. Actor-mimic: Deep multi-task and transfer reinforcement learning. In *International Conference on Learning Representations*, 2016.
- [PGK⁺18] Charles Packer, Katelyn Gao, Jernej Kos, Philipp Krähenbühl, Vladlen Koltun, and Dawn Song. Assessing generalization in deep reinforcement learning. *arXiv preprint arxiv:1810.12282*, 2018.
- [PW21] A. Pananjady and M. J. Wainwright. Instance-dependent ℓ_∞ -bounds for policy evaluation in tabular reinforcement learning. *IEEE Transactions on Information Theory*, 67:566–585, 2021.
- [RD19] Benjamin Van Roy and Shi Dong. Comments on the du-kakade-wang-yang lower bounds. *arXiv preprint arxiv:1911.07910*, 2019.
- [RLTK17] Aravind Rajeswaran, Kendall Lowrey, Emanuel V. Todorov, and Sham M Kakade. Towards generalization and simplicity in continuous control. In *Advances in Neural Information Processing Systems*, pages 6550–6561. 2017.
- [RZF⁺19] Kate Rakelly, Aurick Zhou, Chelsea Finn, Sergey Levine, and Deirdre Quillen. Efficient off-policy meta-reinforcement learning via probabilistic context variables. In *Proceedings of the International Conference on Machine Learning*, pages 5331–5340, 2019.
- [S⁺17] David Silver et al. Mastering the game of go without human knowledge. *Nature*, 550:354–359, 2017.
- [SJ19] Max Simchowitz and Kevin G Jamieson. Non-asymptotic gap-dependent regret bounds for tabular mdps. In *Advances in Neural Information Processing Systems*, pages 1153–1162. 2019.
- [SJT⁺20] Xingyou Song, Yiding Jiang, Stephen Tu, Yilun Du, and Behnam Neyshabur. Observational overfitting in reinforcement learning. In *International Conference on Learning Representations*, 2020.
- [TS09] Matthew E. Taylor and Peter Stone. Transfer learning for reinforcement learning domains: A survey. *Journal of Machine Learning Research*, 10:1633–1685, 2009.

- [WCYW20] Lingxiao Wang, Qi Cai, Zhuoran Yang, and Zhaoran Wang. On the global optimality of model-agnostic meta-learning. In *Proceedings of the International Conference on Machine Learning*, pages 9837–9846, 2020.
- [WDYK20] Ruosong Wang, Simon S. Du, Lin F. Yang, and Sham M. Kakade. Is long horizon rl more difficult than short horizon rl? In *Advances in Neural Information Processing Systems*. 2020.
- [WDYS20] Ruosong Wang, Simon S. Du, Lin F. Yang, and Ruslan Salakhutdinov. On reward-free reinforcement learning with linear function approximation. In *Advances in Neural Information Processing Systems*. 2020.
- [WZXS19] Huan Wang, Stephan Zheng, Caiming Xiong, and Richard Socher. On the generalization gap in reparameterizable reinforcement learning. In *Proceedings of the International Conference on Machine Learning*, pages 6648–6658, 2019.
- [YQH⁺19] Tianhe Yu, Deirdre Quillen, Zhanpeng He, Ryan Julian, Karol Hausman, Chelsea Finn, and Sergey Levine. Meta-world: A benchmark and evaluation for multi-task and meta reinforcement learning. In *Proceedings of the Conference on Robot Learning*, pages 1094–1100, 2019.
- [ZBP18] Amy Zhang, Nicolas Ballas, and Joelle Pineau. A dissection of overfitting and generalization in continuous reinforcement learning. *arXiv preprint arxiv:1806.07937*, 2018.