

Group Testing with a Graph Infection Spread Model

Batuhan Arasli Sennur Ulukus

Department of Electrical and Computer Engineering
University of Maryland, College Park, MD 20742
barasli@umd.edu ulukus@umd.edu

Abstract

We propose a novel infection spread model based on a random connection graph which represents connections between n individuals. Infection spreads via connections between individuals and this results in a probabilistic cluster formation structure as well as a non-i.i.d. (correlated) infection status for individuals. We propose a class of *two-step sampled group testing algorithms* where we exploit the known probabilistic infection spread model. We investigate the metrics associated with two-step sampled group testing algorithms. To demonstrate our results, for analytically tractable *exponentially split cluster formation trees*, we calculate the required number of tests and the expected number of false classifications in terms of the system parameters, and identify the trade-off between them. For such exponentially split cluster formation trees, for zero-error construction, we prove that the required number of tests is $O(\log_2 n)$. Thus, for such cluster formation trees, our algorithm outperforms any zero-error non-adaptive group test, binary splitting algorithm, and Hwang's generalized binary splitting algorithm. Our results imply that, by exploiting probabilistic information on the connections of individuals, group testing can be used to reduce the number of required tests significantly even when infection rate is high, contrasting the prevalent belief that group testing is useful only when infection rate is low.

1 Introduction

The group testing problem, introduced by Dorfman in [1], is the problem of identifying the infection status of a set of individuals by performing fewer tests than individually testing everyone. The key idea of group testing is to mix test samples of the individuals and test the mixed sample. A negative test result implies that everyone within that group is negative, thereby identifying infection status of an entire group with a single test. A positive test result implies that there is at least one positive individual in that group, in which case, Dorfman's original algorithm goes into a second phase of testing everyone individually.

Since Dorfman’s seminal work, various families of algorithms have been studied, such as, adaptive algorithms, where one designs test pools in the $(i + 1)$ st step by using information from the test results in the first i steps, and non-adaptive algorithms, where every test pool is predetermined and run in parallel. In addition, various forms of infection spread models have been considered as well, such as, the independent and identically distributed (i.i.d.) model where each person is infected independent of others with probability p , and the combinatorial model where k out of n people are infected uniformly distributed on the sample space of $\binom{n}{k}$ elements. Under these various system models and family of algorithms, group testing problem has been widely studied. For instance, [2] gives a detailed study of combinatorial group testing and zero-error group testing, [3] relates the group testing problem to a channel coding problem, and [4–25] advance the group testing literature in various directions. The advantage of group testing is known to diminish when the disease is not rare [26–28].

Early works mainly consider two infection models: combinatorial model where prior to designing the algorithm the exact number of infections is assumed to be known, and probabilistic model where each individual is assumed to be infected with probability p identically and independently. Although there is no general result for arbitrary infection probabilities and arbitrary correlations, the following papers have considered advanced probabilistic models: [29] considers a probabilistic model with independent but non-identically distributed infection probabilities. [30] considers a correlated infection distribution under very specific assumptions. [31] considers a model where individuals belong to families, and the system parameters are the number of infected families and the probability that a family is infected. [32] considers a system where individuals are modelled as a community with positive correlations between them for specific setups, such as individuals at contiguous positions in a line.¹ Our goal in this paper is to consider a realistic graph-based infection spread model, and exploit the knowledge of the infection spread model to design efficient group testing algorithms.

To that end, first, we propose a novel infection spread model, where individuals are connected via a random connection graph, whose connection probabilities are known². The infection starts with a patient zero who is uniformly randomly chosen among n individuals. Then, any individual who is connected to at least one infected individual is also infected. For this system model, we propose a novel family of algorithms which we coin *two-step sampled group testing algorithms*. The algorithm consists of a sampling step, where a set of individuals are chosen to be tested, and a zero-error non-adaptive test step, where selected individuals are tested according to a zero-error non-adaptive group test matrix. In order to select individuals to test in the first step, one of the possible cluster formations that can be formed in the random connection graph, is selected. Then, according to the selected cluster formation, we select exactly one individual from every cluster. After identifying the infection status of the selected individuals with zero-error, we assign the same infection

¹We acknowledge an independent and concurrent paper [33] that appeared on arxiv as we were about to upload our paper to arxiv.

²For instance, location data obtained from cell phones can be used to estimate connection probabilities.

status to the other individuals in the same cluster with identified individuals. Note that, the actual cluster formation is not known prior to the test design, and because of that, selected cluster formation can be different from the actual cluster formation. Thus, this process is not necessarily a zero-error group testing procedure.

Our main contributions consist of proposing a novel infection spread model with random connection graph, proposing a two-step sampled group testing algorithm which is based on novel \mathcal{F} -separable zero-error non-adaptive test matrices, characterizing the optimal design of two-step sampled group testing algorithms, and presenting explicit results on analytically tractable *exponentially split cluster formation trees*. For the considered two-step sampled group testing algorithms, we identify the optimal sampling function selection, calculate the required number of tests and the expected number of false classifications in terms of the system parameters, and identify the trade-off between them. Our \mathcal{F} -separable zero-error non-adaptive test matrix construction is based on taking advantage of the known probability distribution of cluster formations. In order to present an analytically tractable case study for our proposed two-step sampled group testing algorithm, we consider exponentially split cluster formation trees as a special case, in which we explicitly calculate the required number of tests and the expected number of false classifications. For zero-error construction, we prove that the required number of tests is less than $4(\log_2 n + 1)/3$ and is of $O(\log_2 n)$, when there are $n\delta$ individuals. We show that, even when we ignore the gain by cluster size δ , our non-adaptive algorithm, in the zero-error setting, outperforms any zero-error non-adaptive group test and Hwang’s generalized binary splitting algorithm [34], which is known to be the optimal zero-error adaptive group test [28]. Since the number of infections scale as $\frac{n}{\log_2 n}\delta$ in exponentially split cluster formation trees with $n\delta$ individuals, our results show that, we can use group testing to reduce the required number of tests significantly in our system model even when the infection rate is high by using our two-step sampled group testing algorithm.

2 System Model

We consider a group of n individuals. The *random infection vector* $U = (U_1, U_2, \dots, U_n)$ represents the infection status of the individuals. Here U_i is a Bernoulli random variable with parameter p_i . If individual i is infected then $U_i = 1$, otherwise $U_i = 0$. Random variables U_i need not be independent. A *patient zero random variable* Z is uniformly distributed over the set of individuals, i.e., $Z = i$ with probability $p_Z(i) = \frac{1}{n}$ for $i = 1, \dots, n$. Patient zero is the first person to be infected. So far, the infection model is identical to the traditional combinatorial model with $k = 1$ infected among n individuals.

Next, we define a *random connection graph* \mathcal{C} which is a random graph where vertices represent the individuals and edges represent the connections between the individuals. Let $p_{\mathcal{C}}$ denote the probability distribution of the random graph \mathcal{C} over the support set of all possible edge realizations. For the special class of random connection graphs where the edges

are realized independently, we fully characterize the statistics of the random connection graph by the random connection matrix \mathbf{C} , which is a symmetric $n \times n$ matrix where the (i, j) th entry C_{ij} is the probability that there is an edge between vertices i and j for $i \neq j$, and $C_{ij} = 0$ for $i = j$ by definition.

Random connection graph \mathcal{C} is an undirected random graph with vertex set $V_{\mathcal{C}} = [n]$, with each vertex representing a unique individual, and a random edge set $E_{\mathcal{C}} = \{e_{ij}\}$ which represents connections between individuals, that satisfies the following: 1) If $e_{ij} \in E_{\mathcal{C}}$, then there is an edge between vertices i and j ; 2) Probability of $E_{\mathcal{C}} = E_{\mathcal{C}}^*$ is equal to $p_{\mathcal{C}}(E_{\mathcal{C}}^*, V_{\mathcal{C}})$. In the case when all $\mathbb{1}_{\{e_{ij} \in E_{\mathcal{C}}\}}$ are independent, the random connection matrix \mathbf{C} fully characterizes the statistics of edge realizations. There is a path between nodes i and j if there exists a set of vertices $\{i_1, i_2, \dots, i_k\}$ in $[n]$ such that $\{e_{i_1 i_2}, e_{i_2 i_3}, \dots, e_{i_{k-1} i_k}\} \subset E_{\mathcal{C}}$, i.e., two vertices are connected if there exists a path between them.

In our system model, if there is a path in \mathcal{C} between two individuals, then their infection status are equal. In other words, the infection spreads from patient zero Z to everyone that is connected to patient zero. Thus, $U_k = U_l$ if there exists a path between k and l in \mathcal{C} . Here, we note that, a realization of the random graph \mathcal{C} consists of clusters of individuals, where a cluster is a subset of vertices in \mathcal{C} such that all elements in a cluster are connected with each other and none of them is connected to any vertex that is not in the cluster. More rigorously, a subset $S = \{i_1, i_2, \dots, i_k\}$ of $V_{\mathcal{C}}$ is a cluster if, i_l and i_m are connected for all $i_l \neq i_m \in S$, but i_a and i_b are not connected for any $i_a \in S$ and all $i_b \in V_{\mathcal{C}} \setminus S$.

Note that the set of all clusters in a realization of the random graph \mathcal{C} is a partition of $[n]$. In a random connection graph structure, formation of clusters in \mathcal{C} along with patient zero Z determine the status of the infection vector. Therefore, instead of focusing on the specific structure of the graph \mathcal{C} , we focus on the cluster formations in \mathcal{C} . For a given $p_{\mathcal{C}}$, we can calculate the probabilities of possible cluster formations in \mathcal{C} .

To solidify ideas, we give an example in Figure 1. For a random connection graph where the edges are realized independently, we give probabilities of the existence of edges (zero probabilities are not shown) in Figure 1(a) and three different realizations of a random connection graph \mathcal{C} , where all three realizations result in different cluster formations in Figure 1(b)-(d). In Figure 1, we consider a random connection graph \mathcal{C} that has $n = 21$ vertices, which represent the individuals in our group testing model. Since in this example we assume that the edges are realized independently, every edge between nodes i and j exists with probability C_{ij} , independently. As we defined, if there is a path between two nodes (i.e., they are in the same cluster), then we say that their infection status are the same. One way of interpreting this is, there is a patient zero Z , which is uniformly randomly chosen among n individuals, and patient zero spreads the infection to everyone in its cluster. Therefore, working on the cluster formation structures, rather than the random connection graph itself, is equally informative for the sake of designing group tests. For instance, in the realization that we give in Figure 1(b), if the edge between nodes 5 and 10 did not exist, that would be

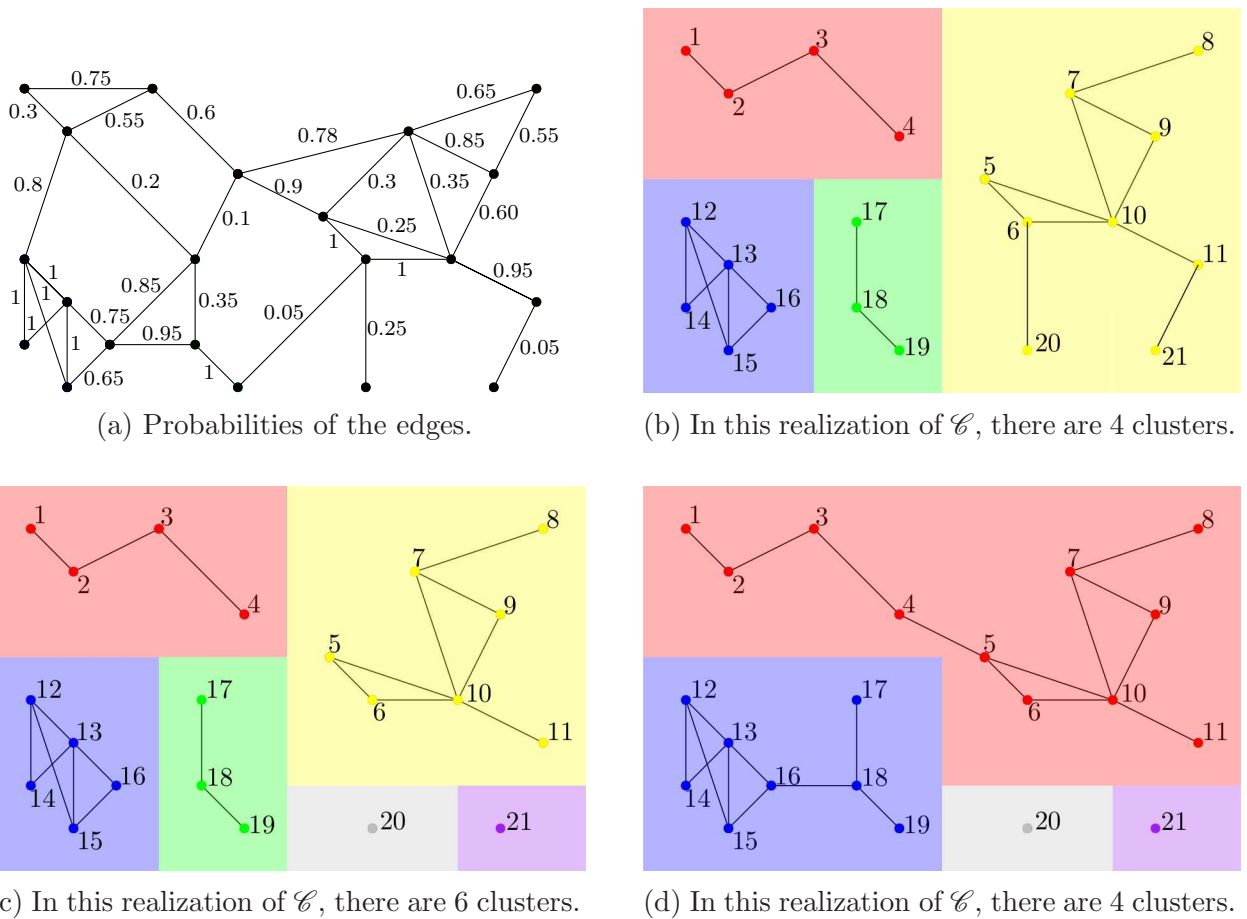


Figure 1: Random connection graph \mathcal{C} and three possible realizations and cluster formations. We show each cluster with a different color.

a different realization for the random connection graph \mathcal{C} , however, the cluster formations would still be the same. As all infections are determined by the cluster formations and the realization of patient zero, cluster formations are a sufficient statistics. Before we rigorously argue this point, we first focus on constructing a basis for random cluster formations.

The *random cluster formation* variable F is distributed over \mathcal{F} as $\mathbb{P}(F = F_i) = p_F(F_i)$, for all $F_i \in \mathcal{F}$, where \mathcal{F} is a subset of the set of all partitions of the set $\{1, 2, \dots, n\}$. In our model, we know the set \mathcal{F} (i.e., the set of cluster formations that can occur) and the probability distribution p_F , since we know $p_{\mathcal{C}}$. Let us denote $|\mathcal{F}|$ by f . For a cluster formation F_i , individuals that are in the same cluster have the same infection status. Let $|F_i| = \sigma_i$, i.e., there are σ_i subsets in the partition F_i of $\{1, 2, \dots, n\}$. Without loss of generality, for $i < j$, we have $\sigma_i \leq \sigma_j$, i.e., cluster formations in \mathcal{F} are ordered in increasing sizes. Let S_j^i be the j th subset of the partition F_i where $i \in [f]$ and $j \in [\sigma_i]$. Then, for fixed i and j , $U_k = U_l$ for all $k, l \in S_j^i$, for all $i \in [f]$ and $j \in [\sigma_i]$.

To clarify the definitions, we give a simple running example which we will refer to throughout this section. Consider a population with $n = 3$ individuals who are connected according

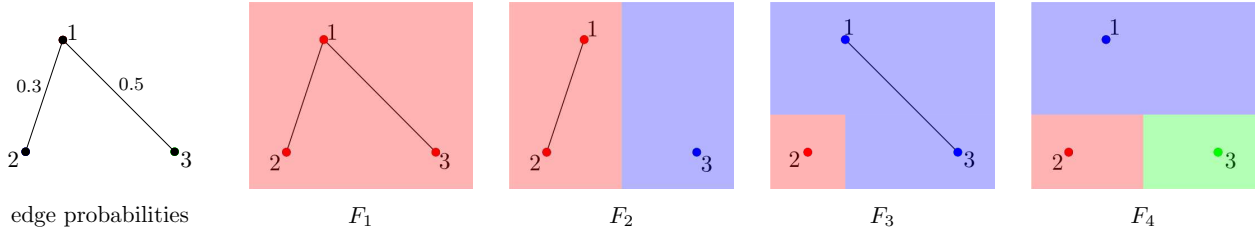


Figure 2: Edge probabilities of \mathcal{C} and elements of \mathcal{F} in example \mathbf{C} given in (1) with clusters shown in different colors.

to the random connection matrix \mathbf{C} and assume that the edges are realized independently,

$$\mathbf{C} = \begin{bmatrix} 0 & 0.3 & 0.5 \\ 0.3 & 0 & 0 \\ 0.5 & 0 & 0 \end{bmatrix} \quad (1)$$

By definition, the main diagonal of the random connection matrix is zero, since we define edges between distinct nodes only. In this example, \mathcal{F} consists of 4 possible cluster formations, and thus, we have $f = |\mathcal{F}| = 4$. The random cluster formation variable F can take those 4 possible cluster formations with following probabilities,

$$F = \begin{cases} F_1 = \{\{1, 2, 3\}\}, & \text{with probability } 0.15 \\ F_2 = \{\{1, 2\}, \{3\}\}, & \text{with probability } 0.15 \\ F_3 = \{\{1, 3\}, \{2\}\}, & \text{with probability } 0.35 \\ F_4 = \{\{1\}, \{2\}, \{3\}\}, & \text{with probability } 0.35 \end{cases} \quad (2)$$

This example network and the corresponding cluster formations are shown in Figure 2. Here, cluster formation F_1 occurs when the edge between nodes 1 and 2 and the edge between nodes 1 and 3 are realized; F_2 occurs when only the edge between nodes 1 and 2 is realized; and F_3 occurs when only the edge between nodes 1 and 3 is realized. Finally, F_4 occurs when none of the edges in \mathcal{C} is realized. In this example, we have $\sigma_1 = |F_1| = 1$, $\sigma_2 = |F_2| = 2$, $\sigma_3 = |F_3| = 2$, and $\sigma_4 = |F_4| = 3$. Note that $\sigma_1 \leq \sigma_2 \leq \sigma_3 \leq \sigma_4$ as assumed without loss of generality above. Each subset that forms the partition F_i are denoted by S_j^i , for instance, F_3 consists of $S_1^3 = \{1, 3\}$ and $S_2^3 = \{2\}$.

Next, we argue formally that cluster formations are a sufficient statistics, i.e., they represent equal amount of information as the realization of the random graph as far as the infection status of the individuals are concerned. When Z and F are realized, the infection

status of n individuals are also realized, i.e., $H(U|Z, F) = 0$. Then,

$$I(U; F) = H(U) - H(U|F) \tag{3}$$

$$= H(U) - (H(U, Z|F) - H(Z|U, F)) \tag{4}$$

$$= H(U) - (H(Z|F) + H(U|Z, F) - H(Z|U, F)) \tag{5}$$

$$= H(U) - (H(Z) - H(Z|U, F)) \tag{6}$$

$$\geq H(U) - (H(Z|\mathcal{C}) + H(U|Z, \mathcal{C}) - H(Z|U, \mathcal{C})) \tag{7}$$

$$= H(U) - H(U|\mathcal{C}) \tag{8}$$

$$= I(U; \mathcal{C}) \tag{9}$$

where in (7) we used the fact that F is a function of \mathcal{C} (not necessarily invertible). In addition, from $U \rightarrow \mathcal{C} \rightarrow F$, we also have $I(U; F) \leq I(U; \mathcal{C})$, which together with (9) imply $I(U; F) = I(U; \mathcal{C})$. Thus, F is a sufficient statistics for \mathcal{C} relative to U . Therefore, from this point on, we focus on the random cluster formation variable F in our analysis.

The graph model and the resulting cluster formations we described so far are general. For tractability, in this paper, we investigate a specific class of \mathcal{F} which satisfies the following condition: For all i , F_i can only be obtained by partitioning some elements of F_{i-1} . This assumption results in a tree like structure for cluster formations. Thus, we call \mathcal{F} sets that satisfy this condition *cluster formation trees*. Formally, \mathcal{F} is a cluster formation tree if $F_{i+1} \setminus F_i$ can be obtained by partitioning the elements of $F_i \setminus F_{i+1}$ for all $i \in [f-1]$. Note that \mathcal{F} in (2) is not a cluster formation tree. However, if the probability of the edge between nodes 1 and 3 were 0, then \mathcal{F} would not contain F_1 and F_3 , and \mathcal{F} would be a cluster formation tree in this case. Note that, cluster formation trees may arise in real-life clustering scenarios, for instance, if individuals belong to a hierarchical structure. An example is: an individual may belong to a professor's lab, then to a department, then to a building, then to a campus.

Next, we define the family of algorithms that we consider, which we coin *two-step sampled group testing algorithms* in this paper. Two-step sampled group testing algorithms consist of two steps in both testing phase and decoding phase. Following definitions are necessary in order to characterize the family of algorithms that we consider in this paper.

In order to design a two-step sampled group testing algorithm, we first pick one of the cluster formations in \mathcal{F} to be the *sampling cluster formation*. The selection of F_m is a design choice, for example, recalling the running example in (1)-(2), one can choose F_2 to be the sampling cluster formation.

Next, we define the *sampling function*, M , to be a function of F_m . The sampling function selects which individuals to be tested by selecting exactly one individual from every subset that forms the partition F_m . Let the infected set among the sampled individuals be denoted by K_M . The output of the sampling function M is the individuals that are sampled and going to be tested. In the second step, a zero-error non-adaptive group test is performed on the sampled individuals. This results in the identification of the infection status of

the selected $\sigma_m = |F_m|$ individuals with zero-error probability. For example, recalling the running example in (1)-(2), when the sampling cluster formation is chosen as F_2 , we may design M as,

$$M = \{1, 3\} \tag{10}$$

Note that, for each selection of F_m , M selects exactly 1 individual from each S_j^m . As long as it satisfies this property, M can be chosen freely while designing the group testing algorithm.

The *test matrix* \mathbf{X} is a non-adaptive test matrix of size $T \times \sigma_m$, where T is the required number of tests. Let $U^{(M)}$ denote the infection status vector of the sampled individuals. Then, we have the following test result vector y ,

$$y_i = \bigvee_{j \in [\sigma_m]} X_{ij} U_j^{(M)}, \quad i \in [T] \tag{11}$$

By using the test result vector y , in the first decoding step, infection status of the sampled individuals are identified with zero-error probability. In the second stage of decoding, depending on F_m and the infection status of the sampled individuals, other non-tested individuals are estimated by assigning the same infection status to all of the individuals that share the same cluster in the cluster formation F_m . In the running example, with M given in (10), one must design a zero-error non-adaptive test matrix \mathbf{X} , which identifies the infection status of individuals 1 and 3.

Let $\hat{U} = (\hat{U}_1, \hat{U}_2, \dots, \hat{U}_n)$ be the *estimated infection status vector*. By definition, the infection estimates are the same within each cluster, i.e., for sampling cluster formation F_m , $\hat{U}_k = \hat{U}_l$, for all $k, l \in S_j^m$, for all $j \in [\sigma_m]$. Since M samples exactly one individual from every subset that forms the partition F_m , there is exactly one identified individual at the beginning of the second step of the decoding phase and by the aforementioned rule, all n individuals have an estimated infection status at the end of the process. For instance, in the running example, for the sampling cluster formation F_2 , we have $M = \{1, 3\}$ as given in (10) and \mathbf{X} identifies U_1 and U_3 with zero-error. Then, $\hat{U}_2 = U_1$, since individuals 1 and 2 are in the same cluster in F_2 .

Finally, we have two metrics to measure the performance of a group testing algorithm. First one is the required number of tests T , which is the number of rows of \mathbf{X} in the two step sampled group testing algorithm family that we defined. Having minimum number of required tests is one of the aims of the group testing procedure. The second metric is the expected number of false classifications. Due to the second step of decoding, the overall two step sampled group testing algorithm is not a zero-error algorithm (except for the choice of $m = f$) and the expected number of false classifications is a metric to measure the error performance of the algorithm. We use $E_f = \mathbb{E}[d_H(U \oplus \hat{U})]$ to denote the *expected number of false classifications*, where $d_H(\cdot)$ is the Hamming weight of a binary vector.

Designing a two-step sampled group testing algorithm consists of selecting F_m , then designing the function M , and then designing the non-adaptive test matrix \mathbf{X} for the second step of the testing and the first step of the decoding phase for zero-error identification of the infection status of the sampled σ_m individuals. We consider cluster formation trees and uniform patient zero assumptions for our infection spread model and we consider two step sampled group testing algorithms for the group test design.

In the following section, we present a motivating example to demonstrate our key ideas.

3 Motivating Example

Consider the following example. There are $n = 10$ individuals, and a cluster formation tree with $f = 3$ levels. Full characterization of F is as follows,

$$F = \begin{cases} F_1 = \{\{1, 2, 3\}, \{4, 5\}, \{6, 7, 8, 9, 10\}\}, & \text{with probability } 0.4 \\ F_2 = \{\{1, 2\}, \{3\}, \{4, 5\}, \{6, 7, 8, 9, 10\}\}, & \text{with probability } 0.2 \\ F_3 = \{\{1, 2\}, \{3\}, \{4, 5\}, \{6, 7\}, \{8, 9, 10\}\}, & \text{with probability } 0.4 \end{cases} \quad (12)$$

First, we find the optimal sampling functions, M , for all possible selections of F_m . First of all, note that M selects exactly one individual from each subset that forms F_m , by definition. Therefore, the number of sampled individuals is constant for a fixed choice of F_m . Thus, in the optimal sampling function design, the only parameter that we consider is the minimum number of expected false classifications E_f . Note that a false classification occurs only when one of the sampled individuals has a different infection status than one of the individuals in its cluster in F_m . For instance, assume that $m = 1$ is chosen. Then, assume that the sampling function M selects individual 1 from the set $S_1^1 = \{1, 2, 3\}$. Recall that after the second step of the two-step group testing algorithm, by using \mathbf{X} , the infection status of individual 1 is identified with zero-error and its status is used to estimate the status of individuals 2 and 3, since they are in the same cluster in $F_m = F_1$. However, with positive probability, individuals 1 and 3 can have distinct infection status, in which case, a false classification occurs. Note that, this scenario occurs only when F_m is at a higher level than the realized F in the cluster formation tree \mathcal{F} , where we refer to F_1 as the top level of the cluster formation tree and F_f as the bottom level.

While finding the optimal sampling function M , one must consider the possible false classifications and minimize E_f , the expected number of false classifications. As shown in Figure 3, the cluster $\{4, 5\}$ does not get partitioned, and for all 3 choices of F_m , M can sample either one of the individuals 4 and 5. This selection does not change the expected number of false classifications since $U_4 = U_5$ in all possible realizations of F . For all sampling cluster formation selections, we have the following analysis:

- If $F_m = F_1$: If M samples individual 1 or 2 from the cluster $S_1^1 = \{1, 2, 3\}$, a false

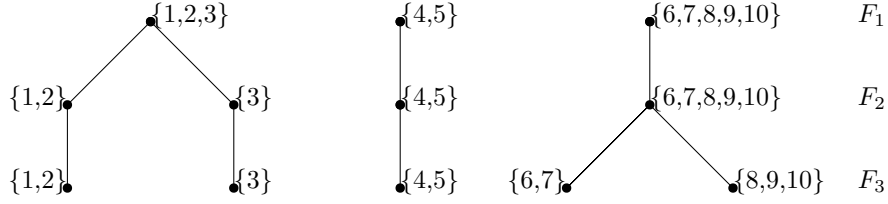


Figure 3: Cluster formation tree \mathcal{F} .

classification occurs if $F = F_2$ and the cluster $\{1, 2\}$ is infected, in that case, individual 3 is falsely classified as infected. Similar false classification occurs when $F = F_3$ and the cluster $\{1, 2\}$ is infected. Similarly, in these cases, if individual 3 is infected, again, individual 3 is falsely classified as non-infected. Thus, for cluster $\{1, 2, 3\}$, when either individual 1 or 2 is sampled, the expected number of false classifications is:

$$(p_F(F_2) + p_F(F_3))(p_Z(1) + p_Z(2) + p_Z(3)) = 0.6 \times 0.3 = 0.18 \quad (13)$$

Similarly, when individual 3 is sampled from the cluster $\{1, 2, 3\}$, individuals 1 and 2 are falsely classified when $F = F_2$ or $F = F_3$ and either the cluster $\{1, 2\}$ or individual 3 is infected. Thus, in that case, the expected number of false classifications is:

$$2(p_F(F_2) + p_F(F_3))(p_Z(1) + p_Z(2) + p_Z(3)) = 2 \times 0.6 \times 0.3 = 0.36 \quad (14)$$

Thus, (13) and (14) imply that, for cluster $S_1^1 = \{1, 2, 3\}$, the optimal M should select either individual 1 or 2 for testing. As discussed above, for cluster $S_2^1 = \{4, 5\}$, the selection of sampled individual is indifferent and results in 0 expected false classification. Finally, for cluster $S_3^1 = \{6, 7, 8, 9, 10\}$, when either individual 6 or 7 is sampled and infected cluster is either $S_4^3 = \{6, 7\}$ or $S_5^3 = \{8, 9, 10\}$ with $F = F_3$, then 3 individuals, $\{8, 9, 10\}$, are falsely classified. Then, the expected number of false classifications is:

$$3p_F(F_3)(p_Z(6) + p_Z(7) + p_Z(8) + p_Z(9) + p_Z(10)) = 3 \times 0.4 \times 0.5 = 0.6 \quad (15)$$

On the other hand, when one of the individuals 8, 9 or 10 is sampled and infected cluster is either $S_4^3 = \{6, 7\}$ or $S_5^3 = \{8, 9, 10\}$ with $F = F_3$, then 2 individuals, $\{6, 7\}$, are falsely classified. Then, the expected number of false classifications is:

$$2p_F(F_3)(p_Z(6) + p_Z(7) + p_Z(8) + p_Z(9) + p_Z(10)) = 2 \times 0.4 \times 0.5 = 0.4 \quad (16)$$

Thus, (15) and (16) imply that, for cluster $S_3^1 = \{6, 7, 8, 9, 10\}$, the optimal M should select one of the individuals in $\{8, 9, 10\}$ for testing.

- If $F_m = F_2$: Similar combinatorial arguments follow and we conclude that selection of sampled individuals from the clusters $S_1^2 = \{1, 2\}$, $S_2^2 = \{3\}$ and $S_3^2 = \{4, 5\}$ are

indifferent in terms of the expected number of false classifications. Only possible false classification can happen in cluster $S_4^2 = \{6, 7, 8, 9, 10\}$ when $F = F_3$ and the infected cluster is either $S_4^3 = \{6, 7\}$ or $S_5^3 = \{8, 9, 10\}$. Similar to the case $m = 1$, if the sampled individual is either 6 or 7, then the expected number of false classifications is:

$$3p_F(F_3)(p_Z(6) + p_Z(7) + p_Z(8) + p_Z(9) + p_Z(10)) = 2 \times 0.4 \times 0.5 = 0.6 \quad (17)$$

Similarly, if the sampled individual is one of 8, 9 and 10, then the expected number of false classifications is:

$$2p_F(F_3)(p_Z(6) + p_Z(7) + p_Z(8) + p_Z(9) + p_Z(10)) = 2 \times 0.4 \times 0.5 = 0.4 \quad (18)$$

Thus, (17) and (18) imply that the optimal M should select one of the individuals 8, 9 and 10 as sampled individual to minimize the expected number of false classifications.

- *If $F_m = F_3$:* It is not possible to make a false classification since for all clusters in F_3 , all individuals that are in the same cluster have the same infection status with probability 1.

Therefore, for this example, the optimal sampling function selects either individual 1 or 2 from the set S_1^1 ; selects either 4 or 5 from the set S_2^1 ; and selects either 8, 9 or 10 from the set S_3^1 if $F_m = F_1$ and the same sampling is optimal with an addition of individual 3, if $F_m = F_2$. Let us assume that M selects the individual with the smallest index when the selection is indifferent among a set of individuals. Thus, the optimal sampling function M for this example is: $\{1, 4, 8\}$, $\{1, 3, 4, 8\}$ or $\{1, 3, 4, 6, 8\}$, depending on the selection of F_m being F_1 , F_2 , or F_3 , respectively.

A more structured and detailed analysis of the selection of the optimal sampling function is given in the next section.

Now, for these possible sets of sampled individuals, we need to design zero-error non-adaptive test matrices.

- *If $F_m = F_1$ (i.e., $M = \{1, 4, 8\}$):* The set of all possible infected sets is $\mathcal{P}(K_M) = \{\{1\}, \{4\}, \{8\}\}$. By a counting argument, we need at least 2 tests, since each of three possible infected sets must result in a unique result vector y and each one of these sets has 1 element. We can achieve this lower bound by using the following test matrix:

	1	4	8
Test 1	0	1	1
Test 2	1	0	1

- *If $F_m = F_2$ (i.e., $M = \{1, 3, 4, 8\}$):* In this case, the set of all possible infected sets is now $\mathcal{P}(K_M) = \{\{1\}, \{3\}, \{1, 3\}, \{4\}, \{8\}\}$. In Figure 4, we present the subtree of

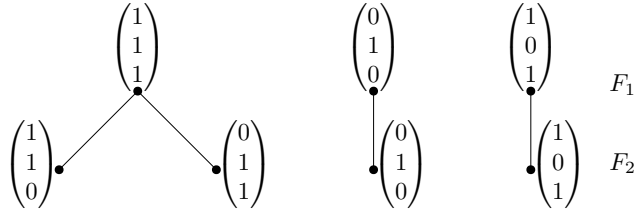


Figure 4: Subtree of \mathcal{F} with assigned result vectors for each node.

\mathcal{F} , which ends at the level F_2 . One must assign unique binary vectors to each node, except for the nodes that do not get partitioned while moving from level to level; for those nodes, the same vector is assigned, as seen in Figure 4. Moreover, while merging in upper level nodes, binary OR of vectors assigned to the descendant nodes must be assigned to their ancestor node. By combinatorial arguments, one can find the minimum vector length such that such vectors can be assigned to the nodes.

In this case, the required number of tests must be at least 3 and by assigning result vectors as in Figure 4, we can construct the following test matrix \mathbf{X} :

	1	3	4	8
Test 1	1	0	0	1
Test 2	1	1	1	0
Test 3	0	1	0	1

Note that for all elements of $\mathcal{P}(K_M)$, corresponding result vector is unique and satisfies the tree structure criteria, as shown in Figure 4.

- If $F_m = F_3$ (i.e., $M = \{1, 3, 4, 6, 8\}$): In this case, the set of all possible infected sets is $\mathcal{P}(K_M) = \{\{1\}, \{3\}, \{1, 3\}, \{4\}, \{6\}, \{8\}, \{6, 8\}\}$. We give a tree structure representation with assigned result vectors of length 3 that achieves the tree structure criteria discussed above, which is shown in Figure 5 where each unique node is assigned a unique vector except for the nodes that do not get partitioned while moving from level to level. Note that every unique node in tree representation corresponds to a unique element of $\mathcal{P}(K_M)$. Corresponding test matrix \mathbf{X} is the following 3×5 matrix:

	1	3	4	6	8
Test 1	1	0	0	1	0
Test 2	1	1	1	0	0
Test 3	0	1	0	0	1

A more structured and detailed analysis of the minimum number of required tests is given in the next section.

We finalize our analysis of this example by calculating the expected number of false classifications where $E_{f,\alpha}$ denotes the conditional expected false classifications, given $F = F_\alpha$:

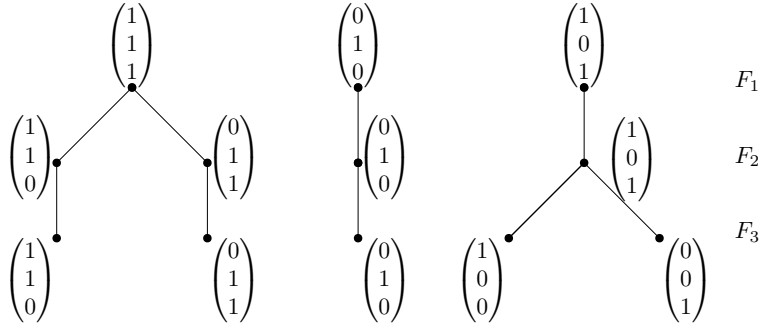


Figure 5: \mathcal{F} with assigned result vectors for each node.

- If $F_m = F_1$:

$$\begin{aligned}
E_f &= \sum_{\alpha} p_F(F_{\alpha}) E_{f,\alpha} \\
&= p_F(F_2) E_{f,2} + p_F(F_3) E_{f,3} \\
&= 0.2(0.3 \times 1) + 0.4(0.3 \times 1 + 0.5 \times 2) \\
&= 0.58
\end{aligned} \tag{19}$$

- If $F_m = F_2$:

$$\begin{aligned}
E_f &= \sum_{\alpha} p_F(F_{\alpha}) E_{f,\alpha} \\
&= p_F(F_3) E_{f,3} \\
&= 0.4(0.5 \times 2) \\
&= 0.4
\end{aligned} \tag{20}$$

- If $F_m = F_3$:

$$\begin{aligned}
E_f &= \sum_{\alpha} p_F(F_{\alpha}) E_{f,\alpha} \\
&= 0
\end{aligned} \tag{21}$$

Note that the choice of F_m is a design choice and one can use time sharing between different choices of m , depending on the specifications of the desired group testing algorithm. For instance, if a minimum number of tests is desired, then one can pick $m = 1$, which results in 2 tests, which is the minimum possible, but with expected 0.58 false classifications, which is the maximum possible in this example. On the other hand, if a minimum expected false classifications is desired, then one can pick $m = 3$, results in 0 expected false classifications, which is the minimum possible, but with 3 tests, which is the maximum possible in this example. Generally, there is a trade-off between the number of tests and the number of false

classifications, and we can formulate optimization problems for specific system requirements, such as finding a time sharing distribution for F_m that minimizes the number of tests for a desired level of false classifications, or vice versa.

In the following section, we describe the details of our proposed group testing algorithm.

4 Proposed Algorithm and Analysis

Our zero-error non-adaptive test algorithm is inspired by the idea of *d-separable* matrices [35]. In *d-separable* test matrix construction, the objective is to design a test matrix such that column-wise OR of all distinct subsets of columns of cardinality d result in a distinct vector. In our *F-separable matrix* construction, we aim to construct binary matrices that have n columns, and for each possible infected subset of the selected individuals, there must be a corresponding distinct result vector. Let \mathbf{X}_S be the sub-matrix of \mathbf{X} that is obtained by columns of \mathbf{X} with indices in S , where S is a subset of $[n]$ where \mathbf{X} has n columns. A binary matrix \mathbf{X} is *F-separable* if

$$\bigvee_{i \in [S_1]} \mathbf{X}_{S_1}^{(i)} \neq \bigvee_{i \in [S_2]} \mathbf{X}_{S_2}^{(i)} \quad (22)$$

is satisfied for all distinct subsets S_1 and S_2 in the set of all possible infected subsets, where $\mathbf{X}_S^{(i)}$ denotes the i th column of \mathbf{X}_S . In *d-separable* matrix construction, this condition must hold for all subsets S_1 and S_2 of cardinality d ; here, it must hold for all possible feasible infection subsets as defined by \mathcal{F} . From this point of view, our *F-separable* test matrix construction exploits the known structure of \mathcal{F} and thus, it results in an efficient zero-error non-adaptive test design for the second step of our proposed algorithm.

We adopt a combinatorial approach to the design of the non-adaptive test matrix \mathbf{X} . Note that, for a given M , we have σ_m individuals to be identified with zero-error probability. Key point of our algorithm is the fact that the infected set of individuals among those selected individuals can only be some specific subsets of those σ_m individuals. Without any information about the cluster formation, any one of the 2^{σ_m} subsets of the selected individuals can be the infected set. However, since we are given \mathcal{F} , we know that, the infected set among the selected individuals, K_M , can be one of the 2^{σ_m} subsets only if there exists at least one set S_i^j that contains K_M and there is no element in the difference set $M \setminus K_M$ such that it is an element of all sets S_i^j containing K_M . This fact, especially in a cluster formation tree structure, significantly reduces the total number of possible infected subsets that need to be considered. Therefore, we can focus on such subsets and design test matrix \mathbf{X} by requiring that the logical OR operation of the columns that correspond to the possible K_M sets to be distinct, in order to decode the test results with zero-error. Let $\mathcal{P}(K_M)$ denote the set of possible infected subsets of the selected individuals, i.e., the set of possible sets that K_M can be. Then, matrix \mathbf{X} must satisfy (22) for all distinct S_1 and S_2 that are elements of $\mathcal{P}(K_M)$.

Note that, the decoding process is a mapping from the result vectors to the infected sets and thus, we require the distinct result vector property to guarantee zero-error decoding.

Designing the \mathbf{X} matrix that satisfies the aforementioned property is the key idea of our algorithm. Before going into the design of \mathbf{X} , we first derive the expected number of false classifications in a given two step sampled group testing algorithm. Recall that false classifications occur during the second step of the decoding phase. In particular, in the second step of the decoding phase, depending on the selection of the sampling cluster formation F_m , the infection status of selected individuals M are assigned to the other individuals such that the infection status estimate is the same within each cluster. For fixed sampling cluster formation F_m and the sampling function M , the number of expected false classifications can be calculated as in the following theorem.

Theorem 1 *In a two step sampled group testing algorithm with the given sampling cluster formation F_m and the sampling function M over a cluster formation tree structure defined by \mathcal{F} and p_F , with uniform patient zero distribution p_Z over $[n]$, the expected number of false classifications given $F = F_\alpha$ is*

$$E_{f,\alpha} = \sum_{i \in [\sigma_m]} \left(\frac{|S^\alpha(M_i)|}{n} \cdot |S_i^m \setminus S^\alpha(M_i)| + \sum_{S_j^\alpha \subseteq S_i^m \setminus S^\alpha(M_i)} \frac{|S_j^\alpha|^2}{n} \right) \quad (23)$$

and the expected number of false classifications is

$$E_f = \sum_{\alpha > m} p_F(F_\alpha) E_{f,\alpha} \quad (24)$$

where $S^\alpha(M_i)$ is the subset in the partition F_α which contains the i th selected individual.

Proof: For the sake of simplicity, we denote the subset in partition F_α that contains the i th selected individual by $S^\alpha(M_i)$. We start our calculation with the conditional expectation where $F = F_\alpha$ is given. Observe that an error occurs, in the second step of the decoding process, only if F_m is at a higher level of the cluster formation tree than the realization of $F = F_\alpha$ and the true infected cluster $K = S_\gamma^\alpha$ is merged at the level F_m , i.e., $\alpha > m$ and $S_\gamma^\alpha \notin F_m$. Since there is exactly one true infected cluster, which is at level F_α , false classifications only happen in the set S_θ^m that contains S_γ^α . Now, we know that for the given sampling function M , the θ th selected individual is selected from the set S_θ^m and in the second step of the decoding phase, its infection status is assigned to all of the members of the set S_θ^m . Therefore, the members of the difference set $S_\theta^m \setminus S^\alpha(M_\theta)$ are falsely classified if the set $S^\alpha(M_\theta)$ is the true infected set. In that case, all members of S_θ^m would be classified as infected while only the subset of them, which is $S^\alpha(M_\theta)$ were infected. On the other hand, when the cluster of the selected individual at level F_α is not infected, i.e., the infected cluster is a subset of $S_\theta^m \setminus S^\alpha(M_\theta)$, then only the infected cluster is falsely identified, since all of the members of

S_θ^m are classified as non-infected. Thus, we have the following conditional expected number of false classifications when $F = F_\alpha$ is given, where $p_{S_i^j}$ denotes the probability of the set S_i^j being infected

$$E_{f,\alpha} = \sum_{i \in [\sigma_m]} \left(p_{S_{M_i}^\alpha} |S_i^m \setminus S^\alpha(M_i)| + \sum_{S_j^\alpha \subseteq S_i^m \setminus S^\alpha(M_i)} p_{S_j^\alpha} |S_j^\alpha| \right) \quad (25)$$

$$= \sum_{i \in [\sigma_m]} \left(\frac{|S^\alpha(M_i)|}{n} \cdot |S_i^m \setminus S^\alpha(M_i)| + \sum_{S_j^\alpha \subseteq S_i^m \setminus S^\alpha(M_i)} \frac{|S_j^\alpha|^2}{n} \right) \quad (26)$$

where (26) follows from the uniform patient zero assumption. Finally, since false classifications occur only when $\alpha > m$, we have the following expression for the expected number of false classifications

$$E_f = \sum_{\alpha > m} p_F(F_\alpha) E_{f,\alpha} \quad (27)$$

concluding the proof. ■

We now proceed to characterize the optimal choice of the sampling function M . First, we define $\beta_i(k)$ functions as follows. For $i \in [f]$ and $k \in [n]$,

$$\beta_i(k) \triangleq \sum_{j > i} p_F(F_j) \left(|S^j(k)| \cdot |S_i^m \setminus S^j(k)| + \sum_{S_l^j \subseteq S_i^m \setminus S^j(k)} |S_l^j|^2 \right) \quad (28)$$

where $S^j(k)$ is the subset in partition F_j that contains k .

Theorem 2 *For sampling cluster formation F_m , the optimal choice of M that minimizes the expected number of false classifications is*

$$M_i = \arg \min_{k \in S_i^m} \beta_m(k) \quad (29)$$

where M_i is the i th selected individual. Moreover, the number of required tests is constant and is independent of the choice of M .

Proof: We first prove the second part of the theorem, i.e., that the choice of M does not change the required number of tests. In a cluster formation tree structure, when we sample exactly one individual from each subset S_i^m , $\mathcal{P}(K_M)$ contains single element subsets of selected individuals, since when $F = F_m$ we have exactly one infected individual that can be any one of these individuals with positive probability. Now consider the cluster formation F_{m-1} . Since it is a cluster formation tree structure, there must be at least one S_i^{m-1} such that, $S_i^{m-1} = S_j^m \cup S_k^m$, $S_j^m \neq S_k^m$, which means that, $\mathcal{P}(K_M)$ must contain the set of se-

lected individuals from S_k^m and S_j^m as well, because of the fact that in the case of $F = F_{m-1}$, these individuals can be infected simultaneously. Similarly, when moving towards the top node of the cluster formation tree (i.e., F_1), whenever we observe a merging, we must add corresponding union of the subsets of individuals to $\mathcal{P}(K_M)$, which is the set of all possible infected sets for the selected individuals M . Thus, the structure of distinct sets of possible infected individuals do not depend on the indices of the sampled individuals within each S_i^m , but depends on the given \mathcal{F} and F_m , completing the proof of the second part of the theorem.

We next prove the first part of the theorem, i.e., we prove that selecting the individual that has the minimum $\beta_m(k)$ value for each S_i^m results in the minimum expected number of false classifications and thus, it is the optimal choice. First, recall that, by definition, M depends on F_m and thus, we design sampling function M for a given F_m . Now, recall the expected number of false classifications stated in (23)-(24). Designing a sampling function that minimizes E_f for a given F_m can be done as follows. From (23)-(24),

$$\min_M E_f = \min_M \left\{ \sum_{\alpha:m<\alpha} p_F(F_\alpha) \sum_{i \in [\sigma_m]} \left(\frac{|S^\alpha(M_i)|}{n} \cdot |S_i^m \setminus S^\alpha(M_i)| + \sum_{S_j^\alpha \subseteq S_i^m \setminus S^\alpha(M_i)} \frac{|S_j^\alpha|^2}{n} \right) \right\} \quad (30)$$

$$= \frac{1}{n} \sum_{i \in [\sigma_m]} \min_M \left\{ \sum_{\alpha:m<\alpha} p_F(F_\alpha) \left(|S^\alpha(M_i)| \cdot |S_i^m \setminus S^\alpha(M_i)| + \sum_{S_j^\alpha \subseteq S_i^m \setminus S^\alpha(M_i)} |S_j^\alpha|^2 \right) \right\} \quad (31)$$

$$= \frac{1}{n} \sum_{i \in [\sigma_m]} \left(\sum_{\alpha:m<\alpha} p_F(F_\alpha) \left(|S^\alpha(k_i^*)| \cdot |S_i^m \setminus S^\alpha(k_i^*)| + \sum_{S_j^\alpha \subseteq S_i^m \setminus S^\alpha(k_i^*)} |S_j^\alpha|^2 \right) \right) \quad (32)$$

where $k_i^* = \arg \min_{k \in S_i^m} \beta_m(k)$, and (32) is the minimum value of the expected number of false classifications for given F_m . The sampling function M defined in (29) achieves the minimum and thus, it is optimal, completing the proof of the first part of the theorem. ■

So far we have presented a method to select individuals to be tested in a way to minimize the expected number of false classifications. Now, we move on to the design of \mathbf{X} , the zero-error non-adaptive test matrix which identifies the infection status of the selected individuals M with a minimum number of tests. Recall that since $|\mathcal{F}| = f$, there are f possible choices of F_m and each choice results in a different test matrix \mathbf{X} .

Based on the combinatorial viewpoint stated in (22), we propose a family of non-adaptive group testing algorithms which satisfy the separability condition for all of the subsets in $\mathcal{P}(K_M)$, which is determined by \mathcal{F} . We call such matrices *\mathcal{F} -separable matrices* and non-adaptive group tests that use *\mathcal{F} -separable matrices* as their test matrix as *\mathcal{F} -separable non-adaptive group tests*. In the rest of the section, we present our results on the required number of tests for *\mathcal{F} -separable non-adaptive group tests*.

The key idea of designing an \mathcal{F} -separable matrix is determining the set $\mathcal{P}(K_M)$ for a given set of selected individuals M and the tree structure of \mathcal{F} so that we can find binary column vectors for each selected individual where all of the corresponding possible result vectors are distinct. Note that, for a given choice of F_m , if we consider the corresponding subtree of \mathcal{F} which starts from the first level F_1 and ends at the level F_m , the problem of finding an \mathcal{F} -separable non-adaptive test matrix is equivalent to finding a set of length T binary column vectors for each node at level F_m that satisfy the following criteria:

1. For every node at the levels that are above the level F_m , each node must be assigned a binary column vector that is equal to the OR of all vectors that are assigned to its descendant nodes. This is because each node in the tree corresponds to a possible set of infected individuals among the selected individuals where each merging of the nodes corresponds to the union of the possible infected sets which results in taking the OR of the assigned vectors of the merged nodes.
2. Each assigned binary vector must be unique for each unique node, i.e., for every node that represents a unique set S_i^j . For the nodes that do not split between two levels, assigned vector remains the same. This is because each unique node (note that when a node does not split between levels, it still represents the same set of individuals) corresponds to a unique possible infected subset of the selected individuals and they must satisfy (22).

In other words, for a cluster formation tree with assigned result vectors to each node, a sufficient condition for achievability of \mathcal{F} -separable matrices as follows:

Let u be a node with Hamming weight $d_H(u)$. Then, the number of all descendant nodes of u with constant Hamming weights i must be less than $\binom{d_H(u)}{i}$ for all i . This must hold for all nodes u . Furthermore, number of nodes with constant Hamming weight i must be less than $\binom{T}{i}$ for all i . In addition, Hamming weights of the nodes must strictly decrease while moving from ancestor nodes to descendant nodes.

This condition is indeed sufficient because it guarantees the existence of unique set of vectors that can be assigned to each node of the subtree of \mathcal{F} that satisfies the merging/OR structure determined by the subtree.

The problem of designing an \mathcal{F} -separable non-adaptive group test can be reduced to finding the minimum number T , for which we can find σ_m binary vectors with length T , such that all vectors that are assigned to the nodes satisfy the above condition. Here the assigned vectors are the result vectors y when the corresponding node is the infected node.

We have the following definitions that we need in Theorem 3. For a given \mathcal{F} , we define $\lambda_{S_i^j}$ as the number of unique ancestor nodes of the set S_i^j . We also define λ_j as the number of unique sets S_a^b in \mathcal{F} at and above the level F_j . Note that $\sum_{a \leq j} \sigma_a$ is the total number of

sets S_a^b in \mathcal{F} at and above the level F_j , and thus we have,

$$\sum_{a \leq j} \sigma_a \geq \lambda_j \quad (33)$$

Theorem 3 For given \mathcal{F} and F_m for $m < f$, the number of required tests for an \mathcal{F} -separable non-adaptive group test, i.e., the number of rows of the test matrix \mathbf{X} , must satisfy

$$T \geq \max \left\{ \max_{j \in [\sigma_m]} (\lambda_{S_j^m} + 1), \lceil \log_2(\lambda_m + 1) \rceil \right\} \quad (34)$$

with addition of 1's removed in (34) for the special case of $m = f$.

Proof: First, we have that each unique node (nodes that represent a unique subset S_i^j) represents a unique possibly infected set K_M where each result vector must be unique as well. Therefore, in total, we must have at least λ_m unique vectors. Furthermore, when $m < f$, it is possible that the infected set among the sampled individuals is the empty set. Thus, we have to reserve the zero vector for this case as well. Therefore, the total number of tests must be at least $\lceil \log_2(\lambda_m + 1) \rceil$ in general, with an exception of $m = f$ case, where we can assign the zero vector to one of the nodes and may achieve $\lceil \log_2(\lambda_m) \rceil$.

Second, assume that for any node j at an arbitrary level F_i , $i < m$, the set of indices of the positions of 1's must contain the set of indices of the positions of 1's of the descendants of node j . Moreover, since all nodes that split must be assigned a unique vector, Hamming weights of the vectors must strictly decrease as we move from an ancestor node to a descendant at each level. Considering the fact that the ancestor node at the top level can have Hamming weight at most T and the nodes at the level F_m must be assigned a vector which has Hamming weight at least 1, including the node that has the most unique ancestor nodes, T must be at least $\max_{j \in [\sigma_m]} (\lambda_{S_j^m} + 1)$. Similar to the first case, when $m = f$, we can have zero vector assigned to one of the bottom level nodes and thus, we can have T at least $\max_{j \in [\sigma_m]} \lambda_{S_j^m}$. ■

Note that Theorem 3 is a converse argument, without a statement about the achievability of the given lower bound. In fact, the given lower bound is not always achievable. In the next section, we introduce and focus on a family of cluster formation trees which we call *exponentially split cluster formation trees*. For this analytically tractable family of cluster formation trees, we achieve the lower bound in Theorem 3 *order-wise*, and we compare our result with the results in the literature.

5 Exponentially Split Cluster Formation Trees

In this section, we consider a family of cluster formation trees, explicitly characterize the selection of optimal sampling function, and the resulting expected number of false classifications and the number of required tests. We also compare our results with Hwang's generalized

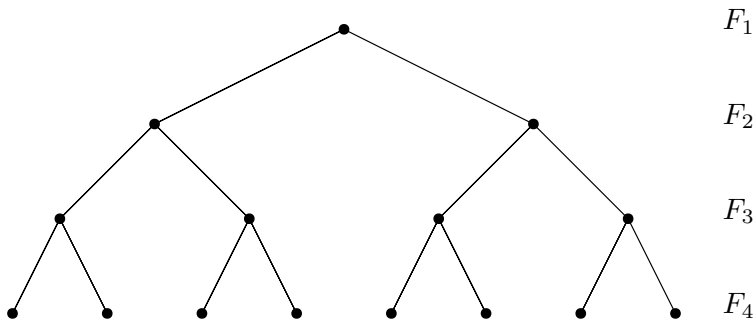


Figure 6: A 4 level exponentially split cluster formation tree.

binary splitting algorithm [34] and zero-error non-adaptive group testing algorithms in order to show the gain of utilizing the cluster formation structure as done in this paper.

A cluster formation tree \mathcal{F} is an *exponentially split cluster formation tree* if it satisfies the following criteria:

- An exponentially split cluster formation tree that consists of f levels has 2^{i-1} nodes at level F_i , for each $i \in [f]$, i.e., $\sigma_i = 2^{i-1}, i \in [f]$.
- At level F_i , every node has $2^{f-i}\delta$ individuals where δ is a constant positive integer, i.e., $|S_j^i| = 2^{f-i}\delta, i \in [f], j \in [\sigma_i]$.
- Every node has exactly 2 descendant nodes in one level below in the cluster formation tree, i.e., every node is partitioned into equal sized 2 nodes when moving one level down in the cluster formation tree.
- Random cluster formation variable F is uniformly distributed over \mathcal{F} , i.e., $p_F(F_i) = 1/f, i \in [f]$.

We analyze the expected number of false classifications and the required number of tests for exponentially split cluster formation trees, by using the general results derived in Section 4. In Figure 6, we give a 4 level exponentially split cluster formation tree example. In that example, there is $2^0 = 1$ node at level F_1 and the number of nodes gets doubled at each level, since each node is split into two nodes when moving one level down in the tree. Also, the sizes of the nodes that are at the same level are the same, with the bottom level nodes having the size δ .

Optimal sampling function and expected number of false classifications: Due to the symmetry of the system, for any choice F_m , each element of S_i^m has the same $\beta_m(i)$ value for all $i \in \sigma_m$. Therefore, the sampling function selects individuals from each set arbitrarily, i.e., the selection of a particular individual does not change the expected number of false classifications. Thus, we can pick any sampling function that selects one element from each

S_i^m . By Theorem 1, the expected number of false classifications, for given F_m , is

$$E_f = \sum_{\alpha > m} \frac{1}{f} \sum_{i \in [\sigma_m]} \left(\frac{|S^\alpha(M_i)|}{n} \cdot |S_i^m \setminus S^\alpha(M_i)| + \sum_{S_j^\alpha \subseteq S_i^m \setminus S^\alpha(M_i)} \frac{|S_j^\alpha|^2}{n} \right) \quad (35)$$

$$= \sum_{\alpha > m} \frac{1}{f} \frac{\sigma_m}{\sigma_\alpha} (\delta(2^{f-m} - 2^{f-\alpha}) + (2^{\alpha-m} - 1)\delta 2^{f-\alpha}) \quad (36)$$

$$= \sum_{\alpha > m} \frac{2^{f+1}\delta}{f} (2^{-\alpha} - 2^{m-2\alpha}) \quad (37)$$

$$= \frac{2^{f+1}\delta}{f} \left(\sum_{\alpha > m} 2^{-\alpha} - 2^m \sum_{\alpha > m} 2^{-2\alpha} \right) \quad (38)$$

$$= \frac{2^{f+1}\delta}{f} \left((2^{-m} - 2^{-f}) - \frac{2^m}{3} (2^{-2m} - 2^{-2f}) \right) \quad (39)$$

$$= \frac{\delta}{3f} (2^{f-m+2} + 2^{m-f+1} - 6) \quad (40)$$

This expected number of false classifications takes its maximum value when $F_m = F_1$,

$$E_f = \frac{\delta}{3f} (2^{f+1} + 2^{2-f} - 6) \quad (41)$$

and it takes its minimum value when $F_m = F_f$ as $E_f = 0$. Since the choice of F_m is a design parameter, one can use time sharing between the possible selections of F_m to achieve any desired value for the expected number of false classifications between $E_f = 0$ and E_f in (41).

Required number of tests: We first recall that, if we choose the sampling cluster formation level F_m , the required number of tests for selected individuals at that level for whom we design an \mathcal{F} -separable test matrix depends on the subtree that is composed of the first m levels of the cluster formation tree \mathcal{F} . Note that the first m levels of an exponentially split cluster formation tree is also an exponentially split cluster formation tree with m levels. In Theorem 4 below, we focus on the sampling cluster formation choice at the bottom level, $F_m = F_f$ and characterize the *exact* required number of tests to be between f and $\frac{4}{3}f$. This implies that the required number of tests at level F_f is $O(f)$, and thus, the required number of tests at level F_m is $O(m)$.

Theorem 4 *For an f level exponentially split cluster formation tree, at level f , there exists an \mathcal{F} -separable test matrix, \mathbf{X} , with not more than $\frac{4}{3}f$ rows, i.e., an upper (achievable) bound for the number of required tests is $\frac{4}{3}(\log_2 n + 1)$ for n individuals. Conversely, this is also the capacity order-wise, since the number of required tests must be greater than f .*

Proof: By using the converse in Theorem 3, we already know that the required number of tests is at least f from (34) since there are $\lambda_f = 2^f - 1$ unique nodes and also $\lambda_{S_i^f} + 1 = f$

for every subset S_i^f . This proves the converse part of the theorem.

In order to satisfy the sufficient conditions for the existence of an \mathcal{F} -separable matrix, each node in the tree must be represented by a T length vector of sufficient Hamming weight, so that i) every descendant can be represented by a unique vector with positions of 1's being the subsets of the positions of 1's of their ancestor nodes, and ii) OR of vectors that are all descendants of a node must be equal to the vector of the ancestor node. In our proof, we show that, for exponentially split cluster formation trees, it is sufficient to check that we have sufficient number of rows in \mathbf{X} to uniquely assign vectors to the bottom level nodes, i.e., the subsets S_i^f at level F_f .

First, as we stated above, from the converse in Theorem 3, an \mathcal{F} -separable test matrix of an exponentially split cluster formation tree with f levels must have at least f rows. However, for exponentially split cluster formation trees, this converse is not achievable: There are 2^{f-1} nodes at level f but $\binom{f}{1}$ binary vectors with Hamming weight 1. Since for $f > 3$, $\binom{f}{1}$ is less than 2^{f-1} , we cannot assign distinct Hamming weight 1 vectors to the bottom level nodes. Thus, we need vectors with length longer than f . Now, assume that an achievable \mathcal{F} -separable test matrix has $f + k$ rows, where k is a non-negative integer. Our objective in the remainder of the proof is to characterize this k in terms of f .

We argue that if the number of nodes at the bottom level, which is equal to 2^{f-1} , is less than $\sum_{i=1}^{k+1} \binom{f+k}{i}$ then we can find an achievable \mathcal{F} -separable test matrix, i.e.,

$$\sum_{i=1}^{k+1} \binom{f+k}{i} \geq 2^{f-1} \quad (42)$$

is a sufficient condition for the existence of an achievable \mathcal{F} -separable test matrix for a given (f, k) pair. Minimum k that satisfies (42) will result in the minimum number of required tests $f + k$. In our construction, we assign each node at level F_i a unique vector with Hamming weight $f + k + 1 - i$, except for the bottom level F_f . Since each node is assigned a unique vector, when moving from a level to one level down, descendant nodes must be assigned vectors that have Hamming weight at least 1 less than their ancestor node. At the bottom level, we use the remaining vectors with Hamming weight less than or equal to $k + 1$. We choose minimum such k for this construction, resulting in the minimum number of tests.

Before proving the achievability of this above construction, we first analyze the minimum k that satisfies (42) in terms of f . We state and prove in Lemma 1 in Appendix that the minimum k that satisfies (42) is less than f . We note that if an (f, k) pair satisfies (42), then the $(f + 1, k)$ pair may also satisfy (42). This fact, when combined with Lemma 1, suggests that we can further improve the upper bound on the minimum k . We already showed that $k < f$ in Lemma 1; further, in Lemma 2 in Appendix we prove that we can sharpen this result as $k \leq f/3$. This finalizes the first part of the achievability proof, showing that $k = f/3$ satisfies (42). This, in turn shows that, we can use all vectors of Hamming weight 1 through $k + 1$ in the bottom level to represent all 2^{f-1} nodes at that level.

Next, we show that for the upper levels, our construction is achievable, i.e., we can find sufficiently many vectors of corresponding Hamming weights. By using Lemma 3 in Appendix, and the fact that for $k \leq f/3$, when $f \geq 13$, we have

$$\binom{f+k}{k+2} \geq 2^{f-2} \quad (43)$$

which implies that, we can find unique vectors of Hamming weight $k+2$, to assign to the nodes at level F_{f-1} (one level up from the bottom level). For the remaining levels below $\lceil (f+k)/2 \rceil$, we have $\binom{f+k}{i} > \binom{f+k}{i+1}$ and the number of nodes decreases by half as we move upwards on the tree. Thus, we can find unique vectors to represent the nodes by increasing the Hamming weights by 1 at each level, which is the minimum increase of Hamming weights while moving upwards on the tree. For the remaining nodes, which are above the level $\lceil (f+k)/2 \rceil$, we can use the lower bound for the binomial coefficient,

$$\binom{f+k}{i} \geq \left(\frac{f+k}{i}\right)^i \geq 2^i \quad (44)$$

to show that there are unique vectors of required weights at those levels as well.

Thus, there are sufficiently many unique vectors of appropriate Hamming weights at every level. Finally, we have to check whether or not there are sufficient number of unique vectors for every subtree of descendants of each node. In exponentially split cluster formation trees, due to the symmetry of the tree, any descendant subtrees of each node is again an exponentially split cluster formation tree. If we assume that k , where the number of rows of \mathbf{X} is equal to $f+k$, satisfies (42) with k being minimum such number, then every descendant subtree below the top level has parameters $(f-i, k)$ and we show in Lemma 2 in Appendix that they also satisfy the condition (42). For f values that are below the corresponding threshold in our proof steps (e.g., $f \geq 13$ threshold before (43) above), manual calculations yield the desired results. This proves the achievability part of the theorem. ■

Expected number of infections: In an exponentially split cluster formation tree structure with f levels, expected total number of infections is,

$$\sum_{i=1}^f \frac{1}{f} 2^{f-i} \delta = \frac{\delta}{f} (2^f - 1) \quad (45)$$

since $p_F(F_i) = 1/f$ and if $F = F_i$ then there are $2^{f-i} \delta$ infections. Thus, the expected number of infections is $O\left(\frac{n}{\log_2 n}\right)$.

Comparison: In order to compare our results for the exponentially split cluster formation trees with other results in the literature, for fairness, we focus on the zero-error case in our system model, which happens when $F_m = F_f$ is chosen. Resulting sampling function selects

in total 2^{f-1} individuals and the resulting number of required tests is between f and $\frac{4}{3}f$, i.e., $O(\log_2 n)$, as proved in Theorem 4. Note that, by performing at most $\frac{4}{3}f$ tests to 2^{f-1} individuals, we identify the infection status of $2^{f-1}\delta$ individuals with zero false classifications, which implies that the number of tests scales with the number of nodes at the bottom level, instead of the number of individuals in the system. This results in a gain scaled with δ . However, in order to fairly compare our results with the results in the literature, we ignore this gain and compare the performance of the second step of our algorithm only, i.e., the identification of infection status of selected individuals only. To avoid confusion, let $\delta = 1$, i.e., each cluster at the bottom level is an individual and thus, $n = 2^{f-1}$.

From (45), the expected number of infections in this system is $\frac{2^f-1}{f} = O\left(\frac{n}{\log_2 n}\right)$. When the infections scale faster than \sqrt{n} , as proved in [26] (see also [28]), non-adaptive tests with zero-error criterion cannot perform better than individual testing. Since our algorithm results in $O(f) = O(\log_2 n)$ tests, it outperforms all non-adaptive algorithms in the literature. Furthermore, we compare our results with Hwang's generalized binary splitting algorithm [34], even though it is an adaptive algorithm and also it assumes the prior knowledge of exact number of infections. Hwang's algorithm results in a zero-error identification of k infections among the population of n individuals with $k \log_2(n/k) + O(k)$ tests and attains the capacity of adaptive group testing [28, 34, 36]. Since the number of infections takes f values in the set $\{1, 2, 2^2, \dots, 2^{f-1}\}$ uniformly randomly, the resulting mean value of the required number of tests when Hwang's generalized binary splitting algorithm is used is

$$\mathbb{E}[T_{\text{Hwang}}] = \sum_{i=0}^{f-1} \frac{1}{f} (2^i \log_2 2^{f-1-i}) + O\left(\frac{n}{\log_2 n}\right) \quad (46)$$

$$= \frac{f-1}{f} \sum_{i=0}^{f-1} 2^i - \frac{1}{f} \sum_{i=0}^{f-1} i 2^i + O\left(\frac{n}{\log_2 n}\right) \quad (47)$$

$$= \frac{2^f - f - 1}{f} + O\left(\frac{n}{\log_2 n}\right) \quad (48)$$

$$= O\left(\frac{n}{\log_2 n}\right) \quad (49)$$

Thus, the expected number of tests when Hwang's generalized binary splitting algorithm is used scales as $O\left(\frac{n}{\log_2 n}\right)$ which is much faster than our result of $O(\log_2 n)$. We note that, Hwang's generalized binary splitting algorithm assumes the prior knowledge of exact number of infections, and is an adaptive algorithm, and further, we have ignored the gain of our algorithm in the first step (i.e., $\delta = 1$). Despite these advantages given to it, our algorithm still outperforms Hwang's generalized binary splitting algorithm for exponentially split cluster formation trees.

6 Numerical Results

In this section, we present numerical results for the proposed two-step sampled group testing algorithm and compare our results with the existing results in the literature. In the first simulation environment, we focus on exponentially split cluster formation trees as presented in Section 5, and in the second simulation environment, we consider an arbitrary random connection graph, as discussed in Section 2, which does not satisfy the cluster formation tree assumption. In the first simulation environment, we verify our analytical results by focusing on exponentially split cluster formation trees. In the second simulation environment, we show that our ideas can be applied to arbitrary random connection graph based networks.

6.1 Exponentially Split Cluster Formation Tree Based System

In the first simulation environment, we have an exponentially split cluster formation tree with $f = 10$ levels and $\delta = 1$ at the bottom level. For this system of $n = 2^{f-1}\delta = 512$ individuals, for each sampling cluster formation choice F_m , from $m = 1$, i.e., the top level of the cluster formation tree, to $m = 10$, i.e., the bottom level of the cluster formation tree, we calculate the expected number of false classifications and the minimum required number of tests. Note that the required number of tests is fixed for a fixed sampling cluster formation F_m , while the number of false classifications depends on the realization of the true cluster formation F_α and patient zero Z . In Figure 7(a), we plot the expected number of false classifications which meets the analytical expressions we found in Section 5. While calculating the minimum number of required tests, for each choice of F_m , our program finds the minimum T that satisfies the sufficient criteria that we presented in Section 4 and in the proof of Theorem 4. We plot the minimum required number of tests in Figure 7(b). Note that, unlike the number of false classifications, for a fixed F_m , the number of required tests is fixed and thus, we do not repeat the simulations while calculating the required number of tests. Resulting non-adaptive test matrix \mathbf{X} is fixed for a fixed F_m and identifies the infection status of the individuals that are selected by M , with zero-error.

Next for this network setting, we compare our zero-error construction results with the results of a variation of Hwang’s generalized binary splitting algorithm [34, 36], presented in [37], which further reduces the number of required tests by reducing the $O(k)$ term in the capacity expression of Hwang’s algorithm. As we state in the comparison part of Section 5, the required number of tests in our algorithm scales with $O(\log_2 n)$, resulting in 13 tests at level $m = f = 10$, as seen in Figure 7(b), while the average number of required tests for Hwang’s algorithm scales as $O\left(\frac{n}{\log_2 n}\right)$, and is approximately 172 in this case. Further, when we remove the assumption of known number of infections, we have to use the binary splitting algorithm presented originally in [38], which results in a number of tests that is not lower than individual testing, i.e., $n = 512$ tests in this case.

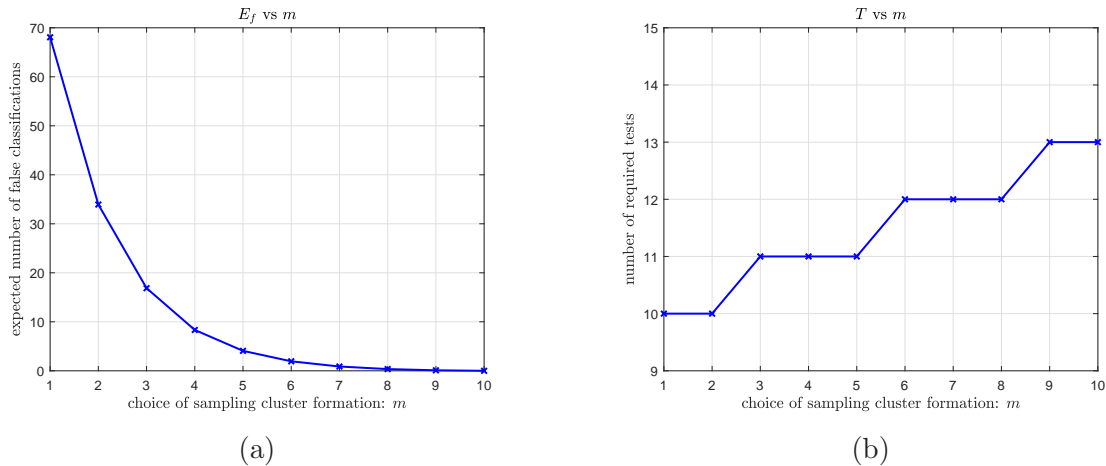


Figure 7: (a) Expected number of false classifications vs the choice of sampling cluster formation F_m . (b) Required number of tests vs the choice of sampling cluster formation F_m .

6.2 Arbitrary Random Connection Graph Based System

In our second simulation environment, we present an arbitrary random connection graph \mathcal{C} with 20 individuals, shown in Figure 8(c), where the edges realize independently with probabilities shown on them (zero probability edges are not shown). In this system, since each independent realization of 9 edges that can be either present or not results in a distinct cluster formation, in total, there are $2^9 = 512$ cluster formations that can be realized with positive probability. Note that this system with the random connection graph \mathcal{C} does not yield a cluster formation tree, yet we still apply our ideas designed for cluster formation trees here. For each one of the 512 possible selections of m , we plot the corresponding expected number of false classifications in Figure 8(a) and the required number of tests in Figure 8(b) for our two-step sampled group testing algorithm.

In this simulation, for each possible choice of the sampling cluster formation F_m , we calculate the set of all possible infected sets $\mathcal{P}(K_M)$ for all possible choices of M and calculate the resulting expected number of false classifications by also calculating p_F , the probability distribution of random cluster formations and select the optimal sampling function M . For the required number of tests, we find the minimum number of tests that satisfies the sufficient criteria that we presented in Section 4 in order to construct \mathcal{F} -separable matrices for this system. In our simulation environment, this procedure is done by brute force, since this system is not a cluster formation tree as in our system model and we cannot use the systematic results that we derived. This simulation demonstrates that the ideas presented can be generalized and applied to arbitrary random connection graph structures.

Since the system here is arbitrary unlike the exponentially split cluster formation tree structure in the first simulation environment in Section 6.1, the resulting expected number of false classifications is not monotonically decreasing when we sort the resulting required number of tests in the increasing order for the choices of F_m . In Figure 8(a), we mark the choices

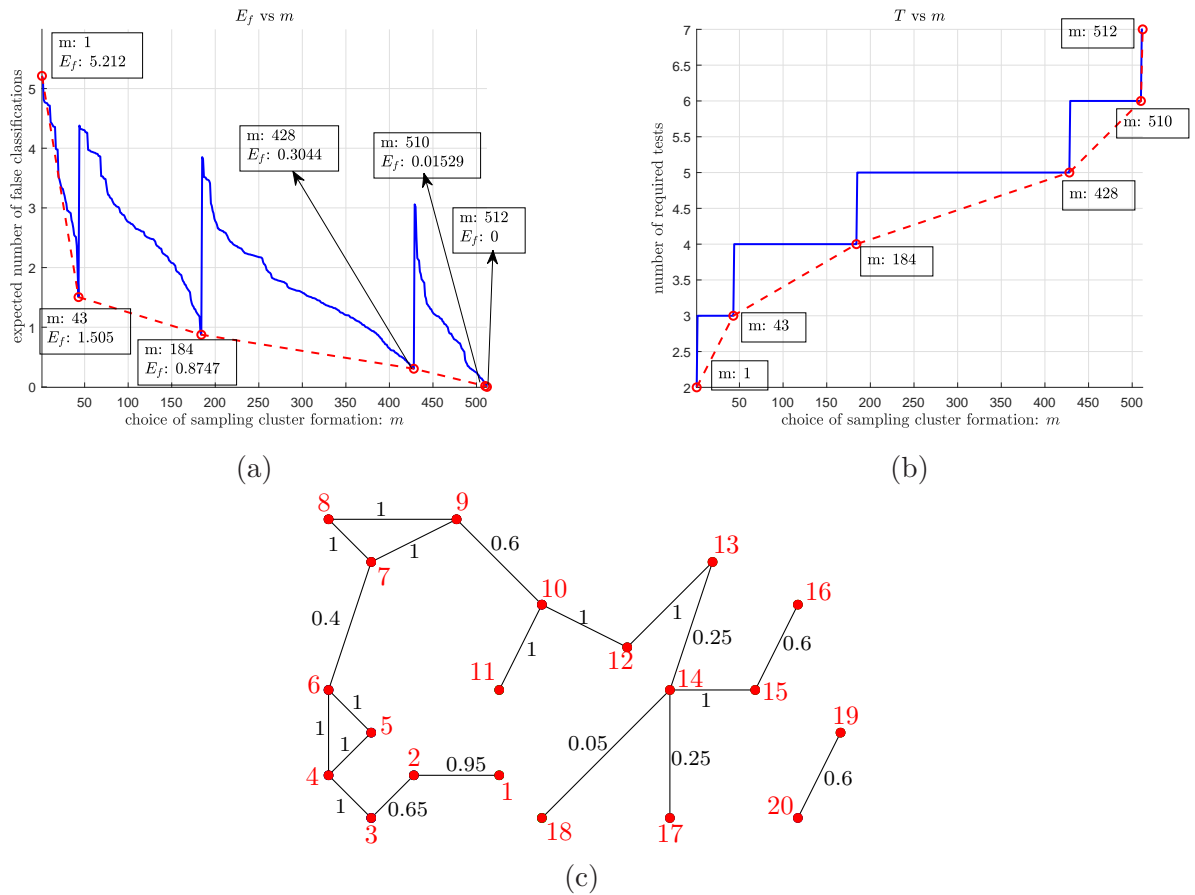


Figure 8: (a) Expected number of false classifications vs the choice of sampling cluster formation F_m . (b) Required number of tests vs the choice of sampling cluster formation F_m . (c) Random connection graph.

of sampling cluster formations that result in the minimum number of expected false classifications within each required number of test range. By using time sharing between these choices of the sampling cluster formations, dotted red lines between them can be achieved. The 6 corner points in Figure 8(a)-(b) correspond to the following cluster formations,

$$F_1 = \{\{1-18\}, \{19-20\}\} \quad (50)$$

$$F_{43} = \{\{1-6\}, \{7-13\}, \{14-18\}, \{19-20\}\} \quad (51)$$

$$F_{184} = \{\{1-6\}, \{7-9\}, \{10-13\}, \{14-18\}, \{19\}, \{20\}\} \quad (52)$$

$$F_{428} = \{\{1\}, \{2\}, \{3-6\}, \{7-9\}, \{10-13\}, \{14-17\}, \{18\}, \{19\}, \{20\}\} \quad (53)$$

$$F_{510} = \{\{1, 2\}, \{3-6\}, \{7-9\}, \{10-13\}, \{14, 15\}, \{16\}, \{17\}, \{18\}, \{19\}, \{20\}\} \quad (54)$$

$$F_{512} = \{\{1\}, \{2\}, \{3-6\}, \{7-9\}, \{10-13\}, \{14, 15\}, \{16\}, \{17\}, \{18\}, \{19\}, \{20\}\} \quad (55)$$

For instance, F_{43} in (51) is composed of 4 clusters with $S_1^{43} = \{1, 2, 3, 4, 5, 6\}$, $S_2^{43} = \{7, 8, 9, 10, 11, 12, 13\}$, $S_3^{43} = \{14, 15, 16, 17, 18\}$ and $S_4^{43} = \{19, 20\}$. When $F_m = F_{43}$ is chosen as the sampling cluster formation, the resulting expected number of false classifica-

tions is $E_f = 1.505$ and the required number of tests is 3, as seen in Figure 8(a) and (b). For the sampling cluster formation choices which are not one of the six cluster formations listed above, these six cluster formations can be chosen to minimize the expected number of false classifications while keeping the required number of tests constant. For instance, all choices of m between $m = 2$ and $m = 42$ result in required number of 3 tests as $m = 43$ but yield a larger E_f than what $m = 43$ yields.

For this system as well, we calculate the average number of required tests for Hwang’s generalized binary splitting algorithm by using the results of [34,36,37] as in the first simulation and find that the average number of required tests is 16.4 in this case. Similar to the first simulation environment, binary splitting algorithm presented originally in [38] which does not require the exact number of infections, cannot perform better than individual testing.

7 Conclusions

In this paper, we introduced a novel infection spread model that consists of a random patient zero and a random connection graph, which corresponds to a non-identically distributed and correlated (non i.i.d.) infection status for individuals. We proposed a family of group testing algorithms, which we call *two step sampled group testing algorithms*, and characterized their optimal parameters. We determined the optimal sampling function selection, derived expected false classifications, and proposed \mathcal{F} -separable non-adaptive group tests which is a family of zero-error non-adaptive group testing algorithms that exploit a given random cluster formation structure. For a specific family of random cluster formations, which we call *exponentially split cluster formation trees*, we calculated the expected number of false classifications and the required number of tests explicitly, by using our general results, and showed that our two-step sampled group testing algorithm outperforms all non-adaptive tests that do not exploit the cluster formation structure and Hwang’s adaptive generalized binary splitting algorithm, even though our algorithm is non-adaptive and we ignore our gain from the first step of our two-step sampled group testing algorithm. Finally, our work has an important implication: in contrast to the prevalent belief about group testing that it is useful only when the infections are rare, our group testing algorithm shows that a considerable reduction in the number of required tests can be achieved by using the prior probabilistic knowledge about the connections between the individuals, even in scenarios with significantly high number of infections.

8 Appendix

Lemma 1 *Minimum k that satisfies*

$$\sum_{i=1}^{k+1} \binom{f+k}{i} \geq 2^{f-1} \quad (56)$$

is upper bounded by f .

Proof: We prove the statement of the lemma by showing that the pair $(f, k) = (f, f-1)$ satisfies (56). We first recall the binomial sum

$$\sum_{i=0}^m \binom{m}{i} = 2^m \quad (57)$$

Thus, for odd m , if we run the sum half of the way, e.g., for $m = 2f-1$ if we run the sum up to $f-1$, we get half of the sum in (57), i.e., $\frac{2^{2f-1}}{2}$. By using this, we have

$$\sum_{i=1}^f \binom{2f-1}{i} \geq \frac{2^{2f-1}}{2} = (2^{f-1})^2 \geq 2^{f-1} \quad (58)$$

for all $f \geq 1$. ■

Lemma 2 *Minimum k that satisfies*

$$\sum_{i=1}^{k+1} \binom{f+k}{i} \geq 2^{f-1} \quad (59)$$

is upper bounded by $f/3$.

Proof: We prove the statement of the lemma by showing that the pair $(f, k) = (f, f/3)$ satisfies (59). We first consider the left hand side of (59) when f is incremented by 1 for fixed k , and write it as

$$\sum_{i=1}^{k+1} \binom{f+k+1}{i} = 2 \sum_{i=1}^{k+1} \binom{f+k}{i} + 1 - \binom{f+k}{k+1} \quad (60)$$

which follows by using the identity $\binom{a}{b} = \binom{a-1}{b-1} + \binom{a-1}{b}$.

Second, we prove the following statement for $k \geq 1$,

$$\sum_{i=1}^{k+1} \binom{4k}{i} \geq 2^{3k-1} \quad (61)$$

Note that, when $k = f/3$, (61) is equivalent to (59) for f values that are divisible by 3. For f values that are not divisible by 3, since the pairs $(f-1, k)$ and $(f-2, k)$ satisfy (59) when the pair (f, k) satisfies (59), by (60), it suffices to prove the statement in (61).

We prove (61) by induction on k . For $k = 1$, the inequality holds. Assume that the inequality holds for a $k \geq 1$, then we show that it also holds for $k + 1$. In the lines below, we use the identity $\binom{a}{b} = \binom{a-1}{b-1} + \binom{a-1}{b}$ recursively,

$$\sum_{i=1}^{k+2} \binom{4k+4}{i} = \sum_{i=1}^{k+2} \binom{4k+3}{i} + \sum_{i=1}^{k+2} \binom{4k+3}{i-1} \quad (62)$$

$$= \sum_{i=1}^{k+2} \binom{4k+2}{i} + \sum_{i=1}^{k+2} \binom{4k+2}{i-1} + 1 + \sum_{i=1}^{k+1} \binom{4k+2}{i} + \sum_{i=1}^{k+1} \binom{4k+2}{i-1} \quad (63)$$

⋮

$$= 9 \sum_{i=1}^{k+1} \binom{4k}{i} - 5 \binom{4k}{k+1} + \binom{4k}{k+2} + 4 \binom{4k}{k-1} + 5 \binom{4k}{k-2} + A \quad (64)$$

$$= 9 \sum_{i=1}^{k+1} \binom{4k}{i} - \frac{2k+11}{k+2} \binom{4k}{k+1} + 4 \binom{4k}{k-1} + 5 \binom{4k}{k-2} + A \quad (65)$$

$$= 8 \sum_{i=1}^{k+1} \binom{4k}{i} - \frac{k+9}{k+2} \binom{4k}{k+1} + \binom{4k}{k} + 5 \binom{4k}{k-1} + 6 \binom{4k}{k-2} + A' \quad (66)$$

$$= 8 \sum_{i=1}^{k+1} \binom{4k}{i} + 3 \binom{4k}{k-2} + A'' \quad (67)$$

$$\geq 2^{3k+2} \quad (68)$$

where A, A', A'' are positive terms that are $o\left(\binom{4k}{k-2}\right)$, and we use the identity $\binom{a}{b} = \frac{a-b+1}{b} \binom{a}{b-1}$ after equation (64) to eliminate the negative $\binom{4k}{k+1}$ term. Inequality (68) follows from the induction assumption. This proves the statement for $k + 1$ and completes the proof. ■

Lemma 3 When $k \leq \frac{2n-8}{5}$, the following inequality holds

$$\frac{1}{2} \sum_{i=1}^k \binom{n}{i} < \binom{n}{k+1} \quad (69)$$

Proof: We prove the lemma by induction over k . First, note that the inequality holds when $k = 1$,

$$\frac{1}{2} \binom{n}{1} < \binom{n}{2} \quad (70)$$

Then, assume that the statement is true for k . Now we check the statement for $k + 1$,

$$\frac{1}{2} \sum_{i=1}^{k+1} \binom{n}{i} < \frac{3}{2} \binom{n}{k+1} \quad (71)$$

$$\leq \frac{n-k-1}{k+2} \binom{n}{k+1} \quad (72)$$

$$= \binom{n}{k+2} \quad (73)$$

where (71) follows from the induction assumption and (72) is because $k \leq \frac{2n-8}{5}$. This proves the statement for $k + 1$ and completes the proof. ■

References

- [1] R. Dorfman. The detection of defective members of large populations. *Annals of Mathematical Statistics*, 14(4):436–440, December 1943.
- [2] D. Z. Zhu and F. K. Hwang. *Combinatorial Group Testing and Its Applications*. 2nd edition, 1999.
- [3] J. Wolf. Born again group testing: Multiaccess communications. *IEEE Trans. on Info. Theory*, 31(2):185–191, 1985.
- [4] G. K. Atia and V. Saligrama. Boolean compressed sensing and noisy group testing. *IEEE Trans. on Info. Theory*, 58(3):1880–1901, 2012.
- [5] T. Wadayama. Nonadaptive group testing based on sparse pooling graphs. *IEEE Trans. on Info. Theory*, 63(3):1525–1534, 2017.
- [6] C. Wang, Q. Zhao, and C. Chuah. Optimal nested test plan for combinatorial quantitative group testing. *IEEE Trans. on Signal Processing*, 66(4):992–1006, 2018.
- [7] S. Wu, S. Wei, Y. Wang, R. Vaidyanathan, and J. Yuan. Partition information and its transmission over boolean multi-access channels. *IEEE Trans. on Info. Theory*, 61(2):1010–1027, 2015.
- [8] C. Shangguan and G. Ge. New bounds on the number of tests for disjunct matrices. *IEEE Trans. on Info. Theory*, 62(12):7518–7521, 2016.
- [9] J. Scarlett and O. Johnson. Noisy non-adaptive group testing: A (near-)definite defectives approach. *IEEE Trans. on Info. Theory*, 66(6):3775–3797, 2020.
- [10] J. Scarlett and V. Cevher. Near-optimal noisy group testing via separate decoding of items. In *IEEE ISIT*, pages 2311–2315, 2018.

- [11] J. Scarlett. Noisy adaptive group testing: Bounds and algorithms. *IEEE Trans. on Info. Theory*, 65(6):3646–3661, 2019.
- [12] A. Mazumdar. Nonadaptive group testing with random set of defectives. *IEEE Trans. on Info. Theory*, 62(12):7522–7531, 2016.
- [13] T. Kealy, O. Johnson, and R. Piechocki. The capacity of non-identical adaptive group testing. In *Allerton Conference*, pages 101–108, 2014.
- [14] O. Johnson, M. Aldridge, and J. Scarlett. Performance of group testing algorithms with near-constant tests per item. *IEEE Trans. on Info. Theory*, 65(2):707–723, 2019.
- [15] H. A. Inan, P. Kairouz, M. Wootters, and A. Ozgur. On the optimality of the kautz-singleton construction in probabilistic group testing. In *Allerton Conference*, pages 188–195, 2018.
- [16] E. Karimi, F. Kazemi, A. Heidarzadeh, K. R. Narayanan, and A. Sprintson. Non-adaptive quantitative group testing using irregular sparse graph codes. In *Allerton Conference*, pages 608–614, 2019.
- [17] O. Gebhard, M. Hahn-Klimroth, D. Kaaser, and P. Loick. Quantitative group testing in the sublinear regime. Available at arXiv: 1905.01458.
- [18] M. Falahatgar, A. Jafarpour, A. Orlitsky, V. Pichapati, and A. T. Suresh. Estimating the number of defectives with group testing. In *IEEE ISIT*, pages 1376–1380, 2016.
- [19] A. Coja-Oghlan, O. Gebhard, M. Hahn-Klimroth, and P. Loick. Information-theoretic and algorithmic thresholds for group testing. *IEEE Trans. on Info. Theory*, pages 1–1, 2020.
- [20] C. L. Chan, S. Jaggi, V. Saligrama, and S. Agnihotri. Non-adaptive group testing: Explicit bounds and novel algorithms. *IEEE Trans. on Info. Theory*, 60(5):3019–3035, 2014.
- [21] S. Cai, M. Jahangoshahi, M. Bakshi, and S. Jaggi. Efficient algorithms for noisy group testing. *IEEE Trans. on Info. Theory*, 63(4):2113–2136, 2017.
- [22] S. Bondorf, B. Chen, J. Scarlett, H. Yu, and Y. Zhao. Sublinear-time non-adaptive group testing with $o(k \log n)$ tests via bit-mixing coding. Available at arXiv: 1904.10102.
- [23] M. Aldridge. Individual testing is optimal for nonadaptive group testing in the linear regime. *IEEE Trans. on Info. Theory*, 65(4):2058–2061, 2019.
- [24] A. Agarwal, S. Jaggi, and A. Mazumdar. Novel impossibility results for group-testing. In *IEEE ISIT*, pages 2579–2583, 2018.

- [25] A. Heidarzadeh and K. Narayanan. Two-stage adaptive pooling with rt-qpcr for covid-19 screening. Available at arXiv: 2007.02695.
- [26] M. Ruszinko. On the upper bound of the size of the r-cover-free families. *Journal of Combinatorial Theory, Series A*, 66(2):302 – 310, 1994.
- [27] L. Riccio and C. J. Colbourn. Sharper bounds in adaptive group testing. *Taiwanese Journal of Mathematics*, 4(4):669–673, 2000.
- [28] M. Aldridge, O. Johnson, and J. Scarlett. *Group Testing: An Information Theory Perspective*. 2019.
- [29] T. Li, C. L. Chan, W. Huang, T. Kaced, and S. Jaggi. Group testing with prior statistics. In *IEEE ISIT*, pages 2346–2350, 2014.
- [30] S. D. Lendle, M. G. Hudgens, and B. F. Qaqish. Group testing for case identification with correlated responses. *Biometrics*, 68(2):532–540, 2012.
- [31] P. Nikolopoulos, T. Guo, C. Fragouli, and S. Diggavi. Community aware group testing. Available at arXiv: 2007.08111.
- [32] Y-J. Lin, C-H. Yu, T-H. Liu, C-S. Chang, and W-T. Chen. Positively correlated samples save pooled testing costs. Available at arXiv:2011.09794.
- [33] S. Ahn, W-N. Chen, and A. Ozgur. Adaptive group testing on networks with community structure. Available at arXiv:2101.02405.
- [34] F. K. Hwang. A method for detecting all defective members in a population by group testing. *Journal of the American Statistical Association*, 67(339):605–608, 1972.
- [35] H. B. Chen and F. K. Hwang. Exploring the missing link among d-separable, d^- -separable and d-disjunct matrices. *Discrete Applied Mathematics*, 155(5):662 – 664, 2007.
- [36] L. Baldassini, O. Johnson, and M. Aldridge. The capacity of adaptive group testing. In *2013 IEEE International Symposium on Information Theory*, pages 2676–2680, 2013.
- [37] A. Allemann. An efficient algorithm for combinatorial group testing. In *Information Theory, Combinatorics, and Search Theory: In Memory of Rudolf Ahlswede*, pages 569–596, 2013.
- [38] M. Sobel and P. A. Groll. Group testing to eliminate efficiently all defectives in a binomial sample. *Bell System Technical Journal*, 38(5):1179–1252, 1959.