

On the decidability of behavioral equivalences for (P,P)-PRS

Irina A. Lomazova
HSE University
Moscow, Russia
ilomazova@hse.ru

Vladimir A. Bashkin
Yaroslavl State University
Yaroslavl, Russia
v_bashkin@mail.ru

Abstract—We study resource similarity and resource bisimilarity – congruent restrictions of the bisimulation equivalence for the (P,P)-class of Process Rewrite Systems (PRS). Both these equivalences coincide with the bisimulation equivalence for (1,P)-subclass of (P,P)-PRS, which is known to be decidable. While it has been shown in the literature that resource similarity is undecidable for (P,P)-PRS, decidability of resource bisimilarity for (P,P)-PRS remained an open question.

In this paper, we present an algorithm for checking resource bisimilarity for (P,P)-PRS. We show that although both resource similarity and resource bisimilarity are congruences and have a finite semi-linear basis, only the latter is decidable.

Index Terms—process rewrite systems, bisimulation equivalence, congruence, decidability, Petri nets, resource bisimilarity

I. INTRODUCTION

General background. The notion of process equivalence can be formalized in many different ways [1]. One of the most important is *bisimulation equivalence* [2], [3], capturing the main features of an observable behaviour of a system. As a rule, bisimulation equivalence is a relation on sets of states of a labelled transition systems (LTS). Two states are bisimilar, if they are undistinguishable modulo systems behavior (the interleaving semantics are assumed).

In [4], an elegant formalism of *process rewrite systems* (PRS) is defined, allowing to represent a (possibly infinite) LTS by a finite set of rewrite rules using algebraic operations of sequential and parallel composition. Many natural and well-studied classes of infinite-state systems are contained in the PRS hierarchy (Fig. 1): basic process algebra (BPA) are (1,S)-PRS, basic parallel processes (BPP) are (1,P)-PRS, pushdown automata (PDA) are (S,S)-PRS, Petri nets are (P,P)-PRS and process algebra (PA) are (1,G)-PRS.

The PRS hierarchy is strict and represents a number of interesting decidability borders. One of them is the decidability of bisimilarity. It is known that bisimilarity is decidable for the lower left (“sequential”) part of the PRS hierarchy diagram:

- (S,S): decidable [5] and Ackerman-hard [6];
- (1,S): decidable [7], PSPACE-hard [8] and EXPTIME-hard [9];
- (1,P): decidable [10] and PSPACE-complete [11].

On the other hand, bisimilarity is undecidable for the upper right (“parallel”) part of the diagram. Jančar [12] proved this for Petri nets ((P,P)-PRS) and hence for both classes above

them — (P,G) and (G,G). The decidability of bisimilarity for the “central” fragment of PRS hierarchy ((1,G) and (S,G)) is still open. It is known that bisimulation is decidable for normed (1,G)-PRS [13], but there are some negative results on the weaker notions of bisimulation for generic (1,G)-PRS [14] and even simpler normed models [15].

The class of (P,P)-PRS is of particular interest in the context of bisimulation checking, because it corresponds to the standard and well-studied notion of labelled place/transition (P/T) nets as originally proposed by Petri [16]. Other important formalism that is equivalent to (P,P)-PRS are Vector Addition Systems with States (VASS). Unfortunately, the fundamental undecidability result from [12] shows that bisimilarity is too weak to be efficiently checked on the (P,P)-PRS. We need either to simplify the model (for example, using only (1,P)-PRS or one-counter Petri nets) or to strengthen the relation itself. In this paper the latter way is studied.

Related work. In [17], an equivalence on places of a Petri net is defined which when lifted to the reachable markings preserves their token game and distribution over the places. This structural equivalence is called “strong¹ bisimulation” in [17] because it allows to generate a non-trivial subset of marking (state) bisimilarity.

The name *place bisimulation* comes from [18] where the Olderog’s notion is improved and used for nets reduction. Place bisimulation relates “equivalent” places in a net, where places are equivalent if they give rise to bisimilar markings (states). More precisely, place bisimulation is defined by a so-called *weak transfer property*: places p and q are bisimilar if any transition using p can be successfully imitated by some other transition using q , and vice versa (w.r.t. arc cardinality). In [19], a polynomial algorithm for the largest place bisimulation is given. The equivalences on the set of places are further explored in [20]–[22]. In particular, it has been proven (using Jančar’s technique from [23] that a weaker relation of *largest correct place fusion* is undecidable. Places p and q can be correctly fused if for any marking M the two markings $M + p$ and $M + q$ are bisimilar.

¹Not related to the more common use of terms “strong bisimulation” and “weak bisimulation” for fundamental state bisimulation and state bisimulation in LTS with invisible (silent) transitions.

Separately, in [24], a similar equivalence relation, called *structural bisimilarity*, is defined for labeled Place-Transition Nets. This relation is defined on the set of all Petri net vertices (both places and transitions) and also uses a kind of weak transfer property.

In [25], [26] a notion of *team bisimulation* is defined for $(\mathbf{1}, \mathbf{P})$ -PRS (BPP nets). Two distributed systems, each composed of a team of sequential, non-cooperating agents (the tokens in the BPP net), are equivalent if it is possible to match each sequential component of the first system with team-bisimilar sequential component of the other system (as in sports, where competing teams have the same number of equivalent player positions). On (\mathbf{P}, \mathbf{P}) -PRS, team bisimulation coincides with place bisimulation from [18].

In [27], a structural equivalence is defined on Petri net resources. A resource in a Petri net is a part of its marking. In PRS notation resources are subterms of process terms. Two resources are similar if replacing one of them by another in any process term does not change the observable process behavior (modulo bisimulation).

The correct place fusion equivalence from [22] turns out to be a special case of the resource similarity, namely the place fusion is the resource similarity for one-token resources in (\mathbf{P}, \mathbf{P}) -PRS. Hence, the resource similarity is undecidable in (\mathbf{P}, \mathbf{P}) -PRS. On the other hand, the resource similarity is a congruence and can be generated by a finite semilinear basis. A special type of minimal basis, called *ground basis*, is presented in [27]. This ground basis is explicitly defined and can be effectively computed for any finite relation.

Also, in [27], a stronger equivalence on the set of a Petri net resources, called *resource bisimulation*², is defined. An equivalence of resources is called a resource bisimulation if its additive and transitive closure is a bisimulation.

In [29], [30] properties of these resource equivalences are studied. In particular it is shown that resource bisimulation is defined by a weak transfer property, similar to the weak transfer property of place bisimulation. It is proved also that there exists the largest resource bisimulation, called *resource bisimilarity*. The questions of whether the resource bisimilarity is decidable and whether it is strictly weaker than the resource similarity remained open [29]–[31].

Our contribution. In this paper we give answers to these open questions. Based on the well-known “tableau method” (see [32], [33]), we construct an algorithm for checking the resource bisimilarity for a (\mathbf{P}, \mathbf{P}) -PRS. Thus it is proved that resource bisimilarity is decidable for (\mathbf{P}, \mathbf{P}) -PRS. This implies that the resource bisimilarity is strictly weaker than the resource similarity. We give also an example of a (\mathbf{P}, \mathbf{P}) -PRS, where two similar resources are not resource bisimilar.

Hence another decidability border for the bisimulation-induced structural equivalences on (\mathbf{P}, \mathbf{P}) -PRS is obtained: between resource bisimulation and resource similarity. Both of them have a compact semilinear representation (ground basis) but only resource bisimulation is decidable.

²Not related to the notion of “resource bisimulation” from [28].

II. PRELIMINARIES

By \mathbb{N} we denote the set of natural numbers. A *multiset* m over a set S is a mapping $m : S \rightarrow \mathbb{N}$, i.e. a multiset may contain several copies of the same element.

For two multisets m, m' over S the inclusion relation and the sum of two multisets are defined as usual: $m \subseteq m'$ iff $\forall s \in S : m(s) \leq m'(s)$, and $\forall s \in S : m + m'(s) = m(s) + m'(s)$.

A multiset m is *finite* iff the set $\text{supp}(m) = \{s \in S \mid m(s) > 0\}$, called a *support* of m , is finite. By $\mathcal{M}(S)$ we denote the set of all finite multisets over S . For a finite multiset m by $|m|$ we denote its cardinality, i.e., the number of elements taking multiple copies into account.

When a set S is finite, multisets over S can be encoded as Parikh vectors over \mathbb{N}^n . Let all elements of S be arranged in some order. A Parikh vector for $m \in \mathcal{M}(S)$ is a vector $\phi(m) = (k_1, k_2, \dots, k_n)$ of length $n = |m|$, where k_i is the number of occurrences in m of its i -th element. Thus for $m_1, m_2 \in \mathcal{M}(S)$ the Parikh vector of their sum $m_1 + m_2$ is computed as a pointwise sum of $\phi(m_1)$ and $\phi(m_2)$.

A. Labeled Transition Systems

As a rule, semantics of processes is described using *labeled transition system*.

Definition 1: Let $\text{Act} = \{a, b, \dots\}$ be a finite set of *actions*. A (labeled) transition system (LTS) is a tuple $LTS = (\mathcal{S}, \text{Act}, \rightarrow)$, where $\mathcal{S} = \{p, r, s, \dots\}$ is a set of *states*, $\rightarrow \subseteq \mathcal{S} \times \text{Act} \times \mathcal{S}$ is a *transition relation*.

A state in a labeled transition system represents the system behavior starting from it, and is also called a *process*. In what follows we will not distinguish states and processes. A transition relation defines the system dynamics. We write $s \xrightarrow{a} s'$ instead of $(s, a, s') \in \rightarrow$, and $s \xrightarrow{a} s'$ represents a step changing state s to state s' by firing action a .

A labeled transition system can be represented as a finite or infinite oriented graph, where nodes are labeled with states and arcs are labeled with actions, and an arc a goes from a node s to a node s' iff $s \xrightarrow{a} s'$.

B. Bisimulation Equivalence

A binary relation $R \subseteq \mathcal{S} \times \mathcal{S}$ over some set \mathcal{S} is an *equivalence* iff it is reflexive, symmetric, and transitive. Equivalences over algebraic expressions can also satisfy the congruence property.

Let L be a set of expressions. For $e, e_1, e_2 \in L$, let $e[e_2/e_1]$ denote a substitution of e_2 for a subexpression e_1 in e . An equivalence R over L is called a *congruence* iff for all $e, e_1, e_2 \in L$, such that $(e_1, e_2) \in R$, we have $(e[e_2/e_1], e) \in R$, i.e., replacing a subexpression with an equivalent one in any expression e produces an expression equivalent to e .

Now we present the basic definitions and concepts related to bisimulation equivalence.

Definition 2: Let $LTS = (\mathcal{S}, \text{Act}, \rightarrow)$ be a labeled transition systems, and $R \subseteq \mathcal{S} \times \mathcal{S}$ be a relation over the set of its states. We say that R conforms the *transfer property* iff for

each $(s, p) \in R$ and for every step $s \xrightarrow{a} s'$, there exists an imitating step $p \xrightarrow{a} p'$ such that $(s', p') \in R$.

The transfer property can be illustrated by the following diagram:

$$\begin{array}{ccc} s & R & p \\ \downarrow a & & \downarrow a \\ s' & R & p' \end{array}$$

Definition 3: A relation R is called a *process bisimulation* iff both R and R^{-1} conform the transfer property.

Processes s and p are called bisimilar (bisimulation equivalent), written $s \sim p$, iff there exists bisimulation relation R such that $(s, p) \in R$. The relation \sim is called *bisimilarity*.

Thus, given a LTS, the bisimilarity is the union of all its bisimulations.

It is easy to prove that each bisimulation is an equivalence. Bisimilarity is also an equivalence, and is itself a bisimulation. In other words, bisimilarity is the largest process bisimulation.

The *stratified bisimulation relations* [34] $\sim_k \subseteq \mathcal{S} \times \mathcal{S}$ for $k \in \mathbb{N}$ are defined as follows:

- $s \sim_0 p$ for all $s, p \in \mathcal{S}$;
- $s \sim_{k+1} p$ iff for each $a \in Act$ if $s \xrightarrow{a} s'$ then there is $p' \in \mathcal{S}$ s.t. $p \xrightarrow{a} p'$ and $s' \sim_k p'$; and if $p \xrightarrow{a} p'$ then there is $s' \in \mathcal{S}$ s.t. $s \xrightarrow{a} s'$ and $s' \sim_k p'$.

It is known [34] that for all image-finite labelled transition systems $s \sim p$ iff $s \sim_k p$ for all $k \in \mathbb{N}$.

Another way to define bisimilarity is to use its game characterization [12], [35], [36]. A *bisimulation game* is a game between two players, Attacker and Defender. Given two processes s and p , Attacker tries to prove $s \not\sim p$, and Defender — to refute him, and thus to prove $s \sim p$.

The game goes in rounds. In each round the players change the current pair of states (processes) (s, p) . Attacker chooses either s or p , an action a and performs a move $s \xrightarrow{a} s'$ or $p \xrightarrow{a} p'$, depending on whether he chose s or p . Defender responds by choosing the other process (either p or s) and performs a simulating move $p \xrightarrow{a} p'$ or $s \xrightarrow{a} s'$ under the same action a . The pair (s', p') becomes the new current pair of states.

A play is finite if one of the players gets stuck (cannot make a move); the player who gets stuck loses the play and the other player is the winner. If the play is infinite then Defender is the winner.

It holds that $s \sim p$ if Defender has a winning strategy in the bisimulation game starting with the pair (s, p) , and $s \not\sim p$ if Attacker has a winning strategy in the corresponding game.

C. Process Rewrite Systems

Let $Act = \{a, b, \dots\}$ be an infinite set of *action names* and $Const = \{A, B, \dots\}$ be an infinite set of *process constants*. *Process expressions* are built from constants using binary operations of *parallel composition* (indicated by a vertical bar

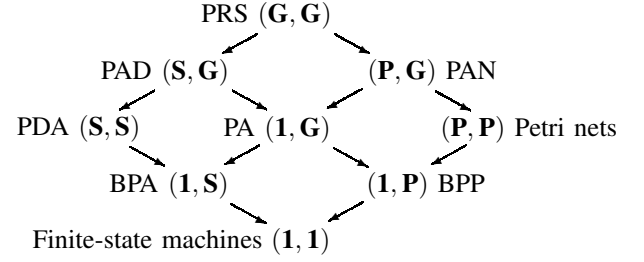


Fig. 1. Hierarchy of PRS-classes

\parallel) and *sequential composition* (indicated by a dot). Formally, process expressions are defined by the following grammar.

$$E ::= A \mid \varepsilon \mid E.E \mid E \parallel E,$$

where A ranges over *Const*, and ε is the empty process.

By \mathcal{E} we denote the set of all process terms.

The parallel composition is supposed to be associative and commutative, sequential composition — associative, and ε — a unit for both operations, i.e., $E \parallel \varepsilon = E$ and $\varepsilon.E = E$. We will not distinguish between expressions which match up to the above properties.

Definition 4: [4] A *process rewrite system (PRS)* Δ is a finite set of *basic rewrite rules* of the form $E_1 \xrightarrow{a} E_2$, where E_1, E_2 are process expressions, and $E_1 \neq \varepsilon$.

For a given PRS Δ , by $Act(\Delta)$ and $Const(\Delta)$ we denote finite sets of actions and, accordingly, constants occurring in the rules from Δ .

The *semantics* of a PRS-system Δ is defined as a *labeled transition system* $LTS(\Delta) = (\mathcal{E}, Act, \rightarrow)$, where states are process expressions from \mathcal{E} , and the transition relation \rightarrow is defined by the following *rules of inference* (SOS rules):

$$\begin{array}{ll} \mathbf{R}_1 : \frac{(E_1 \xrightarrow{a} E_2) \in \Delta}{(E_1 \xrightarrow{a} E_2)} & \mathbf{R}_2 : \frac{E_1 \xrightarrow{a} E'_1}{E_1 \parallel E_2 \xrightarrow{a} E'_1 \parallel E_2} \\ \mathbf{R}_3 : \frac{E_2 \xrightarrow{a} E'_2}{E_1 \parallel E_2 \xrightarrow{a} E_1 \parallel E'_2} & \mathbf{R}_4 : \frac{E_1 \xrightarrow{a} E'_1}{E_1.E_2 \xrightarrow{a} E'_1.E_2} \end{array}$$

[6] distinguishes the following classes of PRS-terms:

- 1** — atomic terms (e.g., A).
- S** — atoms and their sequential compositions (e.g., $A.B.A$).
- P** — atoms and their parallel compositions (e.g., $A \parallel B \parallel B$).
- G** — all terms.

PRS systems are classified according to the type of rules used: (α, β) -PRS is defined as a class of systems with the rules of the form $\alpha \xrightarrow{a} \beta \in \Delta$, where $\alpha \neq \varepsilon$, β may be ε , and $\alpha, \beta \in \{\mathbf{1}, \mathbf{S}, \mathbf{P}, \mathbf{G}\}$.

It is proven in [4] that the class $(\mathbf{1}, \mathbf{1})$ -PRS coincides with the class of finite-state machines, $(\mathbf{1}, \mathbf{P})$ corresponds to process algebra BPP, $(\mathbf{1}, \mathbf{S})$ — process algebra BPA, (\mathbf{P}, \mathbf{P}) — Petri nets, (\mathbf{S}, \mathbf{S}) — push-down automata.

R. Mayr has proven that reachability is decidable for all PRS-systems.

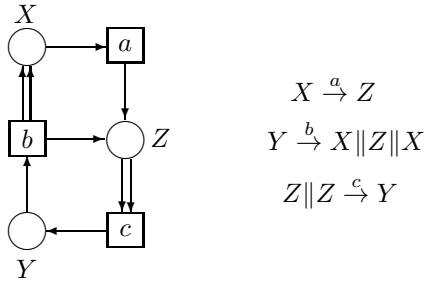


Fig. 2. Petri net and the equivalent (\mathbf{P},\mathbf{P}) -PRS

III. RESOURCE SIMILARITY AND RESOURCE BISIMULATION FOR (\mathbf{P},\mathbf{P}) -SYSTEMS

We study bisimulation equivalences for (\mathbf{P},\mathbf{P}) -systems. Process expressions in (\mathbf{P},\mathbf{P}) -systems are built with the only operation of parallel composition. Since parallel composition is commutative and associative, expressions in (\mathbf{P},\mathbf{P}) -systems are invariant under grouping and permutation and can be considered as multisets of constants.

(\mathbf{P},\mathbf{P}) -systems are equivalent to classical Petri nets (called also P/T-nets) [16]. For a (\mathbf{P},\mathbf{P}) -PRS Δ , each constant from $Const(\Delta)$ corresponds to a Petri net place named with this constant, and a basic rewriting rule $\delta \in \Delta$ is represented by a transition labeled by $Act(\delta)$ and a flow relation – multiple arcs connecting places and transitions. Thus for each basic rewriting rule $\delta = E_1 \xrightarrow{a} E_2$ there is a transition t , labeled with a , and for each constant $A \in Const(E_1)$ there is an arc going from the place (named with) A to t with the multiplicity equal to the number of occurrences of A in E_1 . Symmetrically, for each constant $A \in Const(E_2)$ there is a similar arc going from t to the place (named with) A .

Process expressions in (\mathbf{P},\mathbf{P}) -systems are multisets of constants/places and correspond to Petri net markings (states), where for each constant the number of its occurrences equals to the number of tokens residing in the place named with this constant. Then firing a transition in a Petri net is equivalent to the application of the corresponding basic rule in the (\mathbf{P},\mathbf{P}) -system.

We extend the standard Petri net notation to (\mathbf{P},\mathbf{P}) -systems, and for a basic rewriting rule $\delta = E_1 \xrightarrow{a} E_2$ by $\bullet\delta$ we denote the multiset of constants occurring in E_1 . Symmetrically, by $\delta\bullet$ we denote the multiset of constants in E_2 .

In a graphical representation of a Petri net places are represented by circles named with constants, transitions are boxes labeled with actions, a current marking (a multiset of constants) m is designated by putting $m(A)$ tokens into each place (named with) $A \in Const$.

Fig. 2 illustrates the described correspondence between (\mathbf{P},\mathbf{P}) -PRSs and Petri nets. Further we will use the same notations for the corresponding elements of PRSs and Petri nets, i.e., we will not distinguish Petri net places and PRS constants, Petri net markings and PRS process expressions etc.

It has been proven by P. Jančar [12] that marking (state/process expression) bisimilarity is undecidable for Petri

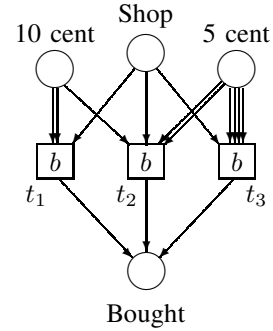


Fig. 3. Buying goods for 20 cents

nets. However, bisimilarity is decidable for $(\mathbf{1},\mathbf{P})$ -systems, which correspond to conflict-free Petri nets, i.e. Petri nets where each transition has not more than one input place. Another interpretation of $(\mathbf{1},\mathbf{P})$ -systems is BPP process algebras [37].

Note, that for $(\mathbf{1},\mathbf{P})$ -systems bisimilarity equivalence is a congruence, while this is not true for a more general class of (\mathbf{P},\mathbf{P}) -systems. The algorithm for checking bisimilarity of two $(\mathbf{1},\mathbf{P})$ -terms [10] is essentially based on its congruence property. Hence one can suppose that congruence ensures decidability of the bisimulation relations. We will explore this issue.

Since states in (\mathbf{P},\mathbf{P}) -systems are multisets of constants, the congruence property in this case can be reformulated as follows:

Definition 5: For a (\mathbf{P},\mathbf{P}) -system Δ , an equivalence relation $R \subseteq \mathcal{M}(Const(\Delta)) \times \mathcal{M}(Const(\Delta))$ is a congruence iff for all $r, s, w \in \mathcal{M}(Const(\Delta))$, $(r, s) \in R$ implies $(r+w, s+w) \in R$.

A. Resource Similarity

The relation of *resource similarity*, introduced in [27] for Petri nets, is a congruent strengthening of the bisimulation equivalence. Intuitively, a resource in a Petri net is a part of its marking. Since a marking is a multiset of places/constants, formally, a resource is a submarking, and the definition of a resource coincides with the definition of a marking, since submarking is a marking itself. Markings and resources are differentiated because of their different substantial interpretation. Resources are parts of markings which may or may not provide this or that kind of net behavior, e.g., in the Petri net example on Fig. 3 from [31], two ten-cent coins form a resource — enough to buy an item of goods.

Two resources are similar for a given Petri net if replacing one of them by another in any marking does not change the observable net behavior. In other words, resource similarity is a congruent relation, which preserves visible behavior up to bisimilarity.

Now we define the resource similarity formally. Recall that \sim denotes the state bisimilarity relation.

Definition 6: Let Δ be a (\mathbf{P},\mathbf{P}) -system. A *resource* in Δ is a multiset of constants from $Const(\Delta)$. Two resources r

and s in Δ are called *similar* (denoted $r \approx s$) iff for all $w \in \mathcal{M}(\text{Const}(\Delta))$ we have $(r + w) \sim (s + w)$.

Below we will give some properties of the similarity relation from [27].

First of all, it is easy to check that the resource similarity is an equivalence, i. e., it is reflexive, symmetric, and transitive.

Also, the relation has the following important properties.

Proposition 1: Let Δ be a (\mathbf{P}, \mathbf{P}) -system, r, s, r', s' — its resources. Then

- 1) $r \approx s \Rightarrow s \sim r$;
- 2) $r \approx s \ \& \ r' \approx s' \Rightarrow (r + r') \approx (s + s')$.

Thus, resource similarity implies process bisimulation, in other words it is a strengthening of process bisimilarity:

$$(\approx) \subseteq (\sim).$$

The second statement says that resource similarity is closed under addition of resources. It is also closed under transitivity as an equivalence.

Let R^{AT} denote the additive-transitive closure (AT-closure) of the relation R (the minimal congruence, containing R). The resource similarity \approx coincides with its AT-closure $(\approx)^{AT}$.

Let B be a binary relations. A relation B' is called an *AT-basis* of B iff $(B')^{AT} = B^{AT}$. An AT-basis B' is called *minimal* iff there is no $B'' \subset B'$ such that $(B'')^{AT} = B^{AT}$.

When a relation is closed under addition and transitivity, it is completely determined by its AT-basis. So, when a relation has a finite AT-basis, it has a convenient finite representation. It was proved [27] that the resource similarity has a finite AT-basis. For constructing this basis a special well-quasi ordering on resources is used.

Recall that a *well-quasi-ordering* (a wqo) over a set S is a quasi-ordering \leq such that, for any infinite sequence x_0, x_1, x_2, \dots , in S , there exist indices $i < j$ with $x_i \leq x_j$. The classical property of wqo's states that the set of minimal w.r.t. a wqo elements is finite.

Now we define a special wqo on pairs of Petri net resources, and minimal elements in this wqo will form a minimal AT-basis for the resource similarity relation.

Note that for a given Petri net its markings (and resources) are multisets over a finite set of places and can be encoded as Parikh vectors – integer vectors of a fixed length. So, by Higman's lemma [38] sequence (coordinate-wise) partial ordering \leq on the set of Petri net markings is a wqo. This ordering is very helpful for analysis of Petri nets as well-structured transition systems [39] and, in particular, for techniques based on constructing a coverability tree/graph. However, for constructing AT-basis for resource similarity relation we need another ordering.

Definition 7: Let S be a finite set, $B \subseteq \mathcal{M}(S) \times \mathcal{M}(S)$ be a binary relation on the set of multisets over S . We define a partial order \sqsubseteq on the set B of pairs of multisets as follows:

- 1) For identity pairs let

$$(r_1, r_1) \sqsubseteq (r_2, r_2) \stackrel{def}{\Leftrightarrow} r_1 \subseteq r_2;$$

- 2) For two non-identity pairs, the maximal identity parts and the addend pairs of disjoint multisets are compared separately:

$$(r_1 + o_1, r_1 + o'_1) \sqsubseteq (r_2 + o_2, r_2 + o'_2) \stackrel{def}{\Leftrightarrow} \\ \stackrel{def}{\Leftrightarrow} o_1 \cap o'_1 = \emptyset \ \& \ o_2 \cap o'_2 = \emptyset \ \& \ r_1 \subseteq r_2 \ \& \\ o_1 \subseteq o_2 \ \& \ o'_1 \subseteq o'_2.$$

- 3) An identity pair and a non-identity pair are always incomparable.

It is easy to prove that the partial ordering \sqsubseteq is a wqo, since for each pair of multisets $r_1, r_2 \in \mathcal{M}(S)$ we have $r_1 \sqsubseteq r_2$ implies $r_1 \leq r_2$, and \leq is a wqo.

Let then B_s denote the set of all elements of B^{AT} , which are minimal with respect to \sqsubseteq .

Theorem 1: [27] Let S be a finite set, $B \subseteq \mathcal{M}(S) \times \mathcal{M}(S)$ be a symmetric and reflexive binary relation on the set of multisets over S . Then B_s is an AT-basis of B^{AT} and B_s is finite.

We call B_s the *ground basis* of B .

Now consider (\mathbf{P}, \mathbf{P}) -system Δ . Resources of Δ are multisets over the finite set $\text{Const}(\Delta)$. The resource similarity for Δ is a symmetric and reflexive binary relation on the set of its resources, closed under addition and transitivity. Hence, by Theorem 1 the resource similarity relation \sim has a finite ground basis \sim_S , such that $(\sim_S)^{AT} = (\sim)$, and \sim_S consists of all minimal pairs of \sim w.r.t. the ordering \sqsubseteq .

Thus, the resource similarity is finitely-based. However, the place fusion (studied in [21], [22]) is a special case of resource similarity for resources of capacity one. Place fusion was proved to be undecidable, and this implies undecidability of resource similarity.

Note, that a resource similarity may be not a bisimulation, since it may not satisfy the transfer property.

B. Resource Bisimilarity

The resource similarity relation is a strengthening of the marking bisimilarity, which is closed under addition of resources and transitivity, i.e. if a relation B is a resource similarity, then $B = B^{AT}$. We know also that, being finitely based, resource similarity is undecidable, and therefore its finite basis cannot be computed effectively. Then looking for a computable approximation of the marking bisimilarity one more relation on Petri net markings (resources) was defined in [27].

Definition 8: Let Δ be a (\mathbf{P}, \mathbf{P}) -system. An equivalence relation $B \subseteq \mathcal{M}(\text{Const}(\Delta)) \times \mathcal{M}(\text{Const}(\Delta))$ on the set of resources of Δ is called a *resource bisimulation* iff B^{AT} is a process bisimulation.

First of all we recall several important properties of resource bisimulations [27].

Let Δ be a (\mathbf{P}, \mathbf{P}) -system. Then

- 1) if B_1, B_2 are resource bisimulations for Δ then $B_1 \cup B_2$ is a resource bisimulation for Δ ;
- 2) there exists the largest resource bisimulation, denoted by \simeq , such that for every resource bisimulation B we have $B \subseteq (\simeq)$.
- 3) for a given (\mathbf{P}, \mathbf{P}) -system the resource bisimilarity is a strengthening of the resource similarity relation, i.e. for each two resources r and s :

$$r \simeq s \Rightarrow r \approx s.$$

So, we have that the relation \simeq is a symmetric and reflexive relation, closed w.r.t. transitivity and addition of resources. Then by Theorem 1 above the maximal resource bisimulation has a finite ground AT-basis, consisting of minimal w.r.t. \sqsubseteq ordering. The main consequence of this for our research is that for each (\mathbf{P}, \mathbf{P}) -system, its largest resource bisimulation can be represented by a finite number of pairs.

The AT-closure of a resource bisimulation is a marking bisimulation, and marking bisimulations are characterized by the transfer property. It was proved in [27] that resource bisimulations can be characterized by a weak variant of the transfer property, when only 'relevant' markings are considered for a transition t . The weak variant of the transfer property for place bisimulation was defined in [19]. The following definition generalizes it for arbitrary resources.

Definition 9: Let Δ be a (\mathbf{P}, \mathbf{P}) -system. We say that a relation $B \subseteq \mathcal{M}(\text{Const}(\Delta)) \times \mathcal{M}(\text{Const}(\Delta))$ satisfies the *weak transfer property* iff for all $(r, s) \in B$, for all $\delta \in \Delta$, s.t. $\bullet\delta \cap r \neq \emptyset$, there exists an imitating step $\gamma \in \Delta$, s.t. $\text{Act}(\delta) = \text{Act}(\gamma)$ and, writing m_1 for $\bullet\delta \cup r$ and m_2 for $\bullet\delta - r + s$, we have $m_1 \xrightarrow{\delta} m_1'$ and $m_2 \xrightarrow{\gamma} m_2'$ with $(m_1', m_2') \in B^{AT}$.

The weak transfer property can be represented by the following diagram:

$$\begin{array}{ccc}
r & \approx_B & s \\
\bullet\delta \cup r & & \bullet\delta - r + s \\
\downarrow \delta & & \downarrow (\exists)\gamma : \text{Act}(\delta) = \text{Act}(\gamma) \\
m_1' & \sim_{B^{AT}} & m_2'
\end{array}$$

The following theorem gives an important characterization of resource bisimulation relations.

Theorem 2: [27] Let Δ be a (\mathbf{P}, \mathbf{P}) -system. A relation $B \subseteq \mathcal{M}(\text{Const}(\Delta)) \times \mathcal{M}(\text{Const}(\Delta))$ is a resource bisimulation iff B is an equivalence and it satisfies the weak transfer property.

Summarizing the above results, we note that given a (\mathbf{P}, \mathbf{P}) -system Δ ,

- if a relation R is a resource similarity, then R is a congruence and R strengthens the process bisimilarity;
- R is a resource bisimulation iff R is a bisimulation and R is a congruence;




Fig. 4. The resource similarity does not coincide with the state bisimilarity: $X \sim Y$, but $X \not\approx Y$

- the resource bisimilarity is the largest resource bisimulation.

We now look at how the three relations, i.e., process bisimilarity, resource similarity, and resource bisimilarity are related to each other.

Theorem 3:

- 1) For each $(\mathbf{1}, \mathbf{P})$ -system, process bisimilarity, resource similarity and resource bisimilarity coincide: $(\sim) = (\approx) = (\simeq)$.
- 2) There exists a (\mathbf{P}, \mathbf{P}) -system for which $(\sim) \neq (\approx)$.
- 3) There exists a (\mathbf{P}, \mathbf{P}) -system for which $(\approx) \neq (\simeq)$.

Proof: 1. For $(\mathbf{1}, \mathbf{P})$ systems process bisimilarity is a congruence, hence it coincides with the resource similarity and is closed under addition and transitivity. Then $(\sim)^{AT} = (\sim)$, and \sim is a resource bisimilarity.

2. Resource similarity is stronger than the state bisimulation: $m \approx m' \Rightarrow m \sim m'$. The converse implication is not true. Fig. 4 gives an example of the Petri net, where states X and Y are bisimilar – for both of them the only possible step is a . But X and Y are not similar resources, since states $X + X$ and $Y + X$ are not bisimilar – the former can fire b , while the latter cannot. In other words $(\approx) \subset (\sim)$. Note, that each transition in the Petri net on Fig. 4 has not more than two incoming arcs, i.e., this net belongs to (\mathbf{P}, \mathbf{P}) -PRS.

3. Fig. 5 gives an example of a Petri net, where for two resources X_1 and Y_1 we have $X_1 \approx Y_1$, but $X_1 \not\approx Y_1$.

Indeed, for each resource u there is a winning Defender strategy in the Bisimulation Game for the pair of states $(X_1 + u, Y_1 + u)$. When e.g., Attacker fires a by moving a token from X_1 to X_2 and $Z \cap u = \emptyset$, Defender answers by firing the transition without output arcs, and removes a token from Y_1 . If $Z \cap u \neq \emptyset$, Defender answers by moving a token from Y_1 to Y_2 . Note that the Defender's answer depends on the added resource u . It is not difficult to check that a 'clever' Defender, who counts tokens in Z , always wins in this game.

However, there is no possibility to ensure the weak transfer property for any relation which includes (X_1, Y_1) . The step from X_1 to X_2 cannot be imitated by the step from Y_1 to Y_2 , since when Z is empty the step b from Y_2 cannot be imitated on the other side. Also, the step from X_1 to X_2 cannot be imitated by the step from Y_1 to Y_4 or by firing t_2 , since after these steps the 'Y side' cannot imitate steps b and c , while the 'X side' can fire b and then c if Z has at least one token.

Therefore, similar resources can be not resource bisimilar due to the locality of the weak transfer property (characterizing resource bisimilarity), while for resource similarity, bisimulation can be provided in different ways for different 'contexts'.

■

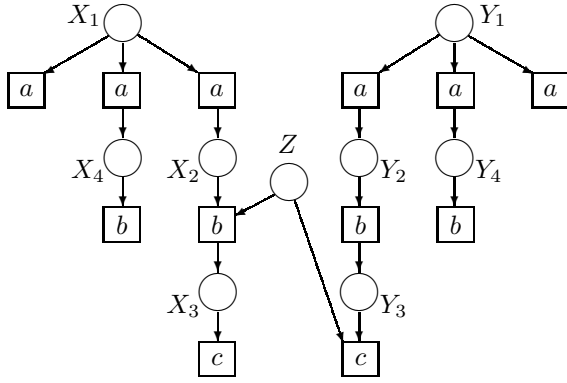


Fig. 5. The resource similarity does not coincide with the resource bisimilarity: $X_1 \approx Y_1$, but $X_1 \not\approx Y_1$

Remark 1: Note that in the proof we used only very simple (\mathbf{P}, \mathbf{P}) systems with at most two atoms on each side of PRS transition rule.

Theorem 3 implies that for (\mathbf{P}, \mathbf{P}) -systems we have strict inclusions for three bisimulation equality relations:

$$(\sim) \subset (\approx) \subset (\simeq).$$

The state bisimilarity (\sim) and the resource similarity (\approx) are undecidable. Further we prove that the resource bisimilarity (\simeq) is decidable.

C. Resource Bisimulation Game and Stratified Resource Bisimilarity

Here we define *Resource bisimilarity game* based on the weak transfer property. Similar to the classical Bisimulation game, there are two players: Attacker and Defender.

Let Δ be a (\mathbf{P}, \mathbf{P}) -system, and $r, s \in \mathcal{M}(\text{Const}(\Delta))$ be two resources in Δ . Attacker wants to prove that $r \not\approx s$ by finding an example of a violation of the weak transfer property. Defender tries not to let him do this.

The game starts with a given pair of resources (r, s) . The play goes in rounds, and one round goes as follows. Attacker chooses a resource (either r , or s) and a transition t in N . Let the resource r be selected, and let the selected transition t be labeled with the action a . Attacker fires t in the marking $(\bullet t \cup r)$. Let $(\bullet t \cup r) \xrightarrow{t} r'$. The Defender should answer with firing some transition t' , such that $l(t) = l(t')$, in the marking $(\bullet t - r + s)$. If Defender cannot answer, Attacker wins. If Defender answers with $(\bullet t - r + s) \xrightarrow{t'} s'$, the play continues for a new round with the pair (r', s') .

It is easy to note, that Attacker can always do a step, since he is allowed to add resources for firing any transitions. Attacker wins the play, if at some round Defender cannot answer. Defender wins, if the play goes infinitely long.

Proposition 2: In the Resource Bisimilarity Game for a pair (r, s) Defender has a universal winning strategy iff $r \simeq s$, and Attacker has a universal winning strategy iff $r \not\approx s$.

Proof: Let Defender has a winning strategy. This strategy can be represented as an infinite tree, where nodes are pairs

of resources, (r, s) is the root node, and a node (r'', s'') is a child of a node (r', s') iff a round starting with (r', s') can end with (r'', s'') according to the winning strategy of Defender. The strategy is universal, i. e., it contains a Defender's answer to any step of Attacker.

Consider the set R of all nodes of this winning strategy tree. R is a binary relation. It is symmetric, since Attacker can choose any resource from the input pair. It satisfies the weak transfer property by construction of the tree. Then extended with the identity relation $I = \{(r, r) \mid r \in \mathcal{M}(\text{Const}(\Delta))\}$, by Theorem 1 $R \cup I$ is a resource bisimulation. Thus $r \simeq s$.

Let now $r \simeq s$. A universal winning strategy tree for Defender is constructed as follows. We start with the root (r, s) . Then, due to the weak transfer property, Defender can answer to any step of Attacker so that the game comes to a new pair of bisimilar resources. This pair is added as a child of (r, s) . Since the number of rules in (\mathbf{P}, \mathbf{P}) -system is finite, the node (r, s) gets a finite number of children. Then the same procedure is repeated for new children going breadth-first.

Now, an Attacker's universal winning strategy can be represented as a finite Attacker's strategy tree, where for each leaf Attacker can fire a transition to which Defender cannot answer. When Defender has a universal winning strategy, a universal winning strategy for Defender cannot exist, and vice versa. ■

Now we define stratified resource bisimilarity, similar to the classical stratified (state) bisimilarity.

Definition 10: Let Δ be a (\mathbf{P}, \mathbf{P}) -system, and $r, s \in \mathcal{M}(\text{Const}(\Delta))$ be two resources in Δ . Let $k \in \mathbb{N}$. We say that r and s are *resource bisimilar up to k rounds*, denoted $r \simeq_k s$, iff in the resource bisimilarity game for (r, s) Defender can hold out k rounds.

Stratified resource bisimilarity has some nice properties. First of all, it is easy to note that for each k ,

$$r \simeq_k s \text{ is an equivalence,}$$

$$(r \simeq_k s) \subseteq (r \simeq_{k+1} s),$$

and by the definition of resource bisimilarity we have

$$(\simeq) = \bigcap_{k \in \mathbb{N}} (r \simeq_k s).$$

The next proposition states that stratified resource bisimilarity is also a congruence.

Proposition 3: Let Δ be a (\mathbf{P}, \mathbf{P}) -system. For all $r, s, w \in \mathcal{M}(\text{Const}(\Delta))$, if $r \simeq_k s$ then $(r + w) \simeq_k (s + w)$.

Proof: Let $r \simeq_k s$. Then for any Attacker's firing transition t , such that $(\bullet t \cup r) \xrightarrow{t} u$, Defender can answer with t' , such that $l(t) = l(t')$, and for some process term u' , $(\bullet t - r + s) \xrightarrow{t'} u'$, and $u \simeq_{k-1} u'$, i.e. Defender can win a round and he is to hold out for more $k - 1$ rounds. (Similarly, if Defender chose s instead of r .)

Now consider Attacker's firing transition t for a process term $(r + w)$. Let $((\bullet t \setminus r) \cap w) = w'$, and $w = w' + w''$, then $(\bullet t \cup (r + w)) = (\bullet t \cup r) + w''$. Hence, the Defender can answer with $((\bullet t - r + s) + w'') \xrightarrow{t'} (u' + w'')$, and $u \simeq_{k-1} u'$. Therefore, one can start another round, and this procedure can be continued for k rounds. ■

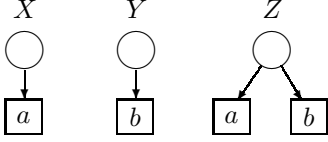


Fig. 6. Petri net example

Corollary 1: Let $r \simeq_k s$ and $r' \simeq_k s'$. Then $(r + r') \simeq_k (s + s')$, i.e. stratified resource bisimilarity is closed under addition.

Proof: By Proposition 3, $r \simeq_k s$ implies $(r + r') \simeq_k (s + r')$, and $r' \simeq_k s'$ implies $(s + r') \simeq_k (s + s')$.

Then by transitivity of the resource bisimilarity, we have $(r + r') \simeq_k (s + s')$. ■

Corollary 2: For each k , stratified resource bisimilarity \simeq_k has a finite AT-basis.

Proof: For every k , stratified resource bisimilarity \simeq_k is closed under addition and transitivity, hence, $(\simeq_k)^{AT} = (\simeq_k)$. The relation \simeq_k is also an equivalence. Then by Theorem 1, \simeq_k has a finite AT-basis. ■

Stratified resource bisimilarity can be considered as an approximation of the resource bisimilarity:

$$(\simeq_1) \supseteq (\simeq_2) \supseteq \dots \supseteq (\simeq_k) \supseteq \dots \supseteq (\simeq).$$

For each k , the resource bisimilarity up to k rounds can be represented by its finite AT-basis. An AT-basis for (\simeq_k) can be effectively computed, since the number of rounds in the Resource bisimilarity game is limited. However, the next example shows that computing AT-bases for (\simeq_k) does not help in computing an AT-basis for the resource bisimilarity.

Example 1: As an example consider the Petri net in Fig. 6. This Petri net is conflict free, each transition has exactly one input place. So, here resource bisimilarity coincides with classical (state) bisimilarity.

For this Petri net the AT-basis for \simeq_1 consists of $X + Y \simeq_1 Z$, $X \simeq_1 2X$, $Y \simeq_1 2Y$, and $Z \simeq_1 2Z$, since adding more tokens does not effect the execution of the first round.

The AT-basis for \simeq_2 consists of $2X + 2Y \simeq_2 2Z$, and $2X \simeq_2 3X$, $2Y \simeq_2 3Y$, $2Z \simeq_2 3Z$.

Similarly, AT-basis for \simeq_k consists of $kX + kY \simeq_k kZ$, and $kX \simeq_k (k+1)X$, $kY \simeq_k (k+1)Y$, $kZ \simeq_k (k+1)Z$.

This example shows that a sequence $(\simeq_1) \supseteq (\simeq_2) \supseteq \dots \supseteq (\simeq_k) \supseteq \dots$ may not stabilize, and its limit \simeq may be not reached at any round.

IV. ALGORITHM FOR CHECKING RESOURCE BISIMILARITY FOR (\mathbf{P}, \mathbf{P}) -PRS

The problem: Given a (\mathbf{P}, \mathbf{P}) -system Δ and two resources $r_0, s_0 \in \mathcal{M}(\text{Const}(\Delta))$ we need to check whether they are resource bisimilar, i.e. whether $r_0 \simeq s_0$.

The algorithm we present here to solve this problem follows the well-known tableau technique (see e.g., [33]) adapted to the resource bisimilarity relation and its weak transfer property.

We start with some definitions that we will need later.

Definition 11: Let S be a finite set, $B \subseteq \mathcal{M}(S) \times \mathcal{M}(S)$ be a binary relation on the set of multisets over S .

1) For a pair $(r, s) \in B$, define its difference rate dr as follows:

- for an identity pairs $dr(r, r) = 0$;
- for a non-identity pair $(r + o, r + o')$, where $o \cap o' = \emptyset$, dr measures difference of two multisets: $dr(r + o, r + o') = |o + o'|$.

2) For two pairs $(r, s), (r', s') \in B$, define $(r, s) \triangleleft (r', s')$ iff $dr(r, s) \leq dr(r', s')$

Obviously, \triangleleft is a partial order on B , moreover, it is well-founded, i.e., there cannot be infinite strictly decreasing chains, since natural numbers are well-founded.

The other ordering, which will be used in the algorithm for checking resource bisimilarity, is the wqo \sqsubseteq (see Definition 7).

Let Δ be a (\mathbf{P}, \mathbf{P}) -system. Recall that Δ is a set of basic rules. We define a relation $\Rightarrow \subseteq (B \times \Delta \times B)$, which represents one round of the Resource bisimilarity game. We write $(r, s) \xrightarrow{\delta} (r', s')$ for $((r, s), \delta, (r', s')) \in \Rightarrow$, where $\delta \in \Delta$, and $(r, s), (r', s') \in B$.

Definition 12: Let Δ be a (\mathbf{P}, \mathbf{P}) -system. For $\delta \in \Delta$, and $r, s, r', s' \in \mathcal{M}(\text{Const}(\Delta))$, the pair (r', s') is a δ -child of (r, s) , denoted $(r, s) \xrightarrow{\delta} (r', s')$, iff there exists $\gamma \in \Delta$, such that $\text{Act}(\delta) = \text{Act}(\gamma)$, $\bullet \delta \cup r \xrightarrow{\delta} r'$, and $(\bullet \delta - r + s) \xrightarrow{\gamma} s'$.

Note, that a pair (r, s) can have many children. By $\text{next}_\delta(r, s)$ we denote the set of all δ -children of (r, s) . This set is always finite, since Δ contains a finite number of rules.

Now we come to describing the algorithm. The algorithm is based on the nondeterministic procedure of constructing a finite *proof tree*, called also a *tableau*. Nodes of this tree are labeled by pairs of resources.

We start at a root labeled with the given pair (r_0, s_0) and build the proof tree depth-first, gradually adding children to each node. Identity nodes of the form (r, r) are called *successful terminal nodes* (leaves).

There are two types of steps, generating new children: EXPAND and REDUCE.

To apply an EXPAND step to a node (r, s) , you need for each $\delta \in \Delta$, nondeterministically choose exactly one pair of resources from $\text{next}_\delta(r, s)$ and exactly one pair of resources from $\text{next}_\delta(s, r)$. All these pairs are then added to the tree as children of the node (r, s) . Thus, in the regular case, if Δ consists of k basic rules, the node (r, s) gets $2k$ children.

If for some δ either $\text{next}_\delta(r, s)$, or $\text{next}_\delta(s, r)$ is empty, then the node (r, s) is marked as a fail terminal leaf, and the whole tree is marked as FAIL.

To apply a REDUCE step to a node (r, s) , you need to check if there is a node (r', s') on the path from the root to the node (r, s) , such that $(r', s') \sqsubseteq (r, s)$. If there is no such node, the step is not applicable. Let (r', s') be such a node, i.e., for some $r_0, r_1, s_1, r'_0, r'_1, s'_1$ we have $r = r_0 + r_1$, $s = r_0 + s_1$, $r_1 \cap s_1 = \emptyset$, similarly, $r' = r'_0 + r'_1$, $s' = r'_0 + s'_1$, $r'_1 \cap s'_1 = \emptyset$, and

$r'_0 \subseteq r_0, r'_1 \subseteq r_1, s'_1 \subseteq s_1$.

Let also $|r'_1| \leq |s'_1|$. Then the REDUCE step adds to the node (r, s) exactly one child $(r, r_0 + (s_1 - s'_1) + r'_1)$, i. e., we substitute r' for s' .

Note that after such a step the difference rate of the child is strictly less than the difference rate of the parent. Indeed, $dr(r, s) = dr(r_0 + r_1, r_0 + s_1) = |r_1| + |s_1|$, and $dr(r, r_0 + (s_1 - s'_1) + r'_1) = dr(r_0 + r_1, r_0 + (s_1 - s'_1) + r'_1) = |(r_1 - r'_1)| + |(s_1 - s'_1)| < |r_1| + |s_1|$.

EXPAND and REDUCE steps are performed in the following order. Initially, there is the only root node, and an EXPAND step is applied to it. If there is no FAIL, to each new child a REDUCE step is applied iteratively until either it is not applicable, or a successful terminal node is reached.

When a REDUCE step is not applicable and the node is not a successful terminal node, a EXPAND step is applied, after which REDUCE steps are iteratively applied to each new node.

The procedure terminates, when either all current leaves in the tree are successful terminal leaves, or at least one of the current leaves is a fail terminal leaf.

If there exists a *successful proof tree* (a tree with all leaves being successful terminal nodes), we enclose $r \simeq s$, otherwise $r \not\simeq s$.

The following theorem asserts the correctness of the algorithm.

Theorem 4: Let Δ be a (\mathbf{P}, \mathbf{P}) -system and $r_0, s_0 \in \mathcal{M}(\text{Const}(\Delta))$ be its two resources. Let $\mathfrak{T}(r_0, s_0)$ be the set of all proof trees constructed by applying the above nondeterministic algorithm to the pair of resources (r_0, s_0) in Δ . Then

- 1) the set $\mathfrak{T}(r_0, s_0)$ is finite, and each proof tree $\mathcal{T} \in \mathfrak{T}(r_0, s_0)$ is finite;
- 2) $r_0 \simeq s_0$ iff there exists a successful proof tree $\mathcal{T} \in \mathfrak{T}(r_0, s_0)$.

Proof: 1) First of all, any proof tree is finitely branching, since the number of basic rules in Δ is finite. Then an EXPAND step cannot be applied infinitely many times without reductions, since the ordering \sqsubseteq is a wqo. In turn, a REDUCE step also cannot be applied in a row an infinite number of times without expanding, since each application of a REDUCE step decreases the difference rate of the resource pair, and the order \triangleleft is well-founded.

Finally, we show that EXPAND and REDUCE steps cannot alternate infinitely many times. Suppose, a proof tree has an infinite branch. Consider a sequence $(r_1, s_1), (r_2, s_2), \dots$ of resource pairs along this branch, for which an EXPAND step is applied immediately after a REDUCE step. Since for each (r_i, s_i) in this sequence a REDUCE step cannot be applied, we have $(r_i, s_i) \not\sqsubseteq (r_j, s_j)$ for all $i \leq j$ in this sequence – a contradiction with the fact that the ordering \sqsubseteq is a wqo.

This proves that any branch in a proof tree is finite. Hence, by König's lemma, each proof tree is finite.

Since the set $\text{next}_\delta(r, s)$ is finite for any (r, s) , and the set of basic rules in Δ is also finite, there are only a limited number of nondeterministic choices when an EXPAND step is applied.

Hence, the number of proof trees constructed by the algorithm is finite.

2) Let $r_0 \simeq s_0$. We will prove that then there exists a proof tree $\mathcal{T} \in \mathfrak{T}(r_0, s_0)$ with the root (r_0, s_0) such that for each node (r, s) in \mathcal{T} we have $r \simeq s$. For this it is sufficient to prove that for each current node (r, s) in a proof tree, if $r \simeq s$, and all its ancestors are also pairs of bisimilar resources in Δ , then it is possible to make a step from (r, s) such that for each its new child (r', s') we have $r' \simeq s'$.

Let (r, s) be a current nonterminal node in a proof tree, $r \simeq s$, and the REDUCE rule is not applicable to it. Then by Theorem 2 the weak transfer property is valid for (r, s) , i. e., for each δ there exists a pair (r', s') , such that $(r, s) \xrightarrow{\delta} (r', s')$ and $r' \simeq s'$. Since the relation (\simeq) is symmetric, we have also that there exists a pair (s'', r'') , such that $(s, r) \xrightarrow{\delta} (s'', r'')$ and $r'' \simeq s''$. Thus, the EXPAND step can be applied to (r, s) by choosing the above variants.

Consider now the case when the REDUCE rule is applicable to (r, s) . Then there exists its ancestor (r', s') such that $(r', s') \sqsubseteq (r, s)$. This implies $r' \subseteq r$ and $s' \subseteq s$, and the result of applying the REDUCE step is $(r - r' + s', s)$, or symmetrically $(r, s - s' + r')$. Since the relation \simeq is closed under addition and transitivity, from $r \simeq s$ and $r' \simeq s'$ we successively have:

$$\begin{aligned} & (r', s'), \quad ((r - r') + s', (r - r') + r'), \\ & ((r - r') + s', r), \quad (r, s), \quad (r - r' + s', s). \end{aligned}$$

The symmetrical case is proved in a similar way.

Let us now prove the opposite. Let $\mathcal{T} \in \mathfrak{T}(r_0, s_0)$ be a successful proof tree. To prove by contradiction assume that $r_0 \not\simeq s_0$. Since $(\simeq) = \bigcap_{k \in \mathbb{N}} (r \simeq_k s)$, there exists a minimal k such that $r_0 \not\simeq_k s_0$.

Consider a node (r, s) in \mathcal{T} for which k is the minimal number such that $r \not\simeq_k s$. If the EXPAND step was applied to this node in \mathcal{T} , then it has at least one child (r', s') such that $r' \not\simeq_{k-1} s'$.

If the REDUCE step with an ancestor node (r'', s'') was applied to the node (r, s) , then due to the minimality of k , we have $r'' \simeq_k s''$, since the node (r'', s'') is at least one application of the EXPAND step 'closer' to the root (r_0, s_0) than the node (r, s) .

The child of (r, s) via the REDUCE step is the node $(r - r'' + s'', s)$, or symmetrically $(r, s - s'' + r'')$. Consider the first case. By Proposition 3, $r'' \simeq_k s''$ implies that $r = ((r - r'') + r'') \simeq_k ((r - r'') + s'')$. It cannot be that $(r - r'' + s'') \simeq_k s$, since otherwise by the transitivity of the relation \simeq we would get $r \simeq_k s$, which is not true. Hence, the child of (r, s) via the REDUCE step also does not belong to the relation $r \simeq_k s$.

Thus we can construct a path from the root to a leaf so that for each node (r, s) on this path we have $r \not\simeq_k s$. This is a contradiction with the fact that each branch in \mathcal{T} ends with a successful (identity) leaf. ■

V. CONCLUSIONS

In this paper we investigate decidability issues of two congruent strengthenings of the bisimulation equivalence for the (\mathbf{P},\mathbf{P}) -subclass of Process Rewrite Systems (PRS), which is equivalent to classical Petri nets (P/T-nets), as well as Vector Addition Systems with States (VASS). These equivalences are resource similarity and resource bisimilarity defined in [27], both of which are congruences, and replacing a resource (subterm/submarking) in a (\mathbf{P},\mathbf{P}) -PRS term, respectively, in a Petri net marking, by a similar resource does not change the observable system behavior.

Resource similarity and resource bisimilarity are subrelations of the state bisimilarity for (\mathbf{P},\mathbf{P}) -PRS. An important property of both of these equivalences is that they, in contrast to state bisimilarity, are finitely-based. So, these equivalences can be used for deducing bisimilar states, and the latter can be used for increasing the efficiency of verification by reducing the state space of the system. Another application of resource equivalences is a Petri net reduction [40].

However, the resource similarity is undecidable, and decidability of the resource bisimilarity, as well as whether the resource bisimilarity is a proper subrelation of the resource similarity, remained an open question [27], [31].

We have shown that the resource bisimilarity is decidable for (\mathbf{P},\mathbf{P}) -PRS. This implies that the resource bisimilarity is a proper subrelation of the resource similarity. We also give an example of a (\mathbf{P},\mathbf{P}) -PRS, where two similar resources are not resource bisimilar.

An interesting question for further research: is it possible to effectively compute a finite AT-basis of the resource bisimilarity equivalence for a given (\mathbf{P},\mathbf{P}) -PRS. Note that this will also answer the question of the computability of a finite AT-basis of the state bisimilarity for $(\mathbf{1},\mathbf{P})$ -PRS, since for $(\mathbf{1},\mathbf{P})$ -PRS, the resource and state bisimilarity coincide.

The answer to this question for the resource similarity equivalence in (\mathbf{P},\mathbf{P}) -PRS is obviously 'no', since the resource similarity is undecidable for (\mathbf{P},\mathbf{P}) -PRS.

ACKNOWLEDGMENT

This work has been supported by the Basic Research Program at the National Research University Higher School of Economics and by Research Project AAAA-A16-116070610022-6 at Yaroslavl State University.

REFERENCES

- [1] R. van Glabbeek, "The linear time - branching time spectrum," in *Handbook of Process Algebra*, J. Bergstra, A. Ponse, and S. Smolka, Eds. Amsterdam: Elsevier Science, 2001, pp. 3 – 99. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/B9780444828309500199>
- [2] D. Park, "Concurrency and automata on infinite sequences," in *Theoretical Computer Science*, P. Deussen, Ed. Berlin, Heidelberg: Springer Berlin Heidelberg, 1981, pp. 167–183.
- [3] R. Milner, *Communication and Concurrency*. USA: Prentice-Hall, Inc., 1989.
- [4] R. Mayr, "Process Rewrite Systems," *Information and Computation*, vol. 156, no. 1, pp. 264 – 286, 2000. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0890540199928262>
- [5] G. Sénizergues, "The bisimulation problem for equational graphs of finite out-degree," *SIAM Journal on Computing*, vol. 34, no. 5, pp. 1025–1106, 2005. [Online]. Available: <https://doi.org/10.1137/S0097539700377256>
- [6] P. Jančar, "Equivalences of pushdown systems are hard," in *Foundations of Software Science and Computation Structures*, A. Muscholl, Ed. Berlin, Heidelberg: Springer Berlin Heidelberg, 2014, pp. 1–28.
- [7] O. Burkart, D. Caucal, and B. Steffen, "An elementary bisimulation decision procedure for arbitrary context-free processes," in *Mathematical Foundations of Computer Science 1995*, J. Wiedermann and P. Hájek, Eds. Berlin, Heidelberg: Springer Berlin Heidelberg, 1995, pp. 423–433.
- [8] J. Srba, "Strong bisimilarity and regularity of Basic Process Algebra is PSPACE-hard," in *Automata, Languages and Programming*, P. Widmayer, S. Eidenbenz, F. Triguero, R. Morales, R. Conejo, and M. Hennessy, Eds. Berlin, Heidelberg: Springer Berlin Heidelberg, 2002, pp. 716–727.
- [9] S. Kiefer, "BPA bisimilarity is EXPTIME-hard," *Information Processing Letters*, vol. 113, no. 4, pp. 101 – 106, 2013. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0020019012003079>
- [10] S. Christensen, Y. Hirshfeld, and F. Moller, "Bisimulation equivalence is decidable for basic parallel processes," in *CONCUR'93*, E. Best, Ed. Berlin, Heidelberg: Springer Berlin Heidelberg, 1993, pp. 143–157.
- [11] P. Jančar, "Strong bisimilarity on basic parallel processes in PSPACE-complete," in *18th Annual IEEE Symposium of Logic in Computer Science, 2003. Proceedings.*, 2003, pp. 218–227.
- [12] —, *Decidability questions for bisimilarity of Petri nets and some related problems*. Berlin, Heidelberg: Springer Berlin Heidelberg, 1994, pp. 581–592. [Online]. Available: http://dx.doi.org/10.1007/3-540-57785-8_173
- [13] Y. Hirshfeld and M. Jerrum, "Bisimulation equivalence is decidable for normed Process Algebra (extended abstract)," in *Automata, Languages and Programming*, J. Wiedermann, P. van Emde Boas, and M. Nielsen, Eds. Berlin, Heidelberg: Springer Berlin Heidelberg, 1999, pp. 412–421.
- [14] J. Srba, "Undecidability of weak bisimilarity for PA-processes," in *Developments in Language Theory*, M. Ito and M. Toyama, Eds. Berlin, Heidelberg: Springer Berlin Heidelberg, 2003, pp. 197–209.
- [15] Q. Yin, Y. Fu, C. He, M. Huang, and X. Tao, "Branching bisimilarity checking for PRS," in *Automata, Languages, and Programming*, J. Esparza, P. Fraigniaud, T. Husfeldt, and E. Koutsoupias, Eds. Berlin, Heidelberg: Springer Berlin Heidelberg, 2014, pp. 363–374.
- [16] C. A. Petri, "Kommunikation mit automaten," PhD thesis, Bonn: Institute für Instrumentelle Mathematik, 1962.
- [17] E.-R. Olderog, "Strong bisimilarity on nets: A new concept for comparing net semantics," in *Linear Time, Branching Time and Partial Order in Logics and Models for Concurrency*, J. W. de Bakker, W. P. de Roever, and G. Rozenberg, Eds. Berlin, Heidelberg: Springer Berlin Heidelberg, 1989, pp. 549–573.
- [18] C. Autant, Z. Belmesk, and P. Schnoebelen, "Strong bisimilarity on nets revisited," in *Parle '91 Parallel Architectures and Languages Europe*, E. H. L. Aarts, J. van Leeuwen, and M. Rem, Eds. Berlin, Heidelberg: Springer Berlin Heidelberg, 1991, pp. 717–734.
- [19] C. Autant and P. Schnoebelen, *Place bisimulations in Petri nets*. Berlin, Heidelberg: Springer Berlin Heidelberg, 1992, pp. 45–61. [Online]. Available: http://dx.doi.org/10.1007/3-540-55676-1_3
- [20] C. Autant, W. Pfister, and P. Schnoebelen, "Place bisimulations for the reduction of labeled Petri nets with silent moves," in *Proc. 6th Int. Conf. on Computing and Information, Peterborough, Canada*, 1994.
- [21] W. Quivrin-Pfister, "Des bisimulations de places pour la réduction des réseaux de Petri," PhD thesis, I.N.P. de Grenoble, France, 1995.
- [22] P. Schnoebelen and N. Sidorova, *Bisimulation and the Reduction of Petri Nets*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2000, pp. 409–423. [Online]. Available: http://dx.doi.org/10.1007/3-540-44988-4_23
- [23] P. Jančar, "Undecidability of bisimilarity for Petri nets and some related problems," *Theor. Comput. Sci.*, vol. 148, no. 2, pp. 281–301, Sep. 1995. [Online]. Available: [https://doi.org/10.1016/0304-3975\(95\)00037-W](https://doi.org/10.1016/0304-3975(95)00037-W)
- [24] M. Voorhoeve, "Structural Petri net equivalence," Technische Universiteit Eindhoven, Tech. Rep. 9607, 1996.
- [25] R. Gorrieri, "Team bisimilarity, and its associated modal logic, for BPP nets," *Acta Informatica*, pp. 1–41, 2020.
- [26] —, "A study on team bisimulations for BPP nets," in *Application and Theory of Petri Nets and Concurrency*, R. Janicki, N. Sidorova, and

- T. Chatain, Eds. Cham: Springer International Publishing, 2020, pp. 153–175.
- [27] V. A. Bashkin and I. A. Lomazova, “Petri nets and resource bisimulation,” *Fundamenta Informaticae*, vol. 55, no. 2, pp. 101–114, 2003.
- [28] F. Corradini, R. De Nicola, and A. Labela, “Models of nondeterministic regular expressions,” *Journal of Computer and System Sciences*, vol. 59, no. 3, pp. 412 – 449, 1999. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0022000099916367>
- [29] V. A. Bashkin and I. A. Lomazova, *Resource Similarities in Petri Net Models of Distributed Systems*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2003, pp. 35–48. [Online]. Available: http://dx.doi.org/10.1007/978-3-540-45145-7_4
- [30] —, *Similarity of Generalized Resources in Petri Nets*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2005, pp. 27–41. [Online]. Available: http://dx.doi.org/10.1007/11535294_3
- [31] I. A. Lomazova, “Resource equivalences in Petri nets,” in *Application and Theory of Petri Nets and Concurrency*, W. van der Aalst and E. Best, Eds. Cham: Springer International Publishing, 2017, pp. 19–34.
- [32] P. Jančar, “Selected ideas used for decidability and undecidability of bisimilarity,” in *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*, 2008.
- [33] L. Aceto, A. Ingólfssdóttir, and J. Srba, “The algorithmics of bisimilarity,” in *Advanced Topics in Bisimulation and Coinduction*, 2011.
- [34] M. Hennessy and R. Milner, “Algebraic laws for nondeterminism and concurrency,” *J. ACM*, vol. 32, no. 1, pp. 137–161, Jan. 1985. [Online]. Available: <https://doi.org/10.1145/2455.2460>
- [35] W. Thomas, “On the Ehrenfeucht-Fraïssé game in theoretical computer science,” in *TAPSOFT’93: Theory and Practice of Software Development*, M. C. Gaudel and J. P. Jouannaud, Eds. Berlin, Heidelberg: Springer Berlin Heidelberg, 1993, pp. 559–568.
- [36] C. Stirling, “Local model checking games (extended abstract),” in *CONCUR ’95: Concurrency Theory*, I. Lee and S. A. Smolka, Eds. Berlin, Heidelberg: Springer Berlin Heidelberg, 1995, pp. 1–11.
- [37] S. Christensen, “Decidability and decomposition in process algebras,” Ph.D. dissertation, University of Edinburgh, UK, 1993. [Online]. Available: <http://hdl.handle.net/1842/410>
- [38] G. Higman, “Ordering by divisibility in abstract algebras,” *Proceedings of The London Mathematical Society*, pp. 326–336, 1952.
- [39] A. Finkel and P. Schnoebelen, “Well-structured transition systems everywhere!” *Theoretical Computer Science*, vol. 256, no. 1, pp. 63–92, 2001. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S030439750000102X>
- [40] V. A. Bashkin and I. A. Lomazova, “Reduction of Coloured Petri Nets based on resource bisimulation,” *Joint Bulletin of NCC & IIS (Comp. Science)*, vol. 13, pp. 12–17, 2000.