

# Spectral Top-Down Recovery of Latent Tree Models

Yariv Aizenbud <sup>\*1</sup>, Ariel Jaffe<sup>\*1</sup>, Meng Wang<sup>5</sup>, Amber Hu<sup>1</sup>, Noah Amsel<sup>1</sup>, Boaz Nadler<sup>2</sup>, Joseph T. Chang<sup>3</sup>, and Yuval Kluger<sup>1,4,5</sup>

<sup>1</sup>Program in Applied Mathematics, Yale University, New Haven, CT 06511

<sup>2</sup>Department of Computer Science, Weizmann Institute of Science, Rehovot, 76100, Israel

<sup>3</sup>Department of Statistics, Yale University, New Haven, CT 06520, USA

<sup>4</sup>Interdepartmental Program in Computational Biology and Bioinformatics, Yale University, New Haven, CT 06511

<sup>5</sup>Department of Pathology, Yale University New Haven, CT 06511

## Abstract

Modeling the distribution of high dimensional data by a latent tree graphical model is a common approach in multiple scientific domains. A common task is to infer the underlying tree structure given only observations of the terminal nodes. Many algorithms for tree recovery are computationally intensive, which limits their applicability to trees of moderate size. For large trees, a common approach, termed *divide-and-conquer*, is to recover the tree structure in two steps. First, recover the structure separately for multiple randomly selected subsets of the terminal nodes. Second, merge the resulting subtrees to form a full tree. Here, we develop Spectral Top-Down Recovery (STDR), a divide-and-conquer approach for inference of large latent tree models. Unlike previous methods, STDR’s partitioning step is non-random. Instead, it is based on the Fiedler vector of a suitable Laplacian matrix related to the observed nodes. We prove that under certain conditions this partitioning is consistent with the tree structure. This, in turn leads to a significantly simpler merging procedure of the small subtrees. We prove that STDR is statistically consistent, and bound the number of samples required to accurately recover the tree with high probability. Using simulated data from several common tree models in phylogenetics, we demonstrate that STDR has a significant advantage in terms of runtime, with improved or similar accuracy.

## 1 Introduction

Learning the structure of latent tree graphical models is a common task in machine learning [3, 9, 21, 36, 55] and computational biology [27, 28]. In these models, the statistical dependencies between observed random variables are determined by unobserved variables that form a tree structure. A canonical application is phylogenetics, where the task is to infer the evolutionary tree that describes the relationship between a group of biological species based on their nucleotide or protein sequences [17, 37, 42]. In various applications, the number of observed nodes ranges from a dozen and up to tens of thousands of nodes.

---

\*YA and AJ contributed equally to this work

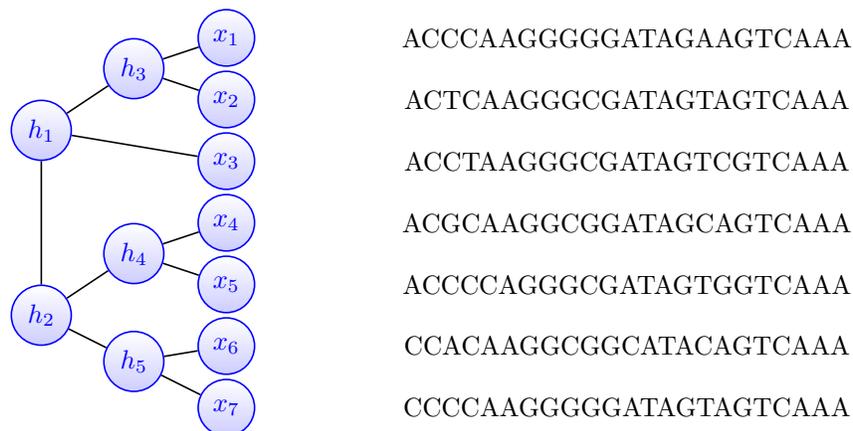


Figure 1: A tree with  $m = 7$  observed nodes. The data consists of a sequence of characters at every terminal node.

In latent tree graphical models, every node is associated with a random variable. The random variables associated with the terminal nodes are observed, while those of the non-terminal nodes are hidden. In phylogenetics, the observed nodes correspond to existing organisms, while the non-terminal nodes correspond to their extinct ancestors. Given a set of nucleotide or amino acid sequences as in Figure 1, the task is to recover the structure of the tree, which describes how the observed organisms evolved from their ancestors.

Due to the importance of these models, many algorithms have been developed for recovering latent trees. Distance-based methods, including the classic neighbor joining (NJ) [40] and UPGMA [44], recover the tree by computing a distance measure between pairs of terminal nodes. These methods are computationally efficient and thus applicable to large trees [49]. They also have statistical guarantees for accurate recovery [4, 33]. Since the distance measure does not encapsulate all the information available from the sequences, distance-based methods may perform poorly in cases where the amount of data is limited [53].

A different approach for tree recovery is based on spectral properties of the input data [2, 15]. Several of these algorithms are top-down methods, where the tree is recovered by repeatedly applying spectral partitioning to the terminal nodes until each partition contains a single node [32, 56]. However, there is no theoretical guarantee that the partitions match the structure of the tree. Of direct relevance to this manuscript is the recently proposed spectral neighbor joining (SNJ) [24], which consistently recovers the tree based on a spectral criterion. Similarly to NJ, SNJ is a bottom-up method, which iteratively merges subsets of nodes to recover the tree structure.

Perhaps one of the most accurate approaches for latent tree models is to search for the topology that maximizes the likelihood of the observed data [17]. Since computing the likelihood for every possible topology is intractable, many methods apply a local search to iteratively increase the likelihood function [19, 38, 45, 57]. Though there is no guarantee that such a process will converge to the global maximum of the likelihood function, in many settings the resulting tree is more accurate than the one obtained by distance-based methods. The main disadvantage of likelihood-based algorithms is their slow runtimes. Such methods are thus computationally impractical for very large trees.

Developing algorithms for recovering large trees is becoming extremely important, as the amount

of available data increased dramatically in recent years [49, 41]. For example, emerging technologies such as scRNA-seq produce sequences that correspond to thousands of cells [39]. Such datasets pose a statistical as well as a computational challenge, as even distance-based methods may prove to be too slow. For example, the classical NJ algorithm has a complexity of  $\mathcal{O}(m^3)$  operations to recover a tree with  $m$  terminal nodes. The focus of this work is to develop a fast and scalable approach backed by theoretical guarantees to recover large trees with thousands of terminal nodes.

To improve the scalability of slow but accurate methods such as maximum likelihood, a common framework known as *divide-and-conquer* is to recover the tree by a three-step process [35, 51]: (i) partition the terminal nodes into a large number of small subsets. (ii) infer the tree structure for the subsets of step (i), and (iii) compute the full tree by merging the small trees obtained in step (ii). In *supertree* methods, the small subsets of terminal nodes in step (i) overlap. The merging step in these methods often requires optimizing a non-convex objective, which is computationally hard [26, 23]. Thus, most supertree methods circumvent global optimization problems by using iterative approaches for step (iii) [48, 51]. Recently, several methods were derived to merge subtrees with disjoint terminal nodes [35, 34]. To apply these algorithms in a divide-and-conquer pipeline, the terminal nodes are partitioned according to an initial tree estimate computed by NJ. In summary, the problem of reconstructing large trees from limited amount of data is not yet fully resolved. In particular, there is still a need for fast and scalable approaches that would also come with strong recovery guarantees.

**Contributions and outline** In our work, we derive a novel divide-and-conquer approach termed Spectral Top-Down Recovery (STDR). The STDR algorithm consists of the following three main steps, described in detail in Section 3.

- (i) Partitioning: split the terminal nodes into two subsets.
- (ii) Recursive reconstruction: infer the latent tree of each subset. When the partition size falls below a given threshold  $\tau$ , the tree is recovered by an arbitrary user-specified algorithm. Above this threshold, the reconstruction is done by recursively applying STDR to each subset.
- (iii) Merging: reconstruct the full tree by merging the two small trees.

An alternative description of the algorithm is: (i) top-down partitioning of the terminal nodes into disjoint subsets till the size of all subsets is smaller than  $\tau$ . (ii) Separate recovery of the inner structure of each subset, and (iii) merging the small trees in a bottom-up approach to recover the full tree.

In contrast to previous randomized divide-and-conquer methods, our partitioning step (i) is deterministic. Specifically, we apply spectral partitioning to a weighted complete graph, with nodes that correspond to the terminal nodes of the tree and weights based on a similarity measure described in Section 3.1. In Section 4.1 we prove that given an accurate estimate of these similarities, step (i) is consistent in the sense that the resulting subsets belong to two disjoint subtrees. For this proof, we derive a relation between latent tree models and a classic result from spectral graph theory known as Fiedler’s theorem of nodal domains [18]. This theorem is important in various learning tasks such as clustering data [50], graph partitioning [11], and low dimensional embeddings [25]. To the best of our knowledge, this is the first guarantee derived for spectral partitioning in the setting of latent tree models.

The output of step (ii) is the inner structure of two disjoint subtrees. The task in step (iii) is to merge them into the full tree. In Section 3.4, we show that this task is equivalent to finding the

root of an unrooted tree, given a reference set of one or more sequences, also known as an *outgroup*. We derive a novel spectral-based method to find the root and prove its statistical consistency in Section 4.2. This approach is of independent interest, as finding the root of a tree is a common challenge in phylogenetics [5, 7, 30]. Finite sample guarantees for STDR are given in Section 5, where we derive an expression for the number of samples sufficient to recover the correct tree with high probability.

In Section 6 we compare the accuracy and runtime of various methods when applied to recover the full tree directly versus when used as subroutines in step (ii) of STDR. For example, Figure 6 shows the results of recovering simulated trees with 2000 terminal nodes generated according to the coalescent model [43]. As one baseline, we applied RAxML [45], one of the most popular maximum likelihood software packages in phylogenetics. With 8,000 samples, RAxML took over  $5\frac{1}{2}$  hours to complete. In contrast, STDR with RAxML as subroutine and a threshold  $\tau = 128$  took approximately 21 minutes, more than an order of magnitude faster. Importantly, in this setting, the trees recovered via STDR have similar accuracy to those obtained by applying RAxML directly. These and other simulation results illustrate the potential benefit of STDR in recovering large trees.

## 2 Problem setup

Let  $\mathcal{T}$  be an unrooted binary tree with  $m$  terminal nodes. We assume that each node of the tree has an associated discrete random variable over the alphabet  $\{1, \dots, \ell\}$ . We denote by  $\mathbf{x} = (x_1, \dots, x_m)$  the vector of the random variables at the  $m$  observed terminal nodes of the tree, and by  $\mathbf{h} = (h_1, \dots, h_{m-2})$  the random variables at the non-terminal nodes. We assume that these random variables form a Markov random field on  $\mathcal{T}$ . This means that given the values of its neighbors, the random variable at a node is statistically independent of the rest of the tree [8]. An edge  $e(h_i, h_j)$  connecting a pair of adjacent nodes  $(h_i, h_j)$  is equipped with two transition matrices of size  $\ell \times \ell$ ,

$$P(h_i|h_j)_{ba} = \Pr[h_i = b|h_j = a], \quad P(h_j|h_i)_{ba} = \Pr[h_j = b|h_i = a]. \quad (1)$$

Note that every pair of adjacent nodes may in general have different transition matrices.

Our observed data is a matrix  $X = [\mathbf{x}^{(1)}, \dots, \mathbf{x}^{(n)}] \in \{1, \dots, \ell\}^{m \times n}$ , where  $\mathbf{x}^{(j)}$  are random i.i.d. realizations of  $\mathbf{x} = (x_1, \dots, x_m)$ . Each row in the matrix is a sequence of length  $n$  that corresponds to a terminal node in the tree, see illustration in Figure 1. For example, in phylogenetics, each row in the matrix corresponds to a different species, while each column corresponds to a different location in a DNA sequence, see [13] and references therein. Figure 1 shows an example with  $m = 7$  terminal nodes and  $n = 23$  observations. The support of each node is the DNA alphabet  $A, C, G, T$ , so  $\ell = 4$ .

Given the matrix  $X$ , the task at hand is to recover the structure of the hidden tree  $\mathcal{T}$ . We assume that for every pair of adjacent nodes  $(h_i, h_j)$ , the corresponding  $\ell \times \ell$  stochastic matrices  $P(h_i|h_j)$  and  $P(h_j|h_i)$  defined in (1) are full rank, with determinants that satisfy

$$0 < \delta < \det(P(h_i|h_j)), \det(P(h_j|h_i)) < \xi < 1. \quad (2)$$

Eq. (2) implies that the transition matrices are invertible and are not permutation matrices. This assumption is necessary for the tree’s topology to be identifiable, see Proposition 3.1 in [8]. Next, to describe our approach we present several definitions related to unrooted trees, following the terminology of [52].

**Definition 1** (clan). *A clan is a subset of nodes in  $\mathcal{T}$  that is connected to the rest of the tree by a single edge.*

**Definition 2** (the root of a clan). *A non-terminal node  $h$  is termed the root of a clan  $C$  if  $h \in C$  and it is connected to the edge that separates  $C$  from the rest of the tree.*

For example, in Figure 1  $h_4$  and  $h_5$  are the root nodes of the clans  $C_1 = \{x_6, x_7, h_5\}$  and  $C_2 = \{x_4, x_5, x_6, x_7, h_2, h_4, h_5\}$ , respectively. In our work, we will sometimes refer to the clans by their terminal nodes only (e.g.  $\{x_6, x_7\}$  and  $\{x_4, x_5, x_6, x_7\}$  for  $C_1$  and  $C_2$ ).

**Definition 3** (adjacent clans). *Let  $C_1$  and  $C_2$  be two disjoint subsets of terminal nodes that form two clans. If the union  $C_1 \cup C_2$  forms a clan, then  $C_1$  and  $C_2$  are adjacent clans.*

Two disjoint clans whose respective root nodes share a common neighboring node are adjacent clans. For example, in Figure 1 the clans  $C_1 = \{x_4, x_5\}$  and  $C_2 = \{x_6, x_7\}$  are adjacent. Their respective root nodes  $h_4$  and  $h_5$  are adjacent to  $h_2$ . This observation is important for the merging step of STDR.

### 3 A spectral top-down approach for tree reconstruction

Here we present the three steps of the Spectral Top-Down Recovery (STDR) algorithm, as outlined in the introduction. Pseudocode for the method appears in Algorithm 1. We begin with the definition and properties of the similarity matrix.

#### 3.1 The pairwise similarity matrix and similarity graph

In Eq. (1), we defined the  $\ell \times \ell$  transition matrix for any pair of adjacent nodes. Similarly, we define the  $\ell \times \ell$  transition matrix for every pair  $h_i, h_j$  of (not necessarily adjacent) nodes by

$$P(h_i|h_j)_{ba} = \Pr[h_i = b|h_j = a].$$

Note that due to the Markov assumption, the transition matrix is multiplicative along the edges of the tree. For example in Figure 1,  $P(x_1|x_2) = P(x_1|h_3)P(h_3|x_2)$ . In [24], a similarity function between a pair of nodes  $h_i$  and  $h_j$  was defined as follows:

$$S(h_i, h_j) = \sqrt{\det(P(h_i|h_j)) \det(P(h_j|h_i))}. \quad (3)$$

Like the transition matrix, this similarity is multiplicative along the edges of the tree. For any two ordered sets of terminal or non-terminal nodes  $A = \{a_1, \dots, a_k\}$  and  $B = \{b_1, \dots, b_l\}$ , we denote by  $S(A, B)$  a matrix of size  $k \times l$ , where

$$S(A, B)_{ij} = S(a_i, b_j) \quad \text{for all } 1 \leq i \leq k \text{ and } 1 \leq j \leq l.$$

To simplify notation, for the case where  $A$  and  $B$  are both equal to the full set of terminal nodes, we denote the similarity matrix by  $S$ :

$$S = S(\mathbf{x}, \mathbf{x}) \quad \text{where } \mathbf{x} = \{x_1, \dots, x_m\}. \quad (4)$$

where by definition,  $S_{ii} = 1$  for all  $i$ . The similarity matrix  $S$  constitutes the adjacency matrix of the following graph.

---

**Algorithm 1** STDR: Spectral Top-Down Recovery

---

**Input:**  $X \in \{1, \dots, \ell\}^{m \times n}$  A matrix containing sequences from  $m$  terminal nodes  
 $\tau \in \mathbb{N}$  Partition size threshold  
Alg An algorithm for recovering small tree structures

**Output:**  $\mathcal{T}$  Estimated tree

- 1: **if** number of terminal nodes  $m \leq \tau$  **then**
  - 2:     **return** Alg( $X$ )                      $\triangleright$  Recover small tree structures by a user defined algorithm
  - 3: **end if**
  - 4: Compute the similarity matrix  $S$  from  $X$  via Eq. (4)
  - 5: Compute the Fiedler vector  $v$  of  $S$   
    $\triangleright$  Partitioning step
  - 6: Partition the set of terminal nodes into two subsets  $C_1$  and  $C_2$  by thresholding  $v$ ; that is,  
    $C_1 = \{i; v(i) \geq 0\}$  and  $C_2 = \{i; v(i) < 0\}$   
    $\triangleright$  Recursive reconstruction step
  - 7:  $\mathcal{T}_1 = \text{STDR}(X(C_1, :), \tau, \text{Alg})$
  - 8:  $\mathcal{T}_2 = \text{STDR}(X(C_2, :), \tau, \text{Alg})$   
    $\triangleright$  Merging step
  - 9: Compute  $u$ , the first left singular vector of  $S(C_1, C_2)$
  - 10: **for** all edges  $e$  in  $\mathcal{T}_1$  **do**
  - 11:     Compute the edge score  $d(e)$  from  $u$  via Eq. (9)
  - 12: **end for**
  - 13: Insert a root node for  $\mathcal{T}_1$  into the edge  $e_1 = \text{argmin}_{e \in \mathcal{T}_1} d(e)$
  - 14: Compute  $v$ , the first right singular vector of  $S(C_1, C_2)$
  - 15: **for** all edges  $e$  in  $\mathcal{T}_2$  **do**
  - 16:     Compute the edge score  $d(e)$  from  $v$  via Eq. (9)
  - 17: **end for**
  - 18: Insert a root node for  $\mathcal{T}_2$  into the edge  $e_2 = \text{argmin}_{e \in \mathcal{T}_2} d(e)$
  - 19: Connect the roots of  $\mathcal{T}_1$  and  $\mathcal{T}_2$  to construct the merged tree  $\mathcal{T}$
  - 20: **return**  $\mathcal{T}$
-

**Definition 4** (Similarity graph). *The similarity graph  $G$  is a complete graph with vertices that correspond to the terminal nodes of  $\mathcal{T}$ . The weight assigned to every edge  $e(x_i, x_j)$  is equal to the similarity  $S(x_i, x_j)$ .*

The relation between the spectral properties of  $G$  and the topology of  $\mathcal{T}$  form the theoretical basis of our approach. The following result from [24, Lemma 3.1] shows how the spectral structure of the similarity matrix  $S$  relates to the structure of the underlying tree.

**Lemma 3.1.** *Let  $A$  and  $B$  be a partition of the terminal nodes of an unrooted binary tree  $\mathcal{T}$ . The matrix  $S(A, B)$  is rank-one if and only if  $A$  and  $B$  are clans of  $\mathcal{T}$ .*

Lemma 3.1 implies that given the exact similarity matrix  $S$ , one can determine if a subset  $A$  of terminal nodes forms a clan in  $\mathcal{T}$  by simply computing the rank of  $S(A, A^c)$ , where  $A^c = \mathbf{x} \setminus A$ . In practice, the exact similarity matrix  $S$  is unknown. We denote by  $\hat{S}$  a noisy estimate computed from the observed data  $X$ .

### 3.2 Tree partitioning via spectral clustering


The aim of step (i) of STDR is to partition the terminal nodes into two clans of  $\mathcal{T}$ . Our approach is based on the similarity graph  $G$ , defined in 4. One possible way to partition the graph is by the min-cut criteria. Given the exact similarity, this approach is guaranteed to yield two clans, see Lemma B.1 in the appendix. Though the min-cut problem can be solved efficiently [50], it often leads to unbalanced partitions of the graph. In our case, this could yield a clan with only 1 or 2 terminal nodes. Since one goal of this step is to reduce the runtime of the reconstruction algorithm in step (ii), we would like to avoid such imbalanced partitions. To this end, we propose to partition the terminal nodes via a spectral approach based on the Fiedler vector.

**Definition 5** (Graph Laplacian and Fiedler vector). *The Laplacian matrix of a graph  $G$  equipped with a symmetric weight matrix  $W$  is given by  $L_G = D - W$ , where  $D$  is a diagonal matrix with  $D_{ii} = \sum_j W(x_i, x_j)$ . The Fiedler vector is the eigenvector of the Laplacian matrix that corresponds to the second smallest eigenvalue.*


In the STDR algorithm, we use the Fiedler vector  $v$  of the similarity graph  $G$  to partition the terminal nodes into two subsets  $C_1$  and  $C_2$  (Algorithm 1, line 6), as follows:

$$C_1 = \{i; v(i) \geq 0\}, \quad C_2 = \{i; v(i) < 0\}. \quad (5)$$

Importantly, although the graph  $G$  does not include vertices that correspond to the non-terminal nodes of  $\mathcal{T}$ , in Section 4.1 we prove that partitioning its nodes via Eq. (5) yields two clans of  $\mathcal{T}$ . To illustrate this point, we created a tree graphical model from a symmetric binary tree with  $m = 128$  nodes, see Figure 2a. The transition matrices between adjacent nodes are all identical and were chosen according to the HKY model [22]. We used this model to generate a dataset of nucleotide sequences of length  $n = 1,000$ . Figure 2b shows the Fiedler vector of the similarity graph estimated from the dataset. Here, the Fiedler vector exhibits a single dominant gap, and partitioning the terminal nodes by Eq. (5) yields two sets  $C_1$  and  $C_2$  which are indeed clans of  $\mathcal{T}$ . A similar example is shown in the appendix for a tree generated according to the coalescent model.

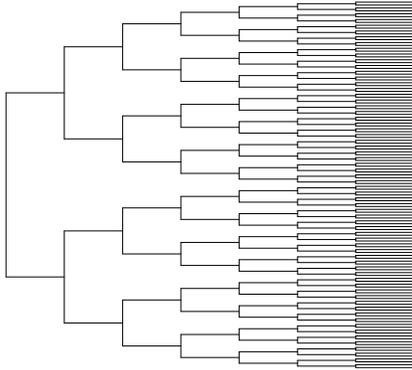

(a) Illustration of a symmetric binary tree.

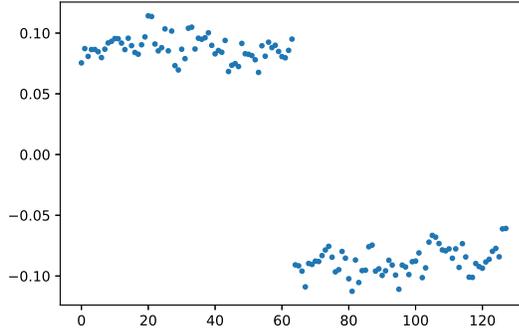

(b) Fiedler vector of binary symmetric tree

Figure 2: Symmetric binary tree with 128 terminal nodes. The data consists of sequences of length  $n = 1000$  over the  $\ell = 4$  characters of the DNA alphabet, generated according to the HKY model.

### 3.3 Recursive Reconstruction Step

The output of step (i) of STDR consists of two sets of terminal nodes  $C_1$  and  $C_2$ . Under suitable conditions, both are clans in the latent tree  $\mathcal{T}$ . In the recursive step, we construct trees  $\mathcal{T}_1$  and  $\mathcal{T}_2$  that describe their latent internal structure. If  $|C_1| > \tau$ , then  $\mathcal{T}_1$  is recovered by reapplying the three steps of STDR to  $C_1$ . When  $|C_1| \leq \tau$ , the input is small enough that we consider it tractable to use a direct method for tree reconstruction, even a slow one like maximum likelihood.

### 3.4 Merging disjoint subtrees

The output of step (ii) of STDR consists of the internal *unrooted* tree structures  $\mathcal{T}_1$  and  $\mathcal{T}_2$  of two subsets of terminal nodes  $C_1$  and  $C_2$ . Assuming steps (i) and (ii) were successful, then  $C_1$  and  $C_2$  are adjacent clans, and  $\mathcal{T}_1$  and  $\mathcal{T}_2$  are indeed their correct internal structure. The remaining challenge in step (iii) is to recover the full tree  $\mathcal{T}$  by correctly merging  $\mathcal{T}_1$  and  $\mathcal{T}_2$ .

Importantly,  $\mathcal{T}_1$  and  $\mathcal{T}_2$  are unrooted binary trees, where every non-terminal node has exactly three neighbors. To merge the two trees, it is necessary to add a root node to each of them. Adding a connecting edge between the two root nodes yields a binary unrooted tree and completes the merging process, see Figure 3 for an illustration.

To add a root node to a subtree, we select one of its edges to be the “placeholder edge” (illustrated in red in Figure 3a). Subsequently, the placeholder edge is replaced with two edges connected by the root node. We make two important remarks.

1. Different choices for the placeholder edge lead to merged trees with a different topologies, see Figure 4 for an illustration.
2. An edge at which a tree was partitioned in a previous iteration of STDR is not necessarily the correct placeholder edge for the merging step. In Figure 4 the terminal nodes were first partitioned into the clans  $\{x_1, x_2, x_3, x_4\}$  and  $\{x_5, x_6, x_7\}$  (marked in green). Next,  $\{x_1, x_2, x_3, x_4\}$  was partitioned at  $e(h_b, x_4)$  to  $\{x_1, x_2, x_3\}$  and  $\{x_4\}$  (marked in yellow). Even

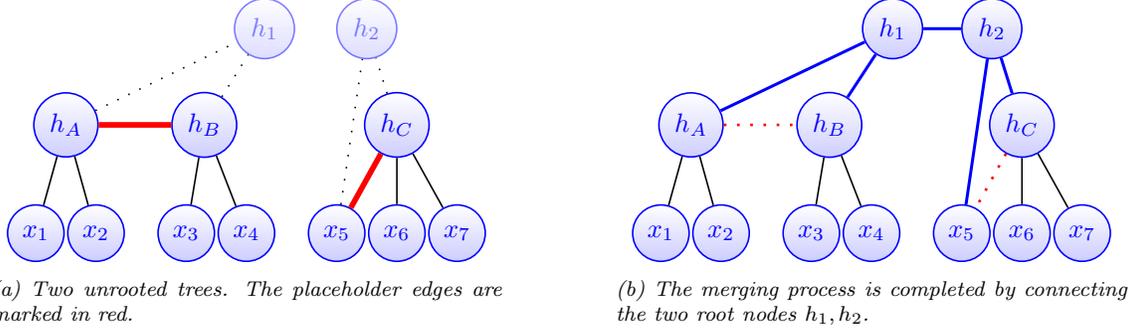


Figure 3: Merging example

though the subtree containing  $\{x_1, x_2, x_3, x_4\}$  was partitioned at  $e(h_B, x_4)$  in the previous step, the correct placeholder edge for merging with  $\{x_5, x_6, x_7\}$  may still be  $e(h_A, h_B)$ .

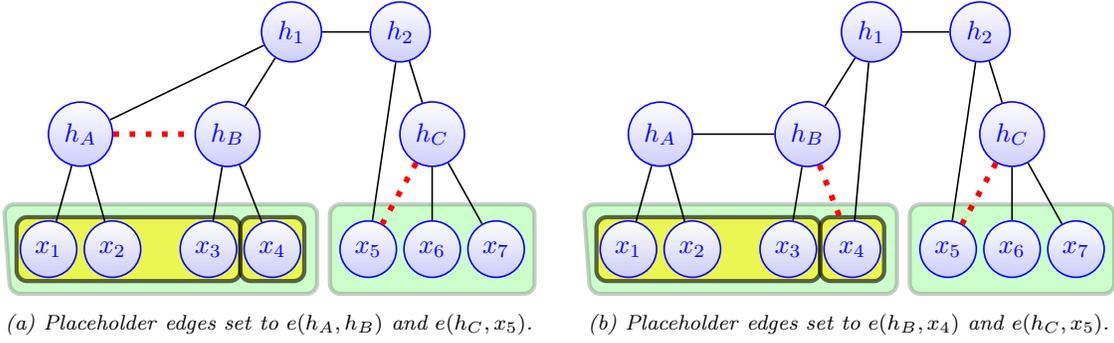


Figure 4: Different choices of placeholder edges result in a different merged trees.

Thus, the task of merging  $\mathcal{T}_1$  and  $\mathcal{T}_2$  reduces to the task of identifying the correct “placeholder edge”. Here, we derive a novel spectral method for finding these edges. To the best of our knowledge, our approach for merging subtrees is new and may be of independent interest for other applications, such as rooting unrooted trees [30, 7, 5]. In the following lemma, we describe a property of the placeholder edge that motivates our approach.

**Lemma 3.2.** *Let  $C_1$  be a set of terminal nodes that forms a clan in  $\mathcal{T}$ , and let  $\mathcal{T}_1$  be the internal structure of  $C_1$ . An edge  $e \in \mathcal{T}_1$  is the correct placeholder edge if and only if it partitions  $C_1$  into two sets  $A(e), B(e)$ , such that both form clans in  $\mathcal{T}$ .*

For example, in Figure 3a, the edge  $e(h_A, h_B)$  divides the left subtree into the clans  $\{x_1, x_2\}$  and  $\{x_3, x_4\}$ . These subsets also form clans in the full tree depicted in Figure 3b.

*Proof.* Denote  $C_2$  the clan consisting of all the terminal nodes of  $\mathcal{T}$  that are not in  $C_1$ . Consider an edge  $e(h_A, h_B)$  in  $\mathcal{T}_1$  that partitions  $C_1$  into  $A(e)$  and  $B(e)$ . First, assume that  $e(h_A, h_B)$  is the correct placeholder edge of  $\mathcal{T}_1$ . Then there exists a node  $h_1$  in the full tree  $\mathcal{T}$  that is connected to  $h_A, h_B$  and the root node of  $C_2$ . Removing the edge  $e(h_A, h_1)$  in  $\mathcal{T}$  separates the subset  $A(e)$  from

the remaining nodes in  $\mathcal{T}$ , which implies that  $A(e)$  is a clan in  $\mathcal{T}$ . The same argument shows that  $B(e)$  is a clan in  $\mathcal{T}$  as well.

Conversely, assume that  $A(e)$ ,  $B(e)$  and  $C_2$  are disjoint clans that partition the terminal nodes of  $\mathcal{T}$ . Then, there exists a node  $h_1$  that connects to the roots of  $A(e)$ ,  $B(e)$  and  $\mathcal{T}_2$ . This proves that the edge  $e(h_A, h_B)$  in  $\mathcal{T}_1$  is the correct placeholder edge, since it is where the root  $h_1$  is inserted.  $\square$

Next, using Lemma 3.2, we derive a spectral characterization of the correct placeholder edge. Recall that by Lemma 3.1, the matrix  $S(C_1, C_2) \in \mathbb{R}^{|C_1| \times |C_2|}$ , which contains the similarities between the terminal nodes of  $\mathcal{T}_1$  and of  $\mathcal{T}_2$  is rank one. Thus,

$$S(C_1, C_2) = uv^T, \quad \text{where} \quad \|v\| = \|u\| = 1, \quad \text{and} \quad \sigma > 0. \quad (6)$$

Given a placeholder edge  $e$  and its corresponding partition of terminal nodes  $A(e)$  and  $B(e)$ , we denote by  $u_{A(e)}, u_{B(e)}$  the entries of  $u$  that correspond to  $A(e)$  and  $B(e)$ , respectively. The following lemma characterizes the correct placeholder edge in terms of  $u_{A(e)}$  and  $u_{B(e)}$ .

**Lemma 3.3.** *An edge  $e$  is the correct placeholder edge of  $\mathcal{T}_1$  if and only if there exists a constant  $\alpha$  such that*

$$S(A(e), B(e)) = u_{A(e)} \alpha u_{B(e)}^T. \quad (7)$$

*Proof.* Let  $h_1$  be the root of the clan formed by  $C_1$  in the full tree  $\mathcal{T}$ . By the multiplicative property of the similarity function,

$$S(C_1, C_2) = S(C_1, h_1)S(h_1, C_2).$$

Combining the above expression with Eq. (6) implies that the left singular vector  $u$  of  $S(C_1, C_2)$  is proportional to the vector of similarities  $S(C_1, h_1)$ . That is,  $\exists \beta \in \mathbb{R}$  such that  $S(C_1, h_1) = \beta u$ . Partitioning  $S(C_1, h_1)$  into  $S(A(e), h_1)$  and  $S(B(e), h_1)$  yields,

$$S(A(e), h_1) = \beta u_{A(e)}, \quad S(B(e), h_1) = \beta u_{B(e)}. \quad (8)$$

We first prove that if  $e$  is the correct placeholder edge of  $\mathcal{T}_1$ , then Eq. (7) holds. By Lemma 3.2, if  $e$  is the correct placeholder edge then the root node  $h_1$  separates  $A(e)$  from  $B(e)$ . By Eq. (8) and the multiplicative property of the similarity measure, we have

$$S(A(e), B(e)) = S(A(e), h_1)S(h_1, B(e)) = u_{A(e)} \beta^2 u_{B(e)}^T.$$

Setting  $\alpha = \beta^2$  proves Eq. (7).

Next, we assume that Eq. (7) holds for some edge  $e$  and some constant  $\alpha$  and prove that  $e$  is the correct placeholder edge. Consider the matrix  $S(A(e), B(e) \cup C_2)$ , which equals the concatenation of  $S(A(e), B(e))$  and  $S(A(e), C_2)$ . Since

$$S(A(e), C_2) = S(A(e), h_1)S(h_1, C_2) \quad \text{and} \quad S(A(e), h_1) = \beta u_{A(e)}$$

we have

$$S(A(e), C_2) = \beta u_{A(e)} S(h_1, C_2).$$

Recall that by assumption  $S(A(e), B(e)) = u_{A(e)} \alpha u_{B(e)}$ . It follows that both matrices  $S(A(e), B(e))$  and  $S(A(e), C_2)$  are rank one with a left singular vector equal to  $u_{A(e)}$ . Thus, the concatenated matrix  $S(A(e), B(e) \cup C_2)$  is rank-one. By Lemma 3.1, this implies that  $A(e)$  is a clan of the tree  $\mathcal{T}$ . A similar argument shows that  $B(e)$  is also a clan in  $\mathcal{T}$ . Since  $A(e)$  and  $B(e)$  are both clans in  $\mathcal{T}$ , it follows from Lemma 3.2 that  $e$  is the correct placeholder edge of  $\mathcal{T}_1$ .  $\square$

In practice we can only compute an estimate of  $S$ . Motivated by Lemma 3.3, we propose to determine the placeholder edge  $e^*$  by minimizing over the following score function,

$$e^* = \operatorname{argmin}_e d(e) = \operatorname{argmin}_e \frac{1}{\|S(A(e), B(e))\|_F} \min_{\alpha} \|S(A(e), B(e)) - u_{A(e)} \alpha u_{B(e)}^T\|_F. \quad (9)$$

The normalizing factor  $\|S(A(e), B(e))\|_F$  is added since the size of  $S(A(e), B(e))$  changes for every edge  $e$ . Note that given the exact matrix  $S$ , at the correct placeholder edge  $d(e^*) = 0$ . In Section 4.2 we show that obtaining the placeholder edge by Eq. (9) yields an accurate merged tree.

### 3.5 Computational complexity

We analyze the complexity of each step of STDR separately. For the analysis we assume a balanced binary tree, and that the partition step based on the Fiedler vector produced  $m/\tau$  subsets of size  $\tau$ .

1. The complexity of partitioning a set of  $k$  terminal nodes is  $\mathcal{O}(k^2)$ . This is due to the computation of the Fiedler vector of the Laplacian matrix, which is positive semi-definite [46, Chapter 2].
2. We denote by  $B(k)$  the complexity of recovering the topology of a tree with  $k$  terminal nodes by the given subroutine Alg.
3. The complexity of merging two subtrees with  $k$  terminal nodes each is composed of two parts: (i) compute the leading singular vector of the matrix  $S(C_1, C_2) \in \mathbb{R}^{k \times k}$ , which has computational complexity of  $\mathcal{O}(k^2)$ . (ii) Compute the score for every edge as in Eq. (9). The number of operations required for the least square operation in the numerator of Eq. (9), as well as computing the Frobenius norms in the numerator and denominator is proportional to the number of elements in  $S(A(e), B(e))$ . Thus, the total complexity of computing the score for all edges in  $\mathcal{T}_1$  (and similarly  $\mathcal{T}_2$ ) is equal to  $\mathcal{O}(\sum_{e \in \mathcal{T}_1} |A(e)| |B(e)|)$ . For a balanced tree, this term is equal to

$$\frac{k^2}{4} + \sum_{i=2}^{\log k} \underbrace{2^i}_{\text{Number of partitions of size } k/2^i} \underbrace{\frac{k}{2^i} \left(k - \frac{k}{2^i}\right)}_{\substack{|A(e)| \\ |B(e)|}} = \mathcal{O}(k^2 \log k).$$

We remark that if the two trees are highly imbalanced, the complexity may increase up to  $\mathcal{O}(k^3)$ .

Let  $T(m)$  be the complexity of the partitioning and merging operations of STDR, excluding the complexity of the subroutine algorithm. We have that

$$T(m) = \underbrace{\mathcal{O}(m^2)}_{\text{partitioning}} + 2T(m/2) + \underbrace{\mathcal{O}(m^2 \log m)}_{\text{merging}} = 2T(m/2) + \mathcal{O}(m^2 \log m).$$

By the Master theorem [6],

$$T(m) = \mathcal{O}(m^2 \log m). \quad (10)$$

Taking into account that the complexity of computing  $S$  is  $\mathcal{O}(m^2n)$ , and adding the complexity of the subroutine, the total complexity of STDR is equal to

$$\mathcal{O}(m^2n + m^2 \log m + (m/\tau)B(\tau)).$$

For example, excluding the computation of the distance matrix, the complexity of NJ is  $B(\tau) = \mathcal{O}(\tau^3)$ . Thus, the complexity of STDR+NJ is  $\mathcal{O}(m^2n + m^2 \log m + m\tau^2)$ , which improves upon the  $\mathcal{O}(m^2n + m^3)$  complexity of running NJ to recover the full tree. In the simulation section, we show that STDR+NJ outperforms NJ in both runtime and accuracy.

An important property of the algorithm, in terms of actual runtime, is that it is embarrassingly parallel. Specifically, steps 7 and 8 in Algorithm 1 can be executed in two independent processes. This will result in up to  $k$  parallel processes, where  $k$  is the number of partitions.

## 4 Consistency of STDR

We analyze the partitioning step (i) and the merging step (iii) of STDR in the population setting, where we assume that the similarity matrix  $S$  is known exactly. Our key results are Theorem 4.2, which states that step (i) is guaranteed to yield disjoint clans, and Theorem 4.5, which states that given accurate trees for two clans, step (iii) recovers the exact structure of the full tree. Combining these two results directly yields the following theorem establishing the consistency of STDR.

**Theorem 4.1.** *Given an exact similarity matrix  $S$ , and assuming that the subroutine  $\text{Alg}$  recovers the internal structure of its input, STDR recovers the exact latent tree  $\mathcal{T}$ .*

### 4.1 Consistency of the partition step

The following theorem proves that given the exact similarity matrix, partitioning the terminal nodes of the tree by thresholding the Fiedler vector as described in Section 3.1 is guaranteed to yield two adjacent clans.

**Theorem 4.2.** *Let  $G$  be the similarity graph of a binary tree  $\mathcal{T}$ . Denote by  $v$  the Fiedler vector of  $G$  and by  $\{A, B\}$  the following partition,*

$$A = \{i; v(i) \leq 0\}, \quad B = \{i; v(i) > 0\}.$$

*Then  $A, B$  are adjacent clans in  $\mathcal{T}$ .*

Before proving Theorem 4.2, we present several preliminaries on graphs. First, we define the Schur complement of a matrix, which plays an important role in graph theory [12].

**Definition 6** (Schur complement). *Let  $A, B, C$  and  $D$  be matrices of dimensions  $p \times p, p \times q, q \times p$  and  $q \times q$ , respectively. Assume  $D$  is invertible and consider the matrix*

$$M = \begin{bmatrix} A & B \\ C & D \end{bmatrix},$$

*of size  $(p + q) \times (p + q)$ . The Schur complement of  $M$  with respect to  $D$  is the  $p \times p$  matrix*

$$M/D = A - BD^{-1}C.$$

Let  $H$  be a graph with a set of nodes  $V$  and Laplacian matrix  $L$ . We denote by  $L_R$  the principle sub-matrix of  $L$  that corresponds to a subset of nodes  $R \subset V$ . It is known that the Schur complement of  $L$  with respect to  $L_R$  yields the Laplacian of a different graph, with  $|V - R|$  nodes [10, 12]. We denote this Laplacian matrix by  $L_{H/R}$ . The rows and columns of  $L_{H/R}$  correspond to vertices of  $H$  that are not in  $R$ . Of specific interest is the case where the graph is a tree  $\mathcal{T}$ , and  $R$  is the set of its non-terminal nodes. In this case,  $L_{\mathcal{T}/R}$  is the Laplacian of a complete graph  $G$  with nodes that correspond to the terminal nodes of  $\mathcal{T}$ . An example of the Schur complement for the Laplacian of a tree with four terminal nodes appears in C and Figure 10 in the appendix.

Equipped with these definitions, we proceed to the proof of Theorem 4.2. The proof consists of two parts, that correspond to Theorem 4.3 and Lemma 4.4. Theorem 4.3, based upon Theorem 3.3 of [47], shows that one can partition the terminal nodes of a tree  $\mathcal{T}$  into two clans via the Fiedler vector of  $L_{\mathcal{T}/R}$ , where  $R$  is the set of all internal nodes. This theorem, however, is not directly applicable to our setting, since computing  $L_{\mathcal{T}/R}$  requires knowledge of the unknown similarities between all nodes of  $\mathcal{T}$ , including its unobserved nodes.

Here, we derive Lemma 4.4 that shows that for any tree  $\mathcal{T}$ , there is *twin tree*  $\tilde{\mathcal{T}}$  with the same topology such that  $L_{\tilde{\mathcal{T}}/R} = L_G$ . This result completes the critical missing link required for inference of the latent tree from the similarity matrix, which can be estimated from observed data.

The following theorem from [47] shows how the Fiedler vector of  $L_{\mathcal{T}/R}$  can be used to obtain two adjacent clans in a tree  $\mathcal{T}$ .

**Theorem 4.3** ([47], Theorem 3.3). <sup>1</sup> *Let  $\mathcal{T}$  be a weighted tree with a node set  $V$  and a subset of non terminal nodes  $R \subset V$ . We denote by  $L_{\mathcal{T}}$  the Laplacian of  $\mathcal{T}$  and by  $L_{\mathcal{T}/R}$  the Laplacian of a graph  $G$  obtained by Schur complement of  $L_{\mathcal{T}}$  with respect to  $R$ . Let  $v$  be the Fiedler vector of  $G$ , and  $A, B$  the following partition of the terminal nodes,*

$$A = \{i \in V \setminus R; v(i) \leq 0\}, \quad B = \{j \in V \setminus R; v(j) > 0\}.$$

*Then  $A$  and  $B$  are adjacent clans in  $\mathcal{T}$ .*

As mentioned above,  $L_{\mathcal{T}/R}$  is unknown since calculating it requires knowing the latent tree  $\mathcal{T}$ . The following lemma relates this unknown Laplacian matrix to the information that we *do* know, namely, the Laplacian of the similarity graph of  $\mathcal{T}$ .

**Lemma 4.4.** *Let  $\mathcal{T}$  be a tree with a set of non-terminal nodes  $R$ . Let  $G$  be the similarity graph of  $\mathcal{T}$ . Then there is a tree  $\tilde{\mathcal{T}}$  with the same topology as  $\mathcal{T}$  and different weights assigned to its edges, such that*

$$L_G = L_{\tilde{\mathcal{T}}/R}.$$

The proof of Lemma 4.4 appears in Appendix D. Combining Lemma 4.4 with Theorem 4.3 yields the following proof of Theorem 4.2.

*Proof of Theorem 4.2.* Let  $L_G$  be the Laplacian matrix of the similarity graph  $G$ . By Lemma 4.4 there is a tree  $\tilde{\mathcal{T}}$  with the same topology as  $\mathcal{T}$  such that  $L_G = L_{\tilde{\mathcal{T}}/R}$ . By Theorem 4.3, partitioning the terminal nodes of  $\tilde{\mathcal{T}}$  according to the signs of the corresponding entries in the Fiedler vector of  $L_{\tilde{\mathcal{T}}/R}$  yields adjacent clans in  $\tilde{\mathcal{T}}$ . Since  $L_G = L_{\tilde{\mathcal{T}}/R}$  and  $\tilde{\mathcal{T}}$  has the same topology as  $\mathcal{T}$ , it follows that partitioning the terminal nodes of  $\mathcal{T}$  according to the signs of the corresponding entries in the Fiedler vector of  $L_G$  yields adjacent clans in  $\mathcal{T}$ .  $\square$

<sup>1</sup>For clarity, we rephrased the theorem from [47] according to our terminology.

## 4.2 Consistency of the merging step

Step (iii) of STDR merges the two subtrees,  $\mathcal{T}_1$  and  $\mathcal{T}_2$ , that were constructed from the two disjoint subsets of terminal nodes  $C_1$  and  $C_2$ . As described in Section 3, this step is done by finding for each tree its placeholder edge as the edge with the smallest score  $d(e)$ , Eq. (9). Here, we analyze the merging step under the following two assumptions on its input (the output of steps (i) and (ii)): the two subtrees  $\mathcal{T}_1, \mathcal{T}_2$  correspond to adjacent clans in  $\mathcal{T}$  and their internal structure was recovered correctly. Under these assumptions, the following theorem shows that the merging step of STDR is consistent.

**Theorem 4.5.** *Let  $C_1$  and  $C_2$  be the terminal nodes of two adjacent clans that partition a tree  $\mathcal{T}$ . Let  $\mathcal{T}_1$  and  $\mathcal{T}_2$  be the internal structures of these clans. Then given the exact similarity matrix  $S(C_1, C_2)$ , minimizing the criterion in Eq. (9) yields the correct placeholder edge.*

*Proof.* If  $e^*$  is the correct placeholder edge, then according to Lemma 3.3, we have

$$S(A(e^*), B(e^*)) = u_{A(e^*)} \alpha u_{B(e^*)}^T$$

for some  $\alpha$ , and hence  $d(e^*) = 0$ . If  $e$  is an incorrect placeholder edge, then again according to Lemma 3.3 there is no constant  $\alpha$  that satisfies the equation, and hence  $d(e) > 0$  which implies  $e^* = \operatorname{argmin} d(e)$ .  $\square$

## 5 Finite sample guarantees for STDR

We address the finite sample case, where instead of having access to the true similarity matrix  $S$ , we only have a noisy estimate  $\hat{S}$  computed from sequence data of finite length  $n$ . We derive a lower bound on the number of samples required for the partitioning step (Section 5.1) and the merging step (Section 5.2) to succeed with high probability. In Section 5.3 we compare these results to other algorithms for recovering trees.

For simplicity, in the finite sample analysis, we assume the Jukes-Cantor (JC) model of sequence evolution, where each transition matrix is parameterized by a single mutation rate  $\theta(i, j)$ :

$$P(h_i | h_j)_{ba} = P[h_i = b | h_j = a] = \begin{cases} 1 - \theta(i, j) & a = b \\ \theta(i, j) / (\ell - 1) & a \neq b. \end{cases} \quad (11)$$

According to this model, the similarity between adjacent nodes defined in Eq. (4) simplifies to

$$S(h_i, h_j) = \left(1 - \frac{\ell}{\ell - 1} \theta(i, j)\right)^{\ell - 1}.$$

By Eq. (2) the similarity is strictly positive and hence  $\theta(i, j) < (\ell - 1) / \ell$ . We remark that our analysis can be extended, under minor additional assumptions to more general models of evolution as in [24, Lemma 4.8].

For simplicity, the results are derived for the first level of the tree partitioning and merging. The result, however, hold for multiple partitions and merging of the tree.

## 5.1 Finite sample guarantees for the partitioning step

Here, we compute the number of samples  $n$  required for the partitioning step of STDR to yield two clans of the tree with high probability. In our analysis we assume a simplistic model in which the tree is binary and symmetric and the similarity between all pairs of adjacent nodes is equal to  $\delta$ .

**Theorem 5.1.** *Let  $\mathcal{T}$  be a binary symmetric tree with  $m$  terminal nodes and similarity  $\delta$  between all pairs of adjacent nodes. Assume that the data is generated according to the Jukes-Cantor model. If the number of samples  $n$  satisfies*

$$n \geq \ln \left( \frac{2m^2}{\epsilon} \right) 4\ell^2(\sqrt{m} + 1)^2 m^{1+4\log_2(\frac{1}{\delta})} \max \left\{ 1, 4 \left( \frac{1}{\delta^2} - 1 \right)^{-2} \right\},$$

then STDR partitions the terminal nodes into two clans with probability at least  $1 - \epsilon$ .

To prove the theorem, we derive an expression for the amount of error that the partitioning step can tolerate in the estimate  $\hat{S}$ .

**Lemma 5.2.** *Assume a binary symmetric tree with  $m$  terminal nodes and similarity  $\delta$  between all adjacent nodes. If the estimate  $\hat{S}$  of the similarity matrix satisfies*

$$\|S - \hat{S}\| \leq \frac{m^{2\log_2(\delta)+1/2}}{2^{3/2}(\sqrt{m} + 1)} \min \left\{ 1, \frac{1}{2} \left( \frac{1}{\delta^2} - 1 \right) \right\}, \quad (12)$$

then STDR successfully partitions the terminal nodes into two clans.

In our proof, we use the following lemma regarding the spectrum of the Laplacian.

**Lemma 5.3.** *Assume a binary symmetric tree  $\mathcal{T}$  with  $m$  terminal nodes and similarity  $\delta$  between all adjacent nodes. Let  $G$  be the similarity graph of  $\mathcal{T}$ . The first, second and third smallest eigenvalues of the graph Laplacian  $L$  are equal to,*

$$\lambda_1 = 0, \quad \lambda_2 = m^{2\log_2(\delta)+1}, \quad \lambda_3 = m^{2\log_2(\delta)+1} \left( \frac{1}{2} + \frac{1}{2\delta^2} \right).$$

The eigenvector  $v_2 \in \mathbb{R}^m$  that corresponds to  $\lambda_2$  is,

$$v_2 = \frac{1}{\sqrt{m}} \left[ \underbrace{1, \dots, 1}_{\frac{m}{2}}, \underbrace{-1, \dots, -1}_{\frac{m}{2}} \right].$$

*Proof of Lemma 5.2.* Let  $L$  and  $\hat{L}$  be two symmetric matrices and let  $v_i$  and  $\hat{v}_i$  be their  $i$ -th eigenvectors, respectively. A variant of the Davis-Kahan theorem for perturbation of eigenvectors (see Theorem 2 of [54]) gives

$$\|v_i - \hat{v}_i\| \leq 2^{3/2} \frac{\|L - \hat{L}\|}{\gamma_i}. \quad (13)$$

where  $\gamma_i = \min\{|\lambda_i - \lambda_{i+1}|, |\lambda_i - \lambda_{i-1}|\}$  is the eigengap. We apply the theorem to the Laplacian matrix  $L$  (see definition 5), and its Fiedler vector  $v_2$ . The spectral norm  $\|L - \hat{L}\|$  can be bounded

by,

$$\begin{aligned} \|L - \hat{L}\| &\leq \|D - \hat{D}\| + \|S - \hat{S}\| = \max_i \left| \sum_k (S_{ik} - \hat{S}_{ik}) \right| + \|S - \hat{S}\| \\ &\leq \max_i \sum_k |S_{ik} - \hat{S}_{ik}| + \|S - \hat{S}\| \leq (\sqrt{m} + 1) \|S - \hat{S}\|. \end{aligned} \quad (14)$$

Substituting (14) into (13) yields

$$\|v_2 - \hat{v}_2\| \leq 2^{3/2} (\sqrt{m} + 1) \frac{\|S - \hat{S}\|}{\gamma_2}. \quad (15)$$

From Lemma 5.3 it follows that the spectral gap  $\gamma_2$  is equal to,

$$\gamma_2 = \min(\lambda_2 - \lambda_1, \lambda_3 - \lambda_2) = m^{2 \log_2(\delta) + 1} \min \left\{ 1, \left( \frac{1}{2\delta^2} - \frac{1}{2} \right) \right\}. \quad (16)$$

Combining Eq. (15) and (16) proves that if

$$\|S - \hat{S}\| \leq \frac{m^{2 \log_2(\delta) + 1/2}}{2^{3/2} (\sqrt{m} + 1)} \min \left\{ 1, \frac{1}{2} \left( \frac{1}{\delta^2} - 1 \right) \right\}$$

then  $\|v_2 - \hat{v}_2\| < 1/\sqrt{m}$ , which implies  $\|v_2 - \hat{v}_2\|_\infty < 1/\sqrt{m}$ . Thus, by Lemma 5.3  $\text{sign}(v_i) = \text{sign}(\hat{v}_i)$  for each  $i \in [m]$ . Hence, partitioning the terminal nodes according to  $\text{sign}(\hat{v}_2)$  or  $\text{sign}(v_2)$  yield the same result. As we proved in Theorem 4.2, the resulting subsets are clans of the tree.  $\square$

Next, we prove Theorem 5.1 under the additional assumption of the Jukes-Cantor model. The theorem is proved by combining Lemma 5.2 with a concentration bound on the similarity matrix estimate  $\hat{S}$ , derived in [24].

*Proof of Theorem 5.1.* From Lemma 4.7 of [24], under the JC model of evolution,

$$P \left( \|\hat{S} - S\| \leq t \right) \geq 1 - 2m^2 \exp \left( -\frac{2nt^2}{\ell^2 m^2} \right).$$

Setting

$$t = \frac{m^{2 \log_2(\delta) + 1/2}}{(\sqrt{m} + 1) 2^{3/2}} \min \left\{ 1, \frac{1}{2} \left( \frac{1}{\delta^2} - 1 \right) \right\},$$

yields that for

$$n \geq \ln \left( \frac{2m^2}{\epsilon} \right) 4\ell^2 (\sqrt{m} + 1)^2 m^{1+4 \log_2(\frac{1}{\delta})} \max \left\{ 1, 4 \left( \frac{1}{\delta^2} - 1 \right)^{-2} \right\},$$

the requirements of Lemma 5.2 are satisfied with probability at least  $1 - \epsilon$ , which concludes the proof.  $\square$

## 5.2 Merging step of STDR

We derive finite sample bounds for the merging step of STDR. In contrast to the guarantees for the partitioning step, the guarantees for the merging step, presented in the following theorem, hold for any tree topology.

**Theorem 5.4.** *Let  $\mathcal{T}$  be a tree with  $m$  terminal nodes. We assume that  $\mathcal{T}$  consists of two subtrees  $\mathcal{T}_1, \mathcal{T}_2$  with terminal nodes  $C_1$  and  $C_2$ , respectively. Let  $\{A, B\}$  be the partition of  $C_1$  induced by the correct placeholder edge  $e^*$ , and define  $D = \min\{\|S(A, B)\|_F, \|S(C_1, C_2)\|_F\}$  and assume  $D > 1$ . For any  $\varepsilon > 0$ , if the number of samples  $n$  satisfies*

$$n \geq 64\ell^2 m^3 \left( \frac{1}{D} + \frac{5}{D^2} + \frac{18 + 40\sqrt{2}}{D^3} \right)^2 \left( \frac{\xi^4}{\delta^6(1-\xi^2)^2} \right) \log \left( \frac{2m^2}{\varepsilon} \right), \quad (17)$$

then STDR finds the correct placeholder edge with probability at least  $1 - \varepsilon$ .

From Eq. (17), if  $D \gg 1$  then the required number of samples is of order  $\tilde{O}(m^3/D^2)$ . Assuming that the lower bound on the similarity between adjacent nodes  $\delta$  is close to 1, the value of  $D$  depends mainly on the size of the two submatrices  $S(A, B)$  and  $S(C_1, C_2)$ . This analysis has important implications on the choice of the smallest partition  $\tau$  in Algorithm 1. For instance, merging  $\mathcal{T}_1$  and  $\mathcal{T}_2$  requires  $\tilde{O}(m)$  samples if  $A, B$  and  $C_2$  are of size  $O(m)$ , but requires  $\tilde{O}(m^3)$  if  $A$  and  $B$  are of size  $O(1)$ . On the one hand, reducing  $\tau$  results in smaller subsets of terminal nodes, which improves the runtime of the reconstruction step of STDR. On the other hand it may affect the accuracy of the merging step. Figure 8 shows both runtime and accuracy of STDR as a function of the threshold parameter  $\tau$ , when applying STDR with RAxML and SNJ as its subroutine. The data consists of  $n = 1000$  samples generated from a binary symmetric tree with  $m = 2048$  terminal nodes. The accuracy of the algorithm degrades for small values of  $\tau$ . The runtime, however, improves by approximately half an order of magnitude.

Our proof of Theorem 5.4 consists of three steps: (i) In Lemma 5.5 we derive a lower bound on the score  $d(e)$  of an edge  $e$  that is not the correct placeholder edge. (ii) Based on the lower bound derived in Lemma 5.5, Lemma 5.7 provides a sufficient condition on the accuracy of the similarity matrix estimate  $\hat{S}$  that guarantees the merging step will yield the correct placeholder edge. (iii) For the JC model, we derive an expression for the number of samples required for the condition in Lemma 5.7 to hold with high probability.

**Step 1: A lower bound on the score  $d(e)$  for incorrect edges** In Section 4.2, we showed that  $d(e) = 0$  if and only if  $e$  is the correct placeholder edge. Here, for the exact similarity matrix  $S$  we derive a lower bound on  $d(e)$ , if  $e$  is an incorrect placeholder edge in  $\mathcal{T}_1$ .

**Lemma 5.5.** *Let  $\mathcal{T}$  be a tree that consists of two subtrees  $\mathcal{T}_1, \mathcal{T}_2$ , and let  $e \in \mathcal{T}_1$  be an edge that is not the correct placeholder edge. Then,*

$$d(e) \geq \begin{cases} \frac{(\sqrt{2}\delta)^{\log m} \delta^2(1-\xi^2)}{2\sqrt{m}\xi^2} & \delta^2 \leq 0.5 \\ \frac{\delta^3(1-\xi^2)}{\sqrt{2m}\xi^2} & \delta^2 > 0.5. \end{cases}$$

For the proof of Lemma 5.5, we introduce new notation, illustrated in Figure 5. The sets of terminal nodes of  $\mathcal{T}_1$  and  $\mathcal{T}_2$  are denoted by  $C_1$  and  $C_2$ , respectively. We denote by  $e^* \in \mathcal{T}_1$  the

correct placeholder edge, and by  $e \in \mathcal{T}_1$  an arbitrary incorrect placeholder edge. The edge  $e$  splits the terminal nodes of  $\mathcal{T}_1$  into  $A$  and  $B$  and has endpoints  $h_A$  and  $h_B$ . We denote by  $h_0, \dots, h_N$  the non terminal nodes on the path between the root node of  $\mathcal{T}_1$ , denoted  $h_0$ , and  $h_A = h_N$ . We partition the terminal nodes in  $A$  to  $N + 1$  subsets  $A_0, \dots, A_N$  according to  $h_0, \dots, h_N$  as follows: Every node in  $A$  is assigned to the closest non terminal node on the path between  $h_0, \dots, h_N$ . In the proof of Lemma 5.5, we use the following auxiliary lemma, proven in appendix E.

**Lemma 5.6.** *Let  $R_i = S(h_0, h_i)^2$ . For any  $1 \leq i \leq N - 1$  we have*

$$\min_{\beta} \frac{(1 - \beta R_i)^2 \|S(A_i, B)\|_F^2 + (1 - \beta R_{i+1})^2 \|S(A_{i+1}, B)\|_F^2}{\|S(A_i, B)\|_F^2 + \|S(A_{i+1}, B)\|_F^2} \geq \begin{cases} \frac{(2\delta^2)^{\log m} \delta^4 (1 - \xi^2)^2}{4m\xi^4} & \delta^2 \leq 0.5 \\ \frac{\delta^6 (1 - \xi^2)^2}{2m\xi^4} & \delta^2 > 0.5 \end{cases} \quad (18)$$

*Proof of Lemma 5.5 .* The proof consists of the following steps: (i) we rewrite the score  $d(e)$  defined in Eq. (9) in terms of  $\|S(A_0, B)\|_F, \dots, \|S(A_N, B)\|_F$ . The new expression is given in Eq. (22). (ii) In Eq. (23) we derive a lower bound on  $d(e)$  in terms of two consecutive terms  $\|S(A_i, B)\|_F$  and  $\|S(A_{i+1}, B)\|_F$ . (iii) In Lemma 5.6 we combine Eq. (23) with a bound on  $\|S(A_i, B)\|_F$  and  $\|S(A_{i+1}, B)\|_F$  to conclude the proof.

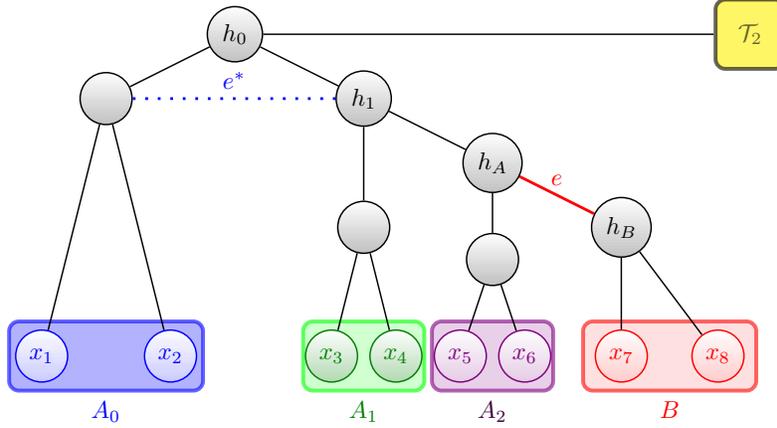


Figure 5: Bounding the score  $d(e)$  for an incorrect placeholder edge in  $\mathcal{T}_1$ . The correct placeholder edge  $e^* \in \mathcal{T}_1$  is marked by a dotted blue line. The incorrect placeholder edge  $e$ , which partitions the terminal node to subsets  $A(e)$  and  $B(e)$ , is marked by a thick red line. The two non-terminal nodes on the path between the correct and incorrect edges are denoted by  $h_1, h_2 = h_A$ , and the root node of  $C_1$  is denoted by  $h_0$ . The subset of terminal nodes closest to  $h_i$  is denoted by  $A_i$ .

First, we express the numerator of  $d(e)$  in Eq. (9) in terms of  $S(A_0, B), \dots, S(A_N, B)$ . Since  $h_0$  separates  $C_1$  and  $C_2$ , by the multiplicative property of the similarity we have,

$$S(C_1, C_2) = S(C_1, h_0)S(h_0, C_2) = u\sigma v^T \quad \|u\| = \|v\| = 1.$$

Let  $\bar{\beta}$  be the proportionality constant between  $u$  and  $S(C_1, h_0)$  such that  $u = \bar{\beta}S(C_1, h_0)$ . Recall that  $u_A, u_B$  in Eq. (9) are the entries in  $u$  that correspond to  $A$  and  $B$ , respectively. Partitioning  $u$  into  $u_A$  and  $u_B$  and partitioning  $S(C_1, h_0)$  into  $S(A, h_0)$  and  $S(B, h_0)$  gives

$$u_A = \bar{\beta}S(A, h_0) \quad u_B = \bar{\beta}S(B, h_0).$$

It follows that

$$S(A, B) - u_A \alpha u_B^T = S(A, B) - \alpha \bar{\beta}^2 S(A, h_0) S(h_0, B) = S(A, B) - \beta S(A, h_0) S(h_0, B),$$

where  $\beta = \bar{\beta}^2 \alpha$ . We split  $S(A, B)$  into the submatrices  $S(A_0, B), S(A_1, B), \dots, S(A_N, B)$ . Similarly, we split  $S(A, h_0)$  into the components  $S(A_0, h_0), S(A_1, h_0), \dots, S(A_N, h_0)$ . This gives

$$S(A, B) - \beta S(A, h_0) S(h_0, B) = \begin{bmatrix} S(A_0, B) \\ S(A_1, B) \\ \vdots \\ S(A_N, B) \end{bmatrix} - \beta \begin{bmatrix} S(A_0, h_0) \\ S(A_1, h_0) \\ \vdots \\ S(A_N, h_0) \end{bmatrix} S(h_0, B). \quad (19)$$

Let  $R_i = S(h_0, h_i)^2$ . We show that the matrix  $S(A_i, h_0) S(h_0, B)$ , which appears on the right side of Eq. (19), is proportional to  $S(A_i, B)$  with the proportionality constant  $R_i$ .

$$\begin{aligned} R_i S(A_i, B) &= S(h_0, h_i)^2 S(A_i, h_i) S(h_i, B) \\ &= S(A_i, h_i) S(h_i, h_0) S(h_0, h_i) S(h_i, B) = S(A_i, h_0) S(h_0, B). \end{aligned} \quad (20)$$

Inserting (20) to (19) gives

$$\begin{bmatrix} S(A_0, B) \\ S(A_1, B) \\ \vdots \\ S(A_N, B) \end{bmatrix} - \beta \begin{bmatrix} R_0 S(A_0, B) \\ R_1 S(A_1, B) \\ \vdots \\ R_N S(A_N, B) \end{bmatrix} = \begin{bmatrix} (1 - \beta R_0) S(A_0, B) \\ (1 - \beta R_1) S(A_1, B) \\ \vdots \\ (1 - \beta R_N) S(A_N, B) \end{bmatrix}.$$

Thus, the score in Eq. (9) is equivalent to

$$d^2(e) = \frac{1}{\|S(A, B)\|_F^2} \min_{\beta} \sum_{i=0}^N (1 - \beta R_i)^2 \|S(A_i, B)\|_F^2. \quad (21)$$

Since  $\|S(A, B)\|_F^2 = \sum_{i=0}^N \|S(A_i, B)\|_F^2$ , we can rewrite Eq. (21) as follows,

$$d^2(e) = \min_{\beta} \frac{\sum_{i=0}^N (1 - \beta R_i)^2 \|S(A_i, B)\|_F^2}{\sum_{i=0}^N \|S(A_i, B)\|_F^2}. \quad (22)$$

To lower bound  $d^2(e)$ , we use an inequality for two sequences of positive elements  $a_i, b_i$ ,  $\frac{\sum a_i}{\sum b_i} \geq \min_i \frac{a_i}{b_i}$ . This inequality implies that  $\frac{\sum a_i}{\sum b_i} \geq \min_i \frac{a_i + a_{i+1}}{b_i + b_{i+1}}$  by considering the sum over pairs of terms. Applying the inequality to Eq. (22) gives

$$d^2(e) \geq \min_{0 \leq i \leq N-1} \min_{\beta} \frac{(1 - \beta R_i)^2 \|S(A_i, B)\|_F^2 + (1 - \beta R_{i+1})^2 \|S(A_{i+1}, B)\|_F^2}{\|S(A_i, B)\|_F^2 + \|S(A_{i+1}, B)\|_F^2}. \quad (23)$$

Combining Eq. (23) and Lemma 5.6 gives

$$d^2(e) \geq \begin{cases} \frac{(2\delta^2)^{\log m} \delta^4 (1 - \xi^2)^2}{4m\xi^4} & \delta^2 \leq 0.5 \\ \frac{\delta^6 (1 - \xi^2)^2}{2m\xi^4} & \delta^2 > 0.5, \end{cases}$$

which concludes the proof of Lemma 5.5, and with it, Step 1 in the proof of Theorem 5.4.  $\square$

**Step 2: A sufficient condition on the estimate  $\hat{S}$**  Lemma 5.5 shows that there is a gap between the score of the correct placeholder edge and the scores all other edges in  $\mathcal{T}_1$ . We use this gap to derive the following lemma, which provides a condition on the accuracy of  $\hat{S}$  that is sufficient to guarantee that STDR selects the correct placeholder edge. For simplicity, we address only the case in Lemma 5.5 where  $\delta^2 \geq 0.5$ .

**Lemma 5.7.** *Let  $D = \min\{\|S(A, B)\|_F, \|S(C_1, C_2)\|_F\}$ . If the similarity matrix estimate  $\hat{S}$  satisfies*

$$\|S - \hat{S}\|_F \leq \frac{1}{2} \left( \frac{4}{D} + \frac{20}{D^2} + \frac{72 + 160\sqrt{2}}{D^3} \right)^{-1} \frac{\delta^3(1 - \xi^2)}{\sqrt{2m\xi^2}}, \quad (24)$$

then STDR selects the correct placeholder edge.

In our proof, we use the following auxiliary lemma, proven in Appendix E.

**Lemma 5.8.** *Let  $d(e), \hat{d}(e)$  be the correct and estimated score functions. If  $\|S - \hat{S}\|_F \leq D/2$ , then*

$$|d(e) - \hat{d}(e)| \leq \|S - \hat{S}\|_F \left( \frac{4}{D} + \frac{20}{D^2} + \frac{72 + 160\sqrt{2}}{D^3} \right).$$

*Proof of Lemma 5.7.* Suppose  $e^* \in \mathcal{T}_1$  is the correct placeholder edge and  $e' \neq e^*$  is a different edge in  $\mathcal{T}_1$ . By Lemma 5.5, the score  $d(e')$  for any incorrect edge is bounded by

$$d(e') \geq \frac{\delta^3(1 - \xi^2)}{\sqrt{2m\xi^2}},$$

while for the correct edge  $d(e^*) = 0$ . It follows from the triangle inequality that if

$$|d(e) - \hat{d}(e)| \leq \frac{1}{2} \frac{\delta^3(1 - \xi^2)}{\sqrt{2m\xi^2}}, \quad (25)$$

for all edges  $e$ , then  $\hat{d}(e^*) < \hat{d}(e')$ . Combining Eq. (25) with Lemma 5.8 shows that if

$$\|S - \hat{S}\|_F \leq \frac{1}{2} \left( \frac{4}{D} + \frac{20}{D^2} + \frac{72 + 160\sqrt{2}}{D^3} \right)^{-1} \frac{\delta^3(1 - \xi^2)}{\sqrt{2m\xi^2}},$$

then STDR selects the correct placeholder edge.  $\square$

**Step 3: Finite sample guarantees** We are now ready to prove Theorem 5.4, which bounds the number of samples required to compute, with high probability, a sufficiently accurate estimate  $\hat{S}$ , as determined in Lemma 5.7.

*Proof of Theorem 5.4.* The following concentration bound for  $\hat{S}$  was derived in Lemma 4.7 of [24],

$$\Pr(\|\hat{S} - S\|_F \leq t) \geq 1 - 2m^2 \exp\left(-\frac{2nt^2}{\ell^2 m^2}\right).$$

We note that in [24], this bound was presented for the spectral norm, but the proof holds for the Frobenius norm as well. Let  $1 - \varepsilon$  be a lower bound on this probability, such that

$$2m^2 \exp\left(-\frac{2nt^2}{\ell^2 m^2}\right) \leq \varepsilon.$$

Then

$$n \geq \frac{\ell^2 m^2}{2t^2} \log\left(\frac{2m^2}{\varepsilon}\right). \quad (26)$$

By Lemma 5.7, a sufficient condition for STDR to select the correct placeholder edge is

$$\|S - \hat{S}\|_F \leq \frac{1}{2} \left( \frac{4}{D} + \frac{20}{D^2} + \frac{72 + 160\sqrt{2}}{D^3} \right)^{-1} \frac{\delta^3(1 - \xi^2)}{\sqrt{2m\xi^2}}. \quad (27)$$

Setting  $t$  to the right hand side of Eq. (27) and substituting into Eq. (26), we have that if

$$\begin{aligned} n &\geq \frac{\ell^2 m^2}{2} 2^2 \left( \frac{4}{D} + \frac{20}{D^2} + \frac{72 + 160\sqrt{2}}{D^3} \right)^2 \left( \frac{2m\xi^4}{\delta^6(1 - \xi^2)^2} \right) \log\left(\frac{2m^2}{\varepsilon}\right) \\ &= 64\ell^2 m^3 \left( \frac{1}{D} + \frac{5}{D^2} + \frac{18 + 40\sqrt{2}}{D^3} \right)^2 \left( \frac{\xi^4}{\delta^6(1 - \xi^2)^2} \right) \log\left(\frac{2m^2}{\varepsilon}\right) \end{aligned}$$

then Eq. (27) holds with probability at least  $1 - \varepsilon$ , and thus the merging step in STDR selects the correct placeholder edge with high probability.  $\square$

### 5.3 Comparison of sample complexity

Combining Theorem 5.1 and Theorem 5.4, for a binary symmetric tree with a fixed similarity between adjacent nodes, the sample complexity of the partitioning and merging steps of STDR is equal to,

$$\tilde{\mathcal{O}}\left(m^3/D_{min}^2 + m^{2+4\log_2(\frac{1}{\delta})}\right) \quad (28)$$

where  $D_{min}$  is equal to the minimum of  $D$  from Theorem 5.4 over all partitions of the tree. We compare this result to three other methods for full recovery of trees. For simplicity, we assume that the similarity between all adjacent nodes is equal to  $\delta$  and that  $D_{min}$  is  $\mathcal{O}(\sqrt{m})$ .

For NJ, the sample complexity given in Section 3.3 of [4] is  $\tilde{\mathcal{O}}(\exp(-\min_{i,j} 4\ln(S(x_i, x_j)))$  or equivalently  $\tilde{\mathcal{O}}(\delta^{-4\text{diam}(\mathcal{T})})$ , where  $\text{diam}(\mathcal{T})$  is the diameter of  $\mathcal{T}$ . For a binary symmetric tree  $\text{diam}(\mathcal{T}) = 2\log_2(m)$  and hence the complexity is  $\mathcal{O}(m^{8\log_2(1/\delta)})$ , which is better than (28) for  $\delta$  close to one, but worse for lower values of  $\delta$ . However, the diameter of the tree can be as large as  $m$ , in which case the sample complexity is exponential in  $m$ , rather than polynomial as in (28).

For SNJ [24], if  $\delta^2 > 0.5$  the sample complexity is  $\tilde{\mathcal{O}}(m^2)$  (see Theorem 4.3 in [24]). This is similar to (28) for  $\delta$  close to one, but improves upon (28) as  $\delta$  decreases.

In Dyadic Close method [14, Theorem 9], the sample complexity is  $\tilde{\mathcal{O}}((1/\delta)^{4\text{depth}(\mathcal{T})})$ . The quantity  $\text{depth}(\mathcal{T})$  depends on the tree topology, see exact definition in [14]. For a binary symmetric tree  $\text{depth}(\mathcal{T}) = \log_2(m)$  in which case the complexity is  $\mathcal{O}(m^{4\log_2(1/\delta)})$ , which improves upon Eq. (28) by  $m^2$ . For highly imbalanced trees  $\text{depth}(\mathcal{T}) = \mathcal{O}(1)$  in which case the sample complexity is logarithmic in  $m$ . The improved sample complexity comes at cost of a  $\mathcal{O}(m^5)$  computational complexity.

## 6 Experimental results

We illustrate the performance of STDR in a variety of simulated settings. In all experiments, the sequences were generated according to the HKY substitution model [22] with transition-transversion ratio of 2, a typical value in the human genome [29]. The mutation rate for the HKY model is specified for each simulation. In all experiments, we applied the following methods to reconstruct the tree: (i) RAxML [45], a standard tool for maximum likelihood-based tree inference, (ii) neighbor joining (NJ), and (iii) spectral neighbor joining (SNJ). Recall that STDR requires as input a subroutine *alg* for the reconstruction of the small trees. Thus, for comparison, we applied STDR with each of the aforementioned algorithms as the subroutine. We denote these three methods as (iv) STDR + RAxML, (v) STR + NJ and (vi) STDR + SNJ. A second input to STDR is the threshold parameter  $\tau$ , which sets an upper bound for the size of the small trees. This parameter is specified in the description of each experiment. The accuracy of the different algorithms is measured by computing the normalized Robinson-Foulds (RF) distance, which is computed as the RF distance [16] between the reconstructed and reference tree divided by  $2m - 6$ . Each experiment was repeated 5 times to obtain a mean and standard deviation of the performance and runtime of each method.

We perform two types of experiments. First we compare the aforementioned algorithms on trees generated according to the coalescent model (6.1), birth-death model (6.2), and the caterpillar model (F.1), in addition we compare our merging procedure to TreeMerge [35] for the coalescent model. The results for the caterpillar tree and the comparison to TreeMerge are shown in Appendix F. Next, we demonstrate how changes in the threshold  $\tau$  affect the results of STDR on a symmetric binary tree.

**Implementation remarks** To improve the results of STDR, we computed two possible partitions  $C_1, C_2$ : (i) A partition that corresponds to a threshold at 0 in the Fiedler vector, and (ii) a partition that corresponds to the largest gap. In practice, the partition was chosen by method (i) or (ii), as the one that minimizes the second singular values of  $S(C_1, C_2)$ , see Lemma 3.1. To improve runtime, we apply randomized methods for computing leading singular values and vectors, see [46, 20, 1].

### 6.1 Kingman’s coalescent model

We generated a random tree according to Kingman’s coalescent model [43] with  $m = 2000$  terminal nodes (See example in Fig 9). Figure 6 shows the accuracy (left panel) and the runtime (right panel) of the different methods as functions of the sequence length. The threshold parameter  $\tau$  was set to 128 for all experiments. Here, STDR+RAxML performs similarly to RAxML in accuracy while achieving more than an order-of-magnitude reduction in runtime. Compared to NJ and SNJ, STDR+NJ and STDR+SNJ show improvement in both accuracy and runtime.

### 6.2 Birth-death model

We generated trees with  $m = 2048$  terminal nodes according to the birth-death model [31]. The STDR threshold was set to  $\tau = 256$  for all three methods. Figure 7 shows the accuracy and runtime of the different methods as functions of the sequence length  $n$ . Using STDR with NJ clearly improves upon the performance of standard NJ both in terms of accuracy and runtime. Compared to SNJ and RAxML, STDR+SNJ and STDR+RAxML show similar accuracy but with significantly faster runtimes

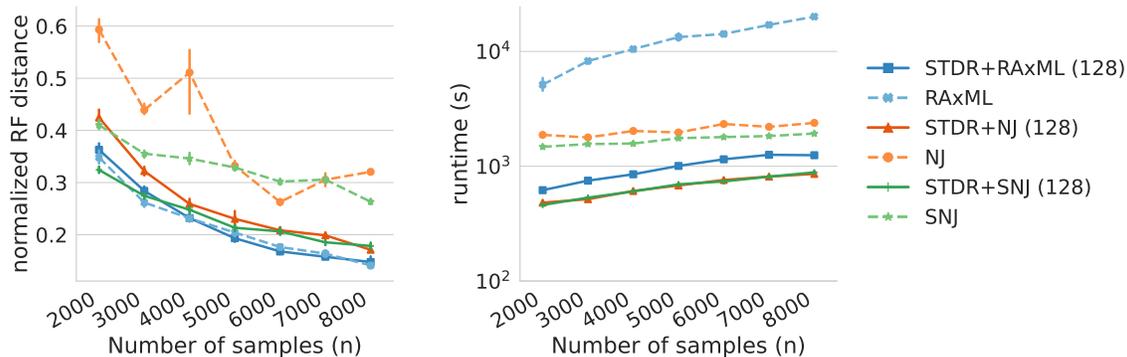


Figure 6: Trees generated according to Kingman’s coalescent model with  $m = 2000$  terminal nodes. The mean and standard deviation of the normalized RF distance (left) between the reconstructed tree and the input tree and of the runtime (right) are shown for each method over 5 independent runs.

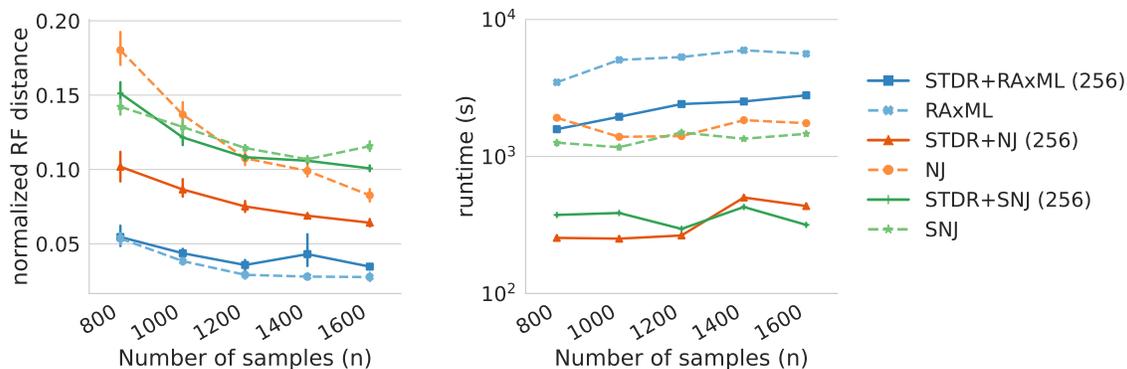


Figure 7: A birth-death tree with  $m = 2048$  terminal nodes. The mean and standard deviation of the normalized RF distance (left) between the reconstructed tree and the input tree and of the runtime (right) are shown for each method over 5 independent runs.

### 6.3 Effect of threshold parameter

Our aim in this experiment was to test the impact of the threshold parameter  $\tau$  on the performance of STDR. To that end, we created a binary symmetric tree with  $m = 2048$  terminal nodes and similarity between all adjacent nodes equal to  $\delta = 0.65$ . The number of samples was set to  $n = 1000$ . We then reconstructed the tree via STDR with different subroutines and a range of threshold values.

Figure 8 shows the normalized RF distance between the recovered trees and the ground truth tree as a function of the threshold. For both RAxML and SNJ, accuracy slightly improves for higher values of the threshold. STDR + NJ is not shown in the plot because it is significantly less accurate in this setting. These results are in accordance with our analysis in Section 5, where we show that the task of merging trees becomes challenging for small subsets of terminal nodes.

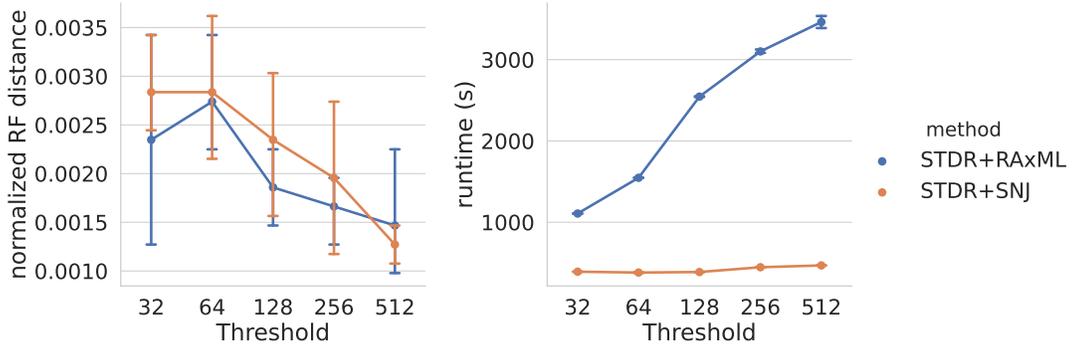


Figure 8: Effect of minimal tree size threshold  $\tau$  on runtime and accuracy of SDTR. Various values of threshold  $\tau$  were chosen to test the performance of SDTR method in recovering a binary tree of size 2048 from sequences of length 1000. SNJ, and RAxML were used as the sub method of SDTR.

## Acknowledgments

The authors would like to thank Junhyong Kim, Stefan Steinerberger and Ronald Coifman for useful and insightful discussions. Y.K. and Y.A. acknowledges support by NIH grants R01GM131642, UM1DA051410 and R61DA047037. Y.K. and B.N. acknowledges support by NIH grants R01GM135928. Y.K. acknowledges support by NIH grants 2P50CA121974.

## Appendix A Example of Fiedler vector in a coalescent tree

We generated a tree with  $m = 512$  nodes according to the coalescent model, see Figure 9a. The transition matrices were set according to the HKY model [22]. With the coalescent tree, we generate a dataset of nucleotide sequences of length  $n = 2,000$ . Figure 9b shows the Fiedler vector of the similarity graph estimated from the dataset. Thresholding the Fiedler vector at 0 corresponds to splitting the terminal nodes into two clans.


## Appendix B Relation between the partitioning step and the min-cut criterion

Let  $\mathcal{T}$  be a binary tree and  $G$  be its similarity graph, as defined in 4. The following lemma shows that partitioning the terminal nodes according to the min-cut criterion yields two clans of  $\mathcal{T}$ .

**Lemma B.1.** *Let  $G$  be the similarity graph of  $\mathcal{T}$ . Let  $A^*$  and  $B^*$  be a partition of the terminal nodes that minimizes the following min-cut criterion:*

$$(A^*, B^*) \in \underset{A, B}{\operatorname{argmin}} \operatorname{Cut}_G(A, B) = \underset{A, B}{\operatorname{argmin}} \sum_{i \in A, j \in B} S(x_i, y_j). \quad (29)$$

*Then  $A^*$  and  $B^*$  are both clans in  $\mathcal{T}$ .*

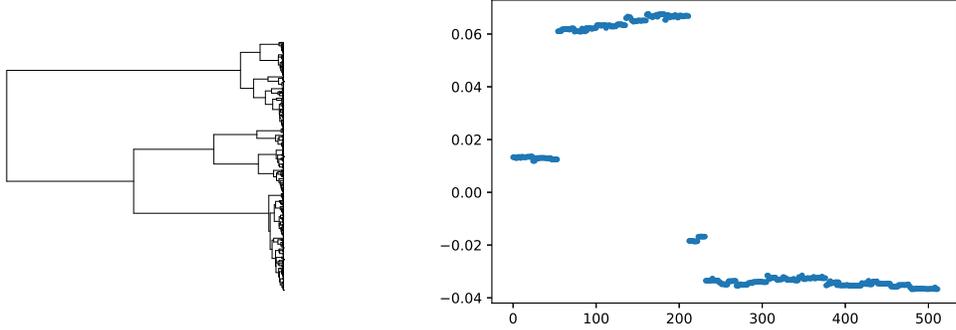

(a) Generated coalescent tree

(b) Fiedler vector of the coalescent tree

Figure 9: Coalescent tree example with 512 terminal nodes

*Proof.* Let  $(x_1, x_2)$  be a pair of terminal nodes with a common neighbor. Consider an arbitrary partition of the terminal nodes into two non-empty subsets, denoted  $A$  and  $B$ . The two adjacent nodes  $(x_1, x_2)$  can, respectively, be labeled  $(A, B)$ ,  $(A, A)$ ,  $(B, A)$  or  $(B, B)$ . We show that if  $A$  and  $B$  each contains nodes besides  $x_1$  and  $x_2$ , then assigning  $x_1$  and  $x_2$  to the same subset decreases the value of the min-cut criterion.

Assume without loss of generality that  $x_1 \in A, x_2 \in B$ . The cut between  $A$  and  $B$  is equal to

$$\text{Cut}(A, B) \equiv \sum_{x \in A, x' \in B} S(x, x') = S(x_1, x_2) + \sum_{x' \in B \setminus \{x_2\}} S(x_1, x') + \sum_{x \in A \setminus \{x_1\}} S(x, x_2) + S_0,$$

where

$$S_0 = \sum_{\substack{x \in A \setminus \{x_1\} \\ x' \in B \setminus \{x_2\}}} S(x, x')$$

does not depend on the assignment of  $x_1$  and  $x_2$ . Let  $h$  be the unique node that is adjacent to both  $x_1$  and  $x_2$ . From the multiplicative property of the similarity, we have

$$\text{Cut}(A, B) = S(x_1, x_2) + S(x_1, h) \sum_{x' \in B \setminus \{x_2\}} S(h, x') + S(x_2, h) \sum_{x \in A \setminus \{x_1\}} S(x, h) + S_0.$$

Without loss of generality, assume that

$$\sum_{x' \in B \setminus \{x_2\}} S(h, x') \geq \sum_{x \in A \setminus \{x_1\}} S(x, h). \quad (30)$$

It follows that

$$\begin{aligned}
\text{Cut}(A, B) &\geq S(x_1, h) \sum_{x \in A \setminus \{x_1\}} S(x, h) + S(x_2, h) \sum_{x \in A \setminus \{x_1\}} S(x, h) + S_0 \\
&= \sum_{x \in A \setminus \{x_1\}} S(x, x_1) + \sum_{x \in A \setminus \{x_1\}} S(x, x_2) + \sum_{\substack{x \in A \setminus \{x_1\} \\ x' \in B \setminus \{x_2\}}} S(x, x') \\
&= \sum_{\substack{x \in A \setminus \{x_1\} \\ x' \in B \cup \{x_1\}}} S(x, x').
\end{aligned} \tag{31}$$

Note that the right hand side of Eq. (31) equals the value of the cut of the same partition, but with  $x_1$  moved from  $A$  to  $B$ . Thus, the min-cut partition  $\{A^*, B^*\}$  satisfies one of the following:

- $x_1$  and  $x_2$  are in the same subset.
- One of  $A^*$  or  $B^*$  equals exactly to  $\{x_1\}$  or  $\{x_2\}$ .

Next, let  $C_1$  and  $C_2$  be two adjacent clans. Assume that the terminal nodes of each of the clans are homogeneous (i.e., they all belong to the same subset,  $A$  or  $B$ ). The same argument for a pair of terminal nodes carries over to the case of two adjacent homogeneous clans, showing that the minimal cut partition  $\{A^*, B^*\}$  satisfies one of the following:

- $C_1$  and  $C_2$  are in the same subset.
- One of  $A^*$  or  $B^*$  equals exactly  $C_1$  or  $C_2$ .

Let  $\{A, B\}$  be an arbitrary partition of the terminal nodes that does not correspond to two clans in the tree. Since  $A$  and  $B$  are not clans, there must be at least two disjoint pairs  $C_1, C_2$  and  $\tilde{C}_1, \tilde{C}_2$  of homogeneous adjacent subsets, where the nodes in  $C_1$  are labeled by  $A$  and the nodes in  $C_2$  are labeled by  $B$ . By our arguments  $\text{Cut}(A, B)$  can be reduced by either changing the labels of  $C_1$  to  $B$  or  $C_2$  to  $A$  which implies that  $\{A, B\}$  is not the min-cut partition. Thus, for any min-cut partition  $\{A^*, B^*\}$ ,  $A^*$  and  $B^*$  are clans.  $\square$


## Appendix C Illustration of the Schur complement operation

Figure 10a illustrates a tree  $\mathcal{T}$  with four terminal nodes and two non-terminal nodes, with all edge weights equal to 1. Its Laplacian matrix  $L_{\mathcal{T}}$  is

$$L_{\mathcal{T}} = D_{\mathcal{T}} - W_{\mathcal{T}} = \left( \begin{array}{cccc|cc} 1 & 0 & 0 & 0 & -1 & 0 \\ 0 & 1 & 0 & 0 & -1 & 0 \\ 0 & 0 & 1 & 0 & 0 & -1 \\ 0 & 0 & 0 & 1 & 0 & -1 \\ \hline -1 & -1 & 0 & 0 & 3 & -1 \\ 0 & 0 & -1 & -1 & -1 & 3 \end{array} \right).$$

Figure 10b illustrates a complete graph  $G$  that corresponds to the Laplacian matrix  $L_{\mathcal{T}/R}$ ,

$$L_{\mathcal{T}/R} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix} - \begin{pmatrix} -1 & 0 \\ -1 & 0 \\ 0 & -1 \\ 0 & -1 \end{pmatrix} \begin{pmatrix} 3 & -1 \\ -1 & 3 \end{pmatrix}^{-1} \begin{pmatrix} -1 & -1 & 0 & 0 \\ 0 & 0 & -1 & -1 \end{pmatrix} = \frac{1}{8} \begin{pmatrix} 5 & -3 & -1 & -1 \\ -3 & 5 & -1 & -1 \\ -1 & -1 & 5 & -3 \\ -1 & -1 & -3 & 5 \end{pmatrix}.$$

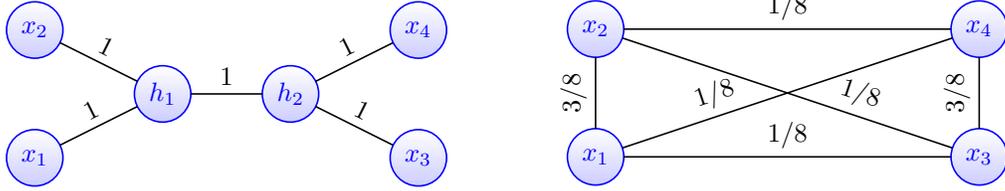

(a) A tree  $\mathcal{T}$  with 4 terminal and 2 internal nodes. The weight for all edges is equal to 1.

(b) A graph with Laplacian equal to the Schur complement  $L_{\mathcal{T}/R}$ , with  $R = \{h_1, h_2\}$ .

Figure 10: A tree and a full graph corresponding to the Schur complement with respect to its internal nodes.

## Appendix D Proof of Lemma 4.4

We begin with several definitions and notations. We denote by  $K(v, w)$  the weight between nodes  $v$  and  $w$  in a graph  $K$ . For a tree  $\mathcal{T}$ , we denote by  $path_{\mathcal{T}}(v, w)$  the set of edges on the path between nodes  $v$  and  $w$ ,

$$path_{\mathcal{T}}(v, w) = \{(\tilde{v}, \tilde{w}) \mid \tilde{v} \text{ and } \tilde{w} \text{ are adjacent nodes on the path between } v \text{ and } w\}.$$

Next, we define the multiplicative weight between two nodes in a tree.

**Definition 7.** *The multiplicative weight between  $v$  and  $w$  in a tree  $\mathcal{T}$  is equal to,*

$$\alpha_{\mathcal{T}}(v, w) = \prod_{(\tilde{v}, \tilde{w}) \in path_{\mathcal{T}}(v, w)} \mathcal{T}(\tilde{v}, \tilde{w}). \quad (32)$$

One example of a multiplicative weight is the similarity between a pair of nodes  $v, w$  defined in Eq. (3).

The next definition concerns a graph with nodes that correspond to a subset of nodes in  $\mathcal{T}$ , and weights computed according to (32).

**Definition 8** (Multiplicative subgraph). *Let  $\mathcal{T}$  be a tree with a set of nodes  $V$ . We say that a graph  $G$  is a multiplicative subgraph with respect to  $\mathcal{T}$  and a subset of nodes  $\tilde{V} \subset V$  if (i) the nodes of  $G$  correspond to  $\tilde{V}$  and (ii) the weight assigned to an edge connecting  $v, w$  in  $G$  is equal to the multiplicative weight between  $v$  and  $w$  in  $\mathcal{T}$ ,*

$$G(v, w) = \alpha_{\mathcal{T}}(v, w).$$

For convenience, we will sometimes say that  $G$  is a multiplicative subgraph of  $\mathcal{T}$  without explicitly stating which nodes are included in  $G$ . By definition, the similarity graph  $G$  is a multiplicative subgraph with respect to the terminal nodes of  $\mathcal{T}$ . Note that we use  $v$  and  $w$  as nodes both in  $G$  and in  $\mathcal{T}$  interchangeably, since by definition every node in  $G$  corresponds to a node in  $\mathcal{T}$ .

The proof of Lemma 4.4 is constructive. Given a tree  $\mathcal{T}$  and its similarity graph  $G$ , we present an iterative procedure to build a second tree  $\tilde{\mathcal{T}}$ , with the same topology as  $\mathcal{T}$ , but with different weights such that

$$L_G = L_{\tilde{\mathcal{T}}/R},$$

where  $R$  is the set of all internal nodes in  $\mathcal{T}$ . Computing  $\tilde{\mathcal{T}}$  consists of iterative and simultaneous updates of a graph and a tree: (i) a graph  $G_i$  with nodes that correspond to a subset of the nodes

in  $\mathcal{T}$ . The initial graph  $G_0$  is set to  $G$ , with only the terminal nodes of  $\mathcal{T}$ . (ii) A tree  $\mathcal{T}_i$ , with the same topology as  $\mathcal{T}$ . The weights of the initial tree  $\mathcal{T}_0$  are set such that  $\mathcal{T}_0 = \mathcal{T}$ .

At each iteration  $i$ , we add one of the non-terminal nodes  $h_i$  of  $\mathcal{T}$  (that was not previously added) to  $G_i$ , creating  $G_{i+1}$ . The weights of the new graph  $G_{i+1}$  are set such that the Schur complement of its Laplacian matrix with respect to the added node  $h_i$  is equal to the Laplacian of the previous graph  $L_{G_i}$ .

$$L_{G_i} = L_{G_{i+1}/h_i}. \quad (33)$$

The steps for computing  $G_{i+1}$  given  $G_i$  and  $\mathcal{T}_i$  are described in Algorithm 2. Next, we compute a new tree  $\mathcal{T}_{i+1}$  with the same topology as  $\mathcal{T}_i$ . The weights of  $\mathcal{T}_{i+1}$  are set such that  $G_{i+1}$  becomes a multiplicative subgraph with respect to  $\mathcal{T}_{i+1}$ . The steps for computing  $\mathcal{T}_{i+1}$  are described in Algorithm 3. At every iteration  $i$ , we maintain an *active set* of nodes which we denote by  $A_i$ . When updating  $G_i$ , changes are only made to edges connecting two nodes in  $A_i \cup h_i$ . When updating  $\mathcal{T}_i$ , changes are only made to edges on the path between two nodes in the active set. The initial active set  $A_0$  is equal to all terminal nodes of  $\mathcal{T}$ .

In our proof, we use the following two auxiliary lemmas, that show the correctness of the updating procedure of  $G_i$  and  $\mathcal{T}_i$ . An implementation of Algorithms 2 and 3 is available on GitHub. The first lemma proves the correctness of Algorithm 2. The input to Algorithm 2 is the tree  $\mathcal{T}_i$ , a multiplicative subgraph  $G_i$  and an active set  $A_i$ , all of which were computed in the previous iteration. The output of the algorithm is an updated graph  $G_{i+1}$  that contains an additional node  $h_i$ . In addition, the algorithm updates the active set  $A_i$  and creates  $A_{i+1}$ .

**Lemma D.1.** *The output of Algorithm 2 is a graph  $G_{i+1}$  whose nodes include  $h_i$  as well as all the nodes in  $G_i$  such that*

$$L_{G_{i+1}/h_i} = L_{G_i}.$$

The next lemma concerns the updating procedure of  $\mathcal{T}_i$ . The input to Algorithm 3 consists of the new active set  $A_{i+1}$ , and the node  $h_i$  added to  $G_{i+1}$ . Here, the only changes made are to edges on the path between  $h_i$  and the nodes in the active set  $A_{i+1}$ .

**Lemma D.2.** *The tree  $\mathcal{T}_{i+1}$  built according to Algorithm 3 is such that  $G_{i+1}$  becomes a multiplicative subgraph of  $\mathcal{T}_{i+1}$ .*

Figure 11 shows two iterations of the aforementioned process for a tree  $\mathcal{T}$  with four terminal and two non-terminal nodes. For simplicity, all the weights of the tree  $\mathcal{T}$  are set to  $1/2$ .

*Proof of Lemma 4.4.* We initialize the updating process with a tree  $\mathcal{T}$  and its similarity matrix  $G = G_0$ . By definition,  $G_0$  is a multiplicative subgraph of  $\mathcal{T}$ , and therefore satisfies the condition for Lemma D.1. The lemma guarantees that after the first update, we obtain a graph  $G_1$  with a Laplacian that satisfies,

$$L_{G_0} = L_{G_1/h_0},$$

where  $h_0$  is the node added to  $G_0$  at the first iteration. Lemma D.2 guarantees that  $G_1$  is a multiplicative subgraph of  $\mathcal{T}_1$ . Thus, we can re-apply Algorithm 2 with the pair  $G_1, \mathcal{T}_1$ . Thus, at each iteration  $i$ , we obtain a graph  $G_{i+1}$  that satisfies,

$$L_{G_i} = L_{G_{i+1}/h_i}. \quad (37)$$

---

**Algorithm 2** Updating  $G_i$ 


---

**Input:**  $\mathcal{T}_i$  - a tree graph  
 $G_i$  - a multiplicative subgraph of  $\mathcal{T}_i$   
 $A_i$  - active set of nodes

**Output:**  $G_{i+1}$  - updated graph such that  $L_{G_i} = L_{G_{i+1}/h_i}$   
 $A_{i+1}$  - updated active set  
 $h_i$  - the node added to  $G_i$   
 $v_{i,1}, v_{i,2}$  - nodes removed from the active set

- 1: Initialize  $G_{i+1} = G_i$  and  $A_{i+1} = A_i$ .
- 2: Choose a node  $h_i$  in  $\mathcal{T}_i$  that is not in  $G_i$  and is adjacent to at least two nodes  $v_{i,1}, v_{i,2}$  in the active set  $A_i$ . Add  $h_i$  to  $G_{i+1}$ .
- 3: Remove edges between the nodes  $v_{i,1}, v_{i,2}$  and the rest of the active set  $A_i$ .
- 4: The weight between the new node  $h_i$  and a node  $x$  in the active set is computed by

$$G_{i+1}(h_i, x) = d\alpha_{\mathcal{T}_i}(h_i, x), \quad (34)$$

where

$$d = \sum_{x' \in A_i} \alpha_{\mathcal{T}_i}(h_i, x'). \quad (35)$$

- 5: The weights between two nodes  $x, y$  in the active set (except  $v_{i,1}, v_{i,2}$ ) are updated by

$$G_{i+1}(x, y) = G_i(x, y) - \alpha_{\mathcal{T}_i}(h_i, x)\alpha_{\mathcal{T}_i}(h_i, y). \quad (36)$$

- 6: Remove the nodes  $v_{i,1}$  and  $v_{i,2}$  from the active set  $A_{i+1}$ , and add  $h_i$ .
  - 7: **return**  $G_{i+1}, A_{i+1}, h_i, v_{i,1},$  and  $v_{i,2}$ .
-

---

**Algorithm 3** Updating  $\mathcal{T}_i$ 

---

**Input:**  $\mathcal{T}_i$  - a tree graph  
 $A_{i+1}$  - the active set  
 $h_i$  - the node last added to  $G_{i+1}$   
 $v_{i,1}, v_{i,2}$  - nodes that were removed from the active set in the last update

**Output:**  $\mathcal{T}_{i+1}$  - a tree with weights computed such that  $G_{i+1}$  is a multiplicative subgraph of  $\mathcal{T}_{i+1}$

- 1: Set  $\mathcal{T}_{i+1}(h_i, v_{i,1}) = d\mathcal{T}_i(h_i, v_{i,1})$  and  $\mathcal{T}_{i+1}(h_i, v_{i,2}) = d\mathcal{T}_i(h_i, v_{i,2})$
- 2: For node  $x \notin \{v_{i,1}, v_{i,2}\}$  adjacent to  $h_i$ , set

$$\mathcal{T}_{i+1}(h_i, x) = \frac{d\mathcal{T}_i(h_i, x)}{\sqrt{1 - \alpha\mathcal{T}_i(x, h_i)^2}},$$

where  $d$  is given by Eq. (35).

- 3: For two adjacent nodes  $x, y \in \mathcal{T}$  where  $y$  is a node in the active set  $A_{i+1}$  and  $x$  is other path between  $y$  and  $h_i$ , set

$$\mathcal{T}_{i+1}(x, y) = \mathcal{T}_i(x, y)\sqrt{1 - \alpha\mathcal{T}_i(x, h_i)^2}$$

- 4: For two adjacent nodes  $x, y \in \mathcal{T}$  that are not in the active set. If  $\mathcal{T}_i(x, y)$  is on the path between a node in the active set and  $h_i$ , where  $x$  is closer to  $h_i$ , set

$$\mathcal{T}_{i+1}(x, y) = \mathcal{T}_i(x, y)\frac{\sqrt{1 - \alpha\mathcal{T}_i(x, h_i)^2}}{\sqrt{1 - \alpha\mathcal{T}_i(y, h_i)^2}}$$

- 5: **return**  $\mathcal{T}_{i+1}$
-

Repeating the updating process for all  $l$  non-terminal nodes of  $\mathcal{T}$  yields the graph  $G_l$ , which by construction has the same topology as  $\mathcal{T}$ . In addition, due to the transitivity of the Schur's complement operation, Eq. (37) implies that

$$L_{\mathcal{T}_l/R} = L_{G_l/R} = L_{G_l/\{h_0, \dots, h_{l-1}\}} = L_{G_{l-1}/\{h_0, \dots, h_{l-2}\}} = \dots = L_{G_1/h_0} = L_{G_0} = L_G.$$

Thus,  $\mathcal{T}_l$  is a tree with the same topology as  $\mathcal{T}$ , but with different weights such that  $L_{\mathcal{T}_l/R} = L_G$ , which proves the lemma.  $\square$

*Proof of Lemma D.1.* Assume, for simplicity of notation, that the  $j$ th row/column of  $L_G$  is the row/column that correspond to  $h_j$  for any  $j$  such that

$$L_G(i, j) = -G(h_i, h_j) \quad \forall h_i, h_j \in G \text{ with } i \neq j.$$

We denote by  $m_j$  the  $j$ -th column of  $L_{G_{i+1}}$  after removing the  $i$ -th entry, and by  $\mathbf{1}$  the all one vector. Since  $h_i$  is a single node, the Schur complement  $L_{G_{i+1}/h_i}$  defined in (6) can be simplified to

$$L_{G_{i+1}/h_i}(j, k) = L_{G_{i+1}}(j, k) - \frac{(\mathbf{1}^T m_j)(\mathbf{1}^T m_k)}{\sum_{l \neq i} \mathbf{1}^T m_l}. \quad (38)$$

For a Laplacian matrix, the sum over any row is equal to zero. Since  $m_j$  is equal to the row of  $L_{G_{i+1}}$  after removing the  $i$ -th entry we have that  $\mathbf{1}^T m_j = -L_{G_{i+1}}(i, j)$ . We rewrite Eq. (38) as,

$$L_{G_{i+1}/h_i}(j, k) = L_{G_{i+1}}(j, k) + \frac{L_{G_{i+1}}(j, i)L_{G_{i+1}}(k, i)}{\sum_{l \neq i} L_{G_{i+1}}(i, l)}. \quad (39)$$

The only edges changed between  $G_i$  and  $G_{i+1}$  are edges between nodes in the active set  $A_i$ . Thus, if either  $h_k$  or  $h_j$  are not in the active set then  $L_{G_{i+1}}(j, k) = L_{G_i}(j, k)$ . In addition, by step 4 of Algorithm 2, the added node  $h_i$  is only connected to nodes in the active set  $A_i$ . Thus, if either node  $h_k$  or  $h_j$  are not part of  $A_i$  we have  $L_{G_{i+1}}(j, i)L_{G_{i+1}}(k, i) = 0$ . It follows that in this case  $L_{G_{i+1}/h_i}(j, k) = L_{G_i}(j, k)$  as required.

Next, we assume that both  $h_j$  and  $h_k$  are part of the active set  $A_i$ . Eqs. (34) and (36) give

$$L_{G_{i+1}}(j, k) = L_{G_i}(j, k) + \alpha_{\mathcal{T}_i}(h_i, h_j)\alpha_{\mathcal{T}_i}(h_i, h_k), \quad L_{G_{i+1}}(k, i) = -d\alpha_{\mathcal{T}_i}(h_i, h_k). \quad (40)$$

By step 4 of Algorithm 2,  $h_i$  is only connected to nodes in the active set  $A_i$ . Inserting Eq. (40) to Eq. (39) gives

$$L_{G_{i+1}/h_i}(j, k) = L_{G_i}(j, k) + \alpha_{\mathcal{T}_i}(h_i, h_j)\alpha_{\mathcal{T}_i}(h_i, h_k) - \frac{d^2\alpha_{\mathcal{T}_i}(h_i, h_j)\alpha_{\mathcal{T}_i}(h_i, h_k)}{\sum_{x \in A_i} d\alpha_{\mathcal{T}_i}(h_i, x)}, \quad (41)$$

The denominator in the last term on the r.h.s of Eq. (41) is equal to  $d^2$  and hence,

$$L_{G_{i+1}/h_i}(j, k) = L_{G_i}(j, k) + \alpha_{\mathcal{T}_i}(h_i, h_j)\alpha_{\mathcal{T}_i}(h_i, h_k) - d^2\alpha_{\mathcal{T}_i}(h_i, h_j)\alpha_{\mathcal{T}_i}(h_i, h_k)\frac{1}{d^2} = L_{G_i}(j, k).$$

We conclude that for any element  $j, k$  we have  $L_{G_{i+1}/h_i}(j, k) = L_{G_i}(j, k)$ .  $\square$

*Proof of Lemma D.2.* Here, our task is to prove that the weight assigned to any edge  $G_{i+1}(x, y)$  is equal to the multiplicative path  $\alpha_{\mathcal{T}_{i+1}}(x, y)$ . We address three cases: (i) the node  $x$  is in the active set  $A_{i+1}$  and  $y$  is equal to the node  $h_i$  added to the graph in iteration  $i$ . (ii) Both  $x$  and  $y$  are in  $A_{i+1}$ , and are not equal to  $h_i$ , and (iii)  $x = h_i$  and  $y$  is either  $v_{i,1}$  or  $v_{i,2}$ . For a pair of nodes  $(x, y)$  that is not in (i) – (iii) the edges in  $G_i$  and  $\mathcal{T}_i$  were not changed in the updating steps.

For case (i) we assume that  $x$  is in  $A_{i+1}$  and  $y = h_i$  and hence by Eq. (34) in Algorithm 2

$$G_{i+1}(x, h_i) = d\alpha_{\mathcal{T}_i}(x, h_i).$$

We denote the nodes on the path between  $x$  and  $h_i$  in  $\mathcal{T}_i$  by

$$\text{path}(h_i, x) = \{z_1 = h_i, z_2, \dots, z_K = x\}.$$

The edge between  $h_i$  and  $z_2$  is updated according to step 2 of Algorithm 3. The edge between  $z_{K-1}$  and  $z_K$  is updated by step 3. The remaining edges are updated by step 4. The multiplicative weight  $\alpha_{\mathcal{T}_{i+1}}(x, h_i)$  in the updated tree  $\mathcal{T}_{i+1}$  according to Algorithm 3 is equal to

$$\begin{aligned} \alpha_{\mathcal{T}_{i+1}}(x, h_i) &= \prod_{j=1}^{K-1} \mathcal{T}_{i+1}(z_j, z_{j+1}) \\ &= \frac{d\mathcal{T}_i(h_i, z_2)}{\sqrt{1 - \alpha_{\mathcal{T}_i}(z_2, h_i)^2}} \times \\ &\quad \prod_{j=2}^{K-2} \mathcal{T}_i(z_j, z_{j+1}) \frac{\sqrt{1 - \alpha_{\mathcal{T}_i}(z_j, h_i)^2}}{\sqrt{1 - \alpha_{\mathcal{T}_i}(z_{j+1}, h_i)^2}} \sqrt{1 - \alpha_{\mathcal{T}_i}(z_{K-1}, h_i)^2} \mathcal{T}_i(z_{K-1}, x) \\ &= d \prod_{j=1}^{K-1} \mathcal{T}_i(z_j, z_{j+1}) = d\alpha_{\mathcal{T}_i}(x, h_i). \end{aligned} \tag{42}$$

Thus, the weight  $G_{i+1}(x, h_i) = \alpha_{\mathcal{T}_{i+1}}(x, h_i)$  for any  $x$  in the active set.

In case (ii)  $x, y$  are two nodes in the active set not equal to  $h_i$ . According to Eq. (36) in Algorithm 2

$$G_{i+1}(x, y) = G_i(x, y) - \alpha_{\mathcal{T}_i}(h_i, x)\alpha_{\mathcal{T}_i}(h_i, y).$$

Denote by  $u$  the unique node that connects between the nodes  $x, y$  and  $h_i$ . Then,

$$\alpha_{\mathcal{T}_i}(h_i, x)\alpha_{\mathcal{T}_i}(h_i, y) = \alpha_{\mathcal{T}_i}(h_i, u)^2 \alpha_{\mathcal{T}_i}(u, x)\alpha_{\mathcal{T}_i}(u, y) = \alpha_{\mathcal{T}_i}(h_i, u)^2 \alpha_{\mathcal{T}_i}(x, y). \tag{43}$$

By assumption on the input to Alg. 2 of the previous iteration, the graph  $G_i$  is a multiplicative subgraph of  $\mathcal{T}_i$  and hence  $G_i(x, y) = \alpha_{\mathcal{T}_i}(x, y)$ . Thus, Eqs. (36) and (43) imply

$$\begin{aligned} G_{i+1}(x, y) &= G_i(x, y) - \alpha_{\mathcal{T}_i}(h_i, u)^2 \alpha_{\mathcal{T}_i}(x, y) \\ &= G_i(x, y) - \alpha_{\mathcal{T}_i}(h_i, u)^2 G_i(x, y) = G_i(x, y)(1 - \alpha_{\mathcal{T}_i}(h_i, u)^2). \end{aligned}$$

Next, we show that  $G_{i+1}(x, y)$  is equal to the multiplicative weight  $\alpha_{\mathcal{T}_{i+1}}(x, y)$ . Let  $z_1 = x, \dots, z_\kappa = u, \dots, z_K = y$  be the nodes on the path between  $x$  and  $y$ . By steps 2 and 3 in Algorithm 3, the

multiplicative weight  $\alpha_{\mathcal{T}_{i+1}}(x, y)$  is equal to

$$\begin{aligned}
\alpha_{\mathcal{T}_{i+1}}(x, y) &= \prod_{j=1}^{\kappa-1} \mathcal{T}_{i+1}(z_j, z_{j+1}) \prod_{j=\kappa}^{K-1} \mathcal{T}_{i+1}(z_j, z_{j+1}) \\
&= \mathcal{T}_i(x, z_2) \sqrt{1 - \alpha_{\mathcal{T}_i}(z_2, h_i)^2} \prod_{j=2}^{\kappa-1} \mathcal{T}_i(z_j, z_{z+1}) \frac{\sqrt{1 - \alpha_{\mathcal{T}_i}(z_{j+1}, h_i)^2}}{\sqrt{1 - \alpha_{\mathcal{T}_i}(z_j, h_i)^2}} \\
&\quad \times \mathcal{T}_i(y, z_{K-1}) \sqrt{1 - \alpha_{\mathcal{T}_i}(z_{K-1}, h_i)^2} \prod_{j=\kappa}^{K-2} \mathcal{T}_i(z_j, z_{z+1}) \frac{\sqrt{1 - \alpha_{\mathcal{T}_i}(z_j, h_i)^2}}{\sqrt{1 - \alpha_{\mathcal{T}_i}(z_{j+1}, h_i)^2}}. \tag{44}
\end{aligned}$$

Note that

$$\begin{aligned}
\mathcal{T}_i(x, z_2) \sqrt{1 - \alpha_{\mathcal{T}_i}(z_2, h_i)^2} \prod_{j=2}^{\kappa-1} \mathcal{T}_i(z_j, z_{z+1}) \frac{\sqrt{1 - \alpha_{\mathcal{T}_i}(z_{j+1}, h_i)^2}}{\sqrt{1 - \alpha_{\mathcal{T}_i}(z_j, h_i)^2}} \\
= \sqrt{1 - \alpha_{\mathcal{T}_i}(z_\kappa, h_i)^2} \prod_{j=1}^{\kappa-1} \mathcal{T}_i(z_j, z_{z+1})
\end{aligned}$$

and

$$\begin{aligned}
\mathcal{T}_i(y, z_{K-1}) \sqrt{1 - \alpha_{\mathcal{T}_i}(z_{K-1}, h_i)^2} \prod_{j=\kappa}^{K-2} \mathcal{T}_i(z_j, z_{z+1}) \frac{\sqrt{1 - \alpha_{\mathcal{T}_i}(z_j, h_i)^2}}{\sqrt{1 - \alpha_{\mathcal{T}_i}(z_{j+1}, h_i)^2}} \\
= \sqrt{1 - \alpha_{\mathcal{T}_i}(z_\kappa, h_i)^2} \prod_{j=\kappa}^{K-1} \mathcal{T}_i(z_j, z_{z+1})
\end{aligned}$$

and thus,

$$\alpha_{\mathcal{T}_{i+1}}(x, y) = \prod_{j=1}^{K-1} \mathcal{T}_i(z_j, z_{z+1}) (1 - \alpha_{\mathcal{T}_i}(z_\kappa, h_i)^2) = G_{i+1}(x, y).$$

Lastly, we consider case (iii), where  $x = h_i$  and  $y = v_{i,1}$  or  $y = v_{i,2}$ . Recall that  $v_{i,1}, v_{i,2}$  are adjacent to  $h_i$  in  $\mathcal{T}$  and were removed from the active set. By step 4 of Algorithm 2 and step 1 of Algorithm 3 the edge  $G_i(x, y)$  and its corresponding edge  $\mathcal{T}_i(x, y)$  have both been updated such that  $\mathcal{T}_{i+1}(x, y) = G_{i+1}(x, y) = d\mathcal{T}_i(x, y)$ .  $\square$

## Appendix E Auxiliary Lemmas for Section 5

*Proof of Lemma 5.3.* We begin by characterizing all the eigenvectors of  $L \in \mathbb{R}^{m \times m}$ . For any non-terminal node  $h$  in the binary symmetric tree  $\mathcal{T}$ , we denote the set of descendant terminal nodes to the “left” of  $h$  by  $A$ , the set of descendant terminal nodes to the “right” of  $h$  by  $B$ , and the rest of the terminal nodes by  $C$ . Let  $v_h \in \mathbb{R}^m$  be a vector with

$$(v_h)_i = \begin{cases} 1 & i \in A \\ -1 & i \in B \\ 0 & i \in C. \end{cases}$$

We show that for any choice of non-terminal node  $h$ ,  $v_h$  is an eigenvector of  $L$ . Since there are  $m - 1$  non-terminal nodes, this set of eigenvectors, together with the vector of all-ones, forms the full set of all eigenvectors of  $L$ .

First, we show that  $v_h$  is an eigenvector of the similarity matrix  $S$ , and compute the corresponding eigenvalue. For  $i \in A$ ,

$$(Sv_h)_i = \sum_{j \in A} S(i, j) - \sum_{k \in B} S(i, k).$$

Due to the symmetry of the tree  $\mathcal{T}$ , every terminal node has a similarity of  $\delta^2$  to one other terminal node,  $\delta^4$  to two other terminal nodes, etc. Thus,

$$\sum_{j \in A} S(i, j) = 1 + \delta^2 + 2\delta^4 + \dots + \dots, |A|\delta^{2 \log_2 |A|} = \delta^2 \left( \frac{1 - (2\delta^2)^{\log_2 |A|}}{1 - 2\delta^2} \right) + 1.$$

The similarity between a node  $i \in A$  and all nodes  $k \in B$  is equal to  $\delta^{2(\log |A|+1)}$ . Thus,

$$\begin{aligned} \sum_{j \in A} S(i, j) - \sum_{k \in B} S(i, k) &= \delta^2 \left( \frac{1 - (2\delta^2)^{\log_2 |A|}}{1 - 2\delta^2} \right) + 1 - |A|\delta^{2(\log |A|+1)} \\ &= 1 + \delta^2 \left( \frac{1 - (2\delta^2)^{\log |A|} (2 - 2\delta^2)}{1 - 2\delta^2} \right). \end{aligned} \quad (45)$$

The same result with a negative sign holds for  $i \in B$ . If  $i \in C$  then by symmetry  $(Sv_h)_i = 0$ . Thus  $v_h$  is an eigenvector of  $S$  with eigenvalue equal to the right side of (45). The sum of every row in  $S$  is equal to,

$$d_i = \sum_j S(i, j) = 1 + \delta^2 + 2\delta^4 + \dots + 2^{\log_2 m} \delta^{2 \log_2 m} = \delta^2 \left( \frac{1 - (2\delta^2)^{\log_2 m}}{1 - 2\delta^2} \right) + 1. \quad (46)$$

Let  $D$  be the scalar matrix with diagonal elements equal to Eq. (46). Combining Eq. (46) and Eq. (45), we get that  $v_h$  is an eigenvector of  $L = D - S$  with eigenvalue:

$$\lambda(h) = \delta^2 \left( \frac{(2\delta^2)^{\log_2 |A|} (2 - 2\delta^2) - (2\delta^2)^{\log_2 m}}{1 - 2\delta^2} \right). \quad (47)$$

For any Laplacian matrix 0 is an eigenvalue that correspond to the vector of all-ones. Since the eigenvalue  $e(h)$  decreases as  $|A|$  grows, the two smallest non-zero eigenvalues correspond to  $|A| = m/2$  and  $|A| = m/4$ . The three smallest eigenvalues are thus equal to,

$$\lambda_1 = 0, \quad \lambda_2 = m^{2 \log_2(\delta)+1}, \quad \lambda_3 = m^{2 \log_2(\delta)+1} \left( \frac{1}{2} + \frac{1}{2\delta^2} \right).$$

□

In the following proof, we use similar notations as in the proof of Lemma 5.5.

*Proof of Lemma 5.6*. For simplicity, let  $x = \|S(A_i, B)\|_F^2$  and  $y = \|S(A_{i+1}, B)\|_F^2$ . To compute the numerator of Eq. (18), we set the partial derivative w.r.t.  $\beta$  to 0, which gives

$$\beta^* = \operatorname{argmin}_{\beta} \left( (1 - \beta R_i)^2 x + (1 - \beta R_{i+1})^2 y \right) = \frac{R_i x + R_{i+1} y}{R_i^2 x + R_{i+1}^2 y}.$$

Plugging  $\beta^*$  back into the numerator of Eq. (18) gives

$$\min_{\beta} \left( (1 - \beta R_i)^2 x + (1 - \beta R_{i+1})^2 y \right) = \frac{xy(R_i - R_{i+1})^2}{R_i^2 x + R_{i+1}^2 y}.$$

Observe that  $R_{i+1} = R_i S(h_i, h_{i+1})^2$ . Thus, the above expression further simplifies to

$$\frac{xy(R_i - R_{i+1})^2}{R_i^2 x + R_{i+1}^2 y} = \frac{xyR_i^2(1 - S(h_i, h_{i+1})^2)^2}{R_i^2(x + S(h_i, h_{i+1})^4 y)} = \frac{xy(1 - S(h_i, h_{i+1})^2)^2}{x + S(h_i, h_{i+1})^4 y}.$$

Since  $\|S(A_i, B)\|_F^2 + \|S(A_{i+1}, B)\|_F^2 = x + y$ , the LHS of (18) is equal to

$$\frac{xy(1 - S(h_i, h_{i+1})^2)^2}{(x + y)(x + S(h_i, h_{i+1})^4 y)}. \quad (48)$$

Recall from Eqs. (2) and (3) that for any  $1 \leq i \leq N - 1$ ,  $S(h_i, h_{i+1}) < \xi < 1$ . It follows that

$$\frac{xy(1 - S(h_i, h_{i+1})^2)^2}{(x + y)(x + S(h_i, h_{i+1})^4 y)} \geq \frac{xy(1 - \xi^2)^2}{(x + y)^2} \geq \frac{xy(1 - \xi^2)^2}{(2 \max(x, y))^2} = \frac{(1 - \xi^2)^2 \min(x, y)}{4 \max(x, y)}. \quad (49)$$

Next, we simplify the term  $\frac{\min(x, y)}{\max(x, y)}$  in Eq. (49). Note that  $h_{i+1}$  separates  $A_i$  and  $A_{i+1}$  from  $B$ , see illustration in Figure 5. Thus, we can rewrite  $\min(x, y)$  as

$$\begin{aligned} \min(x, y) &= \min(\|S(A_i, B)\|_F^2, \|S(A_{i+1}, B)\|_F^2) \\ &= \min(\|S(A_i, h_{i+1})S(h_{i+1}, B)\|_F^2, \|S(A_{i+1}, h_{i+1})S(h_{i+1}, B)\|_F^2) \\ &= \min(\|S(A_i, h_{i+1})\|_F^2 \|S(h_{i+1}, B)\|_F^2, \|S(A_{i+1}, h_{i+1})\|_F^2 \|S(h_{i+1}, B)\|_F^2) \\ &= \min(\|S(A_i, h_{i+1})\|_F^2, \|S(A_{i+1}, h_{i+1})\|_F^2) \cdot \|S(h_{i+1}, B)\|_F^2. \end{aligned}$$

Similarly, we rewrite  $\max(x, y)$  as

$$\max(x, y) = \max(\|S(A_i, h_{i+1})\|_F^2, \|S(A_{i+1}, h_{i+1})\|_F^2) \cdot \|S(h_{i+1}, B)\|_F^2.$$

Thus,

$$\frac{\min(x, y)}{\max(x, y)} = \frac{\min(\|S(A_i, h_{i+1})\|_F^2, \|S(A_{i+1}, h_{i+1})\|_F^2)}{\max(\|S(A_i, h_{i+1})\|_F^2, \|S(A_{i+1}, h_{i+1})\|_F^2)}.$$

Next, we provide lower and upper bounds on the terms  $\|S(A_i, h_{i+1})\|_F^2$  and  $\|S(A_{i+1}, h_{i+1})\|_F^2$ . By Eq. (2), the similarity between the nodes in  $A_i, A_{i+1}$  and  $h_{i+1}$  is bounded by  $\xi$ . It follows that

$$\max(\|S(A_i, h_{i+1})\|_F^2, \|S(A_{i+1}, h_{i+1})\|_F^2) \leq \max(|A_i|, |A_{i+1}|) \xi^2 \leq m \xi^2. \quad (50)$$

For a lower bound, we apply [24, Lemma 4.5]. Given the terminal nodes of a clan  $A$ , and the root of a clan  $h$ , the lemma bounds the norm of  $S(A, h)$  by,

$$\|S(A, h)\|_F^2 \geq \begin{cases} (2\delta^2)^{\log |A|} & \delta^2 \leq 0.5 \\ 2\delta^2 & \delta^2 > 0.5 \end{cases} \geq \begin{cases} (2\delta^2)^{\log m} & \delta^2 \leq 0.5 \\ 2\delta^2 & \delta^2 > 0.5. \end{cases}$$

There are two edges between the root of  $A_i$  and  $h_{i+1}$ , and one edge between the root of  $A_{i+1}$  and  $h_{i+1}$ . Thus,

$$\begin{aligned} \min(\|S(A_i, h_{i+1})\|_F^2, \|S(A_{i+1}, h_{i+1})\|_F^2) &\geq \begin{cases} (2\delta^2)^{\log |A|} \delta^4 & \delta^2 \leq 0.5 \\ 2\delta^6 & \delta^2 > 0.5 \end{cases} \\ &\geq \begin{cases} (2\delta^2)^{\log m} \delta^4 & \delta^2 \leq 0.5 \\ 2\delta^6 & \delta^2 > 0.5. \end{cases} \end{aligned} \quad (51)$$

Plugging Eqs. (50), (51) into (49) concludes the proof.  $\square$

**Lemma E.1.** *Let  $\hat{X} \in \mathbb{R}^{m \times n}$  be an estimate of  $X \in \mathbb{R}^{m \times n}$ , and let  $\hat{y} \in \mathbb{R}$  be an estimate of  $y \in \mathbb{R}^+$ . If  $\|X\|_F \leq y$  and  $\hat{y} > ay$  for  $a > 0$  then*

$$\left\| \frac{X}{y} - \frac{\hat{X}}{\hat{y}} \right\|_F \leq \frac{1}{ay} (\|X - \hat{X}\|_F + |y - \hat{y}|). \quad (52)$$

*Proof.*

$$\begin{aligned} \left\| \frac{X}{y} - \frac{\hat{X}}{\hat{y}} \right\|_F &= \left\| \frac{y(\hat{X} - X) + X(y - \hat{y})}{y\hat{y}} \right\|_F \\ &\leq \left\| \frac{y(\hat{X} - X)}{y\hat{y}} \right\|_F + \left\| \frac{X(y - \hat{y})}{y\hat{y}} \right\|_F \\ &\leq \frac{1}{\hat{y}} \|\hat{X} - X\|_F + \frac{1}{\hat{y}} |y - \hat{y}| \leq \frac{1}{ay} (|y - \hat{y}| + \|\hat{X} - X\|_F). \end{aligned} \quad (53)$$

The second inequality holds since  $0 \leq \|X\|_F \leq y$  and the last inequality holds since  $\hat{y} > ay$ .  $\square$

**Lemma E.2.** *Let  $X$  and  $Y$  be two matrices and let  $\hat{X}$  and  $\hat{Y}$  be their corresponding noisy estimates. Then,*

$$\left| \|X - Y\|_F - \|\hat{X} - \hat{Y}\|_F \right| \leq \|X - \hat{X}\|_F + \|Y - \hat{Y}\|_F.$$

*Proof.* Assume that  $\|X - Y\|_F \geq \|\hat{X} - \hat{Y}\|_F$ . In this case

$$\begin{aligned} \left| \|X - Y\|_F - \|\hat{X} - \hat{Y}\|_F \right| &= \|X - Y\|_F - \|\hat{X} - \hat{Y}\|_F \\ &\leq \|X - Y - \hat{X} + \hat{Y}\|_F \leq \|X - \hat{X}\|_F + \|Y - \hat{Y}\|_F. \end{aligned}$$

Alternatively, if  $\|X - Y\|_F \leq \|\hat{X} - \hat{Y}\|_F$  we have

$$\begin{aligned} \left| \|X - Y\|_F - \|\hat{X} - \hat{Y}\|_F \right| &= \|\hat{X} - \hat{Y}\|_F - \|X - Y\|_F \\ &\leq \|\hat{X} - \hat{Y} - X + Y\|_F \leq \|\hat{X} - X\|_F + \|\hat{Y} - Y\|_F. \end{aligned}$$

$\square$

**Lemma E.3.** Let  $S$  denote a rank one matrix and  $\hat{S}$  its noisy estimate. We denote by  $u, \hat{u}$  their respective leading left singular vectors. If  $\|S - \hat{S}\|_F \leq 0.5\|S\|_F$  then

$$\|uu^T - \hat{u}\hat{u}^T\|_F^2 \leq \frac{50\|S - \hat{S}\|_F^2}{\|S\|_F^2}.$$

*Proof.*

$$\begin{aligned} \|uu^T - \hat{u}\hat{u}^T\|_F^2 &= \sum_{ij} (uu^T - \hat{u}\hat{u}^T)_{ij}^2 = \sum_{ij} (uu^T)_{ij}^2 + \sum_{ij} (\hat{u}\hat{u}^T)_{ij}^2 - 2 \sum_{ij} (uu^T)_{ij} (\hat{u}\hat{u}^T)_{ij} \\ &= \|u\|^4 + \|\hat{u}\|^4 - 2 \sum_i u_i \hat{u}_i \sum_j u_j \hat{u}_j = 2(1 - (u^T \hat{u})^2) = 2 \sin^2(u, \hat{u}). \end{aligned} \quad (54)$$

We apply a variant of the Davis-Kahan theorem for non square matrices [54, Theorem 3]. The perturbation of the leading singular vector is bounded by

$$\sin(u, \hat{u}) \leq \frac{2(2\sigma_1(S) + \|S - \hat{S}\|) \|S - \hat{S}\|}{\sigma_1^2(S) - \sigma_2^2(S)},$$

where  $\sigma_1(S)$  and  $\sigma_2(S)$  are the two leading singular values of  $S$ . Since  $S$  is rank one,  $\sigma_1(S) = \|S\| = \|S\|_F$  and  $\sigma_2(S) = 0$ . In addition, we assumed that  $\|S - \hat{S}\|_F \leq 0.5\|S\|_F$  and hence

$$\sin(u, \hat{u}) \leq \frac{5\|S\|_F \|S - \hat{S}\|_F}{\|S\|_F^2} = \frac{5\|S - \hat{S}\|_F}{\|S\|_F}. \quad (55)$$

Combining Eqs. (54), (55) concludes the proof.  $\square$

*Proof of Lemma 5.8 .* Let  $d(e)$  denote the score of the edge  $e$  computed by the exact similarity matrix  $S$  as defined in (9). We denote by  $\hat{d}(e)$  the score computed by the noisy estimate of the similarity  $\hat{S}$ . The difference between  $d(e)$  and  $\hat{d}(e)$  is equal to

$$|d(e) - \hat{d}(e)| = \left| \frac{\|S(A, B) - \alpha^* u_A u_B^T\|_F}{\|S(A, B)\|_F} - \frac{\|\hat{S}(A, B) - \beta^* \hat{u}_A \hat{u}_B^T\|_F}{\|\hat{S}(A, B)\|_F} \right|, \quad (56)$$

where,

$$\alpha^* = \operatorname{argmin}_{\alpha} \|S(A, B) - \alpha u_A u_B^T\|_F \quad \beta^* = \operatorname{argmin}_{\beta} \|\hat{S}(A, B) - \beta \hat{u}_A \hat{u}_B^T\|_F.$$

We apply Lemma E.1 with

$$\begin{aligned} X &= \|S(A, B) - \alpha^* u_A u_B^T\|_F, & y &= \|S(A, B)\|_F, \\ \hat{X} &= \|\hat{S}(A, B) - \beta^* \hat{u}_A \hat{u}_B^T\|_F, & \hat{y} &= \|\hat{S}(A, B)\|_F, \end{aligned}$$

where we note that here  $X$  and  $\hat{X}$  are scalars. There are two conditions for Lemma E.1: (i)  $0 < |X| \leq y$ , and (ii)  $\hat{y} > ay$  for  $a > 0$ . The first condition holds trivially. To prove the second condition, we have that

$$\left| \|S(A, B)\|_F - \|\hat{S}(A, B)\|_F \right| \leq \|S(A, B) - \hat{S}(A, B)\|_F \leq \|S - \hat{S}\|_F \leq 0.5D \leq 0.5\|S(A, B)\|_F, \quad (57)$$

where the first inequality is due to the reverse triangle inequality, the second is by definition of the Frobenius norm, and the two last inequalities are due to our assumptions. Applying the triangle inequality to Eq. (57) yields that  $\|S(A, B)\|_F > 0.5\|\hat{S}(A, B)\|_F$  and thus the second condition holds with  $a = 0.5$ . Applying Lemma E.1 to (56) yields,

$$|d(e) - \hat{d}(e)| \leq \frac{2}{\|S(A, B)\|_F} \left( \left| \|S(A, B) - \alpha^* u_A u_B^T\|_F - \|\hat{S}(A, B) - \beta^* \hat{u}_A \hat{u}_B^T\|_F \right| + \left| \|S(A, B)\|_F - \|\hat{S}(A, B)\|_F \right| \right). \quad (58)$$

Next, setting  $X = S(A, B)$ ,  $\hat{X} = \hat{S}(A, B)$ ,  $Y = \alpha^* u_A u_B^T$  and  $\hat{Y} = \beta^* \hat{u}_A \hat{u}_B^T$ , by Lemma E.2,

$$\begin{aligned} |d(e) - \hat{d}(e)| &\leq \frac{2}{\|S(A, B)\|_F} \left( \|S(A, B) - \hat{S}(A, B)\|_F + \|\alpha^* u_A u_B^T - \beta^* \hat{u}_A \hat{u}_B^T\|_F \right. \\ &\quad \left. + \left| \|S(A, B)\|_F - \|\hat{S}(A, B)\|_F \right| \right) \\ &\leq \frac{2}{D} \left( 2\|S(A, B) - \hat{S}(A, B)\|_F + \|\alpha^* u_A u_B^T - \beta^* \hat{u}_A \hat{u}_B^T\|_F \right). \end{aligned} \quad (59)$$

where the second inequality is due to the reverse triangle inequality and the definition of  $D$ .

We focus on the term  $\|\alpha^* u_A u_B^T - \beta^* \hat{u}_A \hat{u}_B^T\|_F$  in Eq. (59). The values of  $\alpha^*$ ,  $\beta^*$  are obtained via least square between the elements of  $S(A, B)$ ,  $\hat{S}(A, B)$  and  $u_A u_B^T$ ,  $\hat{u}_A \hat{u}_B^T$ , respectively. For  $\alpha^*$ , the least squares solution is

$$\alpha^* = \frac{1}{\|S(A, B)\|_F^2} \sum_{i,j} S(A, B)_{ij} (u_A u_B^T)_{ij} = \frac{1}{\|S(A, B)\|_F^2} u_A^T S(A, B) u_B, \quad (60)$$

where a similar expression holds for  $\beta^*$ . Multiplying  $\alpha^*$  and  $\beta^*$  by  $u_A u_B^T$  and  $\hat{u}_A \hat{u}_B^T$  gives,

$$\alpha^* u_A u_B - \beta^* \hat{u}_A \hat{u}_B = \frac{1}{\|S(A, B)\|_F^2} u_A u_A^T S(A, B) u_B u_B^T - \frac{1}{\|\hat{S}(A, B)\|_F^2} \hat{u}_A \hat{u}_A^T \hat{S}(A, B) \hat{u}_B \hat{u}_B^T. \quad (61)$$

Next, we apply Lemma E.1 with  $X = u_A u_A^T S(A, B) u_B u_B^T$ ,  $y = \|S(A, B)\|_F^2$ ,  $\hat{X} = \hat{u}_A \hat{u}_A^T \hat{S}(A, B) \hat{u}_B \hat{u}_B^T$  and  $\hat{y} = \|\hat{S}(A, B)\|_F^2$ . The first condition for Lemma E.1 is that  $\|X\|_F < y$ , which holds since

$$\|X\|_F = \|u_A u_A^T S(A, B) u_B u_B^T\|_F \leq \|u_A u_A^T\|_F \|S(A, B)\|_F \|u_B u_B^T\|_F \leq \|S(A, B)\|_F < y.$$

where the last inequality holds by assumption. The second condition for the lemma,  $\hat{y} > ay$  for  $a > 0$ , holds since by Eq. (57)  $\|\hat{S}(A, B)\|_F \geq 0.5\|S(A, B)\|_F$  and thus  $\|\hat{S}(A, B)\|_F^2 \geq 0.25\|S(A, B)\|_F^2$ . Applying Lemma E.1 with  $a = 0.25$  to (61) gives

$$\begin{aligned} \|\alpha^* u_A u_B - \beta^* \hat{u}_A \hat{u}_B\|_F &\leq \frac{4}{\|S(A, B)\|_F^2} \left( \|u_A u_A^T S(A, B) u_B u_B^T - \hat{u}_A \hat{u}_A^T \hat{S}(A, B) \hat{u}_B \hat{u}_B^T\|_F \right. \\ &\quad \left. + \left| \|S(A, B)\|_F^2 - \|\hat{S}(A, B)\|_F^2 \right| \right). \end{aligned} \quad (62)$$

Denote

$$\begin{aligned} \mathcal{A} &= u_A u_A^T & \mathcal{B} &= u_B u_B^T, \\ \varepsilon_A &= \hat{u}_A \hat{u}_A^T - u_A u_A^T, & \varepsilon_B &= \hat{u}_B \hat{u}_B^T - u_B u_B^T \\ \varepsilon(A, B) &= \hat{S}(A, B) - S(A, B) & \varepsilon(C_1, C_2) &= \hat{S}(C_1, C_2) - S(C_1, C_2). \end{aligned}$$

Equipped with the above notations, we bound the first term in the numerator of Eq. (62).

$$\begin{aligned}
& \|u_A u_A^T S(A, B) u_B u_B^T - \hat{u}_A \hat{u}_A^T \hat{S}(A, B) \hat{u}_B \hat{u}_B^T\|_F \\
& \leq \|\mathcal{A}S(A, B)\mathcal{B} - (\mathcal{A} + \varepsilon_A)(S(A, B) + \varepsilon(A, B))(\mathcal{B} + \varepsilon_B)\|_F \\
& = \|\varepsilon_A S(A, B)\mathcal{B} + \mathcal{A}\varepsilon(A, B)\mathcal{B} + \mathcal{A}S(A, B)\varepsilon_B + \varepsilon_A \varepsilon(A, B)\mathcal{B} \\
& \quad + \varepsilon_A S \varepsilon_B + \mathcal{A}\varepsilon(A, B)\varepsilon_B + \varepsilon_A \varepsilon(A, B)\varepsilon_B\|_F \\
& \leq \|\varepsilon_A\|_F \|S(A, B)\|_F \|\mathcal{B}\|_F + \|\mathcal{A}\|_F \|\varepsilon(A, B)\|_F \|\mathcal{B}\|_F + \|\mathcal{A}\|_F \|S(A, B)\|_F \|\varepsilon_B\|_F \\
& \quad + \|\varepsilon_A\|_F \|\varepsilon(A, B)\|_F \|\mathcal{B}\|_F + \|\varepsilon_A\|_F \|S(A, B)\|_F \|\varepsilon_B\|_F + \|\mathcal{A}\|_F \|\varepsilon(A, B)\|_F \|\varepsilon_B\|_F \\
& \quad + \|\varepsilon_A\|_F \|\varepsilon(A, B)\|_F \|\varepsilon_B\|_F.
\end{aligned}$$

Since  $\|\mathcal{A}\|_F, \|\mathcal{B}\|_F \leq 1$  and  $\|\varepsilon_A\|_F, \|\varepsilon_B\|_F \leq 2$ , we have that

$$\begin{aligned}
& \|u_A u_A^T S(A, B) u_B u_B^T - \hat{u}_A \hat{u}_A^T \hat{S}(A, B) \hat{u}_B \hat{u}_B^T\|_F \\
& \leq 2\|S(A, B)\|_F (\|\varepsilon_A\|_F + \|\varepsilon_B\|_F) + 9\|\varepsilon(A, B)\|_F. \quad (63)
\end{aligned}$$

The matrices  $\varepsilon_A, \varepsilon_B$  are submatrices of  $\hat{u}\hat{u}^T - uu^T$  and hence  $\|\varepsilon_A\|_F, \|\varepsilon_B\|_F \leq \|\hat{u}\hat{u}^T - uu^T\|_F$ . Applying Lemma E.3 gives

$$\|\varepsilon_A\|_F + \|\varepsilon_B\|_F \leq 2\|uu^T - \hat{u}\hat{u}^T\|_F \leq \frac{10\sqrt{2}\|\varepsilon(C_1, C_2)\|_F}{\|S(C_1, C_2)\|_F} \leq \frac{10\sqrt{2}\|\varepsilon(C_1, C_2)\|_F}{D}. \quad (64)$$

Combining Eqs. (59), (62), (63) and (64) yields

$$\begin{aligned}
|d(e) - \hat{d}(e)| & \leq \frac{2}{D} \left( 2\|\varepsilon(A, B)\|_F + \frac{4}{\|S(A, B)\|_F^2} \right. \\
& \quad \left. \left( \left| \|S(A, B)\|_F^2 - \|\hat{S}(A, B)\|_F^2 \right| + 9\|\varepsilon(A, B)\|_F + \frac{20\sqrt{2}\|S(A, B)\|_F \|\varepsilon(C_1, C_2)\|_F}{D} \right) \right). \quad (65)
\end{aligned}$$

We have that

$$\begin{aligned}
\left| \|S(A, B)\|_F^2 - \|\hat{S}(A, B)\|_F^2 \right| & = \left| \|S(A, B)\|_F - \|\hat{S}(A, B)\|_F \right| (\|S(A, B)\|_F + \|\hat{S}(A, B)\|_F) \\
& \leq 2.5\|\varepsilon(A, B)\|_F \|S(A, B)\|_F, \quad (66)
\end{aligned}$$

where the inequality is due to the reverse triangle inequality and our assumption on  $\hat{S}(A, B)$  which implies  $\|\hat{S}(A, B)\|_F \leq 1.5\|S(A, B)\|_F$ . Combining (65) and (66), we get

$$\begin{aligned}
|d(e) - \hat{d}(e)| & \leq \frac{2}{D} (2\|\varepsilon(A, B)\|_F \\
& \quad + \frac{4}{\|S(A, B)\|_F^2} \times \\
& \quad \left( \|\varepsilon(A, B)\|_F (2.5\|S(A, B)\|_F + 9) + \frac{20\sqrt{2}\|\varepsilon(C_1, C_2)\|_F \|S(A, B)\|_F}{D} \right)) \\
& \leq \|\varepsilon(A, B)\|_F \left( \frac{4}{D} + \frac{20}{D^2} + \frac{72}{D^3} \right) + \|\varepsilon(C_1, C_2)\|_F \frac{160\sqrt{2}}{D^3} \\
& \leq \|S - \hat{S}\|_F \left( \frac{4}{D} + \frac{20}{D^2} + \frac{72 + 160\sqrt{2}}{D^3} \right),
\end{aligned}$$

which concludes the proof. □

## Appendix F Experimental results

Here we continue the experimental comparison of Section 6.

### F.1 Caterpillar tree

We generated a caterpillar tree with  $m = 512$  terminal nodes, where the non-terminal nodes form a path graph. The similarity between each pair of adjacent nodes was set to  $\delta = 0.81$ . As in Section 6, we compare NJ, SNJ and RAxML, with STDR where the aforementioned methods are used as subroutines. The STDR threshold is set to  $\tau = 64$  for all three STDR variants. Figure 12 shows the normalized RF distance (left) and runtime (right) of the different methods as functions of the sequence length  $n$ . Here, all three methods are significantly improved when combined with STDR in both runtime and accuracy.

### F.2 Comparison to TreeMerge

We generated random trees with 2000 terminal nodes according to the coalescent model. The trees were recursively partitioned by STDR with a threshold of  $\tau = 128$ . The structure of the different partitions was recovered by RAxML. We compared STDR's merging criteria with TreeMerge [35] for various sequence lengths. The results are shown in Figure 13. The merging process of STDR achieved better accuracy than TreeMerge, with a significantly reduced runtime.

## References


- [1] Yariv Aizenbud and Amir Averbuch. Matrix decompositions using sub-gaussian random matrices. *Information and Inference: A Journal of the IMA*, 8(3):445–469, 2019.
- [2] Elizabeth S Allman and John A Rhodes. Molecular phylogenetics from an algebraic viewpoint. *Statistica Sinica*, 17(4):1299–1316, 2007.
- [3] Anima Anandkumar, Daniel J Hsu, Furong Huang, and Sham M Kakade. Learning mixtures of tree graphical models. In *Advances in Neural Information Processing Systems*, pages 1052–1060, 2012.
- [4] Kevin Atteson. The performance of neighbor-joining methods of phylogenetic reconstruction. *Algorithmica*, 25(2-3):251–278, 1999.
- [5] Véronique Barriel and Pascal Tassy. Rooting with multiple outgroups: consensus versus parsimony. *Cladistics*, 14(2):193–200, 1998.
- [6] Jon Louis Bentley, Dorothea Haken, and James B Saxe. A general method for solving divide-and-conquer recurrences. *ACM SIGACT News*, 12(3):36–44, 1980.
- [7] Laura M Boykin, Laura Salter Kubatko, and Timothy K Lowrey. Comparison of methods for rooting phylogenetic trees: A case study using *orcuttieae* (poaceae: Chloridoideae). *Molecular Phylogenetics and Evolution*, 54(3):687–700, 2010.

- [8] Joseph T Chang. Full reconstruction of markov models on evolutionary trees: identifiability and consistency. *Mathematical Biosciences*, 137(1):51–73, 1996.
- [9] Myung Jin Choi, Vincent YF Tan, Animashree Anandkumar, and Alan S Willsky. Learning latent tree graphical models. *Journal of Machine Learning Research*, 12:1771–1812, 2011.
- [10] Douglas E Crabtree. Applications of  $m$ -matrices to non-negative matrices. *Duke Mathematical Journal*, 33(1):197–208, 1966.
- [11] Chris HQ Ding, Xiaofeng He, Hongyuan Zha, Ming Gu, and Horst D Simon. A min-max cut algorithm for graph partitioning and data clustering. In *Proceedings 2001 IEEE International Conference on Data Mining*, pages 107–114. IEEE, 2001.
- [12] Florian Dorfler and Francesco Bullo. Kron reduction of graphs with applications to electrical networks. *IEEE Transactions on Circuits and Systems I: Regular Papers*, 60(1):150–163, 2012.
- [13] Richard Durbin, Sean R Eddy, Anders Krogh, and Graeme Mitchison. *Biological sequence analysis: probabilistic models of proteins and nucleic acids*. Cambridge University Press, 1998.
- [14] Péter L Erdős, Michael A Steel, László A Székely, and Tandy J Warnow. A few logs suffice to build (almost) all trees (i). *Random Structures & Algorithms*, 14(2):153–184, 1999.
- [15] Nicholas Eriksson. Tree construction using singular value decomposition. *New York, NY: Cambridge University Press, 2005.*, pages 347–358, 2005.
- [16] George F Estabrook, FR McMorris, and Christopher A Meacham. Comparison of undirected phylogenetic trees based on subtrees of four evolutionary units. *Systematic Zoology*, 34(2):193–200, 1985.
- [17] Joseph Felsenstein. *Inferring phylogenies*, volume 2. Sinauer Associates, 2003.
- [18] Miroslav Fiedler. A property of eigenvectors of nonnegative symmetric matrices and its application to graph theory. *Czechoslovak Mathematical Journal*, 25(4):619–633, 1975.
- [19] Stéphane Guindon and Olivier Gascuel. A simple, fast, and accurate algorithm to estimate large phylogenies by maximum likelihood. *Systematic Biology*, 52(5):696–704, 2003.
- [20] Nathan Halko, Per-Gunnar Martinsson, and Joel A Tropp. Finding structure with randomness: Probabilistic algorithms for constructing approximate matrix decompositions. *SIAM review*, 53(2):217–288, 2011.
- [21] Stefan Harmeling and Christopher KI Williams. Greedy learning of binary latent trees. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 33(6):1087–1097, 2010.
- [22] Masami Hasegawa, Hirohisa Kishino, and Taka-aki Yano. Dating of the human-ape splitting by a molecular clock of mitochondrial DNA. *Journal of Molecular Evolution*, 22(2):160–174, 1985.
- [23] David M Hillis, Craig Moritz, Barbara K Mable, and Richard G Olmstead. *Molecular systematics*, volume 23. Sinauer Associates Sunderland, MA, 1996.


- [24] Ariel Jaffe, Noah Amsel, Yariv Aizenbud, Boaz Nadler, Joseph T Chang, and Yuval Kluger. Spectral neighbor joining for reconstruction of latent tree models. *arXiv preprint arXiv:2002.12547*, 2020.
- [25] Ariel Jaffe, Yuval Kluger, Ofir Lindenbaum, Jonathan Patsenker, Erez Peterfreund, and Stefan Steinerberger. The spectral underpinning of word2vec. *Frontiers in Applied Mathematics and Statistics*, 6:64, 2020.
- [26] Tao Jiang, Paul Kearney, and Ming Li. A polynomial time approximation scheme for inferring evolutionary trees from quartet topologies and its application. *SIAM Journal on Computing*, 30(6):1942–1961, 2001.
- [27] Matthew G Jones, Alex Khodaverdian, Jeffrey J Quinn, Michelle M Chan, Jeffrey A Hussmann, Robert Wang, Chenling Xu, Jonathan S Weissman, and Nir Yosef. Inference of single-cell phylogenies from lineage tracing data using cassiopeia. *Genome Biology*, 21:1–27, 2020.
- [28] Nick S Jones and John Moriarty. Evolutionary inference for function-valued traits: Gaussian process regression on phylogenies. *Journal of The Royal Society Interface*, 10(78):20120616, 2013.
- [29] Irene Keller, Douda Bensasson, and Richard A Nichols. Transition-transversion bias is not universal: a counter example from grasshopper pseudogenes. *PLoS Genet*, 3(2):e22, 2007.
- [30] Tonny Kinene, J Wainaina, Solomon Maina, and LM Boykin. Rooting trees, methods for. *Encyclopedia of Evolutionary Biology*, pages 489—493, 2016.
- [31] Mark Kot. Stochastic birth and death processes. *New York, NY: Cambridge University Press*, pages 25–42, 2001.
- [32] Motomu Matsui and Wataru Iwasaki. Graph splitting: a graph-based approach for superfamily-scale phylogenetic tree reconstruction. *Systematic Biology*, 69(2):265–279, 2020.
- [33] Radu Mihaescu, Dan Levy, and Lior Pachter. Why neighbor-joining works. *Algorithmica*, 54(1):1–24, 2009.
- [34] Erin K Molloy and Tandy Warnow. Statistically consistent divide-and-conquer pipelines for phylogeny estimation using NJMerge. *Algorithms for Molecular Biology*, 14(1):14, 2019.
- [35] Erin K Molloy and Tandy Warnow. TreeMerge: A new method for improving the scalability of species tree estimation methods. *Bioinformatics*, 35(14):i417–i426, 2019.
- [36] Raphaël Mourad, Christine Sinoquet, Nevin Lianwen Zhang, Tengfei Liu, and Philippe Leray. A survey on latent tree models and applications. *Journal of Artificial Intelligence Research*, 47:157–203, 2013.
- [37] Masatoshi Nei and Sudhir Kumar. *Molecular evolution and phylogenetics*. Oxford University Press, 2000.
- [38] Morgan N Price, Paramvir S Dehal, and Adam P Arkin. FastTree 2-approximately maximum-likelihood trees for large alignments. *PLoS ONE*, 5(3):e9490, 2010.

- [39] Jeffrey J Quinn, Matthew G Jones, Ross A Okimoto, Shigeki Nanjo, Michelle M Chan, Nir Yosef, Trevor G Bivona, and Jonathan S Weissman. Single-cell lineages reveal the rates, routes, and drivers of metastasis in cancer xenografts. *Science*, 2021.
- [40] Naruya Saitou and Masatoshi Nei. The neighbor-joining method: a new method for reconstructing phylogenetic trees. *Molecular Biology and Evolution*, 4(4):406–425, 1987.
- [41] Michael J Sanderson and Amy C Driskell. The challenge of constructing large phylogenetic trees. *Trends in plant science*, 8(8):374–379, 2003.
- [42] Charles Semple, Mike Steel, et al. *Phylogenetics*, volume 24. Oxford University Press on Demand, 2003.
- [43] Julia Sigwart. Coalescent Theory: An Introduction. *Systematic Biology*, 58(1):162–165, 03 2009.
- [44] Robert R Sokal. A statistical method for evaluating systematic relationships. *Univ. Kansas, Sci. Bull.*, 38:1409–1438, 1958.
- [45] Alexandros Stamatakis. RAxML version 8: a tool for phylogenetic analysis and post-analysis of large phylogenies. *Bioinformatics*, 30(9):1312–1313, 2014.
- [46] Gilbert W Stewart. *Matrix Algorithms: Volume II: Eigensystems*. SIAM, 2001.
- [47] Eric A Stone and Alexander R Griffing. On the Fiedler vectors of graphs that arise from trees by schur complementation of the Laplacian. *Linear Algebra and its Applications*, 431(10):1869–1880, 2009.
- [48] Korbinian Strimmer and Arndt Von Haeseler. Quartet puzzling: a quartet maximum-likelihood method for reconstructing tree topologies. *Molecular Biology and Evolution*, 13(7):964–969, 1996.
- [49] Koichiro Tamura, Masatoshi Nei, and Sudhir Kumar. Prospects for inferring very large phylogenies by using the neighbor-joining method. *Proceedings of the National Academy of Sciences*, 101(30):11030–11035, 2004.
- [50] Ulrike Von Luxburg. A tutorial on spectral clustering. *Statistics and Computing*, 17(4):395–416, 2007.
- [51] Tandy Warnow. Supertree construction: opportunities and challenges. *arXiv preprint arXiv:1805.03530*, 2018.
- [52] Mark Wilkinson, James O McInerney, Robert P Hirt, Peter G Foster, and T Martin Embley. Of clades and clans: terms for phylogenetic relationships in unrooted trees. *Trends in Ecology and Evolution*, 22(10.1016), 2007.
- [53] Ziheng Yang and Bruce Rannala. Molecular phylogenetics: principles and practice. *Nature reviews genetics*, 13(5):303, 2012.
- [54] Yi Yu, Tengyao Wang, and Richard J Samworth. A useful variant of the Davis–Kahan theorem for statisticians. *Biometrika*, 102(2):315–323, 2015.


- [55] Nevin L Zhang, Shihong Yuan, Tao Chen, and Yi Wang. Latent tree models and diagnosis in traditional chinese medicine. *Artificial Intelligence in Medicine*, 42(3):229–245, 2008.
- [56] Shu-Bo Zhang, Song-Yu Zhou, Jian-Guo He, and Jian-Huang Lai. Phylogeny inference based on spectral graph clustering. *Journal of Computational Biology*, 18(4):627–637, 2011.
- [57] Xiaofan Zhou, Xing-Xing Shen, Chris Todd Hittinger, and Antonis Rokas. Evaluating fast maximum likelihood-based phylogenetic programs using empirical phylogenomic data sets. *Molecular Biology and Evolution*, 35(2):486–503, 2018.

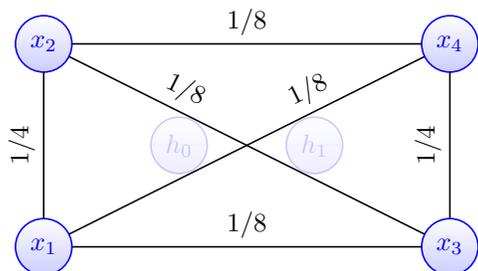


(a) A graph  $G_0$  that is a multiplicative sub-graph with respect to  $\mathcal{T}$  and the terminal nodes of  $\mathcal{T}$ .

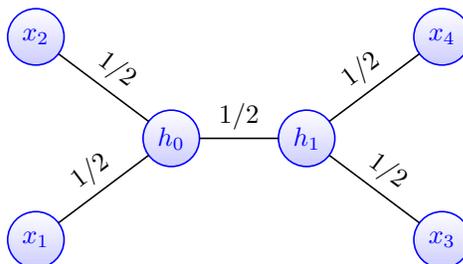


(b) A tree  $\mathcal{T}_0$  with 4 terminal nodes and 2 internal nodes. The weight over all edges is equal to  $1/2$ .

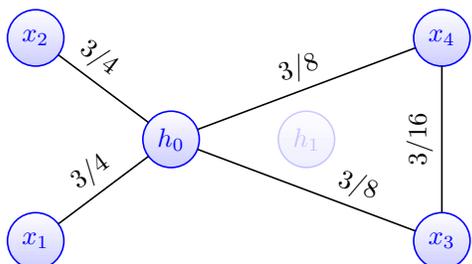

(c) A graph  $G_1$ , created by adding the node  $h_0$  to  $G_0$ . The weights of the graph are set such that  $L_{G_0} = L_{G_1/h_0}$ .

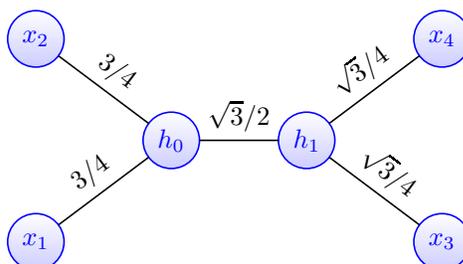

(d) A tree  $\mathcal{T}_1$  with weights set such that  $G_1$  is a multiplicative subgraph of  $\mathcal{T}_1$  with respect to  $\{x_1, x_2, x_3, x_4, h_1\}$

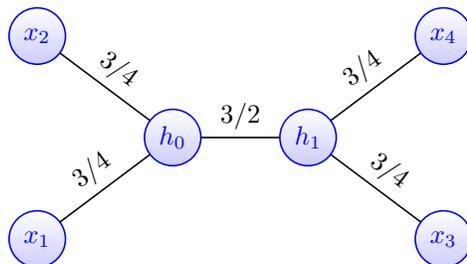

(e) A tree  $\mathcal{T}_2$  with weights set such that  $L_{\mathcal{T}_2/h_2} = L_{G_1}$ .

Figure 11: Constructing a tree  $\mathcal{T}_2$  such that the Schur complement of its Laplacian with respect to the internal nodes is equal to  $L_G$ .

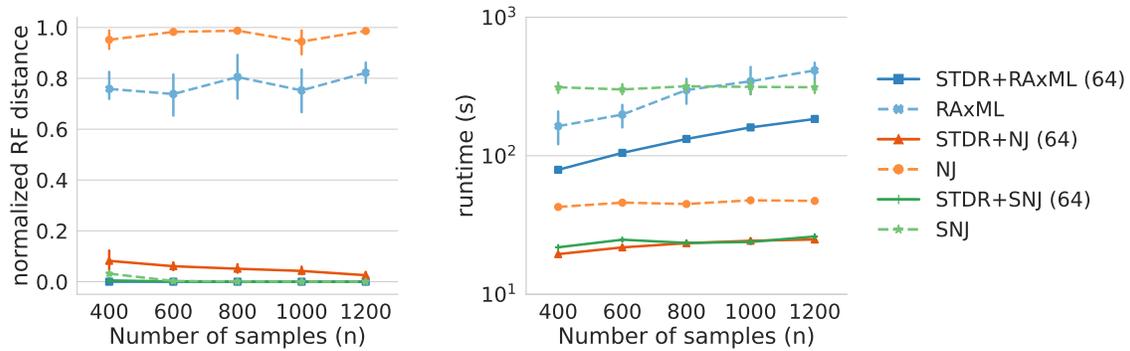


Figure 12: A caterpillar tree with  $m = 512$  terminal nodes. The mean and standard deviation of the runtime (right) and RF distance between the reconstructed tree and the input tree (left) are shown for each method over 5 independent runs.

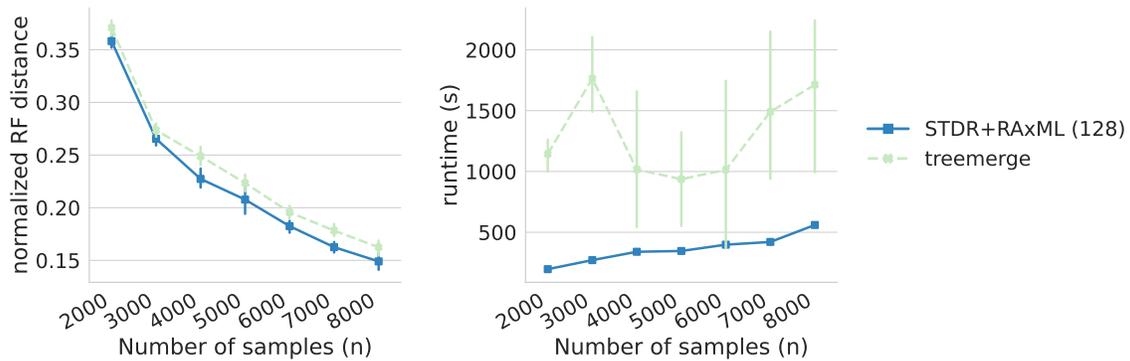


Figure 13: A coalescent tree with  $m = 2000$  terminal nodes. The mean and standard deviation of the normalized RF distance (left) between the reconstructed tree and the input tree and of the runtime (right) are shown for each method over 5 independent runs.