

Multi-task Learning with High-Dimensional Noisy Images

Xin Ma* Suprateek Kundu*

for the Alzheimer’s Disease Neuroimaging Initiative

Abstract

Recent medical imaging studies have given rise to distinct but inter-related datasets corresponding to multiple experimental tasks or longitudinal visits. Standard scalar-on-image regression models that fit each dataset separately are not equipped to leverage information across inter-related images, and existing multi-task learning approaches are compromised by the inability to account for the noise that is often observed in images. We propose a novel joint scalar-on-image regression framework involving wavelet-based image representations with grouped penalties that are designed to pool information across inter-related images for joint learning, and which explicitly accounts for noise in high-dimensional images via a projection-based approach. In the presence of non-convexity arising due to noisy images, we derive non-asymptotic error bounds under non-convex as well as convex grouped penalties, even when the number of voxels increases exponentially with sample size. A projected gradient descent algorithm is used for computation, which is shown to approximate the optimal solution via well-defined non-asymptotic optimization error bounds under noisy images. Extensive simulations and application to a motivating longitudinal Alzheimer’s disease

*Department of Biostatistics and Bioinformatics, Emory University

study illustrate significantly improved predictive ability and greater power to detect true signals, that are simply missed by existing methods without noise correction due to the *attenuation to null* phenomenon.

Keywords: High dimensional statistics; measurement error in covariates; multi-task learning; neuroimaging analysis; scalar-on-image regression.

1 Introduction

Methods for functional data analysis (Ramsay and Dalzell, 1991) have become ubiquitous with the growth of recent technologies that are able to generate high-dimensional functional data. Although, the vast majority of literature has focused on one-dimensional functional curves (Morris, 2015), recent literature has started investigating models involving more complex types of functional data such as images. For example, neuroimaging analysis using entire brain images as covariates (scalar-on-image regression) for prediction of a continuous outcome have gained in popularity (Feng et al., 2020). Such approaches are able to discover significantly activated brain voxels and are clearly more attractive compared to methods that evaluate the association between the outcome and each voxel separately (Lazar, 2008).

Typical scalar-on-image regression approaches need to carefully account for the spatial configuration of hundreds of thousands of voxels, and hence often involve some type of lower dimensional representation for the images such as principal components, wavelet representations, or tensors, along with additional sparsity or shrinkage assumptions designed to tackle the curse of dimensionality. Approaches involving functional principal component analysis (FPCA) (Zipunnikov et al., 2011; Feng et al., 2019) often assume that the components driving variability in the images are related to the outcome that may not always be practical, and they are computationally burdensome for high-dimensional images. Moreover, they only use a subset of principal components resulting in information loss that is

potentially exacerbated in the presence of noise in images. A limited number of alternate methods involving wavelet-based representations have been proposed for scalar-on-image regression (Wang et al., 2014; Reiss et al., 2015) that provides a desirable avenue to preserve the spatial properties of the image when modeling regression coefficients. Tensor-based representations for regression coefficients have also been proposed (Zhou et al., 2013; Feng et al., 2020), which massively reduce the number of parameters needed to be estimated in the model and are shown to possess desirable asymptotic properties. However, the finite sample properties of the existing tensor-based approaches are not well understood, particularly for high-dimensional applications where the tensor decomposition may not provide an adequate characterization.

Unfortunately in spite of the growing practical interest, there is negligible development of methods for joint learning of multiple scalar-on-image regression models corresponding to inter-related high-dimensional imaging datasets. Our joint learning goals are motivated by an increasing interest in data fusion techniques in medical imaging (Lahat et al., 2015), which may involve data on task and rest experiments, or longitudinal neuroimaging data collected in mental health studies such as the Alzheimer’s Disease Neuroimaging Initiative (ADNI) (Weiner and Veitch, 2015), among others. A joint analysis of such inter-related datasets can leverage common threads of information across experiments or visits that is expected to lead to greater predictive accuracy and higher power to detect true signals, and produce reliable estimates that are biologically interpretable (Kundu et al., 2019). One can potentially leverage multi-task learning methods in machine learning literature (Zhang and Yang, 2018; Lounici et al., 2011), as well as related methods for integrative analysis of multiple -omics datasets (Li et al., 2014) for our purposes. Unfortunately, these existing approaches are not designed to tackle integrative analysis involving high dimensional images with spatially distributed voxels, and their theoretical and numerical properties are have not been investigated in the presence of noisy functional covariates.

Our extensive numerical studies and ADNI analysis reveal that the presence of noise may potentially mask the common patterns across inter-related images, which consequently hinders the ability of existing multi-task learning approaches to learn such patterns and eventually results in poor performance.

The presence of noise in brain images is not surprising, given that measurement errors are likely to arise due to technological limitations, operator performance, equipment, environment, and other factors (Vaishali et al., 2015). Although standard pre-processing steps are applied to neuroimaging data prior to analysis, they are not expected to completely alleviate the noise in these images. Unfortunately, existing neuroimaging applications do not account for noise in pre-processed images, which is consistent with the predominant practice in biomedical studies that fail to account for measurement error in their analysis (Brakenhoff et al., 2018). Inadequate noise correction can result in estimation bias in the direction of zero that is known as attenuation to the null (Carroll and Stefanski, 1994). This phenomenon is also clearly evident for our ADNI data analysis (Section 5) where standard approaches without noise-correction discover negligible brain activations. We note that standard denoising steps in scalar-on-function regression approaches (Ramsay and Silverman, 2005) may not be biologically meaningful for our neuroimaging applications that already involve a very specific set of pre-processing steps for the images, and they induce additional computational burden.

Although there is a rich literature on measurement error models with scalar covariates (Carroll and Stefanski, 1994), there is (unfortunately) a limited literature on scalar-on-function regression with noisy functional predictors, which can not be directly adapted to our settings of interest involving multi-task learning with high-dimensional noisy images. Such approaches often rely on corrected least squares (OLS) estimators that account for bias due to the presence of noise (Crambes et al., 2009) that may not be applicable to settings when the model dimensions increase much faster than the sample size without

additional regularization, or add an additional level of hierarchy by assigning a probability model on the observed functional covariates (James, 2002; Goldsmith et al., 2011). These limited approaches have not been adapted to applications with high-dimensional noisy images involving unknown error variances, and their finite sample theoretical properties remain unclear in such settings. In addition, it is not clear whether these methods for noisy functional predictors can be directly applied to multi-task learning problems with an added goal of ensuring model parsimony. Alternative Monte Carlo simulation based approaches such as simulation-extrapolation (SIMEX) (Cook and Stefanski, 1994) that were originally designed for univariate or lower dimensional covariates, also suffer from similar drawbacks.

In this article, we develop a fundamentally novel approach for the joint analysis of multiple scalar-on-image regression models with high-dimensional noisy images that uses wavelet expansions and grouped penalties for sparse multi-task learning. In particular, we propose a corrected M-estimation approach that adjusts for the bias arising due to noisy images by projecting the solution onto a space of admissible solutions. The proposed approach uses minimal assumptions that involve sub-Gaussian distributions on the true image and additive noise terms with unstructured covariance terms. In order to tackle the curse of dimensionality arising due to high-dimensional images and to enable multi-task learning, we employ grouped penalties such as the non-convex group bridge (Huang et al., 2009) as well as the convex $L_{1,q}$ penalty, on the functional regression coefficients. The group bridge penalty promotes differential sparsity patterns across datasets, whereas the group lasso penalty encourages more similar sparsity patterns designed for robust learning across datasets. Since a closed form solution under the corrected optimization criteria is challenging, we propose a computationally efficient projected gradient descent algorithm that approximates the optimal solution of the model parameters in the presence of noisy images. The proposed approaches translate to locally sparse brain activations, i.e. functional

regression coefficients that are zero or non-zero over spatially contiguous regions, which adhere to the biological reality of locally concentrated brain activations in our motivating neuroimaging applications.

We establish attractive theoretical justifications for the proposed methods for high-dimensional applications where the number of voxels (p) increases exponentially with sample size (n) for all the M inter-related imaging datasets. Beginning with the case without measurement error in images, we establish weak oracle properties under the group bridge penalty, and we justify the choice of the $L_{1,q}$ penalty by appealing to the desirable theoretical properties that has already been established in literature in the case of covariates without measurement error (Lounici et al., 2011; Negahban et al., 2012). Moving on to the case with images having voxel-specific additive errors, we derive finite sample statistical error bounds for the optimal solutions explicitly in terms of (n, p, M) , for both non-convex and convex grouped penalty functions, which become vanishingly small with high probability as n grows to infinity. In addition, we derive finite sample optimization error bounds that illustrate that the iterations of the projected gradient descent algorithm under the convex grouped penalties converges with high probability to the optimum solution, which ensures the legitimacy of the computed parameter estimates. Extensive numerical studies conclusively illustrate the gains under the proposed methods over competing multi-task learning approaches without noise correction as well as noise corrected scalar-on-image regression without multi-task learning, in terms of recovery of true signals and predictive performance. We apply the proposed methods to analyze the longitudinal ADNI brain MRI images, which illustrate the predictive gains under the proposed approach when modeling cognitive outcomes, and provides clear evidence regarding the ability of the proposed noise corrected multi-task learning method to detect biologically meaningful brain activations. In contrast, other multi-task learning methods without noise correction result in poor prediction, and negligible or absent brain activations that is consistent with the attenuation

to the null phenomenon in literature.

This article makes several significantly novel contributions. First, to our knowledge, the proposed approach is one of the first methods for integrative analysis of multiple scalar-on-image regressions involving inter-related high-dimensional noisy images that provides significant practical gains over existing methods. Hence this approach expands the literature on scalar-on-image regression models without measurement error to scenarios involving multi-task learning in the presence of noisy images. Second, we derive finite sample error bounds for the model parameters explicitly in terms of (n, p, M) , which is one of the first such results under grouped non-convex and convex penalties involving noisy functional covariates. Such results provide non-trivial generalizations of previous results in Loh and Wainwright (2012) who focused on linear regression under L_1 penalties involving noisy scalar covariates without multi-task learning. We note that deriving such error bounds is not straightforward due to the inherent non-convexity in the loss function that results from the presence of noise (see Section 3). Third, we derive optimization error bounds under the computationally efficient projected gradient descent algorithm to approximate the optimal solution under the grouped $L_{1,q}$ penalty, which guarantees that the computed parameter estimates are well-behaved. To our knowledge, this is one of the first such results involving noisy functional predictors and under grouped penalties, and is motivated by developments in Agarwal et al. (2012).

Section 2 develops the joint scalar-on-image regression approach and theoretical properties corresponding to the case with uncorrupted images. Section 3 extends this approach to the case of noisy images, proposes a projected gradient descent algorithm for computation, and establishes finite sample statistical and optimization error bounds for the parameter estimates under convex and non-convex grouped penalties. Section 4 involves extensive simulation studies, Section 5 applies the methods to ADNI data, and Section 6 contains further discussions.

2 Multi-task learning without Measurement Errors

Our goal is to propose an approach for joint learning for multiple scalar-on-surface regressions. Denote the scalar continuous outcome $y \in \mathfrak{R}$ that is regressed on an image X defined over a d -dimensional surface and observed at a discrete set of voxels $\{\mathbf{v}_1, \dots, \mathbf{v}_p\}$. Here $\mathbf{v}_l \in \mathfrak{R}^d$ with $d = 2$ or 3 in practice corresponding to two- or three-dimensional (2-D or 3-D) images. Moreover, the images for all the subjects and data sources are registered to a common template that is standard in medical imaging applications (Avants et al., 2011). For the purposes of exposition and illustration, we will consider the situation with 2-D images as functional predictors. However, our framework is naturally applicable to 3-D images. Further, it is straightforward to include additional datasource-specific scalar covariates in the modeling framework, but they are omitted in the following discussions in order to preserve simplicity of notations. Let y_{mi} and X_{mi} denote the outcome and the imaging predictor for subject i ($i = 1, \dots, n_m$) from data source m ($m = 1, \dots, M$), where $x_{mi}(\mathbf{v}_k)$ denotes the observed MRI image at voxel \mathbf{v}_k corresponding to X_{mi} . The scalar-on-image regression model for the m th data source can be written as:

$$y_{mi} = \beta_{m0} + \int X_{mi}(\mathbf{v})\beta_m(\mathbf{v})d\mathbf{v} + \epsilon_{mi}, \quad \epsilon_{mi} \stackrel{i.i.d.}{\sim} N(0, \sigma_m^2), \quad m = 1, \dots, M; i = 1, \dots, n_m, \quad (1)$$

where ϵ_{mi} denotes the random error term that is assumed to be normally distributed with data source-specific residual variance, and $\beta_m(\cdot)$ is the functional regression coefficient that captures the effects of the functional predictor on the outcome corresponding to the m th data source. These functional regression coefficients are estimated jointly across M datasets under an integrative learning framework, as elaborated in the sequel.

We propose a wavelet-based decomposition for the 2D images that provides a multiscale

representation to accommodate varying degrees of smoothness (Reiss et al., 2015) as:

$$x_{mi}(\mathbf{v}) = \sum_{k,l=0}^{2^{j_0}-1} c_{mi,j_0,\{k,l\}}^0 \phi_{j_0,\{k,l\}}(\mathbf{v}) + \sum_{j=j_0}^J \sum_{k,l=0}^{2^j-1} \sum_{q=1}^3 c_{mi,j,\{k,l\}}^q \psi_{j,\{k,l\}}^q(\mathbf{v}) \quad (2)$$

where j_0 is the primary level of decomposition that controls the number of basis elements in the multi-scale representation, J denotes the maximum level of decomposition, and $\{\phi_{j_0,\{k,l\}}, k, l = 1, \dots, 2^{j_0} - 1\}$ and $\{\psi_{j,\{k,l\}}^q, j = j_0, \dots, J, k, l = 0, \dots, 2^j - 1, q = 1, \dots, 3\}$ denote pairwise orthonormal wavelets. The wavelet basis functions in (2) can also be expressed as $\phi_{j_0,\{k,l\}}(\mathbf{v}) = \phi_{j_0,k}(v_1)\phi_{j_0,l}(v_2)$, $\psi_{j,\{k,l\}}^1(\mathbf{v}) = \psi_{j,k}(v_1)\phi_{j,l}(v_2)$, $\psi_{j,\{k,l\}}^2(\mathbf{v}) = \phi_{j,k}(v_1)\psi_{j,l}(v_2)$, $\psi_{j,\{k,l\}}^3(\mathbf{v}) = \psi_{j,k}(v_1)\psi_{j,l}(v_2)$, where $\mathbf{v} = (v_1, v_2)$ and $\phi_{j,\cdot}(\cdot), \psi_{j,\cdot}(\cdot)$ are the one-dimensional father and mother wavelets of level j . Using orthonormality, the wavelet coefficients in (2) can be calculated by $c_{mi,j_0,\{k,l\}}^0 = \langle \mathbf{x}_{mi}, \phi_{j_0,\{k,l\}} \rangle$ and $c_{mi,j,\{k,l\}}^q = \langle \mathbf{x}_{mi}, \psi_{j,\{k,l\}}^q \rangle$, where we use $\langle f_1, f_2 \rangle = \int f_1(\mathbf{v})f_2(\mathbf{v})d\mathbf{v}$ to denote the inner product and \mathbf{x}_{mi} denotes the vectorized image. Due to discrete wavelet transform, we usually require the observed number of locations along all dimensions to be the same (power of 2). If the original functional data does not fulfill this requirement, we can easily pad zero values around it and increase the dimension to the nearest high power of 2 (Reiss et al., 2015), which we denote as p_0 . Then the maximum level $J = \log_2(p_0) - 1$, and $p = p_0^2$ is also the total number of wavelet coefficients in (2).

The functional regression coefficients are expressed via the same wavelet basis as in (2) which is routinely used in literature (Wang et al., 2014), i.e. $\beta_m(\mathbf{v}) = \sum_{k,l=0}^{2^{j_0}-1} a_{m,j_0,\{k,l\}} \phi_{j_0,\{k,l\}}(\mathbf{v}) + \sum_{j=j_0}^J \sum_{k,l=0}^{2^j-1} \sum_{q=1}^3 d_{m,j,\{k,l\}}^q \psi_{j,\{k,l\}}^q(\mathbf{v})$, where the unknown coefficients are denoted by $a_{m,j_0,\{k,l\}} = \langle \beta_m, \phi_{j_0,\{k,l\}} \rangle$ and $d_{m,j,\{k,l\}}^q = \langle \beta_m, \psi_{j,\{k,l\}}^q \rangle$. The wavelet representation is flexible enough to allow the functional regression coefficient to be estimated at different levels of smoothness

via different levels of j_0 . Combining the above, one can rewrite the model (1) as:

$$y_{mi} = \beta_{m0} + \mathbf{c}_{mi}^T \boldsymbol{\eta}_m + \epsilon_{mi}, \quad \epsilon_{mi} \stackrel{i.i.d.}{\sim} N(0, \sigma_m^2), \quad i = 1, \dots, n_m, \quad m = 1, \dots, M, \quad (3)$$

where $\mathbf{c}_{mi}^T \boldsymbol{\eta}_m = \sum_{k,l=0}^{2^{j_0}-1} c_{mi,j_0,\{k,l\}}^0 a_{m,j_0,\{k,l\}} + \sum_{j=j_0}^J \sum_{k,l=0}^{2^j-1} \sum_{q=1}^3 c_{mi,j,\{k,l\}}^q d_{m,j,\{k,l\}}^q$ is the linear mean term, $\boldsymbol{\eta}_m = (\eta_{m1}, \dots, \eta_{mp})'$ denotes the vector of unknown wavelet coefficients corresponding to $\beta_m(\mathbf{v})$, and $\mathbf{c}_{mi}(p \times 1)$ denotes the collection of coefficients corresponding to the decomposition of X_{mi} in (2) that can be computed explicitly given the images. Model (3) is now a standard linear regression model with known design matrix $\mathbf{C}_m = (\mathbf{c}_{m1}, \dots, \mathbf{c}_{mn_m})^T$ and unknown wavelet coefficients $\boldsymbol{\eta}_m, m = 1, \dots, M$, corresponding to the m th data source, which are jointly estimated across datasets (as elaborated in the sequel) and can be used to reconstruct the functional regression coefficients. We note that by location transformation, we can assume $\beta_{m0} = 0, m = 1, \dots, M$, without loss of generality, and hence we will ignore the intercept terms in the following discussions. Model (3) represents a discretized version of the original functional linear model in (1) that will be used throughout this article.

One can use different types of wavelet bases in (2)–(3) - see (Walker, 2008) for more details on different choices of wavelet basis. One possible choice is the Haar wavelets (Wang et al., 2014, 2017) that results in piecewise constant approximations of the signal due to one vanishing moment, but may require a large number of non-zero wavelet coefficients to adequately model smooth signals. The Haar wavelets can be generalized to accommodate higher number of vanishing moments via the Daubechies wavelets (Reiss et al., 2015), which is able to capture diverse types of signals while preserving model parsimony. The choice of the wavelet bases can be tuned to the particular application, as needed.

In order to ensure sparsity in the estimated coefficients that reflects the biological reality of a small subset of activated brain locations driving the outcome, suitable grouped penalty functions $\rho(\cdot)$ are imposed that facilitate joint learning. In particular, we propose

to solve the optimization problem: $\max_{\boldsymbol{\eta}} \left\{ -\frac{1}{2} \sum_{m=1}^M \sum_{i=1}^{n_m} \left(y_{mi} - \langle \mathbf{c}_{mi}, \boldsymbol{\eta}_m \rangle \right)^2 - \lambda \rho(\boldsymbol{\eta}) \right\}$, where $\rho(\boldsymbol{\eta})$ may correspond to convex penalty functions such as the $L_{1,q}$ penalty $\rho(\boldsymbol{\eta}) = \sum_{j=1}^p \left(\sum_{m=1}^M |\eta_{mj}|^q \right)^{1/q}$ ($q > 1$), that includes the group lasso when $q = 2$, as well as non-convex penalties such as the group bridge, i.e. $\rho(\boldsymbol{\eta}) = \sum_{j=1}^p \left(\sum_{m=1}^M |\eta_{mj}| \right)^{1/2}$. The convex and non-convex penalties lead to different modes of joint learning by promoting different types of sparsity patterns. The choice of these penalties is motivated by theoretical properties and the availability of software for practical implementations. For example, consistency properties under the group lasso penalty (Nardi et al., 2008), with adaptation to multi-task learning settings (Lounici et al., 2011) are well-known. Similarly, asymptotic properties of the group bridge penalty was established by Huang et al. (2009), and weak oracle properties were derived in Li et al. (2014) corresponding to a binary outcomes.

Weak Oracle properties under group bridge with uncorrupted images: We will establish weak oracle properties (Lv et al., 2009) under group bridge that will extend the results in Li et al. (2014) corresponding to binary outcomes involving scalar covariates to the case of scalar-on-image regression with continuous outcomes. For the ease of notation and without loss of generality, we assume that all M data sources have n samples in the following discussion. However, the proposed methodology and theoretical developments are equally applicable for unequal sample sizes across data sources. One can rewrite the optimization problem as

$$\max_{\boldsymbol{\eta}} \left\{ \mathbf{y}^T \mathbf{C} \boldsymbol{\eta} - \frac{1}{2} \boldsymbol{\eta}^T \mathbf{C}^T \mathbf{C} \boldsymbol{\eta} - n \lambda_n \rho(\boldsymbol{\eta}) \right\} \quad (4)$$

where $\rho(\boldsymbol{\eta}) = \sum_{j=1}^p \left(\sum_{m=1}^M |\eta_{mj}| \right)^{1/2}$, and $\mathbf{C} (Mn \times Mp)$ is a block-diagonal design matrix whose m th block \mathbf{C}_m corresponds to a matrix of known wavelet coefficients computed using the images from the m th data source. For studying theoretical properties, we will assume the true model to be of the form (3) and having the true coefficients $\boldsymbol{\eta}^0$. Consider the following partition of the index set $\{1, \dots, p\}$: $I = \{(m, j) | \eta_{mj}^0 \neq 0, \boldsymbol{\eta}_{(j)}^0 \neq \mathbf{0}\}$, $II =$

$\{(m, j) | \eta_{mj}^0 = 0, \boldsymbol{\eta}_{(j)}^0 \neq \mathbf{0}\}$ and $III = \{(m, j) | \boldsymbol{\eta}_{(j)}^0 = \mathbf{0}\}$ where $\boldsymbol{\eta}_{(j)}^0 = (\eta_{1j}^0, \dots, \eta_{Mj}^0)^T$ denotes the true wavelet coefficients corresponding to the j -th wavelet basis function. Set I denotes the indices for the true nonzero coefficients across all data sources, set II denotes the indices for those true wavelet coefficients that are zero for some data sources but not others, while set III denotes the indices for those wavelet coefficients that are zero across all data sources. It is clear that the three sets are mutually exclusive. Further, let $s = |I|$ be the true sparsity level, let $d = 0.5 \min\{|\eta_{mj}^0| : \eta_{mj}^0 \in I\}$ with $d/\log n \asymp n^{-\alpha_d}$ where $\alpha_d \leq \gamma, \gamma \in (0, 1/2]$, and denote $l = \min_{\{j: \boldsymbol{\eta}_{(j)}^0 \neq \mathbf{0}\}} \|\boldsymbol{\eta}_{(j)}^0\|_1^{1/2}$, $L = \max_{\{j: \boldsymbol{\eta}_{(j)}^0 \neq \mathbf{0}\}} \|\boldsymbol{\eta}_{(j)}^0\|_1^{1/2}$. Define the neighborhood $\mathcal{N}_0 = \{\boldsymbol{\delta} \in \mathcal{R}^s : \|\boldsymbol{\delta} - \boldsymbol{\eta}_I^0\|_\infty \leq d\}$, and the constant $\kappa_0 = \max_{\boldsymbol{\delta} \in \mathcal{N}_0} \max_{\{j: \boldsymbol{\delta}_{(j)} \neq \mathbf{0}\}} 4^{-1} \|\boldsymbol{\delta}_{(j)}\|_1^{-3/2}$, where $\boldsymbol{\delta}_{(j)} = (\delta_{1j}, \dots, \delta_{Mj})^T$ with $\delta_{mj} = 0$ for $(m, j) \notin I$.

Consider the standardized design matrix \mathbf{C} denoted as $\tilde{\mathbf{C}}$, such that $\|\tilde{\mathbf{c}}_{mj}\|_2 = \sqrt{n}$. We denote $\|\cdot\|_\infty$ as the supremum norm, and denote \mathcal{O} and o as the big-O and little-o notations. Also $a \asymp b$ implies a, b , are on the same order. We will assume the following conditions:

- (C1) $\alpha_p = \min(1/2, 2\gamma - \alpha_s)$, where $s \asymp n^{\alpha_s}, \alpha_s < 1, \log p \asymp n^{1-2\alpha_p}$ and $\gamma \in (0, 1/2]$;
- (C2) $\|(\tilde{\mathbf{C}}_I^T \tilde{\mathbf{C}}_I)^{-1}\|_\infty = \mathcal{O}(b_s n^{-1})$, where $b_s = o(n^{1/2-\gamma} \sqrt{\log n})$;
- (C3) $\|\tilde{\mathbf{C}}_{II}^T \tilde{\mathbf{C}}_I (\tilde{\mathbf{C}}_I^T \tilde{\mathbf{C}}_I)^{-1}\|_\infty \leq l/(2L)$.

Assumption (C1) places conditions on the rate of growth for the true sparsity level (s) and allows p to grow much faster than n . (C2) essentially requires $\frac{1}{n} \tilde{\mathbf{C}}_I^T \tilde{\mathbf{C}}_I$ to be non-singular and that the supremum norm of $(\tilde{\mathbf{C}}_I^T \tilde{\mathbf{C}}_I)^{-1}$ has a lower bound as in equation (15) in Fan and Lv (2011), while (C3) is similar to the irrepresentability condition in literature (Zhao and Yu, 2006). Given (C1)-(C3), Theorem 2.1 formalizes the weak oracle property.

Theorem 2.1. *Suppose the conditions (C1)-(C3) hold. For λ_n satisfying $\lambda_n \asymp n^{-\alpha_\lambda}$ with $\alpha_\lambda < \alpha_p$, $\lambda_n b_s = o(n^{-\alpha_d/2-\gamma} \log n)$ and $\lambda_n \kappa_0 = o(\tau_0)$, where $\tau_0 = \lambda_{\min}(n^{-1} \tilde{\mathbf{C}}_I^T \tilde{\mathbf{C}}_I)$, there exists a local maximizer $\hat{\boldsymbol{\eta}}$ of (4), such that: (a) $\hat{\boldsymbol{\eta}}_{II \cup III} = \mathbf{0}$; and (b) $\|\hat{\boldsymbol{\eta}}_I - \boldsymbol{\eta}_I^0\|_\infty \leq$*

$n^{-\gamma} \log n$, with probability greater than $1 - 2\{sn^{-1} + (Mp - s)e^{-n^{1-2\alpha_p} \log n}\}$ for sufficiently large n .

Property (a) indicates that the oracle estimator for the truly zero wavelet coefficients are estimated correctly with high probability tending to one as $n \rightarrow \infty$. Property (b) indicates that with high probability tending to one as n increases, the error under the oracle estimator (in terms of the supremum norm) corresponding to the truly nonzero wavelet coefficients is bounded by a term that goes to zero. Together properties (a) and (b) in Theorem 2.1 imply the weak oracle property, which hold for certain strict local maximizers that satisfies the KKT conditions. The results for the wavelet coefficients in Theorem 2.1 can be used to deduce the non-asymptotic error bounds for the corresponding oracle estimators of the functional regression coefficients $\{\hat{\beta}_1(\cdot), \dots, \hat{\beta}_M(\cdot)\}$ and the predicted means, as captured via the following result.

Corollary 2.1. *If Theorem 2.1 holds, then with probability greater than $1 - 2\{s(Mn)^{-1} + (Mp - s)e^{-(Mn)^{1-2\alpha_p}}\}$, we have $|\hat{\beta}_m(\mathbf{v}) - \beta_m^0(\mathbf{v})| \leq \tau_m(\mathbf{v})sn^{-\gamma}$ and $\left| \int \mathbf{X}_{mi}(\mathbf{v})\hat{\beta}_m(\mathbf{v})d\mathbf{v} - \int \mathbf{X}_{mi}(\mathbf{v})\beta_m^0(\mathbf{v})d\mathbf{v} \right| \leq \iota_m sn^{-\gamma}$, for all $m \in \{1, \dots, M\}$, where $\tau_m(\mathbf{v}) = \max_{j \in \{1, \dots, p\}} \frac{|b_j(\mathbf{v})|}{\sqrt{\frac{1}{Mn} \|\mathbf{c}_{mj}\|_2^2}}$, $b_j(\mathbf{v})$ is the j -th wavelet basis function, and $\iota_m = \max_{i \in \{1, \dots, n\}, j \in \{1, \dots, p\}} \frac{|c_{mi,j}|}{\sqrt{\frac{1}{Mn} \|\mathbf{c}_{mj}\|_2^2}}$.*

3 Multi-task learning with Measurement Errors

We now generalize our multi-task learning scalar-on-image regression approach to the case of images with measurement errors that is the main focus of this article. We assume an additive measurement error model, i.e. $z_{mi}(\mathbf{v}) = x_{mi}(\mathbf{v}) + u_{mi}(\mathbf{v})$, $i = 1, \dots, m_n$, $m = 1, \dots, M$, where $x_{mi}(\mathbf{v})$ denotes the true unobserved image at voxel \mathbf{v} , while $z_{mi}(\mathbf{v})$ denotes the observed noisy image with the measurement error $u_{mi}(\mathbf{v})$. While we still assume the true model to be $y_{mi} = \beta_{m0} + \mathbf{c}_{mi}^T \boldsymbol{\eta}_m^0 + \epsilon_{mi}$, we relax the distribution of the random error ϵ_{mi} to

be sub-Gaussian with parameter σ_m . Moreover, the working model used for fitting the data would replace the true image $x_{mi}(\mathbf{v})$ (that is unobserved) by its noisy counterpart $z_{mi}(\mathbf{v})$ in (2), which results in a different M-estimation criteria compared to (4) (see equation (5)). We capture the randomness of the noisy images by assuming that the vectorized true image $\mathbf{x}_{mi} = (x_{mi}(\mathbf{v}_1), \dots, x_{mi}(\mathbf{v}_p))$ and the measurement errors $\mathbf{u}_{mi} = (u_{mi}(\mathbf{v}_1), \dots, u_{mi}(\mathbf{v}_p))$ are independently distributed as sub-Gaussian random variables with parameters (Σ_m^x, σ_x^2) and (Σ_u, σ_u^2) respectively, which ensures bounded tails and allows unstructured covariances.

Let us denote the matrix of wavelet basis corresponding to the p discrete locations as $B = (\mathbf{b}_1, \dots, \mathbf{b}_p)$ where $\mathbf{b}_j = (b_j(\mathbf{v}_1), \dots, b_j(\mathbf{v}_p))^T$ denotes the realizations of the j -th basis function at all p discrete locations ($j = 1, \dots, p$), so that $B^T B = I$. We define $\mathbf{w}_{mi} = B^T \mathbf{z}_{mi} = B^T \mathbf{x}_{mi} + B^T \mathbf{u}_{mi} = \mathbf{c}_{mi} + B^T \mathbf{u}_{mi}$ as the inner product between the noisy observed image and the wavelet basis functions over all voxels. Hence, \mathbf{w}_{mi} can be considered as an adaptation of the image wavelet coefficients \mathbf{c}_{mi} in (2) to the case of noisy images. We note that based on definition of a sub-Gaussian variable, the vectors $\mathbf{c}_{mi} = B^T \mathbf{x}_{mi}$ and $B^T \mathbf{u}_{mi}$ are also sub-Gaussian with parameters $(B^T \Sigma_m^x B, \sigma_x^2)$ and $(B^T \Sigma_u B, \sigma_u^2)$ respectively. The above arguments imply that the vector \mathbf{w}_{mi} , which will be used henceforth in our scalar-on-image modeling framework with noisy images, is a sum of two independent sub-Gaussian random variables whose covariance parameters are well-defined for finite p .

A naive solution that ignores the noise in the images would be to replace \mathbf{c}_{mi} with \mathbf{w}_{mi} in the scalar-on-image regression model (3), but this strategy would result in inconsistent estimation under the criteria (4) (Sørensen et al., 2015). A potential solution to remedy the problem that is motivated by Loh and Wainwright (2012), is to use a corrected M-estimator that resembles (4) but adjusts for the additive noise. In this context, note that the matrix $\mathbf{C}_m^T \mathbf{C}_m$ in (4) corresponding to the unobserved true images can be approximated by $\hat{\Gamma}_m = \frac{1}{n} \mathbf{W}_m^T \mathbf{W}_m - B^T \Sigma_u B$, via the relationship $\mathbf{w}_{mi} = B^T \mathbf{z}_{mi} = \mathbf{c}_{mi} + B^T \mathbf{u}_{mi}$, where

$\mathbf{W}_m = (\mathbf{w}_{m1}, \dots, \mathbf{w}_{mn})^T$. We propose the following noise corrected version of (4) as

$$\min_{\rho(\boldsymbol{\eta}) \leq R} \left[\sum_{m=1}^M \left\{ \frac{1}{2} \boldsymbol{\eta}_m^T \hat{\boldsymbol{\Gamma}}_m \boldsymbol{\eta}_m - \langle \hat{\boldsymbol{\gamma}}_m, \boldsymbol{\eta}_m \rangle \right\} + \lambda_n \rho(\boldsymbol{\eta}) \right], \quad (5)$$

where $\hat{\boldsymbol{\gamma}}_m = \frac{1}{n} \mathbf{W}_m^T \mathbf{y}_m$, $\mathbf{y}_m = (y_{m1}, \dots, y_{mn})^T$, $\rho(\boldsymbol{\eta})$ denotes grouped penalty functions for multi-task learning, and the remaining terms other than $\rho(\boldsymbol{\eta})$ in (5) represents the loss function \mathcal{L} that makes use of a corrected variance term $\hat{\boldsymbol{\Gamma}}_m$ and a cross-product $\hat{\boldsymbol{\gamma}}_m$. Lemma 3.1 illustrates that $(\hat{\boldsymbol{\Gamma}}_m, \hat{\boldsymbol{\gamma}}_m)$ serve as surrogates for $[Var(\mathbf{c}_{mi})]$ and $[Var(\mathbf{c}_{mi})]\boldsymbol{\eta}_m^0$ respectively, where approximation error is shown to decrease to zero as $n \rightarrow \infty$ even when $p \gg n$. This property indicates the resemblance between the corrected criteria (5) and criteria (4) corresponding to no measurement error, since the terms $C^T \mathbf{y}$ and $C^T C$ in (4) are also unbiased estimators for $[Var(\mathbf{c}_{mi})]\boldsymbol{\eta}_m^0$ and $Var(\mathbf{c}_{mi})$ respectively, in the absence of noise.

Lemma 3.1. (*deviation condition*) *The surrogates $(\hat{\boldsymbol{\Gamma}}_m, \hat{\boldsymbol{\gamma}}_m)$ satisfy (i) $\|\hat{\boldsymbol{\gamma}}_m - B^T \boldsymbol{\Sigma}_m^x B \boldsymbol{\eta}_m^0\|_\infty \leq \phi \sqrt{\frac{\log p}{n}}$; and (ii) $\|(\hat{\boldsymbol{\Gamma}}_m - B^T \boldsymbol{\Sigma}_m^x B) \boldsymbol{\eta}_m^0\|_\infty \leq \phi \sqrt{\frac{\log p}{n}}$, with probability at least $1 - c_1 \exp\{-c_2 \log p\}$, where $\sigma^2 = \sigma_x^2 + \sigma_u^2$, $\phi = \max_{m \in \{1, \dots, M\}} c_0 \sigma (\sigma_m + \sigma \|\boldsymbol{\eta}_m^0\|_1)$, and for constants $c_0, c_1, c_2 > 0$.*

Another unique feature for criteria (5) is that it requires the solution to be restricted to the ball $\rho(\boldsymbol{\eta}) \leq R$, which is defined in terms of the penalty function being used. This restriction is imposed to ensure the stability of solutions, since $\hat{\boldsymbol{\Gamma}}_m$'s are generally not positive semi-definite in the presence of noise, making the loss \mathcal{L} in (5) non-convex. The restricted solution enables one to tackle a potentially large number of negative eigen values in $\hat{\boldsymbol{\Gamma}}_m$ due to noisy images, which could otherwise lead to the objective function \mathcal{L} being unbounded from below in an extreme case. In what follows, we will first use the assumption that the variance matrix for the measurement error $\boldsymbol{\Sigma}_u$ is known to develop our model and theoretical properties, and subsequently relax this assumption and generalize the results to unknown noise covariance matrices that are empirically estimated. Lemma

3.1 and the above discussions provide an intuition regarding the proposed corrected criteria in (5), which is motivated by Loh and Wainwright (2012). However, unlike their paper that involved noisy scalar covariates with L_1 penalties, our focus is on wavelet-based representations of noisy functional covariates involving convex $L_{1,q}$ and non-convex group bridge penalties in a multi-task learning setting.

3.1. Theoretical properties under noisy images

In order to establish theoretical properties corresponding to images with measurement errors under criteria (5), it is necessary to characterize the behavior of the matrix $\hat{\mathbf{\Gamma}}$ (referring to any of $\hat{\mathbf{\Gamma}}_1, \dots, \hat{\mathbf{\Gamma}}_M$) via some lower restricted eigen value (lower-RE) conditions that places lower bounds on quadratic terms $\boldsymbol{\eta}^T \hat{\mathbf{\Gamma}} \boldsymbol{\eta}$ in (5). Such conditions prevent the objective function from being unbounded from below when there are a large number of negative eigen values for $\hat{\mathbf{\Gamma}}$ in the presence of noise. Also, the lower-RE condition ensures that the curvature is not overly flat, since $\hat{\mathbf{\Gamma}}$ represents the curvature of the loss function (equivalent to a Hessian matrix in classical literature). Sufficiently curved loss functions are needed to ensure that optimum solutions are able to converge sufficiently close to the true parameter values, given that a small loss difference $|L(\hat{\boldsymbol{\eta}}) - L(\boldsymbol{\eta}^0)|$ will translate to a small error $|\hat{\boldsymbol{\eta}} - \boldsymbol{\eta}^0|$. To this effect, we define the following lower-RE condition that is similar to those that have been used extensively in penalized regression literature (Van De Geer et al., 2009), and can be considered a substitute for global strong convexity that can not be guaranteed when $p \gg n$.

Definition 3.1. (*Lower-RE condition*). *The matrix $\hat{\mathbf{\Gamma}}$ satisfies a lower restricted eigenvalue condition with curvature $\alpha_1 > 0$ and tolerance $\tau > 0$ if $\boldsymbol{\theta}^T \hat{\mathbf{\Gamma}} \boldsymbol{\theta} \geq \alpha_1 \|\boldsymbol{\theta}\|_2^2 - \tau \|\boldsymbol{\theta}\|_1^2, \forall \boldsymbol{\theta} \in \mathcal{R}^p$.*

It turns out that the lower-RE condition holds with high probability in the presence of noise, given the sub-Gaussian assumptions on the true images and the additive errors. This is shown under certain choices for α_1 and τ , which follows from the results in Loh and

Wainwright (2012).

We are now in a position to formally establish the finite sample error bounds corresponding to the optimal estimators obtained under (5). We denote $\boldsymbol{\eta}^0 = (\boldsymbol{\eta}_1^0, \dots, \boldsymbol{\eta}_M^0)'$ as the true wavelet coefficients concatenated over M data sources. Further denote the index set for true wavelet coefficients that have at least one non-zero signal across data sources as $S = \{j : \|\boldsymbol{\eta}_{(j)}^0\|_1 \neq 0\}$ where the cardinality of S represents the group sparsity of $\boldsymbol{\eta}^0$ (denoted by k). Similarly, denote the index set of unimportant wavelet coefficients as $S^C = \{j : \|\boldsymbol{\eta}_{(j)}^0\|_1 = 0\}$, let $l = \min_{j \in S} \|\boldsymbol{\eta}_{(j)}^0\|_1^{1/2}$, $h_1 = 1 + 3l^{-1}R$ and $h_2 = 1 + 3M^{(q-1)/q}$. The following result establishes the statistical (L_1 and L_2) error bounds corresponding to the group bridge penalty explicitly in terms of n, p, M, R , and other parameters.

Theorem 3.1. *(statistical error under group bridge) For any $\boldsymbol{\eta}^0$ with group sparsity at most k , the global optimum $\hat{\boldsymbol{\eta}}$ of the problem (5) under the group bridge penalty $\rho(\cdot)$ satisfies the following error bounds with probability at least $1 - c_1 \exp\{-c_2 \log p\}$ for constants $c_1, c_2 > 0$, $R \geq \rho(\boldsymbol{\eta}^0)$, $\alpha_1/\tau \geq 2h_1^2 Mk$, and $\lambda_n \geq 2\phi\sqrt{\frac{\log p}{n}} \max\{l, R\}$:*

$$\|\hat{\boldsymbol{\eta}} - \boldsymbol{\eta}^0\|_2 \leq \frac{8h_1\sqrt{Mk}}{\alpha_1} \max\left\{\phi\sqrt{\frac{\log p}{n}}, \lambda_n l^{-1}\right\}, \quad \|\hat{\boldsymbol{\eta}} - \boldsymbol{\eta}^0\|_1 \leq \frac{8h_1^2 Mk}{\alpha_1} \max\left\{\phi\sqrt{\frac{\log p}{n}}, \lambda_n l^{-1}\right\}$$

Remark 3.1: While Theorem 3.1 is stated for a global optimum, we note that the result also holds for any local optimum that satisfies the constraint $\mathcal{L}(\hat{\boldsymbol{\eta}}) \leq \mathcal{L}(\boldsymbol{\eta}^0)$ for \mathcal{L} as in (5).

Corollary 3.1. *The error bounds in Theorem 3.1 hold when the space of admissible solutions in (5) is restricted to a L_1 ball $\{\boldsymbol{\eta} : \|\boldsymbol{\eta}\|_1 \leq R^2\}$ in (5), provided that $\|\boldsymbol{\eta}^0\|_1 \leq R^2$ holds.*

We note that Theorem 3.1 guarantees that the bound on the statistical error under a non-convex penalty goes to zero even when $p \gg n$ and in the presence of measurement errors. In addition, Remark 3.1 suggests the existence of local optima corresponding to (5) that come arbitrarily close to the true parameters in terms of bounded statistical errors in Theorem 3.1. Moreover, Corollary 3.1 illustrates that the results in Theorem 3.1 are valid

when the space of admissible solutions in (5) is modified in terms of a L_1 ball, which provides computational benefits when deriving parameter estimates under a projected gradient descent algorithm (see Section 4). Similar to Theorem 3.1, we now establish finite sample error bounds under the convex $L_{1,q}$ penalty, which includes the group lasso ($q = 2$) as a special case. We note that although the $L_{1,q}$ penalty is convex, the issues of non-convexity arising due to noise in the images that are encountered in Theorem 3.1 still persist in this scenario as well. We note that Theorems 3.1-3.2 provide novel finite sample error bounds that go beyond existing results in literature by accommodating non-convexity arising due to high-dimensional noisy images in the setting of multi-task learning involving non-convex and convex grouped penalties.

Theorem 3.2. *(statistical error under $L_{1,q}$ penalty) For any $\boldsymbol{\eta}^0$ with group sparsity at most k , the global optimum $\hat{\boldsymbol{\eta}}$ of the problem (5) under the $L_{1,q}$ penalty $\rho(\cdot)$ satisfies the following error bounds with probability at least $1 - c_1 \exp\{-c_2 \log p\}$ for constants $c_1, c_2 > 0$, $R \geq \rho(\boldsymbol{\eta}^0)$, $\alpha_1/\tau \geq 2h_2^2 Mk$, $\lambda_n \geq 2\phi\sqrt{\frac{\log p}{n}}M^{(q-1)/q}$:*

$$\|\hat{\boldsymbol{\eta}} - \boldsymbol{\eta}^0\|_2 \leq \frac{8h_2\sqrt{Mk}}{\alpha_1} \max\left\{\phi\sqrt{\frac{\log p}{n}}, \lambda_n\right\}, \quad \|\hat{\boldsymbol{\eta}} - \boldsymbol{\eta}^0\|_1 \leq \frac{8h_2^2 Mk}{\alpha_1} \max\left\{\phi\sqrt{\frac{\log p}{n}}, \lambda_n\right\}$$

Remark 3.2: Although Theorems 3.1-3.2 guarantee accurate recovery of the estimated wavelet coefficients (and hence the functional regression coefficients), no such finite sample guarantees are available for prediction error. However, the proposed methods have good predictive performance as evident from the extensive numerical studies in the sequel.

Although Theorems 3.1-3.2 establish statistical error bounds between any global optimum of (5) and the true wavelet coefficients, it is not immediately clear how to computationally obtain such a global optimum. This is partly due to non-convexity in the loss function, which hinders a closed form solution to (5) under both convex or non-convex penalties. Hence one needs to resort to some type of projected gradient descent algorithm in order to approximate the solution, which generates a sequence of iterates via the following

recursions:

$$\boldsymbol{\eta}^{(t+1)} = \underset{\rho(\boldsymbol{\eta}) \leq R}{\operatorname{argmin}} \left\{ \mathcal{L}(\boldsymbol{\eta}^{(t)}) + \langle \hat{\boldsymbol{\Gamma}}\boldsymbol{\eta} - \hat{\boldsymbol{\gamma}}, \boldsymbol{\eta} - \boldsymbol{\eta}^{(t)} \rangle + \frac{\delta^*}{2} \|\boldsymbol{\eta} - \boldsymbol{\eta}^{(t)}\|_2^2 \right\}, \quad (6)$$

where δ^* denotes the step size. However for non-convex problems, the projected gradient descent may get trapped in local minima. While some local optima may lie close to the global optimum as per Remark 3.1, not all local optima are guaranteed to converge to optimum solutions that satisfy the statistical error bounds in Theorems 3.1-3.2. Fortunately, it is possible to show that the local optima under the projected gradient descent algorithm in (6) involving the $L_{1,q}$ penalty converges (after a suitable number of iterations) to a solution that is arbitrarily close to the global optimum in Theorem 3.2, which ensures the legitimacy of the approximate solution. We first state an additional upper restricted eigen value (upper-RE) condition below that holds with high probability for our settings and is needed in order to derive such a result, followed by the Theorem statement.

Definition 3.2. (*Upper-RE condition*). *The matrix $\hat{\boldsymbol{\Gamma}}$ satisfies an upper restricted eigenvalue condition with curvature $\alpha_2 > 0$ and tolerance $\tau > 0$ if $\boldsymbol{\theta}^T \hat{\boldsymbol{\Gamma}} \boldsymbol{\theta} \leq \alpha_2 \|\boldsymbol{\theta}\|_2^2 + \tau \|\boldsymbol{\theta}\|_1^2, \forall \boldsymbol{\theta} \in \mathcal{R}^p$.*

Theorem 3.3. (*optimization error*) *Let $\hat{\boldsymbol{\eta}}$ denote an optimum solution in Theorem 3.2 under $L_{1,q}$ penalty. Then, the estimate $\boldsymbol{\eta}^{(t)}$ under the projected gradient descent in (6) with initial choice $\boldsymbol{\eta}^*$ satisfies the error bound $\|\boldsymbol{\eta}^{(t)} - \hat{\boldsymbol{\eta}}\|_2^2 \leq c_3 \frac{k \log p}{n} \|\hat{\boldsymbol{\eta}} - \boldsymbol{\eta}^0\|_2^2$ for all iterates $t \geq 2[\log(1/\kappa)]^{-1} \log \frac{\mathcal{L}(\boldsymbol{\eta}^*) - \mathcal{L}(\hat{\boldsymbol{\eta}})}{\delta^2} + \log_2 \log_2 \left(\frac{R\lambda_n}{\delta^2} \right) \left(1 + \frac{\log 2}{\log(1/\kappa)} \right)$ with probability at least $1 - c_1 \exp\{-c_2 \log p\}$, for positive constants $c_1, c_2, c_3 > 0$, $\delta^2 = c_3 \frac{k \log p}{n} \|\hat{\boldsymbol{\eta}} - \boldsymbol{\eta}^0\|_2^2$, and $\kappa \in (0, 1)$.*

Theorem 3.3 shows that the L_2 optimization error under the projected gradient descent algorithm with $L_{1,q}$ penalty is bounded by the statistical error, which is already shown to be well behaved and bounded in Theorem 3.2. This result essentially guarantees that the

iterate t under the projected gradient descent that is easily computed in polynomial-time (especially when $q = 2$ resulting in group lasso penalty), converges to a global optimum for the criteria (5) that may be difficult to compute and may not have a closed form solution. In other words, Theorem 3.3 guarantees that when the gradient descent is run long enough, the iterations under the projected gradient descent will produce an estimate that is essentially as good as any global optimum for (5) in terms of statistical error. This is indeed a desirable practical feature in our applications of interest. Moreover, the number of iterations needed to be run before the approximate solution starts to converge to the optimal solution will depend on the initial choice of the parameters $\boldsymbol{\eta}^*$, with a good choice resulting in faster convergence. This is clear from the fact that a choice of $\boldsymbol{\eta}^*$ close to the global optimum will result in a small difference in $\mathcal{L}(\boldsymbol{\eta}^*) - \mathcal{L}(\hat{\boldsymbol{\eta}})$, subject to the curvature of the loss function.

Case with unknown noise covariance: In practical scenarios, Σ_u is unknown and needs to be estimated. Fortunately, under certain scenarios involving replicated data, it is possible to empirically estimate the noise covariance in a manner that ensures that the results derived in Theorems 3.1-3.3 are preserved. In particular, if we observe n_0 i.i.d. noise vectors \mathbf{u} , then we can use the estimate $\hat{\Sigma}_u = (1/n_0)U_0^T U_0$, where U_0 is a $n_0 \times p$ matrix obtained by concatenating the error vectors. Under the proposed additive error framework, these errors may be computed via the difference between the observed image and a baseline template. The following Corollary shows that the results still hold when Σ_u is replaced by $\hat{\Sigma}_u$ in (5).

Corollary 3.2. *Suppose we replace Σ_u by $\hat{\Sigma}_u = \frac{1}{n_0}U_0^T U_0$ when computing the matrices $\hat{\Gamma}_1, \dots, \hat{\Gamma}_M$ in criteria (5). Then, the results in Theorems 3.1-3.3 still hold.*

The proof of the above result proceeds by showing that Lemma 3.1 condition as well as the lower- and upper-RE conditions still hold with probability at least $1 - c_1 \exp\{-c_2 \log p\}$ under the modified covariance estimator $\hat{\Sigma}_u$. We use this strategy in our analysis of ADNI

data that comprises longitudinal measurements for healthy controls in addition to individuals with AD, as detailed in Section 5.

3.2. Computational Algorithms We implement the projected gradient descent approach under the group bridge and the group lasso penalties, whose convergence can be impacted by the choice of the step size δ^* in (6). We utilize the non-monotone spectral projected gradient (SPG) method for the computation under the group lasso penalty as in Sra (2011) and Duchi et al. (2008), which adopts a spectral choice of the step size with non-monotone line search technique that is known to speed up the convergence. Moreover under the non-convex group bridge penalty, we develop a novel projected gradient descent algorithm which restricts the space of admissible solutions to an L_1 ball of radius R^2 by leveraging Corollary 3.1. Using the data augmentation strategy in Huang et al. (2009), criteria (5) under group bridge can be expressed as the following equivalent problem :

$$\min_{\|\boldsymbol{\eta}\|_1 \leq R^2} \left[\sum_{m=1}^M \left\{ \frac{1}{2} \boldsymbol{\eta}_m^T \hat{\boldsymbol{\Gamma}}_m \boldsymbol{\eta}_m - \langle \hat{\boldsymbol{\gamma}}_m, \boldsymbol{\eta}_m \rangle \right\} + \sum_{j=1}^p \theta_j^{-1} \left(\sum_{m=1}^M |\eta_{mj}| \right) + \tau_n \sum_{j=1}^p \theta_j \right], \quad \tau_n = \lambda_n^2/4, \quad (7)$$

where $\theta_j \geq 0$ for $j = 1, \dots, p$. This can be solved via the SPG method in Algorithm 1 below.

In practice, the radius R in (5) and (7) can be set to be relatively large to ensure a reasonable bound of the estimate. One can get a better sense about the lower bound of the constraints R and R^2 from the estimates of the group lasso and group bridge methods without noise correction in (4), which can be used to guide the choice of R . Moreover, the shrinkage parameter λ_n in the penalty term can be selected via five fold cross validation. In our implementations, we fix the primary level of wavelet transform (j_0) informed by extensive empirical studies. However, in the situation when one is uncertain about the choice of j_0 , a cross validation can be conducted based on cross-validation or goodness of fit scores.

Algorithm 1 Projected Gradient Descent with Data Augmentation under Group Bridge

1. Initialize the values of the wavelet coefficients at $\boldsymbol{\eta}^*$.
2. For the k -th iteration, update θ_j for $j = 1, \dots, p$ as $\theta_j^{(k)} = \tau_n^{-1/2} \left(\sum_{m=1}^M |\eta_{mj}^{(k-1)}| \right)^{1/2}$.
3. Use SPG method to find the solution for $\boldsymbol{\eta}^\theta$ where $\eta_{mj}^\theta = \theta_j^{-1} \eta_{mj}$ as

$$\hat{\boldsymbol{\eta}}^\theta = \underset{\boldsymbol{\eta}^\theta}{\operatorname{argmin}} \left[\sum_{m=1}^M \left\{ \frac{1}{2} (\boldsymbol{\eta}_m^\theta)^T \left(I_\theta^{(k)} \hat{\boldsymbol{\Gamma}}_m I_\theta^{(k)} \right) \boldsymbol{\eta}_m^\theta - \left(I_\theta^{(k)} \hat{\boldsymbol{\gamma}}_m \right)^T \boldsymbol{\eta}_m^\theta \right\} + \|\boldsymbol{\eta}^\theta\|_1 \right]$$

where $I_\theta^{(k)} = \operatorname{diag}\{\theta_1^{(k)}, \dots, \theta_p^{(k)}\}$. Then update $\boldsymbol{\eta}$ with $\eta_{mj}^{(k)} = \theta_j^{(k)} \hat{\eta}_{mj}^\theta$, $m = 1, \dots, M$, $j = 1, \dots, p$ and project it onto an L_1 ball with radius R^2 .

4. Repeat step 2 through 3 until convergence.
-

4 Simulations

In this section we conduct extensive simulations involving three data sources ($M = 3$) with 2D images of size 64×64 that mimics the 2D brain slices and evaluate the performance of the proposed approach with respect to competing methods. The functional image predictors are generated by first generating wavelet coefficients independently from normal distribution with mean 0 and variance 1, and followed by an inverse wavelet transform implemented via the R package `wavethresh` (Nason, 2008). We choose the Daubechies Least Asymmetric wavelet with 4 vanishing moments and $j_0 = 3$ as the wavelet basis function in both data generation and model fitting under all wavelet-based approaches. We generated three types of true 2D functional regression coefficients with different shapes including round, square and triangle, and varying degrees of overlap in the regions with non-zero signals between the three images across the data sources as shown in Figure 1. The scalar outcome variable is then generated under a scalar-on-image regression model based on the true image without noise. The ratio of the mean function variance and residual term variance is set to be 9. For model fitting, we use a working image that is obtained by corrupting the true image with




Figure 1: Three Types of True Signals for Simulations. The signals across the three data sources are placed in partially overlapping regions with the size of the signals varying across data sources.

additive noise, and explore the performance for both known and unknown error covariances.

We simulate data with training and test sample sizes as 200 for each of the three groups.

Competing Methods and Evaluation Metrics: We compare the performance of the proposed approaches to several competing methods that (i) fit the model separately for each data source without accounting for noise in images, including the WNET method (Reiss et al., 2015) which first performs wavelet transform and then applies elastic net penalty regression, and the WPCR method (Reiss et al., 2015) which first performs wavelet transform then applies principal component regression; (ii) fit the model separately to each data source with noise correction, as in the method in Loh and Wainwright (2012) that uses a similar projected gradient descent algorithm as in (6), but with L_1 penalty on the wavelet coefficients that is not equipped for multi-task learning ('p_lasso'); and (iii) multi-task learning approaches involving group lasso and group bridge penalties, but without noise correction as in (4). The WNET and WPCR methods are implemented in R package `refund.wave` (Reiss et al., 2015). We utilize the R package `grpreg` (Breheny and Huang, 2015) for implementing the group lasso without noise correction, while we use a hierarchical representation to implement the group bridge without measurement error. In addition, we implemented the noise corrected 'p_lasso' approach, the proposed projected group lasso ('p_glasso') and the projected group bridge ('p_gbridge') methods. We evaluate the performance of different methods using out-of-sample prediction in a testing sample measured via the prediction mean squared error (PMSE), as well as the accuracy in recovering the functional regression

coefficient in terms of bias and area under the curve (AUC) that measures the ability to distinguish non-zero and zero signals (results in Table 1). The PMSE is calculated for the test set and standardized by the variance of the training set. Table 1 presents replicate-averaged PMSE, AUC and bias.

4.1. Scenario with Known Noise Covariance The true images are generated independently for each of the data sources, and additive noise is introduced to the true image to obtain the working image used for model fitting. The noise is generated by first generating wavelet coefficients independently from normal distribution with mean 0 and variance at $1/4$ (SNR=4) or $1/3$ (SNR= 3), and then followed by an inverse wavelet transform. Results are also reported for an ideal case where the true image is used to fit the data. We report results averaged over 100 replicates for each setting.

Results: For the scenarios where the true images are observed, the group bridge method without noise correction shows the best predictive performance. However, the group lasso approach without noise correction, as well as the projected group lasso methods with noise correction have comparable performance with respect to the group bridge method, in terms of coefficient estimation (bias and AUC) that is superior to remaining methods. While it is expected that methods without noise correction will have improved predictive performance when in fact the true image is observed, it is impressive to see that the projected group lasso approach with noise correction performs equally well in terms of signal recovery under these settings, although it can't guarantee accurate prediction due to the assumption of noise in the images when there is in fact none. For settings of greater interest involving noisy images used for model fitting, the projected group lasso approach has (by far) the best performance in terms of out of sample prediction, bias and AUC, which are almost always significantly improved compared to competing methods. While the empirical performance of the projected group lasso approach in terms of coefficient estimation is supported by our theoretical results, the superior predictive performance under the projected group lasso

approach in the presence of noisy images further highlights the utility of this method. In contrast, the signal recovery accuracy under the projected group bridge is variable and the prediction performance is not always ideal, which is likely due to the lack of theoretical guarantees under the projected gradient descent algorithm that used to compute parameter estimates corresponding to the group bridge penalty.

4.2. Scenario with Unknown Noise Covariance

In this scenario, we assume Σ_u is unknown and needs to be estimated from an external validation sample that is available in addition to the training and testing sets. As with the analysis for ADNI data, we assume that the error covariance for the noise in the images computed using the validation sample is also valid for the training and the test sets. This set-up is designed to mimic the scenario for ADNI data analysis (see Section 5 for more details), and does not use the validation data to inform any other aspect of the modeling or prediction conducted on the training and test data sets beyond computing the error covariance. Unlike the set-up with known noise-covariance, the images for each sample were linked across the three data sources by first generating a true image independently for each sample, and then corrupting these images with additive noise across the three data sources. This scenario leads to common patterns in images across the three data sources that are distorted by noise, and enables one to empirically estimate the noise covariance. We generate the data with varying signal-to-noise ratios (6, 4, or 3) and for 100 replicates for each simulation set-up.

Results: The projected group lasso method consistently has the best prediction performance across all signal shapes and signal-to-noise ratios that is significantly improved compared to the other approaches. In terms of coefficient estimation, both the projected group bridge as well as the projected group lasso methods consistently have significantly improved performance in terms of bias and AUC compared to the other methods. Compared to the case with known noise covariance, the relative performance (bias and AUC) under the

projected group lasso method slightly deteriorates in the case of unknown noise covariance and becomes more at par with the projected group bridge in terms of signal recovery. However in our experience, the performance of the projected group bridge was occasionally sensitive to the starting values, whereas the projected group lasso method produces more stable results that is consistent with the theoretical guarantees under Theorem 3.3.

Summary of Results: The results clearly illustrate the benefits of multi-task learning in scalar-on-image regression, given that the performance those approaches that fit the model separately for each data source are often inferior, even when they account for the presence of noise. In addition, multi-task learning without noise correction results in sub-optimal performance in the presence of noisy images, compared to projected group lasso and group bridge approaches. In our experience, the performance of the projected methods with noise correction is expected to be good as long as the estimated noise covariance is not grossly mis-specified. In practical applications with unknown Σ_u , the proposed approach is best suited in settings where external validation datasets are available for estimating the noise covariance. For our simulations, the proposed methods with noise correction often converge within three minutes on a machine with 1.90GHz Intel i7 processor and 16GB RAM.

5 Analysis of ADNI Data

Established in 2004 in response to a need for improved biomarkers in clinical trials of Alzheimer’s disease (AD) therapies, the Alzheimer’s Disease Neuroimaging Initiative (ADNI) longitudinal study is designed to develop and validate neuroimaging, clinical and genetic biomarkers that provide greater statistical power than clinical or cognitive measures alone, with a goal for early diagnosis and intervention, among others (Weiner and Veitch, 2015). The primary goal of the ADNI analysis in this article is to discover neuroimaging biomarkers in the form of localized activated brain regions that are related to longitudinal changes in

cognition for AD individuals, using magnetic resonance imaging (MRI) scans that measure the brain structure and brain volumes at the voxel level with dimensions $256 \times 256 \times 170$. Data Pre-processing: Our analysis used 1.5T T1-weighted MRI volumetric scans from ADNI-1, created by the ADNI MRI Core. The downloaded data included MRI scans acquired from 192 healthy controls (NC), and 133 Alzheimer’s disease (AD) individuals from screening visit (baseline), month 6 visit and month 12 visit, in addition to other information such as age, gender, and APOE status, which were also included in our analysis. We pre-processed the MRI scans using the registration pipeline of the Advanced Normalization Tools (ANTs) (Avants et al., 2011) and the images were standardized into the space of an ADNI-specific template (Tustison et al., 2019) that addresses the intra-subject longitudinal variations in the MRI scans.

Analysis Outline: The outcome used for our analysis is the Mini-Mental State Exam (MMSE) score that measures cognitive abilities. We conducted our analysis separately for 9 two-dimensional axial slices each of size 128×128 , which covers the hippocampus and amygdala and is our targeted area of interest. Our goal is to study how the relationship between MMSE and brain activations at the voxel level change across time, by jointly analyzing the imaging data across the three longitudinal visits. Due to the fact that age, gender and APOE status did not produce significant associations with the outcome after accounting for the variability due to the brain image, and in order to boost the power to detect important activations, we chose not to adjust for these additional variables in our final scalar-on-image regression model as in Wang et al. (2014). The goals of our analysis are to identify activated brain regions associated with MMSE, and evaluate the out of sample prediction in the presence of noisy MRI scans under the proposed approaches and the same set of competing approaches as in the simulation studies.

For our analysis, we focus our modeling efforts on 133 individuals with AD who have data at baseline, 6 months and 12 months. In addition, we used MRI scans from 192

healthy NC individuals over three longitudinal visits to obtain an estimate for the noise covariance matrix, which was subsequently used for the analysis of the AD cohort. In particular, we use the expression $\hat{\Sigma}_u = (1/n^*) \sum_{i=1}^{n^*} \sum_{m=1}^M (\mathbf{z}_{mi}^* - \bar{\mathbf{z}}_i^*)(\mathbf{z}_{mi}^* - \bar{\mathbf{z}}_i^*)^T / (M - 1)$, where $\bar{\mathbf{z}}_i^* = \sum_{m=1}^M \mathbf{z}_{mi}^* / M$ and \mathbf{z}_{mi}^* denotes the vectorized observation for individual i ($i = 1, \dots, n^*$) in the healthy control group at visit m . The extrapolation of the noise covariance from the NC cohort to the AD cohort is valid under the assumption that the noise in the MRI scans is related to scanner properties and does not depend on the disease status or other individual-specific characteristics. We note that the data on the NC individuals was not used to inform the analysis under other competing approaches, since the model parameters under these methods are specific to the analysis of AD individuals and can not be generalized to other cohorts. For model fitting and out of sample prediction under all the methods, we randomly split the 133 AD individuals into training and test groups (50-50), and consider multiple (25) such splits. The significant voxel-level activations were inferred via a two-sided t-test ($\alpha = 0.05$) with Bon-feronni corrections using the estimated signals over the 25 splits. In order to eliminate clinically weak signals from the activation map, all signals with absolute values less than 10^{-3} were thresholded to zero before conducting the t-test.

Results: Table 2 reports the out of sample prediction results, and the activation maps (along with the direction of association) corresponding to the significant voxels are plotted in Figure 2 for the projected L_1 penalty, the projected group lasso, and the group lasso without noise correction. The right half of Table 2 also reports the number of significant voxels across different methods. From the results, it is clear that while the proposed methods are able to detect significantly activated voxels in biologically interpretable regions (see below), all other competing methods (except the WPCR method) fail to report significant activations after multiplicity corrections that is potentially due to the *attenuation to the null phenomenon* in the presence of noisy images. Our conjecture is that multi-task

learning methods without noise correction lose their ability to detect common activation patterns across longitudinal visits due to non-negligible noise-to-signal ratio that is prevalent in medical imaging studies. Further although the WPCR method shows limited activation, it has the poor prediction performance and the activated regions in earlier visits are not always significant at later visits that seems implausible. In fact, all other methods except the projected group lasso and the group lasso without noise correction have inferior predictive performance, which highlights the advantages of pooling information across longitudinal images under group lasso. In addition, the projected group lasso approach has significantly improved prediction performance compared to the group lasso without noise correction for the vast majority of the slices, and comparable predictive performance in other slices. Lastly, the prediction performance for the group bridge appears inferior compared to projected group lasso, which is potentially due to the lack of guarantees of the estimated coefficients under the projected gradient descent algorithm for the group bridge penalty.

The longitudinal activation maps in Figure 2 illustrate the increase in the number of activated voxels over time under the projected group lasso approach, where the large majority of the activations are positive. It is seen that the direction of association for each voxel over time largely remains constant, and that the activations in the right hemisphere are largely positive (except the right fusiform gyrus and right temporal pole), whereas the left hemisphere contains a mix of positive and negative activations. Interestingly, the activations in both hemispheres corresponding to the hippocampus, amygdala, and parahippocampal gyrus are positive, which along with the loss of volumes in these brain regions, imply a decrease in cognition (MMSE) corresponding to degeneration in these regions that is consistent with evidence in literature (Zanchi et al., 2017; Poulin et al., 2011). In addition, the fusiform gyrus in both hemispheres show negative activations that supports prior evidence linking this region to visual cognition deficits and work memory

tasks in AD (Yetkin et al., 2006). In addition, the activated regions towards the periphery of the brain correspond to the Middle and Inferior temporal gyrus along with the Occipital cortex regions, both of which show a mix of positive and negative activations.

| Methods | Prediction PMSE | | | | | | | | | Number of significantly activated voxels | | | | | | | | | |
|-----------|-----------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--|------|------|------|------|------|------|------|------|-------|
| | s131 | s130 | s129 | s128 | s127 | s126 | s125 | s124 | s123 | s131 | s130 | s129 | s128 | s127 | s126 | s125 | s124 | s123 | total |
| Baseline | WNET | 1.00 | 1.01 | 0.97 | 1.00 | 1.00 | 1.00 | 1.03 | 1.00 | 1.03 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 7 | 7 |
| | WPCR | 1.03 | 1.33 | 1.07 | 1.12 | 1.17 | 1.20 | 1.19 | 1.22 | 1.17 | 19 | 0 | 0 | 0 | 0 | 0 | 56 | 458 | 533 |
| | p_lasso | 0.98 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 46 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 46 |
| | glasso | 0.97 | 0.93 | 0.96 | 0.91 | 0.97 | 0.95 | 0.98 | 0.98 | 0.99 | 16 | 0 | 0 | 25 | 0 | 0 | 0 | 0 | 41 |
| | gbridge | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | p_glasso | 0.92 | 0.86 | 0.89 | 0.90 | 0.94 | 0.97 | 0.99 | 0.96 | 0.97 | 563 | 550 | 455 | 740 | 733 | 631 | 811 | 516 | 1212 |
| | p_gbridge | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.99 | 1.00 | 1.00 | 1.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Month 6 | WNET | 1.00 | 1.00 | 1.00 | 0.94 | 0.98 | 1.00 | 1.01 | 0.99 | 1.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 68 |
| WPCR | | 1.35 | 1.09 | 1.22 | 1.50 | 1.42 | 1.43 | 1.42 | 1.51 | 1.48 | 318 | 432 | 149 | 308 | 282 | 531 | 472 | 348 | 3184 |
| p_lasso | | 1.00 | 1.00 | 1.00 | 0.98 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| glasso | | 0.98 | 1.00 | 0.97 | 0.94 | 0.95 | 0.94 | 0.97 | 0.93 | 0.95 | 8 | 0 | 0 | 12 | 0 | 0 | 0 | 0 | 20 |
| gbridge | | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| p_glasso | | 0.89 | 0.97 | 0.97 | 0.94 | 0.90 | 0.92 | 0.95 | 0.91 | 1.00 | 1257 | 1124 | 592 | 1169 | 1322 | 1049 | 1837 | 1279 | 2212 |
| p_gbridge | | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.99 | 1.00 | 1.00 | 1.00 | 0 | 0 | 0 | 0 | 0 | 486 | 0 | 0 | 486 |
| Month 12 | | WNET | 1.01 | 1.00 | 0.95 | 0.95 | 0.99 | 1.00 | 1.00 | 1.00 | 0.98 | 0 | 0 | 0 | 3 | 0 | 0 | 0 | 81 |
| | WPCR | 1.22 | 1.69 | 1.02 | 1.70 | 1.45 | 1.33 | 1.07 | 1.09 | 1.07 | 1231 | 874 | 176 | 509 | 799 | 569 | 700 | 568 | 6121 |
| | p_lasso | 1.00 | 1.00 | 0.93 | 1.00 | 1.00 | 0.99 | 1.00 | 0.98 | 1.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 11 | 11 |
| | glasso | 1.00 | 1.00 | 0.97 | 0.94 | 1.00 | 0.99 | 0.99 | 0.99 | 0.95 | 2 | 0 | 0 | 17 | 0 | 0 | 0 | 0 | 19 |
| | gbridge | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | p_glasso | 0.96 | 0.92 | 0.89 | 0.87 | 0.91 | 0.97 | 0.98 | 0.90 | 0.88 | 1370 | 1329 | 976 | 1646 | 1718 | 702 | 2024 | 1915 | 2617 |
| | p_gbridge | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.99 | 1.00 | 1.00 | 1.00 | 0 | 0 | 0 | 0 | 0 | 896 | 0 | 0 | 896 |

Table 2: Left half of the Table shows the prediction MSE for ADNI data analysis, whereas the right half shows the number of significantly activated voxels, for each of the 9 axial slices. The bolded numbers imply significantly improved PMSE compared to other methods.

6 Discussion

In this paper, we have proposed a novel approach for joint estimation of multiple scalar-on-image regression models involving noisy high-dimensional images. Although there is a rich literature on functional data analysis, the development for scalar-on-image regression methods is fairly recent, and existing methods in literature haven't addressed the question of mis-specification resulting from noisy images. Hence, the proposed methods are one of the first to address these issues via a novel M-estimation approach involving convex and non-convex group penalties that account for functional data mis-specifications. The implementation of the proposed methods are done via computationally efficient algorithms that are slightly slower than existing functional linear models that don't account for mea-

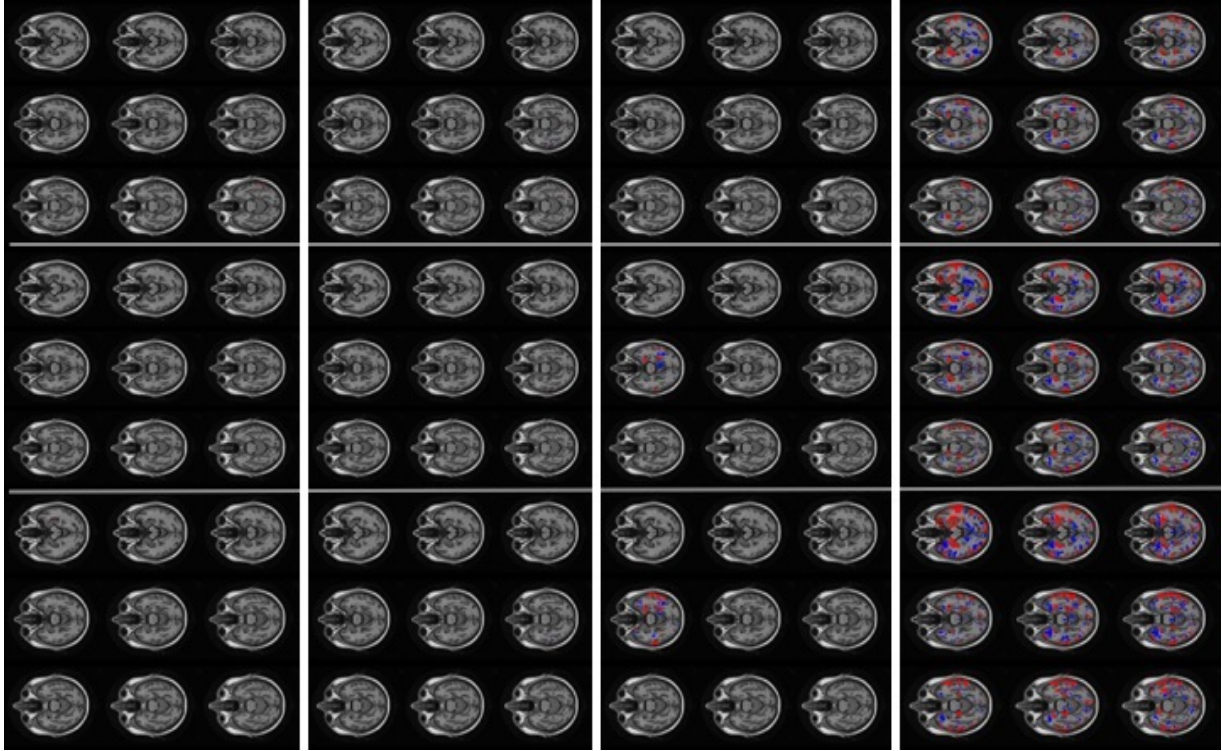


Figure 2: Each sub-panel corresponds to activation maps of the 9 axial slices. Columns 1-4 correspond to the activation maps under the Projected Lasso, Group Lasso, Projected group bridge and Projected Group Lasso methods respectively. The top, middle, and bottom rows correspond to activation maps corresponding to baseline, month 6 and month 12 respectively.

surement error, but is still scalable to high-dimensional brain images. The success of the proposed approaches depend on the accuracy of the noise covariance matrix, which can be computed empirically from replicated data as in our ADNI analysis. While the focus of this paper is on grouped penalties for multi-task learning involving scalar continuous outcomes, the proposed approaches and theoretical results can also be extended to L_1 penalties and to generalized linear models. Developing such models will be the emphasis of future work.

Acknowledgement

This work was partially supported by NIMH award R01MH120299 and NIA award R01 AG071174. The ADNI study was funded by award numbers U01 AG024904 from NIH and W81XWH-12-2-0012 from DOD. The authors would like to thank Nick Tustison for

providing the ADNI-specific template used in image registration.

Supplementary Materials

Supplementary Materials contain proofs of theorems, additional results from simulations and ADNI analysis, and additional computational details.

References

- Agarwal, A., Negahban, S., and Wainwright, M. J. (2012). Fast global convergence of gradient methods for high-dimensional statistical recovery. *Ann. Statist.*, 40(5):2452–2482.
- Avants, B. B., Tustison, N. J., Song, G., et al. (2011). A reproducible evaluation of ants similarity metric performance in brain image registration. *Neuroimage*, 54(3):2033–2044.
- Brakenhoff, T. B., Mitroiu, M., Keogh, R. H., et al. (2018). Measurement error is often neglected in medical literature: a systematic review. *J. Clin. Epidemiol.*, 98:89–97.
- Breheny, P. and Huang, J. (2015). Group descent algorithms for nonconvex penalized linear and logistic regression models with grouped predictors. *Stat. Comput.*, 25:173–187.
- Carroll, R. and Stefanski, L. (1994). Measurement error, instrumental variables and corrections for attenuation with applications to meta-analyses. *Stat. Med.*, 13(12):1265–1282.
- Cook, J. R. and Stefanski, L. A. (1994). Simulation-extrapolation estimation in parametric measurement error models. *J Am Stat Assoc*, 89(428):1314–1328.
- Crambes, C., Kneip, A., Sarda, P., et al. (2009). Smoothing splines estimators for functional linear regression. *Ann. Stat.*, 37(1):35–72.
- Duchi, J., Shalev-Shwartz, S., et al. (2008). Efficient projections onto the l_1 -ball for learning in high dimensions. In *Proc. 25th Int. Conf. on ML*, pages 272–279.

- Fan, J. and Lv, J. (2011). Nonconcave penalized likelihood with np-dimensionality. IEEE Trans. Inf. Theory, 57(8):5467–5484.
- Feng, L., Bi, X., and Zhang, H. (2020). Brain regions identified as being associated with verbal reasoning through the use of imaging regression via internal variation. JASA, (just-accepted).
- Feng, X., Li, T., Song, X., and Zhu, H. (2019). Bayesian scalar on image regression with nonignorable nonresponse. J Am Stat Assoc, pages 1–24.
- Goldsmith, J., Wand, M. P., and Crainiceanu, C. M. (2011). Functional regression via variational bayes. Electron. J. Statist., 5:572–602.
- Huang, J., Ma, S., Xie, H., and Zhang, C.-H. (2009). A group bridge approach for variable selection. Biometrika, 96(2):339–355.
- James, G. M. (2002). Generalized linear models with functional predictors. J. R. Stat. Soc. Ser. B Methodol., 64(3):411–432.
- Kundu, S., Lukemire, J., Wang, Y., and Guo, Y. (2019). A novel joint brain network analysis using longitudinal alzheimer’s disease data. Sci. Rep., 9(1):1–18.
- Lahat, D., Adali, T., and Jutten, C. (2015). Multimodal data fusion: an overview of methods, challenges, and prospects. Proc. IEEE, 103(9):1449–1477.
- Lazar, N. (2008). The statistical analysis of functional MRI data. Springer.
- Li, Q., Wang, S., Huang, C.-C., Yu, M., and Shao, J. (2014). Meta-analysis based variable selection for gene expression data. Biometrics, 70(4):872–880.
- Loh, P.-L. and Wainwright, M. J. (2012). High-dimensional regression with noisy and missing data: Provable guarantees with nonconvexity. Ann. Statist., 40(3):1637–1664.

- Lounici, K., Pontil, M., Van De Geer, S., Tsybakov, A. B., et al. (2011). Oracle inequalities and optimal inference under group sparsity. Ann. Stat., 39(4):2164–2204.
- Lv, J., Fan, Y., et al. (2009). A unified approach to model selection and sparse recovery using regularized least squares. Ann. Stat., 37(6A):3498–3528.
- Morris, J. S. (2015). Functional regression. Annu Rev Stat Appl., 2:321–359.
- Nardi, Y., Rinaldo, A., et al. (2008). On the asymptotic properties of the group lasso estimator for linear models. Electron. J. Stat., 2:605–633.
- Nason, G. (2008). Wavelet methods in statistics with R. Springer Science & Business Media.
- Negahban, S. N., Ravikumar, P., et al. (2012). A unified framework for high-dimensional analysis of m -estimators with decomposable regularizers. Stat. Sci., 27(4):538–557.
- Poulin, S. P., Dautoff, R., Morris, J. C., et al. (2011). Amygdala atrophy is prominent in early alzheimer’s disease and relates to symptom severity. Psy. Res. Neuroimag., 194(1):7–13.
- Ramsay, J. O. and Dalzell, C. (1991). Some tools for functional data analysis. J. R. Stat. Soc. Ser. B Methodol., 53(3):539–561.
- Ramsay, J. O. and Silverman, B. W. (2005). Functional Data Analysis. Springer, New York.
- Reiss, P. T., Huo, L., Zhao, Y., Kelly, C., and Ogden, R. T. (2015). Wavelet-domain regression and predictive inference in psychiatric neuroimaging. Ann Appl Stat, 9(2):1076.
- Sørensen, Ø., Frigessi, A., and Thoresen, M. (2015). Measurement error in lasso: Impact and likelihood bias correction. Stat. Sin., pages 809–829.

- Sra, S. (2011). Fast projections onto l_1, q -norm balls for grouped feature selection. In Joint Eur Confer on Mach Learn and Knowl Discovery in Databases, pages 305–317. Springer.
- Tustison, N. J., Holbrook, A. J., Avants, B. B., et al. (2019). Longitudinal mapping of cortical thickness measurements: An alzheimer’s disease neuroimaging initiative-based evaluation study. J. Alzheimer’s Dis., 71(1):165–183.
- Vaishali, S., Rao, K., and Rao, G. S. (2015). A review on noise reduction methods for brain mri images. In 2015 Int Conf on Signal Proc and Comm Eng Sys, pages 363–365. IEEE.
- Van De Geer, S. A., Bühlmann, P., et al. (2009). On the conditions used to prove oracle results for the lasso. Electron. J. Stat., 3:1360–1392.
- Walker, J. S. (2008). A primer on wavelets and their scientific applications. CRC press.
- Wang, X., Nan, B., Zhu, J., and Koeppe, R. (2014). Regularized 3d functional regression for brain image data via haar wavelets. Ann Appl Stat, 8(2):1045.
- Wang, X., Zhu, H., and Initiative, A. D. N. (2017). Generalized scalar-on-image regression models via total variation. J Am Stat Assoc, 112(519):1156–1168.
- Weiner, M. W. and Veitch, D. P. (2015). Introduction to special issue: overview of alzheimer’s disease neuroimaging initiative. Alzheimers. Dement., 11(7):730–733.
- Yetkin, F. Z., Rosenberg, R. N., et al. (2006). Fmri of working memory in patients with mild cognitive impairment and probable alzheimer’s disease. Eur. Rad., pages 193–206.
- Zanchi, D., Giannakopoulos, P., Borgwardt, S., et al. (2017). Hippocampal and amygdala gray matter loss in elderly controls with subtle cognitive decline. Front. Aging Neurosci., 9:50.
- Zhang, Y. and Yang, Q. (2018). An overview of multi-task learning. N. Sci. Rev, 5(1):30–43.

Zhao, P. and Yu, B. (2006). On model selection consistency of lasso. J. Mach. Learn. Res., 7(Nov):2541–2563.

Zhou, H., Li, L., and Zhu, H. (2013). Tensor regression with applications in neuroimaging data analysis. J Am Stat Assoc, 108(502):540–552.

Zipunnikov, V., Caffo, B., Yousem, D. M., Davatzikos, C., Schwartz, B. S., and Crainiceanu, C. (2011). Functional principal component model for high-dimensional brain imaging. NeuroImage, 58(3):772–784.