

Continuous Uniformization of Rational Relations and Synthesis of Computable Functions

Emmanuel Filiot Sarah Winter

Université libre de Bruxelles, Belgium

A uniformizer of a binary relation is a function whose graph is contained in the relation and which is defined on the same domain as the relation. It is known that any rational relation of infinite words, i.e. a relation given as a transducer, admits a rational uniformizer. Although rational, those uniformizers are not necessarily well-behaved, in the sense that the i th letter of the output word may depend on the whole infinite input word. In other words, those uniformizers might not be continuous (for the Cantor topology). This paper addresses the question of whether rational relations of infinite words can be uniformized by continuous functions. On the negative side, continuous uniformizers might not exist in general and we prove that deciding their existence is algorithmically impossible. On the positive side, we exhibit a large class of rational relations of infinite words, called weakly deterministic rational relations, for which deciding whether a relation in this class admits a continuous uniformizer is an EXPTIME-C problem. This class includes the known classes of deterministic rational relations and automatic relations of infinite words.

As an application of the previous result, and by exploiting a connection between computability and continuity for rational functions of infinite words, we show a result on the synthesis of computable functions from specifications given as weakly deterministic rational relations. In particular, we show that deciding the existence of a computable uniformizer is EXPTIME-C and if there is one, it is possible to effectively synthesize a deterministic two-way transducer computing it. This generalizes the classical setting of Church synthesis to asynchronous implementations which can arbitrarily delay the production of their output signals.

1. Introduction

Uniformization. Let $R \subseteq A \times B$ be a binary relation, and denote by $\text{dom}(R)$ its domain (all elements of A which have at least one image by R). A (partial) function $f : A \rightarrow B$ is a uniformizer of R if $\text{dom}(f) = \text{dom}(R)$ and for all $a \in \text{dom}(f)$, $(a, f(a)) \in R$. Assuming the axiom of choice, any relation is uniformizable, i.e., admits a uniformizer. Assuming the existence of a uniformizer for any binary relation is actually equivalent to the axiom of choice, a uniformizer being seen as a choice function. The notion of uniformization originates from set theory and research in mathematics have studied the existence of “simple” choice functions for particular classes of relations. In computer science, the notion of uniformization has originally been studied for binary relations of words, called rational relations, which are recognized by automata over the product of two free monoids on finite alphabets (aka

transducers). Kobayashi has shown in [69] that any rational relation of finite words admits a rational uniformizer [27]. This result was later extended to rational relations of infinite words [10]. The class of rational relations \mathcal{R} (of finite or infinite words) is said to have the *uniformization property*: uniformizers exist within the class \mathcal{R} . A more general notion is when the class \mathcal{U} of uniformizers is also a parameter. In general, some relations of \mathcal{R} may admit uniformizers in \mathcal{U} , some may not. This yields to a decision problem called the $(\mathcal{R}, \mathcal{U})$ -uniformization problem: given a (finitely represented) relation $R \in \mathcal{R}$, does there exist a uniformizer of R in \mathcal{U} ? There is an extensive literature on the uniformization property and the uniformization problem in automata theory. Just to cite a few, some strong connection between the expressive power of a class of a relation and the uniformization property has been shown in [29], the uniformization property is known to hold for relations defined by nested word automata [9], for relations of finite words defined by two-way transducers [16, 14], by two-way pebble transducers [18], or by logical formulas [13], for tree automatic relations [17, 7], or for particular graph relations defined by MSO-transducers [12]. The uniformization problem has been studied, for instance, for rational relations and sequential uniformizers in [7, 22], for tree relations in [30], and recently for bi-infinite word relations [20]. See also [7] for a survey.

Continuous uniformization problem. As said before, the class of rational relations of infinite words satisfies the uniformization property. The uniformizers of a rational relation, even though they are rational, may need infinite look-aheads, in the sense that given such a uniformizer f and an input word u , the i th letter of $f(u)$ may depend on infinitely many letters of u rather than a finite prefix of it. In other words, f is not continuous for the Cantor distance¹, which ensures that any finite output prefix only depends on a finite input prefix.

Example 1. Let us take some example. Over the alphabet $\Sigma = \{a, b\}$, let X_a be the set of words with finitely many occurrences of a and consider the relation $R_0 = \{(u, v) \mid u \notin X_a, v \in \Sigma^\omega \setminus \{u\}\} \cup \{(u, u) \mid u \in X_a\}$. The relation R_0 is rational, i.e., can be defined by a transducer with a parity condition. Let f be a uniformizer of R_0 . Then, $f|_{X_a}$ is necessarily the identity function on X_a . Consider the family of words of the form $a^n b^\omega$. We have $f(a^n b^\omega) = a^n b^\omega$ because $a^n b^\omega$ contains finitely many a . However, $\lim_{n \rightarrow \infty} f(a^n b^\omega) = \lim_{n \rightarrow \infty} a^n b^\omega = a^\omega \neq f(a^\omega) = f(\lim_{n \rightarrow \infty} a^n b^\omega)$. Hence f is not continuous. Let us now consider the relation R_1 over $\Sigma = \{a, b, A, B\}$ defined as $R_1 = \{(ux\alpha, xu\beta) \mid u\alpha, \beta \in \{a, b\}^\omega, x \in \{A, B\}\}$. The relation R_1 is rational (a transducer non-deterministically guesses x and then process its input accordingly). It admits (amongst others) a uniformizer g mapping any word $ux\alpha$ to $xu\alpha$, which is continuous: the i th output symbol of $g(ux\alpha)$ only depends on the $\max(|u|+1, i)$ first symbols of $ux\alpha$. It is also rational as g can be implemented by a transducer.

In this paper, we study the problem of deciding whether a given rational relation of infinite words can be uniformized by a continuous function. We call it the continuous uniformization problem (for rational relations). While the class of continuous functions is a natural and well-behaved mathematical class of functions, this class has never been considered in the literature on uniformization, to the best of our knowledge. The notion of continuous uniformization was evoked by Thomas in 2009 [35] for its connection with Church synthesis, a connection we make explicit in this paper (later). The problem of deciding whether a given rational function is continuous (hence a particular instance of the continuous uniformization problem) was nevertheless shown to be decidable in PTIME by Prieur [31], a decidability result recently extended to functions definable by non-deterministic two-way transducers [15]. Contrasting those positive results, we prove that the continuous uniformization problem is

¹The Cantor distance between two words u and v is 0 if $u = v$ and otherwise $2^{-\ell}$ where ℓ is the length of their longest common prefix.

unfortunately undecidable for rational *relations*. Our first main contribution is to show decidability of this problem for a large class of rational relations, namely a class that we call weakly deterministic rational relations (wDRAT). This class strictly subsumes the known class of deterministic rational relations [33], which in turn strictly subsumes the class of automatic relations (known in automatic reactive synthesis). Automatic relations are those recognized by two-tape parity automata with synchronized reading heads (or equivalently by finite transducers producing a single output symbol when reading a single input symbol).

Theorem 2. *The problem of deciding whether a weakly deterministic rational relation of infinite words is uniformizable by a continuous function is EXPTIME-C.*

Uniformization and synthesis. As noted by Thomas in [35], the $(\mathcal{R}, \mathcal{U})$ -uniformization problem is strongly related to synthesis problems. Indeed, a binary relation can be seen as a specification relating inputs to possibly many *correct* outputs, and the uniformizer as an implementation of the specification, as long as the class \mathcal{U} corresponds to functions which can be computed in some way. As a celebrated instance, Church synthesis from ω -regular specifications, shown to be decidable by Büchi and Landweber [6], can be formulated as an $(\mathcal{R}, \mathcal{U})$ -uniformization problem, where \mathcal{R} is the class of automatic relations and \mathcal{U} the class of functions defined by Mealy machines. Seeing synthesis problems as uniformization problems offers an elegant and succinct way of formulating synthesis problems, as long as some effectivity is required. Indeed an inherent goal of synthesis is to be able to effectively construct a machine realizing the specification, and moreover, it should be possible to actually execute this machine to produce the output of any given input. Church synthesis (from ω -regular specifications) asks for realizability by a strategy, which is a semantical notion. However, it is known that when a strategy exists, there exists also some strategy representable by a Mealy machine, which can be constructed. Mealy machines are very simple finite state devices (w/o accepting states) which can be used to compute given an input sequence, an output sequence, bit by bit and in a synchronized manner. Hence, Church synthesis can be thought of as an effective, constructive instance of a uniformization problem.

Synthesis of computable functions. While Church reactive synthesis asks to synthesize Mealy machines, in this paper and in the context of more general uniformization problems, we rather want to relax this requirement as much as possible while still keeping a form of effectiveness in uniformization. The weakest requirement is therefore to ask for the existence of *computable* uniformizers, computable in the sense of [36]: a partial function $f: \Sigma^\omega \rightarrow \Sigma^\omega$ is said to be computable, if there exists a deterministic (Turing) machine M with three tapes, a read-only one-way input tape, a two-way working tape, and a write-only one-way output tape that works as follows: if the input tape holds an input sequence $\alpha \in \text{dom}(f)$, then M outputs longer and longer prefixes of $f(\alpha)$ when reading longer and longer prefixes of α .

Example 3. Consider the relation R_1 of [Example 1](#). It is an automatic relation and can be therefore seen as a specification of Church synthesis. Classical reactive synthesis methods would simply conclude that there is no Mealy machine realizing this specification. Indeed the first letter of the output sequence (which has to be produced after reading the first letter of the input sequence) depends on an input letter that might appear much later in the input sequence. However, the uniformizer g of R_1 is computable. Given an input in the domain of R_1 , a Turing machine computing g simply waits (possibly an arbitrary amount of time) till it sees the special symbol $x \in \{A, B\}$ and then can start producing the output.

Therefore in this paper, we also consider the *effective uniformization problem*, which asks to decide given a rational relation whether it admits a computable uniformizer. Using a similar argument as for the continuous uniformization problem, we also show that this problem is undecidable. However, we show its decidability for the class wDRAT. In particular,

we show that the effective uniformization and continuous uniformization problems are interreducible for wDRAT relations. More precisely, we show that if there is a continuous uniformizer, there is one computable by a deterministic two-way transducer. Conversely, if there is a computable uniformizer, then there is also a continuous uniformizer, as any computable function is continuous, as noted in [15].

Theorem 4. *The problem of deciding whether a weakly deterministic rational relation of infinite words is uniformizable by a computable function is EXPTIME-C. If such a function exists, it is possible to effectively synthesize a deterministic two-way transducer computing it.*

Synthesis under assumptions. As we explained, uniformization problems can be seen as synthesis problems. However, there is a subtle but rather drastic difference with classical definitions of synthesis problems from the literature. Classically in synthesis, it is required that a controller produces for *every* input sequence an output sequence correct w.r.t. the specification. Consequently, specifications with partial domain are by default unrealizable. In the definition of uniformization problems, it is required that the uniformizer is defined only on the domain of the specification, and not the set of all words in general. Stated in terms of synthesis, this amounts to make the *assumption* that the controller is only fed input sequences from the domain. The assumption that an environment is somewhat regulated and can not generate all input sequences is reasonable in many synthesis settings. Church synthesis under assumption can be reduced to classical synthesis, by completing the domain of the specification in a regular way². Such a completion requires a potentially costly complement operation or is just incorrect for more expressive classes of specifications and functions. That is why work has been devoted on the topic of synthesis under assumptions on the behavior of the environment [8, 4, 28, 11, 5, 1]. In the context of continuous uniformization, there is an important difference between relations of *total* domain and relations of *partial* domain, as we explain in the related work section.

Related work. In [15], the continuous uniformization and effective uniformization problems are shown to be decidable in the particular case of *functional* relations, i.e., graphs of functions. The main contribution of [15] is to prove that checking whether a function represented by a non-deterministic two-way transducer is continuous is decidable, and that continuity and computability coincide for this large class of functions. This contribution is incomparable to ours, and the techniques of [15] are different, e.g. they do not rely on games unlike us.

Although it was stated in game-theoretic terms, Holtmann et al. [24, 26] proved the decidability of the continuous uniformization problem, for a strictly smaller class of relations than wDRAT, namely automatic relations of *total* domain. The latter assumption is in sharp contrast with our partial domain setting. Indeed, they obtain that if such a relation is uniformizable by a continuous function, then it is also uniformizable by a sequential function computable by a deterministic *one-way* transducer. For partial domains instead, deterministic two-way transducers are necessary. The specification R_1 of Example 1 is uniformizable by the function g which is computable by a deterministic two-way transducer which first moves right to determine the special symbol x and then goes back to the beginning of the word and start transforming its input. No sequential function can uniformize this relation. This implies that R_1 can not be completed to a total domain relation while preserving the existence of a continuous uniformizer, as sequential functions are closed under regular domain restriction.

In [24, 26], the continuous uniformization problem of total automatic relations is modeled as a 2-player delay game. We also rely on a similar game as it also uses an abstraction to

²Any ω -regular spec. S can be completed into $S \cup \overline{\text{dom}(S)} \times \Sigma^\omega$ while preserving Mealy realizability.

store the lookahead gained on Adam's moves by delaying Eve's moves. However, our game is built such that it accounts for the fact that unbounded delays can be necessary and it monitors the domain, which is not necessary in the total domain setting. Accordingly, the main differences between [26] and our delay games are their respective winning objectives and correctness proofs. Another difference is that our game applies to the general class of wDRAT relations, which are *asynchronous* (several symbols, or none, can correspond to a single input symbol) in contrast to automatic relations which are synchronous by definition.

2. Preliminaries

Words, languages, and relations. Let \mathbb{N} denote the set of non-negative integers. Let Σ and Γ denote *alphabets* of elements called *letters* or *symbols*. A *word* resp. ω -*word* over Σ is an empty or non-empty finite resp. infinite sequence of letters over Σ . The empty word is denoted by ε , the length of a word by $|\cdot|$. Usually, we denote finite words by u, v, w , etc., and infinite words by α, β, γ , etc. Given an (in)finite word $\alpha = a_0a_1\cdots$ over Σ with $a_0, a_1, \cdots \in \Sigma$, let $\alpha(i)$ denote the letter a_i , $\alpha(i:j)$ denote the infix $a_i a_{i+1} \cdots a_j$, $\alpha(:i)$ the prefix $a_0 a_1 \cdots a_i$, and $\alpha(i:)$ the suffix $a_i a_{i+1} \cdots$ for $i \leq j \in \mathbb{N}$. For two (in)finite words α, β , let $\alpha \wedge \beta$ denote their longest common prefix. Let Σ^* , Σ^+ , and Σ^ω denote the set of finite, non-empty finite, and infinite words over Σ , respectively. Let Σ^∞ denote $\Sigma^* \cup \Sigma^\omega$. A *language* resp. ω -*language* L is a subset of Σ^* resp. Σ^ω , its set of prefixes is denoted by $\text{Pref}(L)$. A (binary) *relation* resp. ω -*relation* R is a subset of $\Sigma^* \times \Gamma^*$ resp. $\Sigma^\omega \times \Gamma^\omega$. An ω -relation is just called a relation when infiniteness is clear from the context. The domain $\text{dom}(R)$ of a (ω)-relation R is the set $\{\alpha \mid \exists \beta (\alpha, \beta) \in R\}$. It is *total* if $\text{dom}(R) = \Sigma^*$. Likewise, we define $\text{img}(R)$ the image of R , as the domain of its inverse. *By default in this paper, relations and functions are partial, i.e., are not necessarily total.*

Games. A *game arena* is of the form $G = (V_0, V_1, v_0, A, E)$, where $V = V_0 \uplus V_1$ is a set of vertices, V_0 belongs to Eve and V_1 to Adam, v_0 is an initial vertex, A is a finite set of actions, and $E \subseteq V \times A \times V$ is a set of labeled edges such that $(v, a, v') \in E$ and $(v, a, v'') \in E$ implies that $v' = v''$ for all $v \in V$ and $a \in A$. We assume that the arena is deadlock-free. A *play* in G is an infinite sequence $v_0 a_0 v_1 a_1 \cdots$ such that $(v_i, a_i, v_{i+1}) \in E$ for all $i \in \mathbb{N}$. Note that a play is uniquely determined by its action sequence. A *game* is of the form $\mathcal{G} = (G, \text{Win})$, where G is a game arena and $\text{Win} \subseteq V^\omega$ is a winning condition. Eve wins a play $\alpha = v_0 a_0 v_1 a_1 \cdots$ if $v_0 v_1 \cdots \in \text{Win}$, otherwise Adam wins. For ease of presentation, we also write $\alpha \in \text{Win}$.

A *strategy* for Eve resp. Adam is a function $(VA)^*V_0 \rightarrow A$ resp. $(VA)^*V_1 \rightarrow A$ such that $\sigma(xv) = a$ with $x \in (VA)^*$, $v \in V$, and $a \in A$ implies that there is $v' \in V$ such that $(v, a, v') \in E$. A play $v_0 a_0 v_1 a_1 \cdots$ is consistent with a strategy σ for Eve resp. Adam if $\sigma(v_0 a_0 \cdots v_i) = a_i$ for all $i \in \mathbb{N}$ with $v_i \in V_0$ resp. $v_i \in V_1$. A strategy σ for Eve is a *winning strategy* if $\alpha \in \text{Win}$ for all plays α consistent with σ . A *strategy automaton* for Eve is a tuple $\mathcal{S} = (M, V, m_0, \delta, \mu)$, where M is a finite set of (memory) states, V is the alphabet, m_0 is an initial state, $\delta: M \times V \rightarrow M$ is the memory update function, and $\mu: M \times V_0 \rightarrow A$ is the next action function such that for all $v \in V_0$ and $m \in M$, there is $v' \in V$ with $(v, \mu(m, v), v') \in E$.

Automata. A *parity automaton* is a tuple $\mathcal{A} = (Q, \Sigma, q_0, \Delta, c)$, where Q is a finite set of states, Σ a finite alphabet, $q_0 \in Q$ an initial state, $\Delta \subseteq Q \times \Sigma \times Q$ a transition relation, and $c: Q \rightarrow \mathbb{N}$ is a function that maps states to *priorities*, also called *colors*. A parity automaton is *deterministic* if its transition relation Δ is given as a transition function δ . We denote by δ^* the usual extension of δ from letters to finite words. A *run of \mathcal{A} on a word $w \in \Sigma^\infty$* is a word $\rho \in Q^+$ such that $(\rho(i), w(i), \rho(i+1)) \in \Delta$ for all $0 \leq i \leq |w|$. A run on ε is a single state. We say that ρ begins in $\rho(0)$ and ends in $\rho(|w|)$ if w is

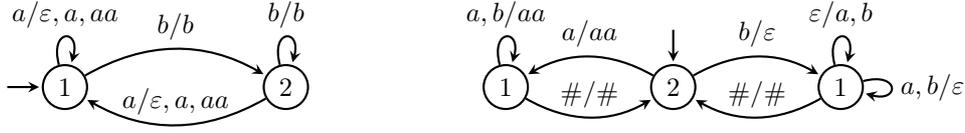


Figure 1.: Weakly deterministic transducers that recognize the relation R_2 (left) and R_3 (right) from [Example 5](#). The state labels denote the priorities (2 must be visited infinitely often).

finite. We define $\text{Occ}(\rho)$ as the set of states that occur in ρ , $\text{Inf}(\rho)$ as the set of states that occur infinitely often in ρ , and $c(\rho)$ as $c(\rho(0))c(\rho(1))\dots$. A run ρ is *accepting* if $\rho \in Q^\omega$, $\rho(0) = q_0$ and $\max \text{Inf}(c(\rho))$ is even. The language *recognized* by \mathcal{A} is the set $L(\mathcal{A}) = \{\alpha \in \Sigma^\omega \mid \text{there is an accepting run } \rho \text{ of } \mathcal{A} \text{ on } \alpha\}$. A language $L \subseteq \Sigma^\omega$ is called *regular* if L is recognizable by a parity automaton.

Transducers. A *transducer* is a tuple $\mathcal{T} = (Q, \Sigma, \Gamma, q_0, \Delta, c)$, where Q is finite state set, Σ and Γ are finite alphabets, $q_0 \in Q$ is an initial state, $\Delta \subseteq Q \times \Sigma^* \times \Gamma^* \times Q$ is a finite set of transitions, and $c: Q \rightarrow \mathbb{N}$ is a parity function. It is *sequential* if Δ is expressed as a function $Q \times \Sigma \rightarrow \Gamma^* \times Q$. A *finite non-empty run* ρ is a non-empty sequence of transitions of the form $(p_0, u_0, v_0, p_1)(p_1, u_1, v_1, p_2)\dots(p_{n-1}, u_{n-1}, v_{n-1}, p_n) \in \Delta^*$. The *input* (resp. *output*) of ρ is $\alpha = u_0 \dots u_{n-1}$ (resp. $\beta = v_0 \dots v_{n-1}$). As shorthand, we write $\mathcal{T}: p_0 \xrightarrow{\alpha/\beta} p_n$. An *empty run* is denoted as $\mathcal{T}: p \xrightarrow{\varepsilon/\varepsilon} p$ for all $p \in Q$. Similarly, we define an *infinite run*. A run is *accepting* if it is infinite, begins in the initial state and satisfies the parity condition. In this paper, we also assume that for any accepting run ρ , its input and output are both infinite. This can be syntactically ensured with the parity condition. The relation *recognized* by \mathcal{T} is $R(\mathcal{T}) = \{(\alpha, \beta) \mid \text{there is an accepting run of } \mathcal{T} \text{ with input } \alpha \text{ and output } \beta\}$. Note that with the former assumption, we have $R(\mathcal{T}) \subseteq \Sigma^\omega \times \Gamma^\omega$.

A relation is called *rational* if it is recognizable by a transducer, we denote by RAT the class of rational relations. We introduce a new transducer type. An *input state* is a state p from which there exists an outgoing transition (p, u, v, q) such that $u \neq \varepsilon$. A transducer \mathcal{T} is *weakly deterministic* if for all words $u \in \Sigma^*$, all $v_1, v_2 \in \Gamma^*$ such that v_1 is a prefix of v_2 , if $\mathcal{T}: p \xrightarrow{u/v_1} q$, $\mathcal{T}: p \xrightarrow{u/v_2} r$ and q, r are input states, then $q = r$. Relations recognized by such transducers are called *weakly deterministic rational*, forming the class denoted wDRAT.

Example 5. Let $R_2 \subseteq (\{a, b\}^\omega)^2$ the set of pairs $(a^{n_1}ba^{n_2}b\dots, a^{m_1}ba^{m_2}b\dots)$ such that there are infinitely many b and for all $i \geq 0$, $n_i \geq 0$ and $2n_i \geq m_i \geq 0$. So, any a occurrence is erased, copied or doubled. A weakly det. transducer recognizing R_2 is depicted on [Fig. 1](#).

Consider the relation $R_- = \{(a^n b^\omega, a^m b^\omega \mid n \geq 0, m \in \{n, 2n\})\}$. $R_- \notin \text{wDRAT}$, because informally, one needs two different states q and r on which there are loops a/a and a/aa respectively, since n can be arbitrarily large. Those two states are necessarily input states because from there, one should be able to read a b . It breaks the weak deterministic property because the outputs produced so far when looping on q and r respectively are prefix of each other. This argument can be generalized to any transducer recognizing R_- .

Over $\{a, b\}$, let R_f be the relation of finite words defined as the pairs (u, v) such that $v = a^{2|u|}$ if u starts with a , otherwise if u starts with b , v is arbitrary. This relation is iterated to define $R_3 = \{(u_1 \# u_2 \# \dots, v_1 \# v_2 \# \dots) \mid \forall i \geq 1, (u_i, v_i) \in R_f\} \in \text{wDRAT}$ (see [Fig. 1](#)).

The class wDRAT strictly contains known and expressive classes, namely the class of automatic relations (AUT), which are for example used as specifications in Church synthesis, as well as the class of deterministic rational relations (DRAT) [33]. More precisely, a relation is in DRAT if it is recognized by a transducer whose state set is partitioned into

Q_i and Q_o , that is, input and output states, and its transition relation Δ is a function $(Q_i \times \Sigma \times \{\varepsilon\} \rightarrow Q) \cup (Q_o \times \{\varepsilon\} \times \Gamma \rightarrow Q)$. It is automatic if additionally Δ strictly alternates between Q_i and Q_o states. For example, it can be seen that the relations R_0 and R_1 of Ex. 1 (see Figs. 2 and 3, Appendix B) are automatic and hence in DRAT. However, the relation R_2 of Ex. 5 is not in DRAT, because transducers in DRAT have limited output non-determinism: they behave deterministically on any consecutive output transitions (transitions from states in Q_o), and most importantly, deterministically decide when to go to an input state in Q_i . So, they could transform an a into any word in a^*b , but not into any word in a^* .

Proposition 6. $\text{AUT} \subsetneq \text{DRAT} \subsetneq \text{wDRAT} \subsetneq \text{RAT}$

Functions and continuity. As said before, by default in this paper, functions are not necessarily total. A function $f: \Sigma^\omega \rightarrow \Gamma^\omega$ is called *rational* resp. *sequential* if its graph is recognizable by a transducer resp. sequential transducer. It is called *continuous* if

$$\forall \alpha \in \text{dom}(f) \forall i \in \mathbb{N} \exists j \in \mathbb{N} \forall \beta \in \text{dom}(f): |\alpha \wedge \beta| \geq j \rightarrow |f(\alpha) \wedge f(\beta)| \geq i. \quad (1)$$

Example 7. To begin with, consider the function $f_1: \{a, b, c\}^\omega \rightarrow \{b, c\}^\omega$ defined by $f_1(a^n b a^\omega) = b^\omega$ and $f_1(a^n c a^\omega) = c^\omega$ for all $n \in \mathbb{N}_{\geq 1}$. f_1 is continuous, because the i th output symbol only depends on the $\max(i, n + 1)$ first input symbols. It is not uniformly continuous because n can be arbitrarily larger than i . Formally, let $\alpha_j = a^j b a^\omega$ and $\beta_j = a^j c a^\omega$, we have $|\alpha_j \wedge \beta_j| = j$ and $|f_1(\alpha_j) \wedge f_1(\beta_j)| = 0$ for all $j \in \mathbb{N}$, falsifying Eq. (2).

Consider the function $f_2: \{a, b\}^\omega \rightarrow \{a, b\}^\omega$ defined by $f_2(\alpha) = a^\omega$ if α contains infinitely many a s and $f_2(\alpha) = b^\omega$ otherwise for all $\alpha \in \{a, b\}^\omega$. The function f_2 is rational, but it is not continuous. It is easy to see that f_2 is rational, a transducer that recognizes f_2 is depicted in Fig. 4 in Appendix B. We verify that f_2 is not continuous, let α_n denote $a^n b^\omega$, we have that $|\alpha_n \wedge a^\omega| = n$ and $|f_2(\alpha_n) \wedge f_2(a^\omega)| = 0$ for all $n \in \mathbb{N}$. Thus, f_2 is not continuous.

3. Uniformization by continuous functions

Continuous uniformization problem. Given a relation $R \subseteq \Sigma^\omega \times \Gamma^\omega$, a *uniformizer* of R (also called a uniformization) is a function $f: \Sigma^\omega \rightarrow \Gamma^\omega$ such that $\text{dom}(f) = \text{dom}(R)$ and $(\alpha, f(\alpha)) \in R$ for all $\alpha \in \text{dom}(R)$. The continuous uniformization problem asks, given a transducer defining a rational relation R , whether R has a continuous uniformizer. In the rest of the paper, we always assume wDRAT relations are given by transducers.

Theorem 8. *It is undecidable whether a rational relation is uniformizable by a continuous function.*

The proof closely follows the proof of [7, Theorem 17] showing that it is undecidable whether a given rational relation of finite words has a sequential uniformizer. On the positive side, we prove decidability of the continuous uniformization problem for wDRAT relations.

Theorem 2. *The problem of deciding whether a weakly deterministic rational relation of infinite words is uniformizable by a continuous function is EXPTIME-C.*

Proof ideas. We introduce the key concepts used to obtain our results. The proof goes by reduction to a finite-state ω -regular two-player game called (unbounded) delay game. In this game, Adam provides inputs and Eve produces outputs such that combination of inputs and outputs is in the relation. However, as seen in Example 1, Eve might need to wait arbitrarily long before she can safely produce output. Hence, as the game is finite, it can not store arbitrary long input words, and Eve's actions cannot produce arbitrarily long words neither. Instead, we finitely abstract input and output words using a notion we call profiles. Profiles

contain sufficient information to express a winning condition which makes sure that given the word of input symbols provided by Adam, if Eve would output concrete output words instead of their abstraction, she would produce infinitely often non-empty output words whose concatenation, together with the input word, belongs to the relation.

State transformation profiles. For the remainder of this proof sketch, we fix a weakly deterministic rational relation $R \subseteq \Sigma^\omega \times \Gamma^\omega$ and some related notations. We let

$\mathcal{T} = (Q_{\mathcal{T}}, \Sigma, \Gamma, q_0^{\mathcal{T}}, \Delta_{\mathcal{T}}, c_{\mathcal{T}})$ be a weakly deterministic parity transducer that recognizes R , and $C_{\mathcal{T}} = \text{img}(c_{\mathcal{T}})$ its set of used priorities;

$\mathcal{D} = (Q_{\mathcal{D}}, \Sigma, q_0^{\mathcal{D}}, \delta_{\mathcal{D}}, c_{\mathcal{D}})$ be a deterministic parity automaton that recognizes $\text{dom}(R)$, and $C_{\mathcal{D}} = \text{img}(c_{\mathcal{D}})$ its set of used priorities; \mathcal{D} can always be constructed from \mathcal{T} by projecting away its outputs and by determinizing the resulting automaton.

Given $u \in \Sigma^*$, its *profile* P_u are all the possible state transformations it induces for any output. Formally, $P_u \subseteq Q_{\mathcal{T}} \times Q_{\mathcal{T}} \times C_{\mathcal{T}}$ is defined as

$$\{(p, q, c) \mid \text{there is } v \in \Gamma^* \text{ and a run } \rho \text{ of the form } \mathcal{T}: p \xrightarrow{u/v} q \text{ with } \max \text{Occ}(\rho) = c\}.$$

Profiles can be multiplied as $P_1 \otimes P_2 = \{(p, r, \max\{m, n\}) \mid \exists q \cdot (p, q, m) \in P_1, (q, r, n) \in P_2\}$. Given $u_1, u_2 \in \Sigma^*$, it is easy to verify that $P_{u_1 u_2} = P_{u_1} \otimes P_{u_2}$, and P_ε is neutral for \otimes .

Finite-state unbounded delay game. We now present a two-player ω -regular game $\mathcal{G} = (G, \text{Win})$ winnable by Eve iff R is continuously uniformizable. In this game, Adam's actions are to provide input letters, letter-by-letter. Eve's goal is to construct a sequence of state transformations $(q_0, q_1, m_1)(q_1, q_2, m_2) \dots$ such that if the infinite input α provided by Adam belongs to the domain of R , then the maximal priority seen infinitely often in $(m_i)_i$ is even, and α can be decomposed into $u_0 u_1 u_2 \dots$ such that for all $i \geq 0$, $u_i \in \Sigma^*$ and there exists a run $\mathcal{T}: q_i \xrightarrow{u_i/v_i} q_{i+1}$ for some $v_i \in \Gamma^*$, whose maximal visited priority is m_i . As a consequence, all these finite runs can be concatenated to form an accepting run on $\alpha/v_0 v_1 \dots$, entailing $(\alpha, v_0 v_1 \dots) \in R$. One can then show that if Eve has a strategy to pick the state transformations while ensuring the latter property, then this strategy can be turned into a continuous function, and conversely. Picking a state transformation is what we call a *producing action* for Eve. Since a state transformation picked by Eve may correspond to an arbitrarily long word u_i , she also has an action *skip* which allows her to wait before making such a producing action. Now, the difficulty for Eve is to decide when she makes producing actions, in other words, how to decompose the input α , only based on prefixes of α . To that end, before picking a state transformation, she may need to gather lookahead information from Adam. Consequently, the vertices of the game manipulates two consecutive profiles P_1 and P_2 , with the invariant that P_1 is the profile of u_i while P_2 is the profile of u_{i+1} , when the input played so far by Adam is $u_0 \dots u_{i+1}$. When Eve knows enough, she picks a state transformation (q_i, q_{i+1}, m_i) in P_1 , then P_1 becomes P_2 and P_2 is reset to P_ε . The inputs of Adam up to the next producing action of Eve form the word u_{i+2} , and so on. The vertices of the game also store information to decide whether the input belongs to the domain of R (states of \mathcal{D}), the parities m_i , as well as the states q_0, q_1, \dots .

Formally, the game graph $G = (V, E)$ is composed of vertices of the form $(q, c, P_1, P_2, r) \times \{\forall, \exists\}$, where

- $q \in Q_{\mathcal{T}}$, *State reached on the combination of input and output sequence.*
- $c \in \{-1\} \cup C_{\mathcal{T}}$, *Priorities of the state transformations, -1 is used to indicate that no state transformation was chosen (skip action below).*
- P_1, P_2 , *Profiles obtained from the given lookahead of the input word.*
- $r \in Q_{\mathcal{D}}$. *State reached on the given lookahead of the input word.*

From a vertex of the form $(q, c, P_1, P_2, r, \forall)$, Adam has the following actions:

- $\xrightarrow{a} (q, -1, P_1, P_2 \otimes P_a, \delta_{\mathcal{D}}(r, a), \exists)$, for all $a \in \Sigma$. *Adam provides the next lookahead letter and P_2 is updated accordingly.*

From a vertex of the form $(q, c, P_1, P_2, r, \exists)$, Eve has the following actions:

- $\xrightarrow{\text{skip}} (q, -1, P_1, P_2, r, \forall)$, and *Eve makes a non-producing action, i.e., she waits for further lookahead on the input.*
- $\xrightarrow{(q, q', m)} (q', m, P_2, P_\varepsilon, r, \forall)$, where $(q, q', m) \in P_1$. *Eve makes a producing action: a state transformation from the first lookahead profile is chosen, the state transformation is applied, and the first profile is consumed.*

The initial vertex of the game is $(q_0^T, -1, P_\varepsilon, P_\varepsilon, q_0^D, \forall)$.

Let us now define $Win \subseteq V^\omega$. The condition makes sure that if the input sequence provided by Adam is in the domain of R , then the sequence of state transformations can be used to build on accepting run of \mathcal{T} on that input. $Win \subseteq V^\omega$ is the set of all plays γ satisfying $\max \text{Inf}(col_{\mathcal{D}}(\gamma))$ is even $\rightarrow \max \text{Inf}(col_{\mathcal{T}}(\gamma))$ is even, where $col_{\mathcal{D}}(\gamma) = c_{\mathcal{D}}(\pi^5(\gamma))$, $col_{\mathcal{T}}(\gamma) = \pi^2(\gamma)$, and $\pi^i(\gamma)$ is the projection of γ onto the i th component of each vertex. This set is ω -regular. For example, one can design a parity automaton that recognizes Win .

We explain the intuition behind Win . Our goal is to extract a continuous function that uniformizes the relation from a winning strategy. Intuitively, there is a continuous function that uniformizes R , if every input word $\alpha \in \text{dom}(R)$ can be read letter-by-letter, and from time to time, a segment of output letters is produced, continuously building an infinite output word β such that $(\alpha, \beta) \in R$. We relate this to Win . Recall that R is defined by \mathcal{T} , and $\text{dom}(R)$ by \mathcal{D} . Given a play γ , there is a unique input word $\alpha \in \Sigma^\omega$ that corresponds to γ . Since we are looking to build a continuous function f with $\text{dom}(f) = \text{dom}(R)$, we care whether $\alpha \in \text{dom}(R)$. The ω -word $col_{\mathcal{D}}(\gamma)$ is equal to $c(\rho_{\mathcal{D}})$, where $\rho_{\mathcal{D}}$ is the run of \mathcal{D} on α . If $\max \text{Inf}(col_{\mathcal{D}}(\gamma))$ is even, $\alpha \in L(\mathcal{D})$, i.e., $\alpha \in \text{dom}(R)$. An output word $\beta \in \Gamma^\omega$ that corresponds to γ is only indirectly defined, instead the play defines a (possibly finite) sequence of state transformations that an output word β should induce together with α . How to extract a concrete β from γ is formally defined in the proof of [Proposition 9](#). The ω -word $col_{\mathcal{T}}(\gamma)$ contains the relevant information to determine whether $(\alpha, \beta) \in R(\mathcal{T})$, i.e., $(\alpha, \beta) \in R$. In particular, if β is finite, $\max \text{Inf} col_{\mathcal{T}}(\gamma)$ is -1 , that means that only finitely many producing actions have been taken. If $\max \text{Inf} col_{\mathcal{T}}(\gamma)$ is even, we have that $(\alpha, \beta) \in R$. Thus, Win expresses that if $\alpha \in L(\mathcal{D})$, then there is some $\beta \in \Gamma^\omega$, which can be built continuously while reading α such that $(\alpha, \beta) \in R$. In the remainder, we show that

Proposition 9. *Eve has a winning strategy in \mathcal{G} iff R is uniformizable by a continuous function f .*

Proof sketch. The proof of [Proposition 9](#) is split into proving both directions. If Eve has a winning strategy in \mathcal{G} , then she also has a finite-state winning strategy. From such a strategy we can build an algorithm (a Turing machines) that computes a continuous function f that uniformizes R . The high-level idea of the algorithm is to simulate the strategy, which abstracts inputs and outputs by profiles, and in parallel store concrete inputs and outputs corresponding to those profiles. This is possible as Turing machines have infinite storage capacity. In the algorithm, an input sequence α is read letter-by-letter and the corresponding play in \mathcal{G} is simulated where Adam plays according to α and Eve according to her winning strategy. In the play, a lookahead $u_i \in \Sigma^*$ gained on Adam's input is stored as its profile P_{u_i} . In the algorithm, the lookahead u_i is stored concretely in addition to its profile P_{u_i} . When Eve takes an action she picks a state transformation (that should occur in the transducer) from $P_{u_{i-1}}$, the profile of the previous lookahead sequence u_{i-1} , also stored by the algorithm. The algorithm picks some $v_{i-1} \in \Gamma^*$ such that u_{i-1}/v_{i-1} induces the state transformation picked by Eve. A new non-empty lookahead $u_{i+1} \in \Sigma^*$ is built, stored as its profile $P_{u_{i+1}}$ in the play and as the concrete sequence u_{i+1} in the algorithm. Eventually, Eve picks a state transformation from P_{u_i} , the algorithm picks a $v_i \in \Gamma^*$ such that u_i/v_i induces the state transformation picked by Eve, and so on. The lookaheads that are built are non-empty (except for the first one), and since Eve plays according to her winning strategy, the

sequence of state transformations she picked can be used to build an accepting run of \mathcal{T} on $u_0u_1 \dots v_0v_1 \dots$, proving that the latter pair belongs to R .

For the other direction, let us explain how to construct a winning strategy from a continuous uniformizer f of R . Given $\alpha \in \text{dom}(R)$ and $f(\alpha)$, we show that it is possible to decompose the input α into $u_0u_1 \dots$ and the output $f(\alpha)$ into $v_0v_1 \dots$ such that there exists an accepting run $\mathcal{T}: q_0 \xrightarrow{u_0/v_0} q_1 \xrightarrow{u_1/v_1} q_2 \dots$. Moreover, this decomposition and run can be determined in a unique way and on-the-fly, in the sense that a factor u_i/v_i only depends on the factors $u_0/v_0, \dots, u_{i-1}/v_{i-1}$. This makes it possible for Eve to pick a corresponding state transformation sequence $(q_0, q_1, c_0)(q_1, q_2, c_1) \dots$ which is only dependent on *the so far seen* actions of Adam spelling $u_0u_1 \dots$. The main idea to determine the u_i is to look at the indices j for which the the longest common prefix of the sets $S_j = \{f(\alpha(:j)\beta) \mid \alpha(:j)\beta \in \text{dom}(R)\}$ strictly increases. Given an u_i , the output v_i and the state transformation (q_i, q_{i+1}, c_i) can be uniquely determined, using the fact the \mathcal{T} is weakly deterministic. \square

Since two-player ω -regular games are decidable [23], decidability of the continuous uniformization problem for wDRAT directly follows. We analyze the complexity. In [26] it was shown that the continuous uniformization problem for automatic relations with total domain is EXPTIME-hard. This is a special case of our setting, the lower bound follows. A complexity analysis which yields a matching upper bound is found in [Appendix D.3](#).

4. Synthesis of computable functions

The goal of synthesis is to automatically generate an executable machine that realizes a specification if such a machine exists. Synthesis problems can be seen as instances of uniformization problems asking for *effective* uniformizers. A relation is seen as a specification and a uniformizer as a realization. The weakest requirement to guarantee effectiveness is to ask for uniformization by computable functions.

Definition 10 ([36] computable functions). A function $f: \Sigma^\omega \rightarrow \Gamma^\omega$ is called *computable* if there exists a deterministic multi-tape machine M that computes f in the following sense, M has a read-only one-way input tape, a two-way working tape, and a write-only one-way output tape. All tapes are infinite to the right, finite to the left. For any finite word $w \in \Sigma^*$, let $M(w)$ denote the output³ of M on w . The function f is said to be computable if for all $\alpha \in \text{dom}(f)$ and $i \in \mathbb{N}$ there exists $j \in \mathbb{N}$ such that $f(\alpha)(:i) \preceq M(\alpha(:j))$.

The notions of computability and continuity are closely related. If a function $f: \Sigma^\omega \rightarrow \Gamma^\omega$ is computable, it is also continuous. This is not difficult to see when comparing the definitions of computable and continuous functions. The converse does not hold because the continuity definition does not have any computability requirements (see [Example 25](#) in [Appendix E](#) for a counter-example). However the two notions coincide for rational functions [15]: a rational function is continuous iff it is computable. Do these notions coincide for uniformization of rational relations? In other words, is the existence of a continuous uniformizer equivalent to the existence of computable uniformizer? We leave this question open.

Example 11. Consider the function f_2 of [Example 7](#). It is rational but not computable, because to determine even the first output letter, an infinite look-ahead is needed. Deciding computability of a rational function somehow amounts to decide if infinite look-aheads are necessary. Seeing f_2 as a rational relation also shows that computable uniformizers might not exist in general for rational relations. However, we know that rational uniformizers always exists [10]. Consider the relation R_1 of [Example 1](#) and its uniformizer g which maps any word $ux\alpha$ to $xu\alpha$. The function g is computable: an algorithm uses a *finite* look-ahead to determine if $x = A$ or $x = B$, and then can transform its input sequentially. The function e

³The finite word written on the output tape the first time M reaches the $|w|$ th cell of the input tape

which maps $ux\alpha$ to $xuf_2(\alpha)$ is a rational uniformizer of R_1 , but is not computable as f_2 is not. In general, the known procedures that uniformize rational relations by rational functions may return uncomputable uniformizers, even though there exists computable ones. This also motivates the study of the uniformization problem of rational functions by computable functions.

We show that it is undecidable whether a rational relation is uniformizable by a computable function, and that restricting this problem to sequential uniformizers is also undecidable. The proof is the same as the continuous case and can be found in [Appendix E](#). However, we show decidability if we restrict the classes of relations from RAT to wDRAT. More precisely, we show that continuity and computability coincide for uniformization of wDRAT relations: there exists a continuous uniformizer iff there exists a computable uniformizer. Indeed, any computable uniformizer is continuous. Conversely, if there exists a continuous uniformizer, then there exists a finite-state winning strategy in the corresponding delay game. We have shown in the proof sketch of [Proposition 9](#) how to translate a finite-state winning strategy into an algorithm that realizes a function f which uniformizes the relation. Since this function f is given by an algorithm (a Turing machine), it is computable. The main contribution in this section is to show that f can be actually recognized by a deterministic two-way transducer (2DFT). Just as (one-way) transducers extend parity automata with outputs on their transitions, 2DFT extend deterministic two-way parity automata with outputs. The reading tape is two-way, but the output tape is one-way. The class of functions recognizable by 2DFTs is smaller than the class of computable functions and enjoys many good algorithmic properties, e.g., decidability of the equivalence problem [2].

Theorem 4. *The problem of deciding whether a weakly deterministic rational relation of infinite words is uniformizable by a computable function is EXPTIME-C. If such a function exists, it is possible to effectively synthesize a deterministic two-way transducer computing it.*

Proof sketch. We already explained that this problem is the same as the continuous uniformization problem. The proof that 2DFT suffice is the most technical part. The main idea is to use two-wayness to encode finite look-ahead over the input: the reading head goes forward to gather input information, and then must come back to the initial place where the look-ahead was needed to transform the input letter. The difficulty is for the 2DFT to come back to the correct position, even though the look-ahead can be arbitrarily long. This uses non-trivial methods from transducer theory, such as the Hopcroft-Ullman construction. \square

5. Complementary results and discussion

In this section, we provide further results on the continuous uniformization problem and the synthesis of transducers, and discuss some other continuity notion.

Continuous uniformization and transducer synthesis. In this paper, we have studied several uniformization problems for the class wDRAT by functions from various classes. In particular, we have shown that if a wDRAT relation is uniformizable by a computable function, it is uniformizable by a 2DFT. Is two-wayness necessary? Yes, as illustrated by the relation R_1 of [Example 1](#) which is not realizable by any deterministic one-way transducer (i.e. a sequential function). However, we can show that non-determinism can be traded for one-wayness even if computable functions are targeted. In particular, if a relation R is uniformizable by a computable function, then it is uniformizable by a computable rational function, i.e. a computable function defined by a non-deterministic one-way transducer. As a result, the uniformization problems of wDRAT relations by continuous, computable, 2DFT, computable rational, and continuous rational functions, are all pairwise interreducible and EXPTIME-C, as implied by the following theorem and [Theorem 2](#).

Theorem 12. *Let $R \in \text{wDRAT}$. The following are equivalent:*

1. *R is uniformizable by a continuous function*
2. *R is uniformizable by a computable function*
3. *R is uniformizable by a function computable by a deterministic two-way transducer*
4. *R is uniformizable by a continuous rational function*
5. *R is uniformizable by a computable rational function*

It is worth noting that 2DFT may define computable functions which are not rational, so the implication $3 \Rightarrow 5$ is non-trivial (and shown in Appendix with the other implications). For example, the function which maps any $u\#\alpha$ where $\#$ is a uniquely occurring symbol, to $\bar{u}\#\alpha$ where \bar{u} is the mirror of u , is computable by a 2DFT but not rational. The converse is open [15]. In particular it is conjectured that any computable rational function is computable by a 2DFT. A consequence of our result is that this conjecture is true for the large class of wDRAT functions, which is strictly included into the rational functions.

Corollary 13. *Let $f: \Sigma^\omega \rightarrow \Gamma^\omega$ be a weakly deterministic rational function. Then, f is continuous iff f is computable iff f is computable by a deterministic two-way transducer.*

Uniformly continuous uniformization and transducer synthesis. Another classical continuity notion in mathematics is that of uniform continuity, which further provides guarantees on the length of the input prefix needed to be read in order to determine an output prefix of a given length. Formally, a function $f: \Sigma^\omega \rightarrow \Gamma^\omega$ is *uniformly continuous* if

$$\forall i \in \mathbb{N} \exists j \in \mathbb{N} \forall \alpha \in \text{dom}(f) \forall \beta \in \text{dom}(f): |\alpha \wedge \beta| \geq j \rightarrow |f(\alpha) \wedge f(\beta)| \geq i. \quad (2)$$

In other words, for all $\alpha \in \text{dom}(f)$, the i th symbol of $f(\alpha)$ only depends on the length j of the input prefix rather than on the input itself. The function $m: \mathbb{N} \rightarrow \mathbb{N}$ which associates to any i , some j satisfying the above equation is called a modulus of continuity. It guarantees that to get i output symbols, it suffices to read at most $m(i)$ input symbols.

It is shown in [24, 26] that deciding whether an *automatic* relation of total domain admits a uniformly continuous uniformizer is EXPTIME-C , and if such a uniformizer exists, there is one computable by a sequential transducer. We generalize here this result to weakly deterministic rational relation of total domain.

Theorem 14. *The problem of deciding whether a weakly deterministic rational relation R of total domain is uniformizable by a uniformly continuous function is EXPTIME-c . If such a function exists (even if R has partial domain), then it is possible to effectively synthesize a sequential transducer computing it.*

Proof sketch. The problem is the same as the continuous uniformization problem for wDRAT relations of total domain. Indeed, it is shown in [24] that any function of total domain is continuous iff it is uniformly continuous. Hence, by [Theorem 2](#) we get the EXPTIME upper bound. The lower bound is already obtained in [24] for automatic relations of total domain.

Showing that sequential transducers are sufficient is the most technical part, it relies again on delay games but we show that in this case bounded delay is sufficient, allowing to convert any finite-memory winning strategy into a sequential transducer. \square

Open questions. [Theorem 14](#) states that when a wDRAT relation is uniformizable by a uniformly continuous function, then it is uniformizable by a sequential transducer. This result is stated even for wDRAT of partial domain. This contrasts the case of continuous uniformization of partial domain wDRAT, where two-wayness is necessary in general. However, we leave open whether the decidability result of [Theorem 14](#) holds for partial domain wDRAT.

Another open question is the decidability of wDRAT uniformization by sequential functions, even for automatic relations. Uniform continuity and sequentiality are two different

notions: the function which maps any $a^n x c^\omega$ for $x \in \{\#, \$\}$, to $x c^\omega$ is sequential but not uniformly continuous, because the waiting time to get the first output symbol is arbitrary; while a sequential transducer just has to erase the a^n part. This problem is interesting because sequential transducer only require bounded memory to compute the function.

References

- [1] Shaull Almagor and Orna Kupferman. Good-enough synthesis. In *International Conference on Computer Aided Verification*, pages 541–563. Springer, 2020.
- [2] Rajeev Alur, Emmanuel Filiot, and Ashutosh Trivedi. Regular transformations of infinite strings. In *2012 27th Annual IEEE Symposium on Logic in Computer Science*, pages 65–74. IEEE, 2012.
- [3] Jean Berstel. *Transductions and context-free languages*, volume 38 of *Teubner Studienbücher : Informatik*. Teubner, 1979.
- [4] Roderick Bloem, Rüdiger Ehlers, and Robert Könighofer. Cooperative reactive synthesis. In Bernd Finkbeiner, Geguang Pu, and Lijun Zhang, editors, *Automated Technology for Verification and Analysis - 13th International Symposium, ATVA 2015, Shanghai, China, October 12-15, 2015, Proceedings*, volume 9364 of *Lecture Notes in Computer Science*, pages 394–410. Springer, 2015.
- [5] Romain Brenguier, Jean-François Raskin, and Ocan Sankur. Assume-admissible synthesis. *Acta Informatica*, 54(1):41–83, 2017.
- [6] J. Richard Büchi and Lawrence H. Landweber. Solving sequential conditions finite-state strategies. *Trans. Amer. Math. Soc.*, 138:295–311, 1969.
- [7] Arnaud Carayol and Christof Löding. Uniformization in Automata Theory. In *Proceedings of the 14th Congress of Logic, Methodology and Philosophy of Science Nancy, July 19-26, 2011*, pages 153–178. London: College Publications, 2014.
- [8] Krishnendu Chatterjee and Thomas A. Henzinger. Assume-guarantee synthesis. In Orna Grumberg and Michael Huth, editors, *Tools and Algorithms for the Construction and Analysis of Systems, 13th International Conference, TACAS 2007, Held as Part of the Joint European Conferences on Theory and Practice of Software, ETAPS 2007 Braga, Portugal, March 24 - April 1, 2007, Proceedings*, volume 4424 of *Lecture Notes in Computer Science*, pages 261–275. Springer, 2007.
- [9] Dmitry Chistikov and Rupak Majumdar. A uniformization theorem for nested word to word transductions. In Stavros Konstantinidis, editor, *Implementation and Application of Automata - 18th International Conference, CIAA 2013, Halifax, NS, Canada, July 16-19, 2013. Proceedings*, volume 7982 of *Lecture Notes in Computer Science*, pages 97–108. Springer, 2013.
- [10] Christian Choffrut and Serge Grigorieff. Uniformization of rational relations. In *Jewels are Forever*, pages 59–71. Springer, 1999.
- [11] Rodica Condurache, Emmanuel Filiot, Raffaella Gentilini, and Jean-François Raskin. The complexity of rational synthesis. In Ioannis Chatzigiannakis, Michael Mitzenmacher, Yuval Rabani, and Davide Sangiorgi, editors, *43rd International Colloquium on Automata, Languages, and Programming, ICALP 2016, July 11-15, 2016, Rome, Italy*, volume 55 of *LIPICs*, pages 121:1–121:15. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2016.

- [12] Bruno Courcelle and Joost Engelfriet. *Graph Structure and Monadic Second-Order Logic - A Language-Theoretic Approach*, volume 138 of *Encyclopedia of mathematics and its applications*. Cambridge University Press, 2012.
- [13] Luc Dartois, Emmanuel Filiot, and Nathan Lhote. Logics for word transductions with synthesis. In Anuj Dawar and Erich Grädel, editors, *Proceedings of the 33rd Annual ACM/IEEE Symposium on Logic in Computer Science, LICS 2018, Oxford, UK, July 09-12, 2018*, pages 295–304. ACM, 2018.
- [14] Luc Dartois, Paulin Fournier, Ismaël Jecker, and Nathan Lhote. On reversible transducers. In Ioannis Chatzigiannakis, Piotr Indyk, Fabian Kuhn, and Anca Muscholl, editors, *44th International Colloquium on Automata, Languages, and Programming, ICALP 2017, July 10-14, 2017, Warsaw, Poland*, volume 80 of *LIPICs*, pages 113:1–113:12. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2017.
- [15] Vrunda Dave, Emmanuel Filiot, Shankara Narayanan Krishna, and Nathan Lhote. Synthesis of computable regular functions of infinite words. In *CONCUR*, volume 171 of *LIPICs*, pages 43:1–43:17. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2020.
- [16] Rodrigo de Souza. Uniformisation of two-way transducers. In Adrian-Horia Dediu, Carlos Martín-Vide, and Bianca Truthe, editors, *Language and Automata Theory and Applications - 7th International Conference, LATA 2013, Bilbao, Spain, April 2-5, 2013. Proceedings*, volume 7810 of *Lecture Notes in Computer Science*, pages 547–558. Springer, 2013.
- [17] Joost Engelfriet. On tree transducers for partial functions. *Information Processing Letters*, 7(4):170–172, June 1978.
- [18] Joost Engelfriet. Two-way pebble transducers for partial functions and their composition. *Acta Informatica*, 52(7-8):559–571, 2015.
- [19] Joost Engelfriet and Hendrik Jan Hoogeboom. Mso definable string transductions and two-way finite-state transducers. *ACM Transactions on Computational Logic (TOCL)*, 2(2):216–254, 2001.
- [20] Grzegorz Fabianski, Michal Skrzypczak, and Szymon Torunczyk. Uniformisations of regular relations over bi-infinite words. In Holger Hermanns, Lijun Zhang, Naoki Kobayashi, and Dale Miller, editors, *LICS '20: 35th Annual ACM/IEEE Symposium on Logic in Computer Science, Saarbrücken, Germany, July 8-11, 2020*, pages 384–396. ACM, 2020.
- [21] Emmanuel Filiot. Logic-automata connections for transformations. In Mohua Banerjee and Shankara Narayanan Krishna, editors, *Logic and Its Applications - 6th Indian Conference, ICLA 2015, Mumbai, India, January 8-10, 2015. Proceedings*, volume 8923 of *Lecture Notes in Computer Science*, pages 30–57. Springer, 2015.
- [22] Emmanuel Filiot, Ismaël Jecker, Christof Löding, and Sarah Winter. On equivalence and uniformisation problems for finite transducers. In *ICALP*, volume 55 of *LIPICs*, pages 125:1–125:14. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2016.
- [23] Erich Grädel and Wolfgang Thomas. *Automata, logics, and infinite games: a guide to current research*, volume 2500. Springer Science & Business Media, 2002.
- [24] Michael Holtmann, Łukasz Kaiser, and Wolfgang Thomas. Degrees of lookahead in regular infinite games. In *International Conference on Foundations of Software Science and Computational Structures*, pages 252–266. Springer, 2010.

- [25] John E Hopcroft and Jeffrey D Ullman. An approach to a unified theory of automata. *The Bell System Technical Journal*, 46(8):1793–1829, 1967.
- [26] Felix Klein and Martin Zimmermann. How much lookahead is needed to win infinite games? *Log. Methods Comput. Sci.*, 12(3), 2016.
- [27] K. Kobayashi. Classification of formal languages by functional binary transductions. *Information and Control*, 15(1):95–109, July 1969.
- [28] Orna Kupferman, Giuseppe Perelli, and Moshe Y. Vardi. Synthesis with rational environments. *Ann. Math. Artif. Intell.*, 78(1):3–20, 2016.
- [29] Nathan Lhote, Vincent Michielini, and Michal Skrzypczak. Uniformisation gives the full strength of regular languages. In Peter Rossmanith, Pinar Heggenes, and Joost-Pieter Katoen, editors, *44th International Symposium on Mathematical Foundations of Computer Science, MFCS 2019, August 26-30, 2019, Aachen, Germany*, volume 138 of *LIPICs*, pages 61:1–61:13. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2019.
- [30] Christof Löding and Sarah Winter. Synthesis of deterministic top-down tree transducers from automatic tree relations. In Adriano Peron and Carla Piazza, editors, *Proceedings Fifth International Symposium on Games, Automata, Logics and Formal Verification, GandALF 2014, Verona, Italy, September 10-12, 2014*, volume 161 of *EPTCS*, pages 88–101, 2014.
- [31] Christophe Prieur. How to decide continuity of rational functions on infinite words. *Theoretical Computer Science*, 250(1-2):71–82, 2001.
- [32] Shmuel Safra. Exponential determinization for ω -automata with strong-fairness acceptance condition. In *Proceedings of the twenty-fourth annual ACM symposium on Theory of computing*, pages 275–282, 1992.
- [33] Jacques Sakarovitch. *Elements of automata theory*. Cambridge University Press, 2009.
- [34] Sven Schewe. Solving parity games in big steps. In *International Conference on Foundations of Software Technology and Theoretical Computer Science*, pages 449–460. Springer, 2007.
- [35] Wolfgang Thomas. Facets of synthesis: Revisiting church’s problem. In Luca de Alfaro, editor, *Foundations of Software Science and Computational Structures, 12th International Conference, FOSSACS 2009, Held as Part of the Joint European Conferences on Theory and Practice of Software, ETAPS 2009, York, UK, March 22-29, 2009. Proceedings*, volume 5504 of *Lecture Notes in Computer Science*, pages 1–14. Springer, 2009.
- [36] Klaus Weihrauch. *Computable analysis: an introduction*. Springer Science & Business Media, 2012.

A. Additional notions and definitions

Definition 15 (deterministic two-way transducer). Given Σ , let Σ_{\vdash} denote $\Sigma \uplus \{\vdash\}$, \vdash is a new left-delimiter symbol. A *deterministic two-way transducer* is a tuple $\mathcal{T} = (Q, \Sigma_{\vdash}, \Gamma, q_0, \delta, c)$, where Q is a finite state set, Σ and Γ are finite alphabets, $q_0 \in Q$ is an initial state, $\delta: Q \times \Sigma \rightarrow \times \Gamma^* \times \{1, -1\} \times Q$ is a transition function, and $c: Q \rightarrow \mathbb{N}$ is a function that maps states to colors. A two-way transducer has a two-way read-only input tape and a one-way write only output tape. Given an input sequence $\alpha \in \Sigma^\omega$, let $\alpha(-1) = \vdash$, the input

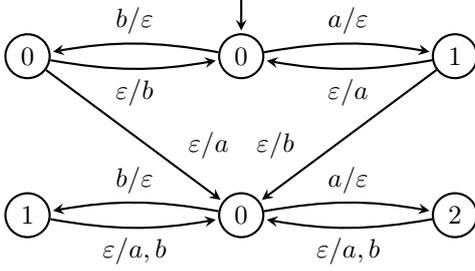


Figure 2.: Strictly alternating transducer that recognizes the relation $R_0 \in \text{AUT}$ from [Example 1](#). The state labels denote the priorities.

tape holds $\vdash \alpha$. We denote a transition $\delta(p, a) = (\gamma, d, q)$ as a tuple (p, a, γ, d, q) , and Δ denotes the tuple representation of δ . A *run* of \mathcal{T} on $\alpha \in \Sigma^\omega$ is a sequence of transitions

$$(q_0, \alpha(i_0), \gamma_0, d_0, q_1)(q_1, \alpha(i_1), \gamma_1, d_1, q_2) \cdots \in \Delta^\omega$$

such that $i_0 = 0$, and $i_{k+1} = i_k + d_k$ for all $k \in \mathbb{N}$. The *input* of ρ is α and the *output* of ρ is $\beta = \gamma_0\gamma_1 \cdots$. We define $c(\rho)$ as the sequence of colors $c(q_0)c(q_1) \cdots$, ρ is *accepting* if $\max \text{Inf}(c(\rho))$ is even. The functional ω -relation *recognized* by the deterministic-two way transducer is defined as

$$R(\mathcal{T}) = \{(\alpha, \beta) \mid \text{there is an accepting run of } \mathcal{T} \text{ with input } \alpha \text{ and output } \beta\}.$$

Definition 16. Given a function $f: \Sigma^\omega \rightarrow \Gamma^\omega$, let $\hat{f}: \Sigma^* \rightarrow \Gamma^\infty$ denote the function defined for all $u \in \text{Pref}(\text{dom}(f))$ as

$$\hat{f}(u) = \bigwedge \{f(u\alpha) \mid u\alpha \in \text{dom}(f)\}, \quad (3)$$

that is, the longest common prefix of all outputs of f for inputs that begin with u .

We state two easy to see facts about continuous function used in the paper.

Remark 17. If f is continuous, i.e., f satisfies [Eq. \(1\)](#), we have

$$\forall u \in \text{Pref}(\text{dom}(f)) \forall i \in \mathbb{N} \exists j \in \mathbb{N} \forall u' \in \text{Pref}(\text{dom}(f)): |u \wedge u'| \geq j \rightarrow |\hat{f}(u)| \geq i. \quad (4)$$

If f is uniformly continuous, i.e., f satisfies [Eq. \(2\)](#), we have

$$\forall i \in \mathbb{N} \exists j \in \mathbb{N} \forall u \in \text{Pref}(\text{dom}(f)): |u| \geq j \rightarrow |\hat{f}(u)| \geq i. \quad (5)$$

We introduce an auxiliary function.

Definition 18 (best). We define the function $\text{best}: \mathcal{P} \times Q_{\mathcal{T}} \times Q_{\mathcal{T}} \rightarrow \mathcal{C}_{\mathcal{T}}$, where \mathcal{P} denotes the set of all profiles. We let

$$\text{best}(P, p, q) = \begin{cases} \max\{m \mid (p, q, m) \in P, m \text{ is even}\} & \text{if there is an even } n \text{ s.t. } (p, q, n) \in P \\ \min\{m \mid (p, q, m) \in P, m \text{ is odd}\} & \text{if there is no even } n \text{ s.t. } (p, q, n) \in P \end{cases}$$

B. Missing proofs of [Section 2](#)

Proposition 6. $\text{AUT} \subsetneq \text{DRAT} \subsetneq \text{wDRAT} \subsetneq \text{RAT}$

Proof. By definition, $\text{AUT} \subseteq \text{DRAT}$. For the strict inclusion, note that on finite words, AUT only define length-preserving relations, unlike DRAT. Take a non length-preserving DRAT relation R over finite words and some alphabet Σ . It can be extended to infinite words over the alphabet $\Sigma \cup \{\#\}$ by as the set R_∞ of pairs $(u\#\alpha, v\#\alpha)$ such that $(u, v) \in R$. Then R_∞ witnesses the strictness of the inclusion $\text{AUT} \subsetneq \text{DRAT}$.

We have already argued that the relation R_2 of [Example 5](#) is in wDRAT but not in DRAT. Let us now show the inclusion $\text{DRAT} \subseteq \text{wDRAT}$. Take a DRAT relation R defined by a

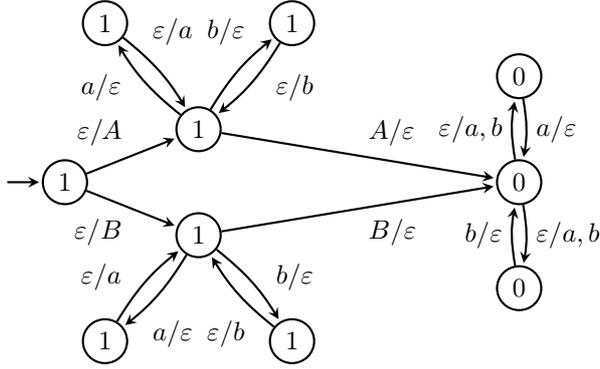


Figure 3.: Strictly alternating transducer that recognizes the relation $R_1 \in \text{AUT}$ from [Example 1](#). The state labels denote the priorities (0 must be visited infinitely often).

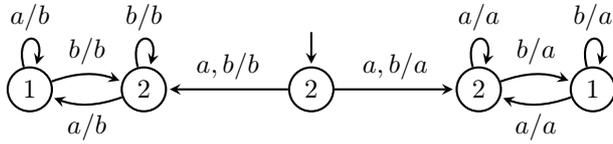


Figure 4.: A transducer that recognizes f_2 from [Example 7](#). The state labels denote the priorities.

transducer \mathcal{T} with its set of states partitioned into Q_i and Q_o . We show that it satisfies the weak-deterministic condition.

We have to show that for all:

$$\mathcal{T}: p \xrightarrow{u/v_1} q \quad \mathcal{T}: p \xrightarrow{u/v_2} r$$

such that v_1 is a prefix of v_2 and q, r are input states, we have $q = r$.

We prove it by induction on $L = |u| + |v_1| + |v_2|$. If $L = 0$, then such a pattern cannot occur in \mathcal{T} by the type of the transition relation of DRAT transducers. So, the property holds.

Consider $L > 0$. Suppose $u = \varepsilon$. Then, $p \in Q_o$. Since $q \in Q_i$, it is not possible to read an output letter from q by definition of Q_i and Q_o . Since v_1 is a prefix of v_2 and DRAT transducers have deterministic behavior over consecutive output symbols, the run $\mathcal{T}: p \xrightarrow{u/v_2} r$ necessarily visit q , and therefore $v_1 = v_2$ and $q = r$.

Suppose $|u| > 0$, and let $u = \sigma u'$. If p is an input state, then by determinism, there exists p' and two runs

$$\mathcal{T}: p' \xrightarrow{u'/v_1} q \quad \mathcal{T}: p' \xrightarrow{u'/v_2} r$$

by induction we get $q = r$.

If p is an output state, then, v_1 and v_2 contains at least one symbol, and since v_1 is a prefix of v_2 , we have $v_1 = \gamma v'_1$ and $v_2 = \gamma v'_2$ for some γ . By determinism, there exists a state p' and two runs

$$\mathcal{T}: p' \xrightarrow{u'/v'_1} q \quad \mathcal{T}: p' \xrightarrow{u'/v'_2} r$$

by induction we get $q = r$.

Finally, the strictness of the inclusion $\text{wDRAT} \subsetneq \text{RAT}$ is witnessed by the relation R_{\neg} of [Example 5](#). \square

C. Missing proofs of Section 3 – Undecidability proofs

Theorem 8. *It is undecidable whether a rational relation is uniformizable by a continuous function.*

Theorem 19. *It is undecidable whether a rational relation is uniformizable by a continuous resp. sequential resp. letter-to-letter sequential function.*

Proof sketch of Theorems 8 and 19. There is a reduction from the halting problem for Turing machines that yields all undecidability results. However, there is a simpler reduction from Post’s correspondence problem that conveys the proof idea and yields all undecidability results except for letter-to-letter sequential functions. We sketch the reduction from Post’s correspondence problem. Let u_1, \dots, u_n and v_1, \dots, v_n be a PCP instance. We construct the ω -rational relation R that contains pairs (α, β) of the form $\alpha = i_1 \cdots i_k \alpha'$ with $i_1 \cdots i_k \in \mathbb{N}^*$ and $\alpha \in \{a, b\}^\omega$ and $\beta = u_{i_1} \cdots u_{i_k} a^\omega$ if α' contains infinitely many a and $\beta \neq v_{i_1} \cdots v_{i_k} \beta'$ otherwise. If the PCP has no solution, then the function $f: i_1 \cdots i_k \alpha' \mapsto u_{i_1} \cdots u_{i_k} a^\omega$ uniformizes R , because $u_{i_1} \cdots u_{i_k} \neq v_{i_1} \cdots v_{i_k}$. The function f is continuous, computable, and sequential. If the PCP has a solution, no continuous function uniformizes R . If the integer sequence $i_1 \cdots i_k$ is the solution, then $u_{i_1} \cdots u_{i_k} = v_{i_1} \cdots v_{i_k}$. Intuitively, for an input sequence starting with the solution, no prefix of the input sequence allows to determine whether the output must begin with $u_{i_1} \cdots u_{i_k}$ or is not allowed to begin with $u_{i_1} \cdots u_{i_k}$. \square

Proof of Theorems 8 and 19. We show the undecidability results by reduction from the halting problem for Turing machines. Let M be a deterministic Turing machine, and let R_M be the relation that contains pairs (α, β) of the form $\alpha = c_0 \$ c_1 \$ \cdots c_n \$ \alpha'$ and $\beta = c'_0 \$ c'_1 \$ \cdots c'_n \$ \beta'$, where $c_0, \dots, c_n, c'_0, \dots, c'_n$ code configurations of M in the usual way, c_0 is the initial configuration, c_n is a halting configuration, α' and $\beta' \in \{a, b\}^\omega$, and either $\beta = \alpha$ if α' contains infinitely many a , or there is some $i \in \{0, \dots, n-1\}$ such that $\text{succ}(c_i) \neq c'_{i+1}$, where $\text{succ}(c_i)$ is the successor configuration of c_i if α' contains finitely many a . We argue that R_M is ω -rational. A transducer that recognizes R_M can guess and verify whether the input contains infinitely many a . If it guesses infinitely many a , it has to verify that input and output are equal. If it guesses finitely many a , it reads the first configuration of the output, and can then read c_i and c'_{i+1} in parallel for all $i \in \{0, \dots, n-1\}$ and check whether $\text{succ}(c_i) \neq c'_{i+1}$.

We show that R_M is uniformizable by a continuous function, a computable function, a sequential function, resp. a letter-to-letter sequential function iff M does not halt on the empty tape.

Assume M does not halt. Let f_{id} be the identity function. Clearly, f_{id} is continuous, computable, sequential, and synchronous sequential. It is easy to verify that f_{id} uniformizes R_M . Consider an infinite input word α . If α contains infinitely many a , clearly $(\alpha, f_{id}(\alpha)) \in R_M$. If α contains finitely many a , there has to be some $i \in \{0, \dots, n-1\}$ such that $\text{succ}(c_i) \neq c'_{i+1}$. This is true, because M does not halt, thus, the configuration sequence $c_0 \$ c_1 \$ \cdots c_n$ has an error, i.e., there is some i such that $\text{succ}(c_i) \neq c_{i+1}$. Hence, since $c_0 \$ c_1 \$ \cdots c_n \$ = c'_0 \$ c'_1 \$ \cdots c'_n \$$, we obtain $\text{succ}(c_i) \neq c'_{i+1}$.

Assume M does halt. Towards a contradiction, assume that f is a function that uniformizes R_M that is either continuous, computable, sequential, or synchronous sequential. Note that every synchronous sequential function is sequential, every sequential function is computable and every computable function is continuous. We arrive at a contradiction by using only properties of continuous functions. Since M halts, there exists a configuration sequence starting with the initial configuration that ends with a halting configuration that has no errors. Let u denote this configuration sequence. Consider $ua^\omega \in \text{dom}(f)$. According to Eq. (1), there exists some $j \in \mathbb{N}$ such that for all $\beta \in \text{dom}(f)$ holds that $|ua^\omega \wedge \beta| \geq j$ implies that $|f(ua^\omega) \wedge f(\beta)| \geq |u|$. Consider $ua^j b^\omega \in \text{dom}(f)$, we have $f(ua^\omega) = ua^\omega$ and $f(ua^j b^\omega) = u' \beta'$ with $|u| = |u'|$ and $u \neq u'$, because u' must begin with a configuration

Algorithm 1: Algorithm computing continuous f that uniformizes R . The algorithm is described in the proof of [Lemma 20](#).

Input: $\alpha \in \Sigma^\omega$, G game arena, $\mathcal{S} = (M, V, m_0, \delta, \mu)$ strategy automaton
Output: $\beta \in \Gamma^\infty$, if $\alpha \in \text{dom}(R)$, then $(\alpha, \beta) \in R$

```

1  $m := m_0$  ; // current state of the strategy automaton
2  $u_1 := \varepsilon$  ; // first input block
3  $u_2 := \varepsilon$  ; // second input block
4  $s_{prev} := s_0$ , initial vertex of  $G$  ; // previous vertex in the game
5  $s_{cur} := s_0$  ; // current vertex in the game
6  $a := \alpha(0)$  ; // current letter of  $\alpha$ 
7 while true do
8    $u_2 := u_2.a$  ;
9    $s_{cur} := s$  if  $s_{cur} \xrightarrow{a} s \in E$  ; // update game vertex according to Adams
    action
10   $m := \delta(m, s_{cur})$  ; // strategy automaton is updated with Adams action
11   $s_{prev} := s_{cur}$  ;
12   $s_{cur} := s$  if  $s_{cur} \xrightarrow{\mu(m, s_{cur})} s \in E$  ; // strategy automaton yields Eves
    action, the updated game vertex is of the form  $(\cdot, \cdot, P_{u_1}, P_{u_2}, \cdot, \cdot)$ 
13   $m := \delta(m, s_{cur})$  ; // strategy automaton is updated with Eves action
14  if  $e := (s_{prev}, (p, q, c), s_{cur})$  is a producing edge then
15    choose output block  $v_1 \in \Gamma^*$  such that  $\mathcal{T}: p \xrightarrow{u_1/v_1} q$  with max prio  $c$  ;
    ; // this choice can be made canonical by computing for instance
    the smallest word in lexicographic order satisfying this
    property
16     $u_1 := u_2$  ;
17     $u_2 := \varepsilon$  ;
18    print( $v_1$ ) ; // produce output block
19  end
20   $a := \alpha.\text{nextLetter}()$  ; // read next input letter
21 end

```

sequences such that there is some $i \in \{0, \dots, n-1\}$ such that $\text{succ}(c_i) \neq c'_{i+1}$. Since there is no i such that $\text{succ}(c_i) \neq c_{i+1}$, because u has no errors, this implies that $u \neq u'$. Thus, $|ua^\omega \wedge ua^j b^\omega| \geq j$, but $|f(ua^\omega) \wedge f(ua^j b^\omega)| < |u|$, which is a contradiction. \square

D. Missing proofs of [Section 3](#) – Continuous uniformization

Theorem 2. *The problem of deciding whether a weakly deterministic rational relation of infinite words is uniformizable by a continuous function is EXPTIME-C.*

The above theorem is proved by [Lemmas 20](#) and [21](#) and [Propositions 23](#) and [24](#).

D.1. Extracting a continuous function from a winning strategy

Lemma 20. *If Eve has a winning strategy in \mathcal{G} , then R is uniformizable by a continuous computable function f .*

Proof. Let σ_\exists be a winning strategy for Eve in \mathcal{G} . This implies that there exists also a finite state winning strategy for Eve. In [Algorithm 1](#), we give an algorithm that describes a

continuous computable function $f: \Sigma^\omega \rightarrow \Gamma^\omega$ that uniformizes R which is constructed from a finite state winning strategy given by a strategy automaton \mathcal{S} . Intuitively, the algorithm plays the game where Adams actions correspond to an input word α and Eves actions are determined by the winning strategy given by \mathcal{S} . In a play, the lookahead on the input is not stored concretely, but as an abstraction in form of two profiles. When Eve takes an edge labeled with a state transformation, then the first lookahead profile is removed, the chosen state transformation is applied, the second lookahead profile takes the place of the first one, and the second lookahead profile is build anew. In the algorithm, additionally, the lookahead on the input that is used to build the the two profiles is stored concretely. When Eve takes an edge labeled with a state transformation, say (p, q, c) , we have the information what kind of state transformation should occur for the input $u_1 \in \Sigma^*$ that currently corresponds to the first profile P_1 . The algorithm picks an output $v_1 \in \Gamma^*$ such that $\mathcal{T}: p \xrightarrow{u_1/v_1} q$ and the maximal priority seen on this run is c . Then, in the game, profile P_2 takes the place of P_1 and the second profile is set to P_ε . Additionally, the algorithm sets u_1 to u_2 , that is, the input that currently corresponds to P_2 , and sets u_2 to ε . The stored strings u_1 and u_2 can get arbitrarily long, but are reset from time to time, as the algorithm is build from a winning strategy, thus producing edges are taken again and again. Note that the algorithm is guaranteed to produce non-empty output strings again and again, because in [Line 8](#) a new letter is appended to the string u_2 again and again, and in [Line 16](#) the string u_1 is set to u_2 from time to time. Thus, the string u_1 is infinitely often not empty. In fact, u_1 is only empty the first time an output word is chosen.

The correctness of the algorithm can easily be seen. Assume that γ is a play according to the winning strategy σ_\exists and assume that the corresponding input word $\alpha \in \Sigma^\omega$, spelt by Adams actions, is part of the the domain of the relation, i.e., $\alpha \in L(\mathcal{D})$. Hence, since $\max \text{Inf}(\text{col}_{\mathcal{D}}(\gamma))$ is even, also $\max \text{Inf}(\text{col}_{\mathcal{T}}(\gamma))$ is even, because $\gamma \in \text{Win}$. This means that that Eve takes infinitely many producing edges, otherwise $\max \text{Inf}(\text{col}_{\mathcal{T}}(\gamma))$ would be -1 . Thus, the algorithm infinitely often prints a finite output word building an output word β . We have that $(\alpha, \beta) \in R$, i.e., $(\alpha, \beta) \in R(\mathcal{T})$, because $\max \text{Inf}(\text{col}_{\mathcal{T}}(\gamma))$ is even and β was build such that there exists a run $\rho_{\mathcal{T}}$ of \mathcal{T} on α/β such that $\max \text{Inf}(\text{col}_{\mathcal{T}}(\gamma)) = \max \text{Inf}(c(\rho_{\mathcal{T}}))$. (Note that we assume that \mathcal{T} defines a relation $R \subseteq \Sigma^\omega \times \Gamma^\omega$ (controlled with the parity condition) which guarantees that β is build from finite words of which infinitely many are non-empty, because $\max \text{Inf}(c(\rho_{\mathcal{T}}))$ is even.)

We now argue that algorithm yields a computable function. The algorithm handles an input sequence in a letter-by-letter fashion, the only ambiguity in the algorithm is in [Line 15](#), that requires the algorithm to pick an output block v_1 such that $\mathcal{T}: p \xrightarrow{u_1/v_1} q$. We explain

that this is indeed computable by a deterministic machine as described in [Definition 10](#). Clearly, for each (p, q, c) there exists a transducer, say $\mathcal{T}_{(p,q,c)}$, that recognizes $\{(u, v) \mid \mathcal{T}: p \xrightarrow{u/v} q\}$. To pick some v_1 for a given u_1 , a machine M as in [Definition 10](#) can work as follows. Let $\mathcal{T}_{(p,q,c)}$ have an order on its transitions. The machine M can make a depth first search in the computation tree of $\mathcal{T}_{(p,q,c)}$ for the input u_1 on its working tape (loops with no input are only traversed once). When a leaf is reached whose state is accepting, it writes the output word v_1 that corresponds to this run on its output tape. The size of v_1 is linear in u_1 . \square

D.2. Extracting a winning strategy from a continuous function

Lemma 21. *If R is uniformizable by a continuous function f , then Eve has a winning strategy in \mathcal{G} .*

Proof. To begin with, we describe how to inductively factorize an input word $\alpha \in \Sigma^\omega$. Let

$u_0 = \varepsilon$, and let $u_0 \dots u_{i-1}$ be the already defined factors of α , let $\alpha = u_0 \dots u_{i-1} \alpha'$, and let

$$u_i := \alpha'(:k), \quad (6)$$

where $k \in \mathbb{N}_{\geq 1}$ is chosen such that $\alpha'(:k)$ is the shortest non-empty prefix of α' such that there is a prefix $v \preceq \hat{f}(u_0 \dots u_{i-1} \alpha'(:k))$ such that $\Delta_{\mathcal{T}}^*(q_0^{\mathcal{T}}, u_0 \dots u_{i-1}/v) \cap Q_i^{\mathcal{T}} \neq \emptyset$ ($Q_i^{\mathcal{T}}$ denotes the set of input states of the wDRAT transducer \mathcal{T} as defined in [Section 2](#)). In words, the input $u_0 \dots u_i$ provides enough information to determine a run of \mathcal{T} that consumes the input $u_0 \dots u_{i-1}$. If such a prefix of α' does not exist, let $u_i = \alpha'$, that is, the infinite remainder of α .

Let $\alpha_1, \alpha_2 \in \Sigma^\omega$, and let $u_0^1 \dots$ and $u_0^2 \dots$ denote their factorizations built according to [Eq. \(6\)](#). Note that $u_i^1 = u_i^2$ for all i such that $|u_0^1 \dots u_i^1| \leq |\alpha_1 \wedge \alpha_2|$. Furthermore, given an input word α , the factorization according to [Eq. \(6\)](#) can be determined on-the-fly reading the input word letter-by-letter. If $\alpha \in \text{dom}(f)$, its factorization has infinitely many factors, because f is continuous meaning that \hat{f} grows over time.

In the remainder of the proof we are only interested in plays where the input word α spelt by Adam is in $L(\mathcal{D})$, i.e., $\text{dom}(R)$, because all other plays automatically satisfy *Win*, so there is nothing to show for plays whose corresponding input word $\alpha \notin L(\mathcal{D})$. Since f uniformizes R , we have that $\text{dom}(f) = \text{dom}(R)$, so we can safely consider only plays where its corresponding input word $\alpha \in \text{dom}(f)$.

The idea of the proof is that we use the sequence of input blocks $u_0 u_1 \dots$ of α built as in [Eq. \(6\)](#) to obtain the actions of Eve. Her actions pick state transformations, our goal is to pick state transformations by defining a sequence of output blocks $v_0 v_1 \dots$ and pick state transformations that are induced by $u_0/v_0 \cdot u_1/v_1 \dots$. Formally, we let

$$v_{i-1} = v \preceq (u_0 \dots u_{i-1})^{-1} \hat{f}(u_0 \dots u_i), \quad (7)$$

for some v such that $\Delta_{\mathcal{T}}^*(q_0^{\mathcal{T}}, u_0 \dots u_{i-1}/v_0 \dots v_{i-2}v) \cap Q_i^{\mathcal{T}} \neq \emptyset$ for all $i \geq 1$. Note that [Eq. \(6\)](#) implies $\hat{f}(u_0 \dots u_i)$ is long enough such that the described infix exists.

We define a strategy that satisfies the following invariant for all $i \in \mathbb{N}$:

Claim 22. If there exists a run ρ of \mathcal{T} on $u_0 \dots u_{i-1}/v_0 \dots v_{i-1}$ of the form

$$\mathcal{T}: \underbrace{q_0^{\mathcal{T}} \xrightarrow{u_0/v_0} q_1 \in Q_i^{\mathcal{T}}}_{\rho_0} \quad \underbrace{q_1 \xrightarrow{u_1/v_1} q_2 \in Q_i^{\mathcal{T}}}_{\rho_1} \quad \dots \quad \underbrace{q_{i-1} \xrightarrow{u_{i-1}/v_{i-1}} q_i \in Q_i^{\mathcal{T}}}_{\rho_{i-1}},$$

then the sequence of chosen producing edges in the play after the input $u_0 \dots u_i$ has the label sequence

$$(q_0^{\mathcal{T}}, q_1, m_0)(q_1, q_2, m_1) \dots (q_{i-1}, q_i, m_{i-1}),$$

where the edge labeled with $(q_j, q_{j+1}, m_j) \in P_{u_j}$ with $m_j = \text{best}(P_{u_j}, q_j, q_{j+1})$ (see [Definition 18](#)) is taken after the input $u_0 \dots u_{j+1}$ for all $0 \leq j \leq i-1$. Furthermore, after the input $u_0 \dots u_i$ the play is in the vertex

$$(q_{i-1}, -1, P_{u_{i-1}}, P_{u_i}, \delta_{\mathcal{D}}^*(q_0^{\mathcal{D}}, u_0 \dots u_i), \exists).$$

We show the invariant holds by induction. For $k = 0$, the invariant trivially holds. For the step $k-1 \rightarrow k$, assume that Adams actions have spelt $u_0 \dots u_k$, and for $v_0 \dots v_{k-2}$ the invariant holds. Let v_{k-1} as in [Eq. \(7\)](#), let ρ_{k-1} be a run of the form $q_{k-1} \xrightarrow{u_{k-1}/v_{k-1}} q_k \in Q_i^{\mathcal{T}}$ which must exist by choice of v_{k-1} . The invariant yields that after input $u_0 \dots u_{k-1}$ the play is in the vertex

$$(q_{k-2}, -1, P_{u_{k-2}}, P_{u_{k-1}}, \delta_{\mathcal{D}}^*(q_0^{\mathcal{D}}, u_0 \dots u_{k-1}), \exists)$$

and then Eve takes the producing edge labeled with $(q_{k-2}, q_{k-1}, m_{k-2})$. Thus, after further input u_k , the play is in the vertex

$$(q_{k-1}, -1, P_{u_{k-1}}, P_{u_k}, \delta_{\mathcal{D}}^*(q_0^{\mathcal{D}}, u_0 \dots u_k), \exists).$$

Since ρ_{k-1} is of the form $\mathcal{T}: q_{k-1} \xrightarrow{u_{k-1}/v_{k-1}} q_k$, the priority $\text{best}(P_{u_{k-1}}, q_{k-1}, q_k)$ is defined, let m_{k-1} denote this priority. Thus, this vertex has a producing edge with label

$(q_{k-1}, q_k, m_{k-1}) \in P_{u_{k-1}}$. Eve's action is to take this edge. This concludes the proof that the invariant holds for k .

It is left to show the above defined strategy is winning. Recall the condition for a play γ such that it is winning for Eve.

$$\max \text{Inf}(col_{\mathcal{D}}(\gamma)) \text{ is even} \rightarrow \max \text{Inf}(col_{\mathcal{T}}(\gamma)) \text{ is even.}$$

Consider a play γ according to the above defined strategy, let α be the input word associated to γ , assume that $\alpha \in \text{dom}(f)$, and let $u_0 \cdots$ be its factorization according to Eq. (6). By definition of the game graph, the sequence $col_{\mathcal{D}}(\gamma)$ is exactly the sequence $c_{\mathcal{D}}(\rho_{\mathcal{D}})$, where $\rho_{\mathcal{D}}$ is the run of \mathcal{D} on α . Since $\alpha \in L(\mathcal{D})$, we have that $\max \text{Inf}(col_{\mathcal{D}}(\gamma))$ is even. Thus, we have to show that $\text{Inf}(col_{\mathcal{T}}(\gamma))$ is even.

Recall $col_{\mathcal{T}}(\gamma)$ is the sequence of colors obtained from the chosen state transformation functions in the play, where -1 is the color when no state transformation function is chosen. Since $\alpha \in \text{dom}(f)$ and f is continuous, the factorization according to Eq. (6) that was used to build the strategy has infinitely many factors. Hence, infinitely many producing edges are taken, meaning that $\text{Inf}(col_{\mathcal{T}}(\gamma)) \in C_{\mathcal{T}}$. Furthermore, we also defined infinitely many v_i . Let $\beta = v_0 v_1 \cdots$, clearly $(\alpha, \beta) \in R$, because $f(\alpha) = \beta$.

Thus, there exists an accepting run of \mathcal{T} on α/β . Consider the run ρ of \mathcal{T} on α/β of the form $\rho_0 \rho_1 \cdots$ build according to Claim 22. We show that every accepting run ρ' of \mathcal{T} on α/β has a factorization of the form:

$$\mathcal{T}: \underbrace{q_0 \xrightarrow{u_0/v'_0} q_1 \in Q_i^{\mathcal{T}}}_{\rho'_0} \quad \underbrace{q_1 \xrightarrow{u_1/v'_1} q_2 \in Q_i^{\mathcal{T}}}_{\rho'_1} \quad \cdots \quad \underbrace{q_{i-1} \xrightarrow{u_{i-1}/v'_{i-1}} q_i \in Q_i^{\mathcal{T}}}_{\rho'_{i-1}}.$$

Assume there is a run ρ' that does not have this property. Towards a contradiction, pick the first i such that ρ'_i of the form $q_i \xrightarrow{u_i/v'_i} p_{i+1}$ with $p_{i+1} \neq q_{i+1}$. However, since either $v_0 \cdots v_i$ is a prefix of $v'_0 \cdots v'_i$ or vice versa, because \mathcal{T} is weakly deterministic, it is implied that if $\mathcal{T}: q_i \xrightarrow{u_0 \cdots u_i/v_0 \cdots v_i} q_{i+1}$ and $\mathcal{T}: q_i \xrightarrow{u_0 \cdots u_i/v'_0 \cdots v'_i} p_{i+1}$ then $p_{i+1} = q_{i+1}$. We have a contradiction.

Hence, pick any accepting run ρ' of \mathcal{T} on α/β . Since ρ' is accepting, $\max \text{Inf}(c(\rho'))$ is even. Recall that we have to show that $\max \text{Inf}(col_{\mathcal{T}}(\gamma))$ is even. Recall that $col_{\mathcal{T}}(\gamma) = m_0 m_1 \cdots$ according to Claim 22. We have chosen m_i as $best(P_{u_i}, q_i, q_{i+1})$. Consider the factorization $\rho'_0 \rho'_1 \cdots$ of ρ' as above. Clearly, the color m_i is at least as good for Eve as $\text{Occ}(\rho'_i)$. Thus, since $\max \text{Inf}(c(\rho'))$ is even, we also have that $\max \text{Inf}(col_{\mathcal{T}}(\gamma))$ is even which concludes the proof. \square

D.3. Complexity analysis

Proposition 23. *The continuous uniformization problem for weakly deterministic rational relations over infinite words is decidable in EXPTIME.*

Proof. From the game $\mathcal{G} = (G, \text{Win})$ we can obtain an equivalent parity game of size $|G| \cdot |\mathcal{W}|$, where \mathcal{W} is a deterministic parity automaton that recognizes the set Win .

First, we analyze the size of $G = (V, E)$. A vertex is an element of $Q_{\mathcal{T}} \times (C_{\mathcal{T}} \cup \{-1\}) \times \mathcal{P} \times \mathcal{P} \times Q_{\mathcal{D}} \times \{\forall, \exists\}$, where \mathcal{P} is the set of all profiles. A profile is a subset of $Q_{\mathcal{T}} \times Q_{\mathcal{T}} \times C_{\mathcal{T}}$, thus, the set of profiles is of size exponential in $|Q_{\mathcal{T}}|$ and $|C_{\mathcal{T}}|$. We assume that the domain automaton \mathcal{D} is obtained from \mathcal{T} by projection and determinization. A deterministic parity automaton with $2^{\mathcal{O}(n \log n)}$ states and $\mathcal{O}(nk)$ priorities can be constructed from a nondeterministic parity automaton with n states and k priorities using Safra's construction [32]. We obtain that \mathcal{D} has a state space of size exponential in $|Q_{\mathcal{T}}|$ and priorities of size linear in $|Q_{\mathcal{T}}| \cdot |C_{\mathcal{T}}|$. It follows that V and E are of size exponential in $|Q_{\mathcal{T}}|$ and $|C_{\mathcal{T}}|$. All in all, since $|C_{\mathcal{T}}| \leq |Q_{\mathcal{T}}|$, $|V|$ and $|E|$ are exponential in $|Q_{\mathcal{T}}|$.

Secondly, we analyze the size of \mathcal{W} . Recall that Win contains plays γ that satisfy

$$\max \text{Inf}(\text{col}_{\mathcal{D}}(\gamma)) \text{ is even} \rightarrow \max \text{Inf}(\text{col}_{\mathcal{T}}(\gamma)) \text{ is even.}$$

We reformulate this as

$$\max \text{Inf}(\text{col}_{\mathcal{D}}(\gamma)) \text{ is odd} \vee \max \text{Inf}(\text{col}_{\mathcal{T}}(\gamma)) \text{ is even.}$$

A deterministic parity automaton for the second disjunct has a state set of size linear in $|Q_{\mathcal{T}}|$ with priorities $C_{\mathcal{T}}$. The first disjunct simply states that the input sequence α associated to γ is in $\text{dom}(f)$, i.e., $\alpha \in L(\mathcal{D})$. A nondeterministic parity automaton for $L(\mathcal{D})$ has a state set of size linear in $|Q_{\mathcal{T}}|$ and priorities $C_{\mathcal{T}}$. Thus, a nondeterministic parity automaton for the conjunction has a state set of size linear in $|Q_{\mathcal{T}}|$ and priorities $C_{\mathcal{T}}$. Using Safra's construction, we obtain a deterministic variant with a state set of size exponential in $|Q_{\mathcal{T}}|$ with priorities of size linear in $|Q_{\mathcal{T}}| \cdot |C_{\mathcal{T}}|$. Let \mathcal{W} denote this automaton with state set $Q_{\mathcal{W}}$. The alphabet of \mathcal{W} is V , thus, the alphabet size is exponential in $|Q_{\mathcal{T}}|$.

The parity game with arena $G \times \mathcal{W}$ has $|V| \cdot |Q_{\mathcal{W}}|$ many vertices and $|E| \cdot |Q_{\mathcal{W}}|$ many edges. Thus, its vertices and edges are of size exponential in $|Q_{\mathcal{T}}|$. The game has priorities of size linear in $|Q_{\mathcal{T}}| \cdot |C_{\mathcal{T}}|$.

A parity game with n vertices, m edges, and k priorities can be solved in time $\mathcal{O}(mn^{k/3})$ [34]. Consequently, we obtain that our parity game is solvable in time exponential in $|Q_{\mathcal{T}}| \cdot |C_{\mathcal{T}}|$. Since $|C_{\mathcal{T}}| \leq |Q_{\mathcal{T}}|$, the overall time complexity is exponential in $|Q_{\mathcal{T}}|$. \square

Proposition 24. *The continuous uniformization problem for weakly deterministic rational relations over infinite words is EXPTIME-hard.*

Proof. In [24], it is shown that every continuous function with total domain is uniformly continuous and vice versa. In [26], it is shown that the uniformly continuous uniformization problem for total domain is EXPTIME-hard. Hence, we obtain that the continuous uniformization problem is EXPTIME-hard.

We explain that it is indeed shown in [26] that the uniformly continuous uniformization problem for total domain is EXPTIME-hard. In [26], the authors study delay games with ω -regular winning conditions which are relations with total domain. A delay function is a mapping $f: \mathbb{N} \rightarrow \mathbb{N}$. A delay game for a delay function f and an relation R with total domain is a two-player infinite duration game played in rounds, where Adam spells an input sequence $\alpha \in \Sigma^{\omega}$ and Eve an output sequence $\beta \in \Gamma^{\omega}$ in the limit. Eve wins if $(\alpha, \beta) \in R$. In round i , Adam provides $f(i)$ input letters, then Eve answers with one output letter. Given an relation R with total domain, it is not difficult to see that R is uniformizable by a uniformly continuous function iff Eve wins the delay game with objective R for some delay function f . In [26, Theorem 4.3], it is shown that the following problem is EXPTIME-hard: Given an relation R with total domain, does Eve win the delay game with objective R for some delay function f ? \square

E. Missing proofs of Section 4

Example 25. Fix an enumeration of Turing machines, let M_i denote the i th Turing machine in the enumeration. Consider the function $f_3: \{a\}^{\omega} \rightarrow \{0, 1\}^{\omega}$ defined by $f_3(a^{\omega}) = b_0 b_1 \dots$ with $b_i = 1$ if M_i halts on ε and $b_i = 0$ otherwise for all $i \in \mathbb{N}$. The function f_3 defines a constant, thus, it is clearly continuous. It is easy to verify that f_3 is not computable, because the halting problem for Turing machines is undecidable.

Theorem 4. *The problem of deciding whether a weakly deterministic rational relation of infinite words is uniformizable by a computable function is EXPTIME-C. If such a function exists, it is possible to effectively synthesize a deterministic two-way transducer computing it.*

Proof. First, we show that the problem of deciding whether a weakly deterministic rational relation of infinite words is uniformizable by a computable function reduces to the problem of deciding whether a weakly deterministic rational relation of infinite words is uniformizable by a continuous function which is ExpTime-c, see [Theorem 2](#).

Let $R \in \text{wDRAT}$. Clearly, if R is uniformizable by a computable function f , then it is also uniformizable by a continuous function, because computability implies continuity for functions from infinite words to infinite words. For the other direction, if f is a continuous function that uniformizes R , then Eve has a winning strategy in the game \mathcal{G} , see [Lemma 21](#). Thus, R is uniformizable by a computable function according to [Lemma 20](#).

The second part of the statement of [Theorem 4](#) is proved in [Proposition 26](#). \square

Proposition 26. *If $R \in \text{wDRAT}$ is uniformizable by a continuous function, then R is uniformizable by a deterministic two-way transducer.*

Proof. Assume R is uniformizable by a continuous function, then [Lemma 21](#) yields that Eve has a finite-state winning strategy in \mathcal{G} . [Algorithm 1](#) describes a continuous computable function that uniformizes R built from a finite-state winning strategy given by strategy-automaton \mathcal{S} . At line 15, this algorithm makes a choice of output v_1 . We slightly modify this choice: given two states p and q of the transducer recognizing R and a priority c , the relation

$$R_{(p,q,c)} = \{(u, v) \mid \mathcal{T} : p \xrightarrow{u/v} q \text{ and the maximal priority seen is } c\}.$$

is a rational relation of finite words. It is known that every rational relation on finite words has a uniformization by rational function, see, e.g., [3]. So let $f_{(p,q,c)}$ denote such a rational function, as obtained in [3]. We modify line 15 of the algorithm so that it chooses output $v_1 = f_{(p,q,c)}(u_1)$.

We denote by f the function computed by the (modified) algorithm. We show that f is recognizable by a deterministic two-way transducer. The main difficulty is that in the game, there is a desynchronization between the moment Eve makes a producing action (a triple (q, q', m)) and the interval of the play during which the input corresponding to this producing action has been provided by Adam. In [Algorithm 1](#), this is easily solved because unbounded memory can be used to store these intervals. A deterministic two-way transducer must solve this by reading far enough into the input such that the producing action is known, then the transducer must deterministically go back to the input segment for which this producing action was chosen. The main difficulty lies in deterministically finding the right beginning and end points of such a segment when going back.

We provide a construction in two steps. First, we describe a simpler setting, where an input sequence is enriched by a function f_{annot} with information about the corresponding play in the game consistent with the strategy defined by the strategy automaton. Those information are: vertices of the play, actions performed during the play, current state of the strategy automaton. Recall that the game alternates between Adam and Eve actions and start by an Adam action. Adam's actions are input symbols in Σ while Eve's actions are either *skip* or a triple (q, q', m) of some profile. Let us denote by A_{\exists} Eve's actions. Then, the type of f_{annot} is

$$f_{\text{annot}} : \text{dom}(R) \subseteq \Sigma^\omega \rightarrow \left(\Sigma \times ((V \times M) \times (V \times M) \times (A_{\exists} \times V \times M)) \right)^\omega$$

where V are the vertices of the game and M are the states of the strategy automaton. The function returns an input sequence annotated with sufficient information to reconstruct a play in the game induced by the strategy applied on this input sequence, and the run of the strategy automaton on this play. More precisely, for a single letter a the annotation contains the vertex of the game and the state of the strategy automaton, Adam's action (which is a), the target vertex and target state induced by Adam's action, Eve's action as prescribed by the strategy automaton, the target vertex and target state induced by Eve's action.

We explain how to construct a deterministic two-way transducer that recognizes the function g which takes an annotated input sequence $f_{annot}(\alpha)$ and maps it to $f(\alpha)$ for all $\alpha \in \text{dom}(R)$. Subsequently, we explain how to modify the transducer to recognize the function $f: \alpha \mapsto f(\alpha)$ for all $\alpha \in \text{dom}(R)$.

An annotated string α' based on α defines a unique segmentation $u_0u_1 \cdots$ of α where the endpoint of u_i is annotated with a producing action of Eve for all $i \geq 1$ (u_0 is defined as ε). The producing action (q, q', m) seen at the end of u_i means that for the segment u_{i-1} an output v_{i-1} must be produced such that $\mathcal{T}: q \xrightarrow{u_{i-1}/v_{i-1}} q'$ and the maximal priority seen is m . In the annotated sequences it is easy for a deterministic two-way transducer to advance to the end of the segment u_i and go back to the beginning of segment u_{i-1} for all $i \geq 1$ because all segment endpoints are annotated with a producing action (the intermediate positions are annotated with *skip*).

We now explain how a deterministic two-way transducer can produce the desired output v_{i-1} for the segment u_{i-1} with annotations. First, we show that for any state transformation (q, q', m) , the function $f_{(q,q',m)}$ of finite words can be computed by a deterministic two-way transducer.

Rational functions over finite words are recognizable by deterministic two-way transducers, which can be seen as follows. In [21], it is shown that a function from finite words to finite words is rational iff it is definable as an order-preserving MSO-transduction. In [19], it is shown that a function from finite words to finite words is definable as an MSO-transduction iff it is definable by a deterministic two-way transducer. Hence, it follows that rational functions over finite words are recognizable by deterministic two-way transducers.

Such a transducer can be constructed, let $\mathcal{T}_{(q,q',m)}$ denote the deterministic two-way transducer that recognizes $f_{(q,q',m)}$.

Consequently, when the deterministic two-way transducer on α' has returned to the beginning of the annotated segment u_{i-1} (after it went to the endpoint of u_i to get the state transformation (q, q', m) corresponding to u_{i-1}), it can run the deterministic two-way transducer $\mathcal{T}_{(q,q',m)}$ on u_{i-1} that will produce a suitable v_{i-1} . The difficulty is to stay inside of u_{i-1} for this transformation. However, the annotations in α' clearly mark the endpoints of u_{i-2} and u_{i-1} (by state transformations instead of *skip* action), so we can run the transducer $\mathcal{T}_{(q,q',m)}$ designed to work on finite words because we have clear markers on the bounds of the segment u_{i-1} .

After producing the output v_{i-1} , the two-way transducer can advance to the end of u_{i+1} , obtain the producing action that should be applied to u_i , go back to the beginning of u_i , apply it and so on.

The priorities that have to be seen on a run of this transducer can be derived from the annotations. Annotation *skip* means priority -1 , and an annotation of the form (q, q', m) means priority m must be seen. Thus, we have shown that there exists a deterministic two-way transducer that recognizes g , let \mathcal{T}_g denote this transducer.

We now explain how we can get rid of the annotations. When we read an input $\alpha \in \Sigma^\omega$, we can determine the annotations assigned by f_{annot} deterministically on-the-fly using the strategy automaton, because the strategy automaton is deterministic. Therefore we slightly have to extend the strategy automaton such that it additionally stores in its state space the current vertex (that is the input alphabet of the strategy automaton) and the Eve's chosen action (determined by the strategy automaton via its next move function).

Let \mathcal{A} denote this enhanced strategy automaton, it remains deterministic. The deterministic automaton \mathcal{A} has the property that when going from left-to-right in α , it computes the annotation in the sense that it corresponds to the information stored in the state space of \mathcal{A} . So, by running \mathcal{A} from left-to-right, we have access to the annotation.

Our goal is now to extend \mathcal{T}_g such that it computes the run of \mathcal{A} on α . Clearly, when going from a position j to $j+1$ it is possible to compute the state of \mathcal{A} on $j+1$ when the state of \mathcal{A} on j is known, however, when going from a position j to $j-1$, we also want to

obtain the state of \mathcal{A} that was seen on $j - 1$ based on the state that was seen on j .

It is possible to compute this information with a deterministic two-way transducer using the Hopcroft-Ullman construction presented in [25]. The construction describes how to simulate a deterministic one-way automaton together with a two-way automaton. It is described for two-way automata on finite words, however, in order to obtain the state of the one-way automaton at position $j - 1$ when one is at position j , the Hopcroft-Ullman construction only needs to re-read some positions to the left of j , so the same construction can be applied in the infinite word setting.

Hence, \mathcal{T}_g combined with \mathcal{A} using the Hopcroft-Ullman construction can be run on words $\alpha \in \Sigma^\omega$ instead of $f_{\text{annot}}(\alpha)$ and computes the desired function f . \square

F. Missing proofs of Section 5

Theorem 12. *Let $R \in \text{wDRAT}$. The following are equivalent:*

1. R is uniformizable by a continuous function
2. R is uniformizable by a computable function
3. R is uniformizable by a function computable by a deterministic two-way transducer
4. R is uniformizable by a continuous rational function
5. R is uniformizable by a computable rational function

Proof. Proposition 26 states that if a wDRAT relation is uniformizable by a continuous function, then it is uniformizable by a function computable by a 2DFT. In other words, $1 \Rightarrow 3$. The implication $3 \Rightarrow 2$ is trivial, as any function computable by a 2DFT is computable. It is also not difficult to see that any computable function is continuous (the converse is not true in general), see for example [15] for a proof. Therefore, we get $2 \Rightarrow 1$ and $5 \Rightarrow 4$. So far, we have shown $1 \Leftrightarrow 2 \Leftrightarrow 3$ and $5 \Rightarrow 4$. The implication $4 \Rightarrow 1$ is trivial. It remains to show $1 \Rightarrow 5$. Since this is the main technical part of this proof, we have written a separate statement in the next subsection. So, $1 \Rightarrow 5$ is exactly Proposition 27 below, concluding the proof. \square

Proposition 27. *If $R \in \text{wDRAT}$ is uniformizable by a continuous function, then R is uniformizable by a computable rational function.*

Proof. Assume R is uniformizable by a continuous function, then Lemma 21 yields that Eve has a finite-state winning strategy in \mathcal{G} . Algorithm 1 describes a continuous computable function that uniformizes R built from a finite-state winning strategy given by strategy-automaton \mathcal{S} . Exactly as in the proof of Theorem 26, we impose that the choice of v_1 made at line 15 of the algorithm is done thanks to the rational functions $f_{p,q,c}$, for all state transformations (p, q, c) . See the beginning of the proof of Theorem 26 for definition and details on how to get $f_{p,q,c}$. We let f be the function computed by the modified algorithm.

We show that f is rational by constructing a (non-deterministic) transducer \mathcal{T} that recognizes f . The main difficulty is that in the game, there is a desynchronization between the moment Eve makes a producing action (a triple (q, q', m)) and the interval of the play during which the input corresponding to this producing action has been provided by Adam. In Algorithm 1, this is easily solved because unbounded memory can be used to store these intervals. Instead, a transducer can use non-determinism to guess in advance the producing actions of Eve and check later on that its guess was correct.

We proceed step by step and describe several rational functions whose composition is f . This proves that f is rational because rational functions are closed under composition [3].

First, we describe a function f_{annot} defined over all sequences $\alpha \in \text{dom}(R)$ and which annotates α with the actions taken by Eve on the input symbols of α , as prescribed by the strategy automaton \mathcal{S} . Recall that the game alternates between Adam and Eve actions and

start by an Adam action. Adam's actions are input symbols in Σ while Eve's actions are either *skip* or a triple (q, q', m) of some profile. Let us denote by A_{\exists} Eve's actions. Then, the type of f_{annot} is

$$f_{annot} : \text{dom}(R) \subseteq \Sigma^{\omega} \rightarrow (\Sigma \times A_{\exists})^{\omega}$$

where V are the vertices of the game. It is not difficult to construct a transducer recognizing f_{annot} by using the strategy automaton and a parity automaton checking that the input belongs to the domain of the relation (which is ω -regular because rational functions have ω -regular domains). In particular, this transducer needs to keep track in its states of the current game vertex v_{curr} as well as the current state m_{curr} of the strategy automaton. On input $a \in \Sigma$, let v_{next} be the game vertex reached from v_{curr} on input a , and m_{next} the next state of the strategy automaton. Let $x \in A_{\exists}$ be the action prescribed by the strategy automaton in memory state m_{next} for vertex v_{next} , and finally let v_{nnext} be the vertex of the game reached on action x and m_{nnext} the state of the strategy automaton on input v_{nnext} . The transducer, on input $a \in \Sigma$, outputs (a, x) and changes its state to (v_{nnext}, m_{nnext}) .

The function f_{annot} annotates any infinite input of the domain of the relation with Eve's actions, which are skip actions or producing actions (i.e. she picks an element (q, q', m)). Such a producing action indicates that she has gathered enough information on the input to be able to produce something. However, this something might be a finite word of arbitrary length, and therefore, a transducer cannot output it in one step. More precisely, let $\alpha \in \text{dom}(R)$. Let $f_{annot}(\alpha) = u'_0 u'_1 u'_2 \dots$ where $u'_0 = \varepsilon$ and for all $i \geq 1$, we have $u'_i \in (\Sigma \times \{\text{skip}\})^* \cdot (\Sigma \times A_{\exists}^{prod})$ where A_{\exists}^{prod} is the set of producing actions. By definition of the game, there exist states q_1, q_2, \dots of the transducer for R , and priorities m_1, m_2, \dots such that the producing action of u'_i is (q_i, q_{i+1}, m_i) for all $i \geq 1$. Let $u_0 = \varepsilon$ and for all $i \geq 1$, let u_i be the projection of u'_i on Σ .

The correctness of the algorithm is based on the property that for all $i \geq 1$, the state transformation (q_i, q_{i+1}, m_i) corresponds to Eve choosing an output v_{i-1} for u_{i-1} such that there exists a run $q_i \xrightarrow{u_{i-1}/v_{i-1}} q_{i+1}$ visiting maximal priority m_i , and such that $(u_0 u_1 \dots, v_0 v_1 \dots) \in R$. As long as a v_{i-1} satisfying this property is chosen, the algorithm is guaranteed to compute a uniformizer of R . In the modified algorithm, we just have set $v_{i-1} = f_{q_i, q_{i+1}, m_i}(u_{i-1})$.

Our goal is now to explain how all the outputs v_i can be computed sequentially by a transducer. To that end we compose f_{annot} with another rational function f_{out} which computes for each (q_i, q_{i+1}, m_i) the value $v_{i-1} = f_{q_i, q_{i+1}, m_i}(u_{i-1})$. The type of f_{out} is

$$f_{out} : (V \times A_{\exists})^{\omega} \rightarrow \Gamma^{\infty}$$

and it satisfies $f = f_{out} \circ f_{annot}$. A transducer \mathcal{T}_{out} recognizing f_{out} needs non-determinism to guess, when it starts reading u_{i-1} (for $i \geq 1$), the triple (q_i, q_{i+1}, m_i) and later on check its guess was correct. To produce an output v_{i-1} , we use a transducer $\mathcal{T}_{q_i, q_{i+1}, m_i}$ recognizing f_{q_i, q_{i+1}, m_i} , which exists since this function is rational. Then, the transducer \mathcal{T}_{out} recognizing f_{out} , when it guesses a triple (q_i, q_{i+1}, m_i) , uses $\mathcal{T}_{q_i, q_{i+1}, m_i}$ in parallel to its master computation (using a product construction) in order to compute its output. When \mathcal{T}_{out} makes a new guess, say $(q_{i+1}, q_{i+2}, m_{i+1})$, it stops if $\mathcal{T}_{q_i, q_{i+1}, m_i}$ was not in some accepting state, otherwise it starts using $\mathcal{T}_{q_{i+1}, q_{i+2}, m_{i+1}}$ to compute an output on u_i , and so on. \square

G. Missing proofs of Section 5 – Uniformly continuous uniformization

Theorem 14. *The problem of deciding whether a weakly deterministic rational relation R of total domain is uniformizable by a uniformly continuous function is EXPTIME- c . If such a function exists (even if R has partial domain), then it is possible to effectively synthesize a sequential transducer computing it.*

Proof. The problem of deciding whether a weakly deterministic rational relation of total domain is uniformizable by a uniformly continuous function reduces to the problem of deciding whether a weakly deterministic rational relation of total domain is uniformizable by a continuous function.

Indeed, it is shown in [24] that any function of total domain is continuous iff it is uniformly continuous. Hence, by [Theorem 2](#) we get the EXPTIME upper bound. The lower bound is already obtained in [24] for automatic relations of total domain.

The second part of the statement of [Theorem 14](#) is shown in [Proposition 28](#). \square

Proposition 28. *If $R \in \text{wDRAT}$ is uniformizable by a uniformly continuous function, then R is uniformizable by a sequential transducer.*

The above proposition is proved by [Lemmas 29](#) and [30](#).

We show that if R is uniformizable by a uniformly continuous function f , then Eve has a winning strategy in a finite-state delay game with *bounded delay*. We show that the bound on the necessary lookahead can be based on the profiles. Given a profile P , let $L(P)$ denote the set $\{u \in \Sigma^* \mid P_u = P\}$. Let \mathcal{P}_{fin} be the set of profiles whose associated languages are finite, let $L = \bigcup_{P \in \mathcal{P}_{fin}} L(P)$, and let ℓ be the length of the longest word in L . We show that a lookahead of ℓ suffices. We change the game used to model the continuous setting to (implicitly) reflect this bound, i.e., Eve is only allowed to delay to pick skip at most ℓ times in a row.

Finite-state bounded delay game. Let $\mathcal{G}_{uni} = (G, \text{Win})$ be the infinite-duration turn-based two-player game that is obtained from \mathcal{G} (see [Page 8](#)) by adding the following constraint to the $\xrightarrow{\text{skip}}$ moves of Eve. There is an edge $(q, c, P_1, P_2, r, \exists) \xrightarrow{\text{skip}} (q, -1, P_1, P_2, r, \forall)$ if $|L(P_2)| \neq \infty$.

G.1. Extracting a sequential function from a winning strategy

Lemma 29. *If Eve has a winning strategy in \mathcal{G}_{uni} , then R is uniformizable by sequential transducer.*

Proof. Let σ_{\exists} be a winning strategy for Eve in \mathcal{G}_{uni} , clearly it is also a winning strategy for Eve in \mathcal{G} since \mathcal{G}_{uni} is obtained from \mathcal{G} by adding edge constraints. Thus, we can use [Algorithm 1](#) to obtain a continuous function f that uniformizes R . We now explain that f is in fact sequential.

First, we recall some definitions made in the paragraph preceding the definition of \mathcal{G}_{uni} , see [Page 28](#). Given a profile P , $L(P)$ denotes the set $\{u \in \Sigma^* \mid P_u = P\}$. The set \mathcal{P}_{fin} is the set of profiles whose associated languages are finite, $L = \bigcup_{P \in \mathcal{P}_{fin}} L(P)$, and ℓ is the length of the longest word in L . The game \mathcal{G}_{uni} is obtained from \mathcal{G} by adding the following constraint to the $\xrightarrow{\text{skip}}$ moves of Eve. There is an edge $(q, c, P_1, P_2, r, \exists) \xrightarrow{\text{skip}} (q, -1, P_1, P_2, r, \forall)$ if $|L(P_2)| \neq \infty$. This directly implies that Eve never uses skip more than ℓ times in a row.

The construction of [Algorithm 1](#) yields that f is such that it reads a non-empty input block of length at most ℓ , and then produces an output block (a canonical choice of size linear in ℓ is possible), and so on. It directly follows that f is sequential, and a sequential transducer that recognizes f can be effectively constructed. \square

G.2. Extracting a winning strategy from a uniformly continuous function

Lemma 30. *If R is uniformizable by a uniformly continuous function f , then Eve has a winning strategy in \mathcal{G}_{uni} .*

Proof. To begin with, we recall some definitions made in the paragraph preceding the definition of \mathcal{G}_{uni} , see [Page 28](#). Given a profile P , $L(P)$ denotes the set $\{u \in \Sigma^* \mid P_u = P\}$. The set \mathcal{P}_{fin} is the set of profiles whose associated languages are finite, $L = \bigcup_{P \in \mathcal{P}_{fin}} L(P)$, and ℓ is the length of the longest word in L . The game \mathcal{G}_{uni} is obtained from \mathcal{G} by adding the following constraint to the \xrightarrow{skip} edges of Eve. There is an edge $(q, c, P_1, P_2, r, \exists) \xrightarrow{skip} (q, -1, P_1, P_2, r, \forall)$ if $|L(P_2)| \neq \infty$. This directly implies that Eve never uses skip more than ℓ times in a row.

We describe how to inductively factorize an input word $\alpha \in \Sigma^\omega$. Let $u_0 = \varepsilon$, and let $u_0 \dots u_{i-1}$ be the already defined factors of α , let $\alpha = u_0 \dots u_{i-1} \alpha'$, and let

$$u_i := \alpha'(:k), \quad (8)$$

where $k \in \mathbb{N}_{\geq 1}$ is the smallest number such that $P_{u_i} \notin \mathcal{P}_{fin}$, in other words, $L(P_{u_i})$ is infinite. Note that such a prefix always exists since L is finite. Moreover, this implies that $|u_i| \leq \ell$ for all $i \in \mathbb{N}$.

Let $\alpha_1, \alpha_2 \in \Sigma^\omega$, and let $u_0^1 \dots$ and $u_0^2 \dots$ denote their factorizations built according to [Eq. \(6\)](#). Note that $u_i^1 = u_i^2$ for all i such that $|u_0^1 \dots u_i^1| \leq |\alpha_1 \wedge \alpha_2|$. Furthermore, given an input word α , the factorization according to [Eq. \(8\)](#) can be determined on-the-fly reading the input sequence letter-by-letter.

Recall that f uniformizes $R = R(\mathcal{T})$, thus, $\text{dom}(f) = \text{dom}(R) = L(\mathcal{D})$. Note that if the prefix $u_0 \dots u_i$ of the input word α from a play can not be completed to a word from $\text{dom}(f)$, we do not care how the strategy behaves from this point on, because then the play automatically belongs to *Win*. So in the remainder of the proof we only consider plays where Adam spells a word that belongs to $\text{dom}(f)$.

We design a strategy of Eve that behaves as follows. After Adam's actions have spelt $u_0 \dots u_i$, Eve's action is to take a producing edge for all $i \in \mathbb{N}_{\geq 1}$. In between factors, Eve's action is to skip. This ensures that the play is in a vertex of the form

$$(q_{i-1}, -1, P_{u_{i-1}}, P_{u_i}, \delta_{\mathcal{D}}^*(q_0^{\mathcal{D}}, u_0 \dots u_i), \exists)$$

after Adam's actions have spelt $u_0 \dots u_i$ for all $i \in \mathbb{N}_{\geq 1}$. Note that since $L(P_{u_i}) = \infty$, as ensured by the factorization according to [Eq. \(8\)](#), Eve can use skip and must take a producing edge. Furthermore, in between factors, Eve is indeed allowed to use the skip action.

Now we explain how we use the sequence of input blocks $u_0 u_1 \dots$ of α built as in [Eq. \(8\)](#) to obtain the actions of Eve. Her actions pick state transformations, our goal is to pick state transformations by defining a sequence of output blocks $v_0 v_1 \dots$ and pick state transformations that are induced by $u_0/v_0 \cdot u_1/v_1 \dots$.

As described at the beginning of this proof, after a certain amount of input, Eve must make a producing action. Generally, given two prefixes $u \prec uu' \in \text{Pref}(\text{dom}(f))$, it can be the case that $\hat{f}(u) = \hat{f}(uu')$. However, if u' is such that $L(P_{u'})$ is infinite, then we can pick an arbitrary long u'' that has the profile as u' . We have that $uu'' \in \text{Pref}(\text{dom}(f))$, because having the same profile means that they induce the same behavior in \mathcal{T} . Since f is uniformly continuous, $f(u) \prec \hat{f}(uu'')$ if u'' is long enough. The idea is to use $\hat{f}(uu'')$ instead of $\hat{f}(uu')$ to determine Eve's next action.

Formally, in order to choose output blocks v_0, v_1, \dots , we inductively build blocks $\bar{u}_0, \bar{u}_1, \dots$, where \bar{u}_i is based on u_i for all $i \in \mathbb{N}$. The idea is that, since each u_i is such that $L(P_{u_i})$ is infinite for $i \in \mathbb{N}_{\geq 1}$, we can pick some \bar{u}_i that has the same profile as u_i to such that there exists some

$$\bar{v} \preceq \hat{f}(\bar{u}_0 \dots \bar{u}_i), \quad (9)$$

such that $\Delta_{\mathcal{T}}^*(q_0^{\mathcal{T}}, \bar{u}_0 \dots \bar{u}_{i-1}/\bar{v}) \cap Q_i^{\mathcal{T}} \neq \emptyset$ ($Q_i^{\mathcal{T}}$ denotes the set of input states of the wDRAT transducer \mathcal{T} as defined in [Section 2](#)) which is possible if $\bar{u}_0 \dots \bar{u}_i$ can be completed to an ω -word from $\text{dom}(f)$ because of [Eq. \(5\)](#). This makes it possible to pick output blocks for all previous input blocks. We let

$$\bar{v}_{i-1} = \bar{v} \preceq (\bar{v}_0 \dots \bar{v}_{i-1})^{-1} \hat{f}(\bar{u}_0 \dots \bar{u}_i), \quad (10)$$

such that $\Delta_{\mathcal{T}}^*(q_0^{\mathcal{T}}, \bar{u}_0 \cdots \bar{u}_{i-1} / \bar{v}_0 \cdots \bar{v}_{i-2} \bar{v}) \cap Q_i^{\mathcal{T}} \neq \emptyset$ for all i . Based on \bar{u}_j , \bar{v}_j , and u_j , we pick v_j , which is explained further below.

We show that for the input block sequence $u_0 \cdots u_i$, with $\bar{u}_0 \cdots \bar{u}_{i-1}$ and $\bar{v}_0 \cdots \bar{v}_{i-1}$ defined as described above, we can pick an output block sequence $v_0 \cdots v_{i-1}$ such that the following claim is satisfied for all $i \in \mathbb{N}$:

Claim 31. If there is a run $\bar{\rho}$ of \mathcal{T} on $\bar{u}_0 \cdots \bar{u}_{i-1} / \bar{v}_0 \cdots \bar{v}_{i-1}$ of the form

$$\mathcal{T}: \underbrace{q_0^{\mathcal{T}} \xrightarrow{\bar{u}_0/\bar{v}_0} q_1 \in Q_i^{\mathcal{T}}}_{\bar{\rho}_0} \quad \underbrace{q_1 \xrightarrow{\bar{u}_1/\bar{v}_1} q_2 \in Q_i^{\mathcal{T}}}_{\bar{\rho}_1} \quad \cdots \quad \underbrace{q_{i-1} \xrightarrow{\bar{u}_{i-1}/\bar{v}_{i-1}} q_i \in Q_i^{\mathcal{T}}}_{\bar{\rho}_{i-1}},$$

then there a run ρ of \mathcal{T} on $u_0 \cdots u_{i-1} / v_0 \cdots v_{i-1}$ of the form

$$\mathcal{T}: \underbrace{q_0^{\mathcal{T}} \xrightarrow{u_0/v_0} q_1}_{\rho_0} \quad \underbrace{q_1 \xrightarrow{u_1/v_1} q_2}_{\rho_1} \quad \cdots \quad \underbrace{q_{i-1} \xrightarrow{u_{i-1}/v_{i-1}} q_i}_{\rho_{i-1}},$$

and the sequence of chosen producing edges in the play after the input $u_0 \dots u_i$ has the label sequence

$$(q_0^{\mathcal{T}}, q_1, m_0)(q_1, q_2, m_1) \cdots (q_{i-1}, q_i, m_{i-1}),$$

where $m_j = \text{best}(P_{u_j}, q_j, q_{j+1})$ (see [Definition 18](#)) and the edge labeled with (q_j, q_{j+1}, m_j) is taken after the input $u_0 \dots u_{j+1}$ for all $0 \leq j \leq i-1$. Furthermore, after the input $u_0 \cdots u_i$ the play is in the vertex

$$(q_{i-1}, -1, P_{u_{i-1}}, P_{u_i}, \delta_{\mathcal{D}}^*(q_0^{\mathcal{D}}, u_0 \cdots u_i), \exists).$$

We show that the claim holds by induction. For $k=0$, the claim is trivially true. For the step $k-1 \rightarrow k$, assume that Adams actions have spelt $u_0 \cdots u_k$, we have already defined $\bar{u}_0 \cdots \bar{u}_{k-1}$ (which yields the definition of $\bar{v}_0 \cdots \bar{v}_{k-2}$), and $v_0 \cdots v_{k-2}$ such that the invariant is satisfied. Clearly, after $u_0 \cdots u_k$, the play is in

$$(q_{k-1}, -1, P_{u_{k-1}}, P_{u_k}, \delta_{\mathcal{D}}^*(q_0^{\mathcal{D}}, u_0 \cdots u_k), \exists).$$

We now define \bar{u}_k , \bar{v}_{k-1} and v_{k-1} as follows. Let \bar{u}_k such that [Eq. \(9\)](#) is satisfied. Since the profiles of $\bar{u}_0 \cdots \bar{u}_{k-1}$ and $u_0 \cdots u_{k-1}$ are the same, it follows that $\bar{u}_0 \cdots \bar{u}_{k-1} \in \text{Prefs}(\text{dom}(f))$, because we assumed that $u_0 \cdots u_{k-1} \in \text{Prefs}(\text{dom}(f))$. This yields the definition of \bar{v}_{k-1} as given in [Eq. \(10\)](#). Pick some $\bar{\rho}_k$ of the form $\mathcal{T}: q_k \xrightarrow{\bar{u}_k/\bar{v}_k} q_{k+1} \in Q_i^{\mathcal{T}}$, and let $m_k = \text{best}(P_{\bar{u}_k}, q_k, q_{k+1})$, we have $(q_k, q_{k+1}, m_k) \in P_{\bar{u}_k}$. Since \bar{u}_k and u_k have the same profile, we also have $(q_k, q_{k+1}, m_k) \in P_{u_k}$, which implies that we can pick $v_k \in \Gamma^*$ such that ρ_k is of the form $\mathcal{T}: q_k \xrightarrow{u_k/v_k} q_{k+1}$ and $m_k = \max \text{Occ}(\rho_k)$. Furthermore, $(q_k, q_{k+1}, m_k) \in P_{u_k}$ implies that Eve can take a producing edge with label (q_k, q_{k+1}, m_k) . Hence, the claim is satisfied for k .

It is left to argue that the strategy is a winning strategy for Eve. Recall that if $u_0 u_1 \cdots \in \text{dom}(f)$, then $\bar{u}_0 \bar{u}_1 \cdots \in \text{dom}(f)$ and $(\bar{u}_0 \bar{u}_1 \cdots, f(\bar{u}_0 \bar{u}_1 \cdots)) \in R$. The same argumentation as in the proof of [Lemma 21](#) yields that the strategy is winning. The main point is to prove that every excepting run $\bar{\rho}'$ of \mathcal{T} on $\bar{u}_0 \bar{u}_1 \cdots / f(\bar{u}_0 \bar{u}_1 \cdots)$ can be factorized into the form

$$\mathcal{T}: \underbrace{q_0^{\mathcal{T}} \xrightarrow{\bar{u}_0/\bar{v}'_0} q_1}_{\bar{\rho}'_0} \quad \underbrace{q_1 \xrightarrow{\bar{u}_1/\bar{v}'_1} q_2}_{\bar{\rho}'_1} \quad \cdots \quad \underbrace{q_{i-1} \xrightarrow{\bar{u}_{i-1}/\bar{v}'_{i-1}} q_i}_{\bar{\rho}'_{i-1}},$$

with the same intermediate states as the both the runs ρ and $\bar{\rho}$ inductively constructed in order to define the strategy that satisfies [Claim 31](#). Since $\bar{\rho}'$ is accepting and each m_i is at least as good as $\text{Occ}(\bar{\rho}'_i)$, it is easy to see that the strategy is winning. \square