

# On the Impact of Applying Machine Learning in the Decision-Making of Self-Adaptive Systems

Omid Gheibi

Department of Computer Science  
Katholieke Universiteit Leuven  
omid.gheibi@kuleuven.be

Danny Weyns

Department of Computer Science  
KU Leuven and Linnaeus University  
danny.weyns@kuleuven.be

Federico Quin

Department of Computer Science  
Katholieke Universiteit Leuven  
federico.quin@kuleuven.be

**Abstract**—Recently, we have been witnessing an increasing use of machine learning methods in self-adaptive systems. Machine learning methods offer a variety of use cases for supporting self-adaptation, e.g., to keep runtime models up to date, reduce large adaptation spaces, or update adaptation rules. Yet, since machine learning methods apply in essence statistical methods, they may have an impact on the decisions made by a self-adaptive system. Given the wide use of formal approaches to provide guarantees for the decisions made by self-adaptive systems, it is important to investigate the impact of applying machine learning methods when such approaches are used. In this paper, we study one particular instance that combines linear regression to reduce the adaptation space of a self-adaptive system with statistical model checking to analyze the resulting adaptation options. We use computational learning theory to determine a theoretical bound on the impact of the machine learning method on the predictions made by the verifier. We illustrate and evaluate the theoretical result using a scenario of the DeltaIoT artifact. To conclude, we look at opportunities for future research in this area.

## I. INTRODUCTION

Dealing with uncertainties is an essential problem in self-adaptive systems (SAS) [1]–[4]. Uncertainties may affect the confidence of the adaptation decisions that need to guarantee the adaptation goals [5]–[10]. Recently, we witness a rapid increase in the application of supervised and interactive machine learning (ML) methods to support self-adaptive software systems dealing with uncertainties [11], for example to reduce large adaptation spaces [12], [13], keep uncertainty parameters of runtime models up-to-date [14], update adaptation rules under uncertainty [15], and predict resource consumption [16].

While these ML methods aim at mitigating some types of uncertainties, they are likely sources of uncertainties themselves. In particular, since ML methods apply in essence statistical techniques, they may have an impact on the decisions made by a self-adaptive system. This impact is particularly relevant when formal approaches are used for runtime analysis of adaptation options that aim at providing guarantees for the decisions made by a self-adaptive system [17]–[22].

However, research has spent little attention on the impact of applying ML methods on the decision-making in self-adaptive systems [21], [23]. In fact, most self-adaptive approaches demonstrate the added value of ML methods empirically based on training data sets and runtime experiments. Yet, a rigorous theoretical analysis of the impact of applying ML methods on the decision-making of self-adaptive systems is often missing.

Computational learning theory [24]–[26] (CLT) studies the design, analysis, and complexity of ML methods, in particular

supervised methods. CLT offers a number of theorems that provide statistical bounds on the precision of machine learner models in the test phase (when the models are used to make predictions) based on their precision in the training phase (when the models are trained to generate the right output), the training data, and the capacity of the learner.

In this paper, we apply a number of CLT concepts and theorems to determine a theoretical bound for the impact of applying ML on the decisions made by a self-adaptive system based in its verification results. We focus on a particular instance that combines one type of learner - linear regression - with one type of verifier - statistical model checking - to support the decision-making of self-adaptation.

The contribution of this paper is the definition of a theoretical bound on the guarantees provided by combining linear regression with statistical model checking in decision-making for self-adaptation. We evaluate the theoretical bound empirically using a scenario of the DeltaIoT artifact [27].

The remainder of this paper is structured as follows. In Section II, we explain the research problem we tackle and we formulate the research question. Section III introduces CLT concepts, definitions, and lemmas, providing the basis for our work. In Section IV, we present the core contribution of this paper: a theorem that defines a theoretical bound for the impact of a machine learning method on the analysis results provided by a verifier. Section V evaluates the theoretical results using a scenario of the DeltaIoT artifact. Finally, in Section VI we discuss related efforts, and we conclude with suggestions for future work in this area in Section VII.

## II. PROBLEM CONTEXT AND RESEARCH QUESTION

A prominent approach to guarantee the adaptation goals in self-adaptive systems is the use of formal analysis of adaptation options at runtime. The principal idea of formal analysis is to use runtime models to predict the expected quality properties of different configurations that can be considered to adapt a system, i.e., the adaptation options, with the complete set called the adaptation space. Over the years, a variety of formal techniques have been studied to perform runtime analysis in self-adaptive systems. One prominent approach is probabilistic model checking [18], [28] that (in its basic form) exhaustively verifies the state space of each adaptation option, providing strong guarantees on the realisation of the adaptation goals. An alternative approach applies statistical model checking [29] to analyse adaptation options, as for instance used in [30].

Statistical model checking combines runtime simulation of stochastic models with statistical techniques. The approach is more efficient as exhaustive verification, yet the results are subject to an approximation interval with a confidence level.

In this paper, we focus on self-adaptive systems that are based on the MAPE-K model [31], comprising four elements: Monitor, Analyse, Plan, and Execute that share a Knowledge repository. In particular, we focus on the *adaptation problem* of ensuring an optimization goal for a self-adaptive system (e.g., ensuring that the packet loss of an IoT system is minimized). The *learning problem* is making predictions for a system property using a regressor to support analysis (e.g., predicting the packet loss of all the adaptation options to reduce the adaptation space based on a threshold value of allowed packet loss). The *verification problem* is making estimates to support the decision-making using a statistical model checker (e.g., estimating the packet loss of the reduced adaptation space to select the option with the lowest estimated packet loss).

The central idea of statistical model checking is to check the probability  $p \in [0, 1]$  that a hypothesized model  $M$  (a runtime model here) of a stochastic system (the managed system with its environment) satisfies a property  $\varphi$  (a quality goal), i.e., to check  $P_M(\varphi) \geq p$  by performing a series of simulations on  $M$ . Statistical model checking applies statistical techniques on the simulation results to decide whether the system satisfies the property with some degree of accuracy and confidence. Concretely, statistical model checking allows computing an estimation of probability  $p$  with an accuracy interval  $[p-\epsilon, p+\epsilon]$  and confidence level  $1-\alpha$ . Uppaal-SMC [32] is a tool that supports statistical model checking. A probability estimation query in Uppaal-SMC is formulated as  $p = Pr[bound](\varphi)$ . For further details, we refer the reader to [32]–[34].

Our interest here is how the application of ML affects the analysis results and hence the adaptation decisions made based on these results. Hence, the research question we address is:

*What is the impact of applying a ML method, in particular a linear regressor, on the analysis results, in particular the results obtained using statistical model checking, to support decision-making for self-adaptation?*

As the problem of the research question is statistical in nature, we need to specify the behavior of a supervised machine learner statistically, for which we rely on CLT.

### III. PRELIMINARIES

This section explains essential concepts of supervised ML derived from CLT. Supervised ML consists of a training phase and a testing phase. During training, the machine learner trains a model using labeled examples, i.e., (input, target) pairs. During testing, the learner uses the trained model to predict the target for new input. Since the training data is known, the training error can be determined. Yet, in the testing phase, when the learner is used in the real world, the test data is not known in advance, and the target values it will predict will be subject to some error. This raises the question: Can we define any bound on the test error of a learning model of a supervised learner based on its error over the training data?

To answer this question, we formalize all the relevant concepts, leveraging on notations taken from [26]. We start

with devising a statistical model for a supervised learner. To that end, we use the basic model of a supervised learner shown in Figure 1 with the following components:

- A random generator  $G$  of independent identically distributed vectors<sup>1</sup>  $x \in \mathbb{R}^n$ , from a fixed and unknown probability distribution function  $p(x)$ .
- A supervisor  $S$  that returns an output  $y$  for every input  $x$  based on a fixed and unknown conditional probability distribution function<sup>2</sup>  $p(y|x)$ .
- A learning machine  $LM$  that selects a function from a set of functions  $f(x; \theta)$  such that it obtains the best approximation for responses of  $S$ . Here,  $\theta \in \Lambda$  is a set of abstract parameters. Example parameters for a linear regressor  $y = w \times x + b$  are  $w$  and  $b$ .

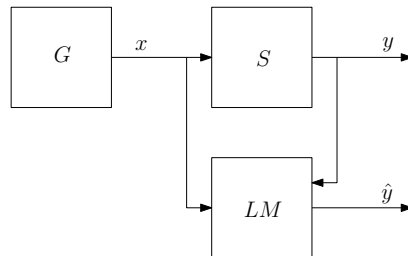


Fig. 1: The model of learning [26].

The function chosen by  $LM$  is based on a training set  $L$  that comprises of pairs  $\{(x_1, y_1), \dots, (x_m, y_m)\}$ . Note that these pairs are independent identically distributed and drawn from probability distribution function<sup>3</sup>  $p(x, y) = p(x)p(y|x)$ .

Suppose that the loss function<sup>4</sup> of  $y$  (the output of  $S$ , see Figure 1) and  $\hat{y}$  (the output of  $LM$ ) is denoted by  $l(x, y, \theta) = loss(y, f(x; \theta))$ , we can describe the *expected risk*  $r(\theta)$  as a function on the domain of  $(x, y)$  pairs, denoted by  $\Omega$ , as:

$$r(\theta) = \int_{\Omega} l(x, y, \theta) p(x, y) \mathbf{d}x \mathbf{d}y.$$

The expected risk function refers to the performance of a learning algorithm in terms of the accuracy of the predictions it makes; it is defined as the continuous mathematical expectation [35] of the loss function, with  $(x, y)$  being a pair of continuous random variables. The goal of the learning problem is to minimize the value of  $r(\theta)$ . However,  $p(x, y)$  is unknown. Therefore, we define a replacement for  $r(\theta)$  that is called *empirical risk* denoted by the function  $r_e(\theta)$ , and defined as follows (with  $\{(x_1, y_1), \dots, (x_m, y_m)\}$  representing the training data set):

$$r_e(\theta) = \frac{1}{m} \sum_{i=1}^m l(x_i, y_i, \theta)$$

Whereas  $r(\theta)$  is based on unknown  $p(x, y)$ , the empirical risk corresponds to the discrete mathematical expectation of

<sup>1</sup>Hence, we follow the common assumption that samples have been drawn from the same distribution function independent from each other.

<sup>2</sup>The conditional probability distribution function is defined by  $\frac{p(x, y)}{p(x)}$ .

<sup>3</sup>Based on the definition of the conditional probability,  $p(y|x) = p(x, y)/p(x)$ , we have  $p(x, y) = p(x)p(y|x)$ .

<sup>4</sup>The loss function defines a distance measure on the predicted target value by the learner and the real target value.

the loss function based on the known samples from  $\Omega$ . To answer the question how we can define a bound on the test error of a learning model of a supervised learner based on its error of the training data, we need to define a relation between  $r_e(\theta)$  and  $r(\theta)$  based on the definition of the loss function.

To that end, a vital concept is *Vapnik–Chervonenkis (VC) dimension* that defines the learning capacity of the machine learner based on its loss function  $l(x, y, \theta)$  – that is a set of functions based on  $\theta$  parameter – and its input dimension, i.e., the dimension of  $x$ . Lemma 1 states that the VC dimension of linear regression methods with input dimension  $n$  (we use this lemma for the evaluation case in this paper). Values for other common learning methods can be found in the CLT literature, see for instance [24], [25]. For further details on the formal definition of the VC dimension, we refer the reader to [26].

**Lemma 1** ([36]). *The VC dimension of a set of linear functions in  $\mathbb{R}^n$  (such as for linear regression) is  $n + 1$ .*

We can now define a bound on the probability of the expected risk in a range based on: (i) the number of training data  $m$ , (ii) the empirical risk  $r_e(\theta)$  with  $\theta \in \Lambda$ , (iii) the VC dimension of the learner  $d = \mathcal{VC}(l(x, y, \theta))$ , (iv) the minimum and maximum value of the predefined loss function  $a$  and  $b$  respectively, and (v) a free variable  $\eta \in [0, 1]$  that is controllable by the designer, using the following lemma:

**Lemma 2** ([26]). *For all functions in a set of totally bounded functions  $a \leq l(x, y, \theta) \leq b$  with  $\theta \in \Lambda$  and VC dimension  $d = \mathcal{VC}(l(x, y, \theta))$ , for  $m$  independent identically distributed training data with  $d < m$ , the probability  $\mathbb{P}$  of the expected risk  $r(\theta)$  between an upper and lower bound is bounded as:*

$$\mathbb{P}[r_e(\theta) - \delta \leq r(\theta) \leq r_e(\theta) + \delta] \geq 1 - \eta$$

$$\delta = (b - a)\sqrt{\nu} \text{ and } \nu = \frac{d(\ln \frac{2m}{d} + 1) - \ln \frac{\eta}{4}}{m}.$$

Lemma 2 defines a lower and upper bound for the expected risk of a learner.  $\eta$  is a free variable set by the designer to balance the lower and upper bound of  $r(\theta)$  and the minimum probability that the (lower and upper) bound contains the true value of  $r(\theta)$ . The probability of the (lower and upper) bound for the expected risk can be set in different ways. For instance, we can have a tighter bound by decreasing the VC dimension using a different learning model. If we want to reach a high probability for the (lower and upper) bound by lowering  $\eta$  but without changing the (lower and upper) bound (as  $\nu$  contains  $\eta$ ) and keeping the same learning model, we can for instance increase the number of training samples for the learner.

#### IV. IMPACT OF ML ON VERIFICATION RESULTS

We now determine the impact of applying a ML method (regression) on the verification results (obtained through statistical model checking), answering the research question. Concretely, regression is used to predict the value of a quality property of all the adaptation options for a given adaptation goal. These predictions are used to reduce the adaptation options. These options are then verified using statistical model checking and the best adaptation option is selected using the estimated values of the quality property of the verified options.

The aim of statistical model checking is to estimate the true mean of the value  $y$  of a quality. Yet, this estimation, denoted by  $y'$ , has an error that we denote by  $\kappa$ . The probability that  $y$  lays in the  $\kappa$ -neighborhood of  $y'$  is determined by the confidence level  $1 - \alpha$  of statistical model checker,<sup>5</sup> i.e.:

$$\mathbb{P}[y' - \kappa \leq y \leq y' + \kappa] \geq 1 - \alpha$$

Note that error  $\kappa$  is domain-dependent and can in general be expressed as a function  $g(\epsilon)$ , with  $\epsilon$  representing the bounds of the approximation interval of a probability estimation  $p \pm \epsilon$  obtained using statistical model checking.

On the other hand, we know that the prediction of the machine learner will be determined by  $f(x; \theta)$  (defined in Section III) based on the input vector  $x$ . Hence, we need to define a loss function to measure the distance of the predicted quality value  $\hat{y}$  and the true value  $y$ . For the purpose of our further analysis, we define the loss function as the squared error  $(y - f(x; \theta))^2$  for two reasons: (i) this loss function is differentiable in all points, and (ii) by taking the square root of the loss function, we can simply obtain an error on  $y$  with the same unit as the estimation error  $\kappa$ . In contrast, choosing a more straightforward loss function such as the absolute error  $|y - f(x; \theta)|$  would not be differentiable at point zero.

Applied to this loss function, the expected risk  $r(\theta)$  of  $y$  and  $\hat{y}$  (see Section III and Fig. 1) is defined as follows:

$$r(\theta) = \int_{\Omega} (y - f(x; \theta))^2 p(x, y) \mathbf{d}x \mathbf{d}y$$

By taking the squared root  $\sqrt{r(\theta)}$ , we obtain the expected error (or expected euclidean distance) of  $y$  and  $\hat{y} = f(x; \theta)$ . Since this error has the same unit as the estimation error  $\kappa$ , the expected error of a verification result obtained with statistical model checking for an adaptation option selected based on its predicted value with a linear regressor will be  $\sqrt{r(\theta)} + \kappa$ .

To express this empirically and answer the research question, we follow a three-step process: (i) we determine the impact of the result of statistical model checking on the expected and empirical risk of the regressor in Lemma 2, (ii) we determine the absolute error between the value of the best-selected option of the reduced and the complete adaptation space (and its relation to the expected error  $\sqrt{r(\theta)}$ ), and (iii) we combine the results of (i) and (ii) to determine the impact of ML - in particular regression - on the verification results - in particular those obtained using statistical model checking.

##### A. Impact of verification results on ML predictions

In Section III, the definition of empirical risk  $r_e(\theta)$  assumed that the target values  $y_i$  of the training data are exactly known, determining the true target values for  $x_i$ . However, when applying statistical model checking, the values of the training data are estimated by the verifier. Hence, we modify the definition of  $r_e(\theta)$  by replacing  $y_i$  with  $y_i \pm \kappa$ . The definition

<sup>5</sup>Probability estimation computes approximation interval  $p \pm \epsilon$  with confidence  $1 - \alpha$ . If this estimation is repeated  $N$  times, then the estimated interval contains the true probability  $p$  at least  $(1 - \alpha)N$  times for  $N \rightarrow \infty$  [32].

of expected risk  $r'_e(\theta)$  that is based on training values obtained through statistical model checking is defined as:

$$r'_e(\theta) = \frac{1}{m} \sum_{i=1}^m l(x_i, y_i \pm \kappa, \theta)$$

To find a relation between  $r_e$  and  $r'_e$ , we develop the Taylor series<sup>6</sup> of  $l(x, y \pm \kappa, \theta)$  around constant point  $c = (x_0, y_0, \theta_0)$ :

$$l(x, y \pm \kappa, \theta) = l(c) + \left( \frac{\partial l}{\partial x}(c)(x - x_0) + \frac{\partial l}{\partial y}(c)(y \pm \kappa - y_0) + \frac{\partial l}{\partial \theta}(c)(\theta - \theta_0) \right) + \dots$$

Rephrasing the elements of the series gives:

$$\begin{aligned} l(x, y \pm \kappa, \theta) &= \left[ l(c) + \left( \frac{\partial l}{\partial x}(c)(x - x_0) + \frac{\partial l}{\partial y}(c)(y - y_0) \right. \right. \\ &\quad \left. \left. + \frac{\partial l}{\partial \theta}(c)(\theta - \theta_0) \right) \right. \\ &\quad \left. + \text{Higher order of Taylor series for } l(x, y, \theta) \right] \\ &\pm \frac{\partial l}{\partial y}(c)\kappa + \xi(\kappa^2) \\ &= l(x, y, \theta) \pm \frac{\partial l}{\partial y}(c)\kappa + \xi(\kappa^2) \end{aligned}$$

The first part of the series (inside the square brackets) is the Taylor series of  $l(x, y, \theta)$ . The last term  $\xi(\kappa^2)$  shows that the lowest power of  $\kappa$  in the remaining part of the series is two. If we assume that error  $\kappa$  is small and  $\kappa^2$  is negligible, we can replace  $l(x, y \pm \kappa, \theta)$  with  $l(x, y, \theta) \pm \frac{\partial l}{\partial y}(c)\kappa$  in  $r'_e$ :

$$r'_e(\theta) \approx \frac{1}{m} \sum_{i=1}^m \left( l(x_i, y_i, \theta) \pm \frac{\partial l}{\partial y}(c)\kappa \right)$$

Rewriting the right hand side gives:

$$r'_e(\theta) \approx \frac{1}{m} \sum_{i=1}^m (l(x_i, y_i, \theta)) \pm \frac{\partial l}{\partial y}(c)\kappa$$

$$r'_e(\theta) \approx r_e(\theta) \pm \frac{\partial l}{\partial y}(c)\kappa$$

This formula expresses the empirical risk  $r'_e(\theta)$  with data values obtained from statistical model checking based on empirical risk with true data values  $r_e(\theta)$  and an error  $\frac{\partial l}{\partial y}(c)\kappa$ .

If we assume a smooth loss function, i.e., the absolute value of the derivative of  $l$  in  $y$  is limited, i.e.,  $a' \leq \left| \frac{\partial l}{\partial y} \right| \leq b'$ , we can rewrite the formula in Lemma 2 as follows:

$$\begin{aligned} \mathbb{P}[r'_e(\theta) - \delta' \leq r(\theta) \leq r'_e(\theta) + \delta'] &\geq (1 - \eta)(1 - \alpha) \quad (1) \\ \delta' &= \delta + b'\kappa \end{aligned}$$

This formula shows the impact of statistical model checking on the machine learner's expected and empirical risks. The initial expected risk  $r_e(\theta)$  of the lower and upper bounds of the risk in Lemma 2 is replaced by the expected risk  $r'_e(\theta)$  for

data obtained through statistical model checking. The bound  $\delta$  on the probability of the risk is affected by the error  $\kappa$  of statistical model checking (as a function of  $\epsilon$ ) denoted by  $\delta'$ . The probability of the (lower and upper) bound is modified by multiplying the original probability  $1 - \eta$  with the confidence level of the result obtained from statistical model checking  $1 - \alpha$  (because, the true value of each  $y_i$  is located in  $\kappa$ -neighborhood of  $y_i$  with probability  $1 - \alpha$ ). The analysis in this section relies on the assumption that  $l$  is differentiable in all points, see the selection of the squared error loss function.

### B. Error of best option after adaptation space reduction

The adaptation space reduction is based on the predictions of a quality property by a regressor. This paper analyzes the case of an optimization goal that aims at minimizing a quality property<sup>7</sup>. The domain of the value of the quality property is defined between  $L_q$  and  $U_q$ .<sup>8</sup> The adaptation space reduction is based on a cut-off value  $C$ , with  $L_q < C < U_q$ , that is, all configurations whose quality value is predicted to be  $\leq C$  are included in the reduced adaptation space. The cutoff can be defined as a specific absolute value or as a percentage of the actual adaptation options or another approach can be used.

We denote the best-available adaption option of the complete adaptation space by  $O_w$  with a true value of  $B_w$ . The best option of the reduced space is denoted by  $O_r$  with a true value  $B_r$ . To determine the absolute error of the best-selected option, i.e.,  $|B_r - B_w|$ , two general cases are possible.

First, the prediction of the adaptation option  $O_w$  with true value  $B_w$  lays inside the reduced space  $[L_q, C]$ , i.e.,  $L_q \leq B_w - \sqrt{r(\theta)}$  and  $B_w + \sqrt{r(\theta)} \leq C$ , with  $\sqrt{r(\theta)}$  the expected error of the predicted value of the selected adaptation option, as shown in Figure 2.




Fig. 2: The true value of the quality attribute for each adaptation option is marked with a cross on the axis. The best option of the complete adaptation space ( $O_w$ ) is marked by the (blue) square. In this case, the predicted value of the best adaptation option with expected error  $\sqrt{r(\theta)}$  is located inside the reduced space based on the cut-off value  $C$  for the minimization goal.

Second, when the prediction of  $O_w$  lays outside the reduced space, its predicted value can be greater than  $C$ , i.e.,  $B_w + \sqrt{r(\theta)} > C$ , see Figure 3. We refer to an adaptation option with a true value in the  $\sqrt{r(\theta)}$ -neighborhood of  $B_w$  as a *feasible option*. Assume that the predicted values of adaptation options are *uniformly distributed*<sup>9</sup> around their true value  $\sqrt{r(\theta)}$ -neighborhood. Take a feasible option  $O_f$  with the true value  $B_f$ , hence,  $B_f - B_w \leq \sqrt{r(\theta)}$ . Based on the uniform distribution, the probability  $p_f$  that the prediction of

<sup>7</sup>For the analysis of a goal that maximizes a quality property, see [37].

<sup>8</sup> $L_q$  and  $U_q$  are real values, i.e.,  $L_q \in [-\infty, +\infty)$  and  $U_q \in (-\infty, +\infty]$ .

<sup>9</sup>We use uniform distribution for explaining the general idea. Based on the domain and regression method, other distributions may apply.

<sup>6</sup>A series that expands a function in an infinite number of terms of its derivative. Also, it can be defined for multi-variable functions based on the function's partial differentiation of its variable which is denoted by  $\partial$ .

$O_f$  is located inside the reduced space is equal to the ratio of its true value  $\sqrt{r(\theta)}$ -neighborhood  $[B_f - \sqrt{r(\theta)}, B_f + \sqrt{r(\theta)}]$  that intersects with the reduced space  $[L_q, C]$ :

$$p_f = \frac{\left| \left[ B_f - \sqrt{r(\theta)}, B_f + \sqrt{r(\theta)} \right] \cap [L_q, C] \right|}{\left| \left[ B_f - \sqrt{r(\theta)}, B_f + \sqrt{r(\theta)} \right] \cap [L_q, U_q] \right|}$$

The maximum value of the divisor of  $p_f$  is obtained when the complete  $\sqrt{r(\theta)}$ -neighborhood of the true value of the feasible option is located inside the range of quality property values  $[L_q, U_q]$ . Hence, the maximum value for the divisor is  $2\sqrt{r(\theta)}$ . On the other hand, since for a feasible option  $B_f - \sqrt{r(\theta)} \leq B_w \leq C$  and  $B_w \leq C < B_f + \sqrt{r(\theta)}$ , the dividend of  $p_f$  is greater than or equal to  $C - B_w$ . Therefore  $p_l = C - B_w / 2\sqrt{r(\theta)} \leq p_f$ .

We denote the lower bound of  $p_f$  with  $p_l = C - B_w / 2\sqrt{r(\theta)}$ . Since  $p_l$  does not depend on the true value of  $O_f$ , the prediction of any feasible option will be located in the reduced set of adaptation options with the minimum probability  $p_l$ .

However, in a real application we cannot compute  $p_l$  as the value  $B_w$  is unknown. To address this problem, we can estimate this value by selecting the best option among the set of all predictions; we denoted the value of this best option with  $\hat{B}_w$ . If we assume that  $\hat{B}_w$  is located inside the reduced space, as the expected error of the prediction is  $\sqrt{r(\theta)}$ , we can estimate the probability  $p_l$  with  $\hat{p}_l = \frac{C - \hat{B}_w}{2\sqrt{r(\theta)}}$ .




Fig. 3: The predicted value of the best adaptation option with expected error  $\sqrt{r(\theta)}$  can be located outside the reduced space based on the cut-off value  $C$  for the minimization goal.

If the prediction of any feasible option is located inside the reduced space, it is straightforward to show that the error  $|B_r - B_w|$  will be at most  $\sqrt{r(\theta)}$ . Hence, the probability of  $|B_r - B_w| \leq \sqrt{r(\theta)}$  is equal to the probability that at least one of the feasible options is located in the reduced space. If we denote the number of feasible options by  $n$ , the probability of  $|B_r - B_w| \leq \sqrt{r(\theta)}$  is at least  $1 - (1 - \hat{p}_l)^n$ , i.e., formally:

$$\mathbb{P} \left[ |B_r - B_w| \leq \sqrt{r(\theta)} \right] \geq 1 - (1 - \hat{p}_l)^n \quad (2)$$

**Example.** Consider a self-adaptive IoT network with a packet loss in a range  $[0, 100]$  and a cut-off value for packet loss of 10%. The system uses a runtime model to predict the packet loss for different adaptation options. Figure 4 illustrates the error of the best adaptation option after adaptation space reduction at a particular point in time for the IoT application.

Assume that  $\sqrt{r(\theta)}$  is 5, and at the point in time shown in the figure the best adaptation option among  $n = 25$  feasible options has a value  $\hat{B}_w = 7\%$ . Then, the probability that error  $|B_r - B_w| \leq 5$  is equal to  $1 - \left(1 - \frac{10-7}{10}\right)^{25} \approx 0.99$ . If we decrease cut-off value  $C$  from 10 to 8, this probability, with the same number of feasible options, will decrease to 0.96.

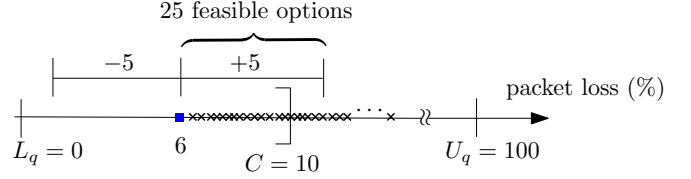


Fig. 4: Illustration error of best adaptation option after adaptation space reduction at one point in time for IoT application.

### C. Impact of ML on Verification Results

To answer the research question, i.e., to determine the impact of applying regression on the analysis results obtained with statistical model checking to support the adaptation decisions, we need to combine the results of the two previous sections: (i) a (lower and upper) bound of the expected risk  $r(\theta)$  based on known factors (VC dimension of the learner,  $\eta$ , etc.) in Formula (1) (Section IV-A), and (ii) a probabilistic bound for the absolute difference between the true value of the best-selected adaptation option in the complete and reduced adaptation space (Section IV-B), in Formula (2). Based on that, we formulate a theorem to answer the research question:

**Theorem 1.** For the specified regressor and statistical model checker, the absolute error of the best-selected adaptation option for a minimization goal will be at most  $(\sqrt{r'_e(\theta)} + \delta' + \kappa)$  with minimum probability  $(1 - \eta)(1 - \alpha)^2 (1 - (1 - p_m)^n)$ ;  $\delta' = \delta + 2U_q \cdot \kappa$  is a measurable factor that determines the absolute difference of expected and empirical risk with  $\delta = U_q^2 \sqrt{\nu}$ ,  $p_m = (C - \hat{B}_w) / (2\sqrt{r'_e(\theta)} + \delta')$  the estimated probability that the predicted quality value of a feasible option is inside the reduced adaptation space,  $\hat{B}_w$  the minimum predicted quality value of the complete adaptation options, and  $n$  the minimum number of feasible adaptation options that can be approximated and depend on the domain at hand.

We can approximate  $n$  and  $p_m$  using the predictions of the regressor and relying on the verification results of the options of the reduced adaptation space.

**Answer to Research Question:** The impact of applying a machine learner - a linear regressor that reduces the adaptation space with a given cutoff value for an optimization goal - on the analysis results of a verifier - a statistical model checker - is as follows: the bound on the estimation error of the best selected adaptation option increases from  $\kappa = g(\epsilon)$  to  $\sqrt{r'_e(\theta)} + \delta' + \kappa$ , while the confidence level is reduced from probability  $1 - \alpha$  to probability  $(1 - \eta)(1 - \alpha)^2 (1 - (1 - p_m)^n)$ .  $r'_e(\theta)$  is the measured empirical risk of the regressor,  $\delta'$  is the measurable factor that determines the absolute difference of the expected and empirical risk,  $\eta$  is a parameter that can be set by the designer to control the tightness of the error interval and its confidence level,  $p_m$  is the estimated probability that a feasible option is located in the reduced adaptation space, and  $n$  is the minimum number of feasible adaptation options, that can be determined for the domain at hand.



## V. ILLUSTRATION AND EVALUATION

We evaluate Theorem 1 empirically using an illustrative scenario of the DeltaIoT artifact [27], inspired by the work presented in [13].<sup>10</sup> DeltaIoT is a wireless IoT network that monitors the environment and sends the data to a central facility. The network is subject to interference and varying traffic load. To that end, a managing system adjusts the communication paths to minimize packet loss. This managing system exploits a regressor that predicts the packet loss of all possible network configurations (4096 in this scenario), i.e., adaptation options, in each adaptation cycle. These predictions are used to reduce the adaptation space based on a cut-off value  $C = \text{min value} + (\text{median} - \text{min value})/4.0$ . The analysis of the runtime model of the selected adaptation options is done with UPPAAL SMC using the verification query  $\text{Pr}[\leq 1] (\langle \text{Network} \rangle . \text{PacketLoss})$  (for details see [13], [37]). The minimum and the median values of  $C$  are computed over the predictions. We compare the theoretical bound on the error of the packet loss of the best selected adaptation option over 200 cycles as defined in Theorem 1, i.e.,  $\sqrt{r'_e(\theta)} + \delta' + \kappa$ , and the measured error, i.e., the absolute difference between the minimum packet loss value for the optimal configuration obtained from verification of all adaptation options and the value obtained from the reduced set of adaptation options. Here, the empirical training risk  $r'_e$  is defined as the mean squared error (MSE) of the regressor on the training data, i.e.,  $r'_e(\theta) = \frac{1}{m} \sum_{i=1}^m (y_i - \hat{y}_i)^2$ .

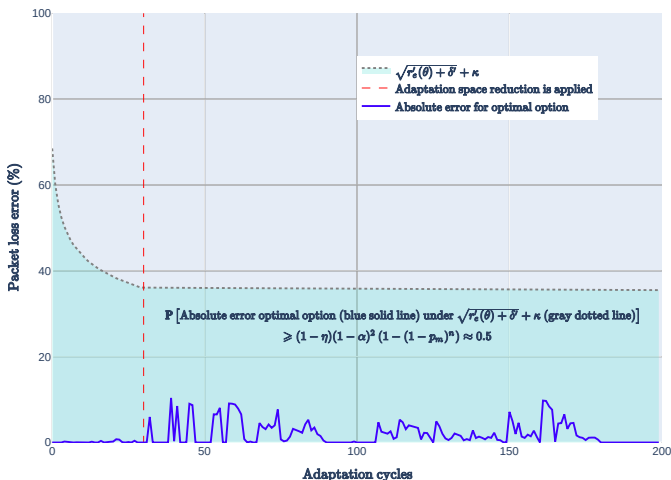


Fig. 5: The dotted line shows the theoretical bound of the packet loss error; the solid line shows the measured error. Settings used in the experiment: statistical model checking parameters  $\epsilon = 0.01$  and  $\alpha = 0.1$ , dimension of input data to determine the features of the regressor 85, the VC dimension of the regressor  $d = 85 + 1$  (see Lemma 1), and estimation error  $\kappa = 1$ , that is,  $\kappa$  is equal to  $g(\epsilon) = 100 \times \epsilon$ .

Figure 5 shows the results. During the first 30 cycles, the learner is trained without adaptation space reduction. From cycle 31 onward adaptation space reduction is applied. The absolute difference between the packet loss values of the best of all adaptation options and the best option of the reduced

space fluctuates between 0.0 and 10.4 (mean 2.1, std. 2.7). The results show that the error for the packet loss obtained from this experiment complies with the theoretical bound on the estimated error and its confidence level as defined in Theorem 1. Yet, the results are subject to validity concerns with respect to a single evaluation in one particular domain.

## VI. RELATED WORK

A characteristic work that applies ML in support of obtaining guarantees for the adaptation goals is [38]. That work used a decision tree to predict how long it takes to change a state in the environment based on the current state. This knowledge is then used to tune the adaptation policies. However, that work does not provide guarantees on the bound of the prediction results, which could be obtained leveraging on the results we present in this paper. Another recent study [39] employs Q-learning to predict the quality of service of a system in support to the planning stage. While the approach can reduce the decision space effectively, the paper does not provide a theoretical bound on the guarantees for the proposed approach. One way to provide such guarantees is to exploit CLT that provides theoretical bounds for reinforcement learning methods, in line with the approach and results we present in this paper.

Verification of properties of machine learners is a recent line of research applied to safety-critical systems. Reluplex [40] is a characteristic work in this realm that introduced an efficient satisfiable modulo theories solver to verify a deep neural network (DNN) with a rectified linear unit activation function. The method was applied in the domain of collision avoidance of unmanned aircrafts. Other efforts related to Reluplex are [41]–[43], and [44] that proposed a unified framework for verifying properties of DNN. Another related effort proposed a process to select safe actions based on verified results using reinforcement learning [45]. In contrast to these efforts, our work studies the impact of a machine learner on the adaptation decisions made based on formal verification.

## VII. CONCLUSION AND OUTLOOK FOR FUTURE WORK

This paper contributes a theorem that defines a theoretical bound on the impact of applying a machine learning method, in particular a linear regressor that reduces the adaptation space of a self-adaptive system for an optimization goal, on the analysis results of a verifier, in particular a statistical model checker, that are used for making adaptation decisions. We evaluated the theorem using a simply IoT application.

The work presented in this paper can be extended to classification tasks that apply for the decision-making of threshold goals. This case can rely on Lemma 2, yet, for this case, the analysis needs to determine the impact of the classification loss on the bound of the error of the selected adaptation options and its probability. For ML-based reduction methods in general, it may be useful to study Rademacher complexity [46] to determine a tighter bound for the guarantees of verification results. Rademacher complexity measures the learning capacity of the machine learner. Utilizing this complexity provides an alternative way to determine a bound between the expected and the empirical risk, analogous to Lemma 2. Finally, more research is required to investigate other types of learners and other use cases of ML methods used in self-adaptive systems.

<sup>10</sup>For a complete description of the evaluation setting with results, see [37].

## REFERENCES

- [1] B. H. Cheng *et al.*, “Software engineering for self-adaptive systems: A research roadmap,” in *Software engineering for self-adaptive systems*, Springer, 2009.
- [2] R. de Lemos *et al.*, “Software engineering for self-adaptive systems: A second research roadmap,” in *Software Engineering for Self-Adaptive Systems II*, vol. 7475 of *Lecture Notes in Computer Science*, Springer, 2010.
- [3] R. de Lemos *et al.*, “Software engineering for self-adaptive systems: Research challenges in the provision of assurances,” in *Software Engineering for Self-Adaptive Systems III. Assurances*, Springer, 2017.
- [4] D. Weyns, *Introduction to Self-Adaptive Systems: A Contemporary Software Engineering Perspective*. Wiley, IEEE Press, 2020.
- [5] D. Garlan, “Software engineering in an uncertain world,” in *Future of Software Engineering Research (FoSER)*, Santa Fe, New Mexico, USA, 2010.
- [6] A. Ramirez, A. Jensen, and B. H. Cheng, “A taxonomy of uncertainty for dynamically adaptive systems,” in *Software Engineering for Adaptive and Self-Managing Systems*, 2012.
- [7] N. Esfahani and S. Malek, “Uncertainty in self-adaptive software systems,” in *Software Engineering for Self-Adaptive Systems II*, Springer, 2013.
- [8] D. Perez-Palacin and R. Mirandola, “Uncertainties in the modeling of self-adaptive systems: a taxonomy and an example of availability evaluation,” in *International Conference on Performance Engineering*, 2014.
- [9] S. Mahdavi-Hezavehi, P. Avgeriou, and D. Weyns, “A classification framework of uncertainty in architecture-based self-adaptive systems with multiple quality requirements,” in *Managing Trade-Offs in Adaptable Software Architectures*, pp. 45 – 77, Morgan Kaufmann, 2017.
- [10] R. Calinescu, R. Mirandola, D. Perez-Palacin, and D. Weyns, “Understanding uncertainty in self-adaptive systems,” in *International Conference on Autonomic Computing and Self-Organizing Systems*, 2020.
- [11] O. Gheibi, D. Weyns, and F. Quin, “Applying machine learning in self-adaptive systems: A systematic literature review,” in *arXiv*, 2103.04112, 2021.
- [12] P. Jamshidi, J. Cámara, B. Schmerl, C. Käestner, and D. Garlan, “Machine learning meets quantitative planning: Enabling self-adaptation in autonomous robots,” in *2019 IEEE/ACM 14th International Symposium on Software Engineering for Adaptive and Self-Managing Systems (SEAMS)*, pp. 39–50, IEEE, 2019.
- [13] F. Quin, D. Weyns, T. Bamelis, S. B. Sarpreet, and S. Michiels, “Efficient analysis of large adaptation spaces in self-adaptive systems using machine learning,” in *2019 IEEE/ACM 14th International Symposium on Software Engineering for Adaptive and Self-Managing Systems (SEAMS)*, pp. 1–12, IEEE, 2019.
- [14] T. Chen, “All versus one: an empirical comparison on retrained and incremental machine learning for modeling performance of adaptable software,” in *International Symposium on Software Engineering for Adaptive and Self-Managing Systems*, IEEE, 2019.
- [15] T. Zhao, W. Zhang, H. Zhao, and Z. Jin, “A reinforcement learning-based framework for the generation and evolution of adaptation rules,” in *2017 IEEE International Conference on Autonomic Computing (ICAC)*, pp. 103–112, IEEE, 2017.
- [16] M. Ferroni, A. Corna, A. Damiani, R. Brondolin, J. D. Kubiawicz, D. Sciuto, and M. D. Santambrogio, “Marc: a resource consumption modeling service for self-aware autonomous agents,” *ACM Transactions on Autonomous and Adaptive Systems*, vol. 12, no. 4, 2017.
- [17] R. Calinescu, L. Grunske, M. Kwiatkowska, R. Mirandola, and G. Tamburrelli, “Dynamic QoS management and optimization in service-based systems,” *IEEE Transactions on Software Engineering*, vol. 37, no. 3, 2011.
- [18] G. A. Moreno, J. Cámara, D. Garlan, and B. Schmerl, “Proactive self-adaptation under uncertainty: A probabilistic model checking approach,” in *10th Joint Meeting on Foundations of Software Engineering, ESEC/FSE 2015*, (New York, NY, USA), p. 1–12, Association for Computing Machinery, 2015.
- [19] D. Weyns and M. U. Iftikhar, “Activforms: A model-based approach to engineer self-adaptive systems,” *CoRR*, vol. abs/1908.11179, 2019.
- [20] R. de Lemos *et al.*, “Software engineering for self-adaptive systems: Research challenges in the provision of assurances,” in *Software Engineering for Self-Adaptive Systems III. Assurances*, vol. 9640 of *Lecture Notes in Computer Science*, Springer, 2013.
- [21] D. Weyns, N. Bencomo, R. Calinescu, J. Cámara, C. Ghezzi, V. Grassi, L. Grunske, P. Inverardi, J.-M. Jezequel, S. Malek, R. Mirandola, M. Mori, and G. Tamburrelli, “Perpetual assurances for self-adaptive systems,” in *Software Engineering for Self-Adaptive Systems III. Assurances*, pp. 31–63, Springer, 2017.
- [22] R. Calinescu, D. Weyns, S. Gerasimou, M. U. Iftikhar, I. Habli, and T. Kelly, “Engineering trustworthy self-adaptive software with dynamic assurance cases,” *IEEE Transactions on Software Engineering*, vol. 44, no. 11, pp. 1039–1069, 2018.
- [23] D. Weyns, “Software engineering of self-adaptive systems,” *Handbook of Software Engineering*, 2017.
- [24] D. Angluin, “Computational learning theory: Survey and selected bibliography,” in *Proceedings of the Twenty-Fourth Annual ACM Symposium on Theory of Computing*, STOC ’92, (New York, NY, USA), p. 351–369, Association for Computing Machinery, 1992.
- [25] M. J. Kearns and U. Vazirani, *An Introduction to Computational Learning Theory*. The MIT Press, 1994.
- [26] V. Vapnik, *The nature of statistical learning theory*. Springer science & business media, 2013.
- [27] M. U. Iftikhar, G. S. Ramachandran, P. Bollansée, D. Weyns, and D. Hughes, “Deltaiot: A self-adaptive internet of things exemplar,” in *International Symposium on Software Engineering for Adaptive and Self-Managing Systems*, IEEE Computer Society, 2017.
- [28] R. Calinescu, L. Grunske, M. Kwiatkowska, R. Mirandola, and G. Tamburrelli, “Dynamic qos management and optimization in service-based systems,” *IEEE Trans. Softw. Eng.*, vol. 37, p. 387–409, May 2011.
- [29] A. Legay, B. Delahaye, and S. Bensalem, “Statistical model checking: An overview,” in *International conference on runtime verification*, pp. 122–135, Springer, 2010.
- [30] D. Weyns and U. Iftikhar, “Model-based simulation at runtime for self-adaptive systems,” *Models at Runtime*, pp. 1–9, 2016.
- [31] J. O. Kephart and D. M. Chess, “The vision of autonomic computing,” *Computer*, vol. 36, no. 1, pp. 41–50, 2003.
- [32] A. David, K. Larsen, and A. Legay *et al.*, “Uppaal smc tutorial,” *International Journal on Software Tools for Technology Transfer*, vol. 17, no. 4, pp. 397–415, 2015.
- [33] H. Younes, *Verification and Planning for Stochastic Processes with Asynchronous Events*. PhD thesis, 2004. Carnegie Mellon University. AAI3159989.
- [34] E. Clarke, J. Faeder, and C. Langmead *et al.*, “Statistical model checking in biolab: Applications to the automated analysis of t-cell receptor signaling pathway,” in *6th International Conference on Computational Methods in Systems Biology*, pp. 231–250, Springer-Verlag, 2008.
- [35] A. S. Poznyak, *Advanced mathematical tools for automatic control engineers: Stochastic techniques*. Elsevier, 2009.
- [36] C. Burges, “A tutorial on support vector machines for pattern recognition,” *Data mining and knowledge discovery*, vol. 2, no. 2, 1998.
- [37] O. Gheibi, D. Weyns, and F. Quin, “Complementary material paper: On the impact of applying machine learning in the decision-making of self-adaptive systems,” in <https://people.cs.kuleuven.be/danny.weyns/material/SASML/index.htm>, 2021.
- [38] A. Rodrigues, R. D. Caldas, G. N. Rodrigues, T. Vogel, and P. Pelliccione, “A learning approach to enhance assurances for real-time self-adaptive systems,” in *Software Engineering for Adaptive and Self-Managing Systems*, IEEE, 2018.
- [39] J. Cámara, H. Muccini, and K. Vaidyanathan, “Quantitative verification-aided machine learning: A tandem approach for architecting self-adaptive iot systems,” in *2020 IEEE International Conference on Software Architecture (ICSA)*, pp. 11–22, 2020.
- [40] G. Katz, C. Barrett, D. L. Dill, K. Julian, and M. J. Kochenderfer, “Reluplex: An efficient SMT solver for verifying deep neural networks,” in *International Conference on Computer Aided Verification*, 2017.
- [41] O. Bastani, Y. Ioannou, L. Lampropoulos, D. Vytiniotis, A. Nori, and A. Criminisi, “Measuring neural net robustness with constraints,” in *Advances in neural information processing systems*, 2016.
- [42] L. Pulina and A. Tacchella, “An abstraction-refinement approach to verification of artificial neural networks,” in *International Conference on Computer Aided Verification*, pp. 243–257, Springer, 2010.
- [43] R. Ehlers, “Formal verification of piece-wise linear feed-forward neural networks,” in *International Symposium on Automated Technology for Verification and Analysis*, pp. 269–286, Springer, 2017.
- [44] R. R. Bunel, I. Turkaslan, P. Torr, P. Kohli, and P. K. Mudigonda, “A unified view of piecewise linear neural network verification,” in *Advances in Neural Information Processing Systems*, 2018.
- [45] G. R. Mason, R. C. Calinescu, D. Kudenko, and A. Banks, “Assured reinforcement learning for safety-critical applications,” in *Doctoral Consortium at the 10th International Conference on Agents and Artificial Intelligence*, SciTePress, 2017.
- [46] S. Shalev-Shwartz and S. Ben-David, *Understanding machine learning: From theory to algorithms*. Cambridge university press, 2014.