
D3P - A PYTHON PACKAGE FOR DIFFERENTIALLY-PRIVATE PROBABILISTIC PROGRAMMING

Lukas Prediger¹, Niki Loppi², Samuel Kaski^{1,3}, and Antti Honkela⁴

¹Aalto University, Finland

²NVIDIA AI Technology Center, Finland

³University of Manchester, UK

⁴University of Helsinki, Finland

Abstract

We present `d3p`, a software package designed to help fielding runtime efficient widely-applicable Bayesian inference under differential privacy guarantees. `d3p` achieves general applicability to a wide range of probabilistic modelling problems by implementing the differentially private variational inference algorithm, allowing users to fit any parametric probabilistic model with a differentiable density function. `d3p` adopts the probabilistic programming paradigm as a powerful way for the user to flexibly define such models. We demonstrate the use of our software on a hierarchical logistic regression example, showing the expressiveness of the modelling approach as well as the ease of running the parameter inference. We also perform an empirical evaluation of the runtime of the private inference on a complex model and find an ~ 10 fold speed-up compared to an implementation using TensorFlow Privacy.

Keywords differential privacy, JAX, NumPyro, probabilistic programming, variational inference

1 Introduction

Probabilistic modelling presents a natural way to model data by describing their (assumed) generative process. The model is then fit to observations by probabilistic inference algorithms. Learning from sensitive data, however, clearly raises concerns about privacy, calling for privacy-preserving model inference algorithms. Differential privacy (DP) [10] provides a rigorous mathematical framework for addressing such concerns and has become the de-facto standard notion for privacy. It essentially assures that an algorithm's outputs will not differ significantly whether a specific individual's data record is included in the data set or not. Unfortunately, differentially-private algorithms are usually more complex than their non-private counterparts, which typically results in increased runtime. Software support for performing fast differentially-private inference is therefore a crucial tool to achieve privacy-preserving data analysis with the probabilistic modelling approach.

An exciting application of differentially-private probabilistic modelling is its use as a generative model to publish a privacy-preserving synthetic twin of a sensitive data set [20]. The model is trained under differential privacy guarantees and then a new data set is sampled from that model. Since the model is learned under privacy guarantees, the synthetic data does not leak sensitive information and can safely be published. The major appeal of this approach is that it allows arbitrary analysis of the published data set and is not restricted to a fixed number of a certain set of queries.

Probabilistic programming is a programming paradigm that allows a user to specify and infer probabilistic models programmatically, typically following the mathematical specification very closely. This makes probabilistic programming very expressive, flexible and convenient to use, as demonstrated by the popularity of probabilistic programming frameworks such as, e.g., Pyro [3]. Unfortunately, neither Pyro nor other comparable frameworks provide out-of-the-box support for privacy-preserving inference of model parameters. Practitioners are forced to come up with their own implementation, either from scratch or by adapting existing privacy-enabling libraries, which can be an onerous process and leads to many users having to implement the same (or quite similar) wrapper code. There is therefore a clear need for software solutions that enable privacy-preserving probabilistic programming in a convenient and runtime efficient way to allow for fast prototyping and development involving probabilistic programming under privacy constraints.

We address this gap and extend the tool set for growing adoption of DP by introducing an open-source Python software package called `d3p`.¹ `d3p` focuses on providing a reliable high-performance implementation of differentially-private doubly stochastic variational inference (DP-VI) [19] for tabular data, where each record corresponds to a single individual. `d3p` integrates with the NumPyro probabilistic programming framework [31, 3], allowing modellers to express and fit a large class of probabilistic models under strict privacy guarantees. Alongside the fundamental DP-VI algorithm, `d3p` uses a state-of-the-art privacy accounting technique [24] to compute tight bounds on the privacy parameters, allowing it to achieve higher levels of utility than with other commonly employed accountants.

Behind the scenes, `d3p` relies on the JAX framework [4] to perform computation on GPUs and implements a recent GPU-optimised minibatch sampling algorithm [34] to further optimise performance. Using `d3p` we achieve a ~ 10 fold speedup for fitting a variational auto-encoder model [23] compared to a similar implementation using TensorFlow Privacy [32] on modern GPUs.

`d3p` addresses a research audience of probabilistic modelling practitioners working with sensitive data. We aim to provide a helpful tool for experimental modelling under privacy constraints. Our main focus in its design therefore is on usability and runtime performance to enable fast modelling iterations. Due to this, `d3p` currently does not address technical issues arising from implementing idealised differentially private algorithms on machines with imperfect sources of randomness and finite precision, discussed further in Sec. 2.5; these could theoretically be exploited by an adversary if deployed in a production setting.

In summary, we make the following contributions:

- We provide a convenient probabilistic programming package, `d3p`, with extremely fast and widely-applicable differentially-private variational inference.
- We review probabilistic programming and differentially private variational inference to identify software requirements for such a software package for use in research (Section 2).
- We demonstrate use of our software on a non-trivial hierarchical logistic regression example, illustrating the expressiveness of the probabilistic programming approach and probabilistic modelling (Section 3).
- We highlight some implementation details informed by the identified requirements (Section 4).
- Finally, we provide (probabilistic) runtime bounds for a special case of the CUDA-Shuffle algorithm [34], a recent innovation which enables GPU-optimised minibatch sampling in our software. (Section 4).

2 Differentially Private Probabilistic Programming

In this section, we review the background and techniques for differentially private probabilistic programming that inform the implementation choices of our framework. We start with a broad general introduction of the probabilistic programming paradigm and variational inference (Sec. 2.1) and the definition of differential privacy as our main privacy formalism (Sec. 2.2). Following that we give an outline of the powerful DP-VI private inference algorithm (Sec. 2.3) and review privacy accounting tools (Sec. 2.4). Finally we briefly point out technical difficulties resulting from implementing idealised differentially private algorithms on machines with imperfect sources of randomness and finite precision (Sec. 2.5). Each subsection provides an overview of the topic and allows us to identify major requirements for a software implementation, which are summarised in Table 1. The requirements we identify correspond directly to our overarching goals of providing software that is convenient to use and highly performant. Accordingly, we categorise requirements in Table 1 with the labels *usability* or *performance*.

No.	Requirement	Category	Section
I	Integrate with an existing popular probabilistic programming framework.	<i>usability</i>	2.1
II	Provide assistance for the user in finding adequate privacy bounds	<i>usability</i>	2.2
III	Perform efficient per-instance gradient computation and clipping.	<i>performance</i>	2.3
IV	Determine DP inference algorithm parameters (C and σ) automatically.	<i>usability</i>	2.3
V	Perform efficient independent minibatch sampling.	<i>performance</i>	2.3
VI	Provide state-of-the-art privacy accounting.	<i>usability</i>	2.4

Table 1: Requirements for the differentially private probabilistic programming framework with their corresponding category and the subsection they were discussed in (in order of appearance in the text).

¹Available at: <https://github.com/DPBayes/d3p>

2.1 Probabilistic Programming

Probabilistic programming describes a paradigm in which a user programmatically defines a statistical model of data which often depends on a set of parameters θ . In mathematical terms, such a model determines a probabilistic density function $p(\cdot|\theta)$. A probabilistic inference algorithm is then used to determine the posterior distribution $p(\theta|X)$ of the parameter values given a training data set X . The posterior is given by Bayes' formula as $p(\theta|X) \propto p(X|\theta)p(\theta)$, where, $p(X|\theta)$ is the likelihood of the data under the probabilistic model with given parameter values. $p(\theta)$ is a prior distribution encapsulating existing knowledge about plausible parameter values.

The approach is comparable to other machine learning approaches such as neural networks in so far that the user defines some structure of the model programmatically but the exact parameter values are learned from data. However, probabilistic programming allows the user to incorporate prior knowledge about the data in a much more principled way: They can, e.g., enforce structural constraints on correlation of data dimensions through hierarchical models and conditional distributions, and domain constraints through the choice of distributions with an appropriate support. Additionally, existing knowledge about plausible data or parameter values can be provided by means of the prior distribution over the parameter values.

Probabilistic models are often preferable to black-box models to gain insights on the processes generating data. The structural information encoded by a probabilistic model typically makes them easier to interpret. They also intrinsically provide measures of uncertainty, which allow the user to assess the quality and usefulness of the model. Finally, probabilistic models can often be used to sample new data points from the inferred distribution, which makes them ideally suited for synthesising data sets.

It follows that probabilistic programming languages or frameworks need to provide the user with convenient means to specify the probabilistic models, to perform parameter inference for the models, to evaluate the goodness of an inferred model for some data, and to sample new data points from a model. There are popular frameworks that already provide these features and have established user bases. To enable easy user adoption, a software package providing differential privacy for probabilistic programming should not aim to re-implement these but rather integrate with existing solutions by extending them with support for differentially private inference (Table 1, Requirement I).

Doubly Stochastic Variational Inference At the heart of probabilistic programming lies the inference algorithm that is used to determine the posterior distribution of parameters $p(\theta|X)$. For complex models computing this posterior exactly is typically intractable. Variational inference [21, 39], a class of approximate inference algorithms, therefore approximates it with a simpler, tractable distribution $q(\theta|\psi)$ with parameters ψ , found by solving the optimisation problem $\min_{\psi} D(q(\theta|\psi)||p(\theta|X))$ where $D(\cdot||\cdot)$ is a divergence measure for probability distributions.

Doubly stochastic variational inference (DSVI) [37] is a gradient ascent algorithm for non-conjugate models with differentiable (joint) probability densities $p(X, \theta)$ and a $q(\theta|\psi)$ from which values can be easily sampled algorithmically. While these conditions limit applicability somewhat, they still allow for a large class of models to be fitted.

DSVI minimises the KL-divergence by maximising the so-called *evidence lower bound (ELBO)*, defined as

$$\mathcal{L}(\psi|X) = \mathbb{E}_{\theta \sim q(\theta|\psi)} [\log p(X|\theta) + \log p(\theta) - \log q(\theta|\psi)]. \quad (1)$$

The expectation is approximated stochastically by sampling θ from $q(\theta|\psi)$ and using a minibatch of the training data for each gradient step. For details we refer to [37].

2.2 Differential Privacy

We rely on (approximate) differential privacy [10, 9] as the primary privacy notion for a privacy-preserving variant of the DSVI algorithm. Following [8, Def. 2.4], it is defined as:

Definition 1 (Approximate Differential Privacy). A randomised algorithm \mathcal{M} satisfies (ϵ, δ) -differential privacy with $\epsilon > 0$ and $0 \leq \delta \leq 1$ if, for all neighbouring data sets $X \sim X'$, and for all $S \subset \text{im}(\mathcal{M})$, we have

$$\Pr(\mathcal{M}(X) \in S) \leq e^{\epsilon} \Pr(\mathcal{M}(X') \in S) + \delta. \quad (2)$$

The two data sets X and X' are considered to be neighbours, denoted $X \sim X'$, when we can obtain one from the other by adding (resp. removing) a single element. ϵ and δ are *privacy bounds* (or *privacy parameters*) restricting the effect that the presence of any particular record in the input data set has on the output of the algorithm \mathcal{M} .

Smaller values for these privacy bounds correspond to stricter privacy, however there is a trade-off between privacy and utility of the algorithm's outputs. Larger values for privacy bounds typically result in higher utility of the outputs, as they allow more information to pass through the algorithm. Choosing the privacy bounds therefore requires careful

consideration of this trade-off. This is difficult because for many users, especially those inexperienced with DP, it is not clear how to interpret the privacy bounds in a concrete setting. The software should therefore assist the user in choosing appropriate privacy bounds which we reflect in Requirement II.

2.3 Differentially Private Doubly Stochastic Variational Inference

Jälkö et al. introduced a (ϵ, δ) -DP version of the doubly stochastic variational inference algorithm in [19]. This DP-VI algorithm is derived from the influential DP-SGD [33, 2] and the relevant steps of a single iteration (out of T many) can be summarised as

1. Sample a random minibatch of size B from the training data set.
2. For each instance in the minibatch:
 1. Compute the gradient of the ELBO.
 2. Clip the norm of the gradient to a bound C .
3. Aggregate per-instance gradients.
4. Perturb by adding zero-mean Gaussian noise with variance $C^2\sigma^2$.
5. Update the model parameters with the perturbed gradient.

The main mechanism by which differential privacy is achieved is the perturbation of the minibatch gradient in step 4 via the Gaussian mechanism [8, Thm. 3.22]. The level of noise, characterised by its variance σ^2 , must be carefully calibrated to provide the desired level of privacy. However, the gradient of any data instance could in theory be arbitrarily large, rendering any fixed noise level ineffective. To remedy this, the DP-VI algorithm enforces an upper bound C on the gradient of each data instance (in step 2.2). The important implication of this is that an implementation of DP-VI needs an efficient way of computing and manipulating the per-instance (often also known as per-example) gradients in a minibatch instead of a single gradient over the entire minibatch (Requirement III).

Another important observation is that the DP-VI algorithm has additional hyperparameters C and σ which govern the privacy vs. accuracy trade-off. Especially σ depends non-trivially on the clipping bound C , desired privacy bounds ϵ and δ , batch size B and the number of iterations T . The next requirement for the software package is therefore the ability to (automatically) derive appropriate values for the DP-VI hyperparameters from these other hyperparameters (Requirement IV).

A final crucial point is that the algorithm is shown to provide differential privacy only under the assumption that minibatches are independently sampled from the training set. As this needs to occur in every iteration of the algorithm, this routine must be especially fast to not slow down the inference as a whole, making another performance requirement for our software (Requirement V).

2.4 Privacy Accounting

As we have seen, the DP-VI algorithm consists of an iterative application of the (subsampling) Gaussian mechanism on gradients wrt. random minibatches of the training data. The overall privacy bounds ϵ and δ of the DP-VI algorithm then result from the DP composition. In order to achieve good utility it is crucial to compute these overall privacy bounds to be as tight as possible: Looser bounds mean that larger perturbations are required for a desired level of privacy, reducing the information extracted from the data and decreasing utility of the inferred model (cf. [11]).

While loose bounds can be computed using general DP composition theorems in a simple way (cf. [8]), obtaining tight bounds typically requires more complex computation using methods called *privacy accountants*. Abadi et al.'s Moments accountant [2] was the first of these and significantly improved over traditional DP composition theorems. The tightest privacy bounds are currently achieved by the Fourier accountant [24].

Privacy accountants are typically of the form $f_{PA}(C, \sigma, B, T, \delta) = \epsilon$, i.e., they take in the algorithm's parameters as well as a target value for δ and compute the corresponding upper bound for ϵ . They are therefore the primary tool to translate between privacy bounds and inference hyperparameters and instrumental for addressing Requirements II and IV.

With these considerations, providing an implementation of a state-of-the-art privacy accountant is an important aspect for a differentially private probabilistic programming framework and becomes Requirement VI.

2.5 Remaining Technical Concerns for the Practical Implementation

The definition of approximate differential privacy given in Section 2.2 provides information-theoretic guarantees: It is impossible for the output probabilities of an algorithm to vary too much no matter what the input is. These can typically not be achieved by a computer system which do not have access to perfect sources of randomness for sampling noise and rely on finite-precision approximation of real numbers. Both of these have the potential to completely void the privacy guarantees of DP algorithms in practical implementations: Predictable randomness can allow an attacker to remove the perturbations [16] and finite-precision floating point numbers can leak information due to approximation errors [29].

We recognise these issues as generally important for production systems. However, as we have already pointed out, we undergo no effort to address these for the current version of d3p, which is primarily intended as a research tool. We consider solving these issues for the DP-VI algorithm as important future work.

2.6 Summary

We have seen in this section that there is a large number of desiderata for an implementation of a differentially private probabilistic programming framework. These are summarised in Table 1 and fall into different categories that make some mostly technical considerations for the implementation (e.g., Requirements III, V), while others are important aspects in the design of the user interface (e.g., Requirements II, IV).

In the following sections we first explore how our software package addresses these requirements from a user perspective by implementing an example model. However, some of the technical requirements are not experienced by the user in the programming interface directly and cannot be demonstrated in the example: Whether the implementation is performant (Requirements III, V) has almost no effect on the interface seen by the user but is nevertheless a crucial part of their experience. We therefore briefly discuss some implementation details following the examples to illustrate how the identified requirements were addressed and, following that, provide an empirical evaluation of the runtime performance.

3 d3p Usage Example

We will now demonstrate our d3p software package on a practical example to show how the previously identified requirements are addressed from a user’s perspective. d3p centers around an efficient implementation of the DP-VI algorithm and therefore admits non-conjugate models with differentiable probability densities. It is designed to provide differential privacy guarantees for tabular data, where each individual contributed a single sensitive record and records are assumed conditionally independent. d3p uses NumPyro [31, 3] as a modelling language and JAX [4, 15] as the underlying computation framework, which offers an API similar to NumPy [18]. We start by implementing an intentionally simple logistic regression model to make the reader familiar with the basics of probabilistic programming and show how d3p’s DP-VI algorithm is invoked to infer the model’s parameters. We then highlight the expressiveness of the probabilistic programming approach by adapting the code to a more complex model that achieves a better fit to the data.

3.1 Defining a Model

The simple logistic regression model we consider first is for a data set X of records $\mathbf{x}_i \in \mathbb{R}^D$ with corresponding labels $y_i \in \{0, 1\}$. We assume that each such record and label corresponds to a single individual.

Mathematically the logistic regression model is formulated as

$$\begin{aligned} p(y_i | \mathbf{x}_i, \mathbf{w}) &= \text{Bernoulli}(y_i; \theta_i), \\ \theta_i &= \sigma(\mathbf{w}^T \mathbf{x}_i), \\ p(\mathbf{w}) &= \mathcal{N}(\mathbf{w}; \mathbf{w}_0, \mathbf{S}_0), \end{aligned} \tag{3}$$

where $\sigma(x) = 1/(1 + \exp(-x))$ denotes the sigmoid function and $\text{Bernoulli}(\cdot; \theta)$ denotes the Bernoulli distribution with success probability θ . The model uses a weight vector $\mathbf{w} \in \mathbb{R}^D$ to express the relationship between the records and labels. For a Bayesian treatment we place a prior on \mathbf{w} to encode existing knowledge. In our first example we assume that we do not have strong prior knowledge but want to enforce some regularisation, and therefore use a weakly informative, zero-centered Gaussian prior with $\mathbf{w}_0 = 0$ and $\mathbf{S}_0 = 4\mathbf{I}$. The model is visualised using plate diagram notation in Figure 1.

```

def model(xs, ys, N): # specifies the model p(ys, w | xs)
    batch_size, d = xs.shape # obtain data dimensions

    # the prior for w
    w = sample('w', Normal(0, 4), sample_shape=(d,))

    # distribution of label y for each record x, vectorised
    with plate('batch', N, batch_size):
        theta = sigmoid(xs.dot(w))
        sample('ys', Bernoulli(theta), obs=ys)

def guide(xs, ys, N): # specifies the variational posterior q(w)
    d = jnp.shape(xs)[1]

    # variational parameters
    w_loc = param('w_loc', jax.numpy.zeros((d,)))
    w_scale = jnp.exp(param('w_scale_log', jax.numpy.zeros((d,))))

    # variational distribution for w
    sample('w', Normal(w_loc, w_scale))

```

Listing 1: Implementation of a simple logistic regression model in NumPyro for d3p.

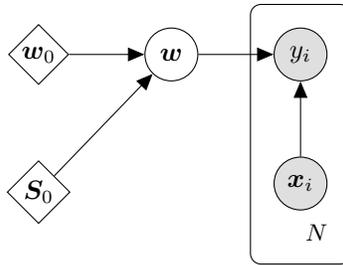


Figure 1: Plate diagram of the simple logistic regression model $p(y, w|x)$.

Implementation of the Model We can implement this model using the modelling mechanisms of the NumPyro probabilistic programming framework, as shown in `model` function in the top part of Listing 1. The model is defined as a function taking (a minibatch of) the data as an input and specifies a sampling process in an imperative programming style: Values for w are sampled from the specified Gaussian prior with zero mean and a standard deviation of 4. The values for labels are sampled from the Bernoulli distribution (cf. Eq. 3). However, the `sample` call for y is conditioned to return the values `ys` passed into the `model` function using the `obs` keyword. This is the mechanism by which the labels are passed into the inference algorithm despite the model being specified from a generative perspective.

NumPyro’s `plate` context manager is used to express the independence assumption for the individual data records. Note that this is an important assumption in the `d3p` package and must be reflected in the model in this way.² This requires the additional argument `N` to the model, which specifies the total amount of data records in the training data.

Implementation of the Variational Posterior For inference of the model’s parameters in our example, we use independent Gaussian distributions for every data dimension j with parameters $\mu_{w,j}$ and $\sigma_{w,j}$ as the variational approximation to the posterior distribution, i.e.,

$$q(w_j | \mu_{w,j}, \sigma_{w,j}) = \mathcal{N}(\mu_{w,j}, \sigma_{w,j}^2). \quad (4)$$

The variational parameters μ_w and σ_w will be optimised according to the discussion in Section 2.1. The corresponding NumPyro implementation is shown in the `guide` function, following naming conventions of NumPyro, in the lower portion of Listing 1. We register μ_w and σ_w as parameters `w_loc` and `w_scale` for the inference algorithm and

²Apart from clearly stating the assumptions made for the data, this ensures that using minibatches instead of the whole data set does not affect the amount by which an individual sample contributes to the ELBO.

```

def infer(data, labels, batch_size, num_iter, epsilon, delta, rng_key):
    # set up minibatch sampling
    batchifier_init, get_batch, _ = \
        subsample_batchify_data((data, labels), batch_size)
    batchifier_state = batchifier_init(rng_key)

    # set up DP-VI algorithm
    q = batch_size / len(data)
    dp_scale = approximate_sigma(epsilon, delta, q, num_iter)
    loss = Trace_ELBO()
    optimiser = Adam(1e-3)
    dpsvi = DPSVI(model, guide, optimiser, loss, dp_scale, len(data))
    svi_state = dpsvi.init(rng_key, get_batch(0, batchifier_state))

    # run inference
    for i in range(num_iter):
        data_batch, label_batch = get_batch(i, batchifier_state)
        svi_state, loss = dpsvi.update(svi_state, data_batch, label_batch)
    return dpsvi.get_params(svi_state)

```

Listing 2: Running the inference for a NumPyro model using d3p’s DPSVI class.

sample w according to Equation 4 in a vectorised fashion. Note that each $\sigma_{w,j}$, the standard deviation of the variational Gaussian, must be a positive number, so we actually register a parameter site named `w_scale_log` that we pass through the exponential function to obtain `w_scale`. This allows us to perform the optimisation in an unconstrained space but enforces the positivity constraint for `w_scale`.

3.2 Running the Inference

In the previous section, we programmatically specified the simple logistic regression model using NumPyro. We now turn to the actual private inference of parameter values using d3p. d3p provides an implementation of the DP-VI algorithm via the DPSVI class, which offers the same interface as NumPyro’s implementation of the DSVI algorithm in the SVI class.³ As discussed in Section 2.3, the DP-VI algorithm must be configured for the desired privacy bounds given the batch size and number of training iterations for the inference (Req. IV) and use independent random minibatches (Req. V). The entire code for running the inference is shown in Listing 2.

We first use d3p’s `subsample_batchify_data` on the data set which returns a function that efficiently samples and returns independent random minibatches. This function is assigned to `get_batch` in our example code. The additional call to `batchify_init` initialises the internal state of the minibatch sampler.

To instantiate a DPSVI object, the main driver of the inference, we need to supply a value for the privacy noise scale σ . We can obtain a σ appropriate for our desired privacy bounds and training hyperparameters using the `approximate_sigma` function. This function returns an approximate value for σ that is guaranteed to achieve the privacy bounds as measured by the Fourier accountant [24], a state-of-the-art privacy accountant method. We store the result in `dp_scale`. Note that the separate computation of σ is a deliberate choice in d3p. While it would be possible to let the instantiation code of the DPSVI class handle this internally, the current approach allows the user easily provide values for σ different from the ones computed by the `approximate_sigma` function, e.g., for research purposes.

After also instantiating implementations of the ELBO (`loss`) and an optimiser of our choice (`optimiser`) using classes provided by NumPyro, we are ready to create the DPSVI object (`dpsvi`). Similar to the minibatch sampler, the DP-VI algorithm provides an initialisation function that is called to produce a state object (`svi_state`). The state object contains randomness state as well as the current values of the parameters and the state of the optimiser. We can now finally run the inference by repeatedly sampling a batch using the `get_batch` function we obtained before and then calling `dpsvi.update`. The `update` method completely encapsulates a single iteration of the DP-VI algorithm, including the performant per-instance gradient computation (Req. III), clipping, perturbation and the update of current parameter estimates by the optimiser.

³We chose DPSVI as the name for implementation of the DP-VI algorithm in d3p to stay close to NumPyro’s naming convention.

Obtaining parameter estimates from the inference algorithm (and therefore the approximate posterior distribution $q(w)$ in our example model) completes our example at this point. The user can now use standard NumPyro code to interact with the model and the inferred parameters without additional privacy leakage due to DP’s invariance to post-processing.

3.3 Switching to a More Complex Model

One of the main benefits of the probabilistic programming approach is the ability to easily tailor the model complexity to the information needs and the available prior knowledge and clearly specifying how the respective components of the model relate to each other. So far we have looked at a very simple example where our model makes the implicit assumption that the data are homogeneous and a single parameter vector w describes their relation to the labels equally well for all records. In reality, however, we often face tasks where data comes from different sources that have different local distributions for records. For example, data records containing information about wealth and income of individual persons from different countries are likely to be heavily influenced by the average level of wealth in the respective country. To address this case, we can use a hierarchical logistic regression model like the one considered in [41].

Extending the Model Specification We now extend the previous model notation by vectors $g_l \in \mathbb{R}^K$ of group characteristics for L groups and, for each records x_i , an indicator l_i assigning it to one of the groups. We assume that the records x_i and labels y_i are sensitive but the group vectors g_l are not. Following [41], we use a separate weight vector w_l to model the relationship between data record x_i and label y_i within each group in the same way we did in the simple logistic regression model. However, we now use a hierarchical Gaussian prior centered at Mg_l for each weight vector w_l . The matrix $M : \mathbb{R}^K \times \mathbb{R}^D$ is a new parameter capturing the relation between group characteristics and their corresponding weight vector w_l . The full model is visualised in Figure 2 and defined by

$$\begin{aligned}
 p(y_i^{(l)} | x_i^{(l)}, w_l) &= \text{Bernoulli}(y_i^{(l)}; \theta_i^{(l)}), \\
 \theta_i^{(l)} &= \sigma(w_l^T x_i^{(l)}), \\
 p(w_l | g_l, M, \Sigma_l) &= \mathcal{N}(w_l; \eta_l, \Sigma_l), \\
 \eta_l &= M g_l, \\
 p(M_{k,d}) &= \mathcal{N}(M_{k,d}; \mu_0, \sigma_0^2).
 \end{aligned}
 \tag{5}$$

For simplicity, we consider the covariance matrix Σ_l for the distribution of the w_l a fixed model parameter of value $\Sigma_l = I$. We assume an independent weakly informative Gaussian prior for each element of matrix M with $\mu_0 = 0$ and $\sigma_0 = 4$ as before.

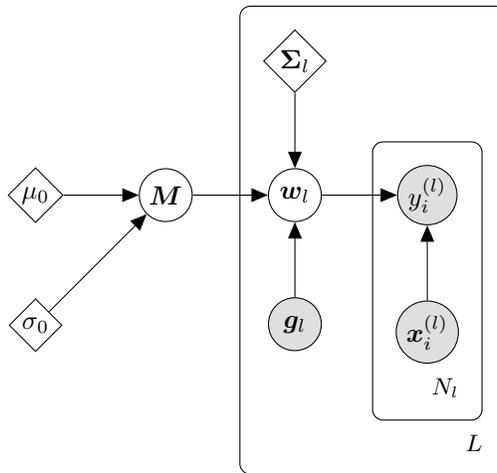


Figure 2: Plate diagram of the hierarchical logistic regression model $p(y, M | x, g_l)$.

Model Implementation The required changes to adapt our existing model implementation in function guide are straightforward and essentially follow one to one from the textual description above, as shown in Listing 3. First

```

def model(xs, ys, ls, gs, N):
    batch_size, D = xs.shape
    L, K = gs.shape

    M = sample('M', Normal(0, 4), sample_shape=(K, D))

    with plate('group', L, L):
        etas = M * gs
        ws = sample('ws', Normal(etas, 1).to_event(1))

        with plate('batch', N, batch_size):
            thetas = sigmoid(xs.dot(ws[ls]))
            sample('ys', Bernoulli(thetas), obs=ys)

def guide(xs, ys, ls, gs, N):
    _, D = xs.shape
    _, K = gs.shape

    M_loc = param('M_loc', jax.numpy.zeros((K, D)))
    M_scale = jax.numpy.exp(param('M_scale_log', jax.numpy.zeros((K, D))))
    sample('M', Normal(M_loc, M_scale))

```

Listing 3: Implementation of a hierarchical logistic regression model in NumPyro for d3p.

we sample a value for M according to our prior (M), compute the values for η_l (etas) and sample the group-specific weight vectors w_l (ws) in a vectorised manner. The remaining code implementing the logistic regression for individual records is almost identical to the implementation of the simple model, except that we use the group indices provided in ls to select the entry in ws that corresponds to the group each record belongs to.

Variational Posterior For the hierarchical logistic regression model, we are interested in a variational approximation to the posterior of the matrix M . Again we can use independent Gaussian distributions for each dimension of M :

$$q(M_{k,d}|\mu_{kd}, \sigma_{kd}) = \mathcal{N}(M_{k,d}; \mu_{kd}, \sigma_{kd}^2), \quad (6)$$

where μ_{kd} and σ_{kd} for all $1 \leq k \leq K$ and $1 \leq d \leq D$ are the variational parameters.

The implementation of this is shown in the `guide` function in Listing 3 and is almost identical to the one for the simple model. Invocation of the inference algorithm for the new model also does not change compared to the simple logistic regression model we have looked at before, except for passing the additional data to the `model` and `guide` functions, making it especially easy and fast to refine and tweak models.

Note that we do not specify posterior parameters for the group weight vectors w_l . This is because in our model these are determined by M , the group characteristics g_l and the known covariance matrix Σ_l . If we are interested in obtaining values for the w_l , we can use NumPyro routines to sample them from the posterior predictive distribution

$$q(w_l|g_l) = \int p(w_l|Mg_l, \Sigma_l)q(M|\mu, \sigma)dM \quad (7)$$

after inference of the variational parameters for M . In the above we slightly abuse notation to denote by $q(M|\mu, \sigma) = \prod_{k=1}^K \prod_{d=1}^D q(M_{k,d}|\mu_{kd}, \sigma_{kd})$ the variational posterior of the full matrix M for all variational parameters.

Discussion As we have seen we were able to expand our model to the additional structure within our data with a few simple changes in the implementation. The changes correspond directly to the textual description of the new hierarchical model, making it easy for the user to translate theory into implementation. While the initial simple logistic regression model is quite a common choice and specialised implementations for this exist in many software packages, extending the model in a similar fashion to what we did in this section is often more complicated, if at all possible, in those.

Note that we still have made a couple of simplifying assumptions here, one of which is the assumption that the covariance Σ_l of the distribution of group weight vectors is a known constant. Note that this was merely for convenience

and not because of restrictions of model expressiveness. We can easily formulate a prior and a variational posterior for Σ_l to learn it from the data, if this assumption does not hold. Another simplifying modelling assumption is the choice of the prior for M , however, we consider selecting more informative priors outside the scope of this example. NumPyro offers a wide range of distributions from which the user can choose adequate priors according to their modelling needs. These two brief notes serve to show that the probabilistic programming paradigm allows the user to make fine-grained decisions on the model expressiveness they need by flexibly either excluding details they are not interested in or incorporating detailed prior knowledge in the model.

4 d3p Implementation Outline

We now discuss some technical details of our d3p package and how it meets the requirements identified in Section 2.

We chose NumPyro as the underlying probabilistic programming framework for d3p to meet Requirement I. It is a spin-off of the popular Pyro [3] framework, providing a very similar API, but relies on Google’s JAX [4, 15] for the underlying computational optimisation functionality. The JAX framework uses tracing mechanisms to compile pure (side-effect free) functions directly from Python code to efficient XLA kernels that can be run on either CPU or GPU. Implementations of the DP-SGD algorithm in JAX were found to be consistently faster than competing implementations [35], making it a promising backend for d3p.

The choice of NumPyro as basis for d3p is therefore a compromise between fulfilling Requirement I and being able to provide a high-performance implementation (Req. III, V). While targeting Pyro instead of NumPyro would arguably have enabled access to a larger established user base, implementing per-instance gradients in the underlying PyTorch would have decreased performance of d3p.

We organise this section by first looking at the implementation of the DP-VI algorithm for NumPyro (Section 4.1) with a focus on how it realises its high performance for per-instance gradient computation (Req. III). We also provide a brief overview of the implementation of d3p’s `approximate_sigma` function which computes the hyperparameters for the DP-VI algorithm. This is a relevant tool without which setting up the inference would be very difficult for inexperienced users (Section 4.2).

As the second major performance consideration we then discuss our GPU-optimised i.i.d. minibatch sampling routine (Req. V) in Section 4.3 and finish the discussion on implementation by a brief overview of the remaining usability goal in the implementation (Section 4.4).

4.1 Implementation of DP-VI

As we have seen in the examples, d3p centers around the `DPSVI` class implementing the DP-VI algorithm. `DPSVI` offers the same interface as NumPyro’s non-private implementation in the `SVI` class and therefore works as a drop-in replacement for it. This allows for especially easy adoption of privacy-preserving methods with minimal required changes to the code base.

We have identified in Section 2.3 that the DP-VI algorithm requires computation of per-instance gradients. Unfortunately, these are typically not readily available in established machine learning frameworks. A naive but inefficient solution is to set the batch size B to one, which gives per-instance gradients at the cost of losing the performance gains resulting from parallel computation on minibatches that are crucial for efficient machine learning applications.

As the JAX framework is based on the manipulation of side-effect free functions, it also provides a range of composable higher order transformations for these. Crucially, the computation of gradients as well as vectorising a function for parallel execution are examples of these higher order transformations. This enables d3p’s implementation in the `DPSVI`’s class to efficiently parallelise computation of gradients and the subsequent clipping over a minibatch using vectorisation, i.e., single-instruction-multiple-data (SIMD) style computing. Leveraging the massively parallel processing capabilities of modern GPUs in this way allows us to negate most of the additional overhead introduced by the per-instance gradient computation.

This vectorisation approach effectively turns computation on a batch of size B into B parallel computations on batches of size 1. In order to prevent this from affecting the relative contributions of prior and variational posterior of global parameters, models must use NumPyro’s `plate` environment to scale likelihood contributions from the batch appropriately to the perceived batch size. This typically means that each data instance’s contribution to the loss is scaled up. The `DPSVI` class therefore performs some crucial bookkeeping to ensure that the privacy perturbation in each iteration is also scaled appropriately.

As a convenience feature, the DPSVI class offers methods to obtain tight privacy bounds for its current hyperparameter values which are computed using the Fourier accountant [24].⁴

4.2 Determining DP-VI Hyperparameters

The DPSVI class is configured directly with a value for the DP-VI hyperparameter σ (and optionally C) to give the user a maximum of control. However, in accordance with Requirement IV, `d3p` offers the `approximate_sigma` function to compute these hyperparameters automatically from provided values for privacy bounds ε and δ . For this we rely on a simple black-box optimisation scheme using the Fourier accountant to find σ , fixing C to a constant value beforehand. Let in the following $f_{FA}(\sigma; \delta) = \varepsilon$ denote the Fourier Accountant that computes ε for a given σ and fixed δ .

The black-box optimisation scheme proceeds iteratively by maintaining an interval $[\sigma_l, \sigma_u]$ such that always $f_{FA}(\sigma_l; \delta) \geq \varepsilon$ and $f_{FA}(\sigma_u; \delta) \leq \varepsilon$. In each iteration, we select $\sigma' \in [\sigma_l, \sigma_u]$, compute $f_{FA}(\sigma'; \delta)$ and update the interval bounds accordingly: Setting $\sigma_l = \sigma'$ if $f_{FA}(\sigma'; \delta) \geq \varepsilon$, $\sigma_u = \sigma'$ otherwise.⁵ Thereby the size of the interval shrinks in each step until it is less than an accuracy threshold, upon which σ_u is returned.

The evaluation point σ' can be chosen arbitrarily within $[\sigma_l, \sigma_u]$, however, we found that f_{FA}^{-1} is usually locally approximated well by a logarithmic function. We therefore fit an approximation $g(\varepsilon) = a - b \log(\varepsilon)$ on the current interval and use $\sigma = g(\varepsilon)$ as a close to optimal evaluation point for updating interval bounds.

Initial values for the interval bounds are obtained by evaluating f_{FA} at $\sigma = 1$ and then increasing or decreasing the query value until ε has been bounded from above and below.

4.3 Performant GPU Batch Subsampling

We have seen in Section 2.3 that the DP-VI algorithm’s privacy guarantees rely crucially on minibatches sampled from the data set in a truly i.i.d. fashion (Requirement V). This is an important difference to non-private algorithms that can usually get away with a permute-and-iterate approach to sample minibatches. Often, the data set is permuted once in its entirety and minibatches are then consumed by iterating over the permuted set. Due to being invoked comparatively rarely, the performance of the permutation algorithm does not make a noticeable difference on the overall run time. For the same reason, it can also run on a different device than the learning algorithm as slow bus transfers are infrequent.

The i.i.d. requirement for DP-VI requires that the minibatch sampling routine is invoked once for each iteration, making the cost of a slow sampling routine prohibitive (or at least, much more noticeable). `d3p` therefore ships with a parallel and GPU-optimised minibatch sampling routine based on a novel shuffling methodology (CUDA-Shuffle) proposed in [34]. Conventional shuffling algorithms, such as Fisher-Yates shuffle, are ill-suited for GPU-acceleration as they are sequential. In contrast, the main idea in the parallel shuffle algorithm is to use a bijective function f_k that for a given key k defines a unique pseudo-random mapping on sets of indices $I_B \rightarrow I_X$. Assuming $I_B = \{0, \dots, B-1\}$ to describe indices in a minibatch and $I_X = \{0, \dots, n-1\}$ indices in the data set, f_k allows sampling a minibatch of elements from the input set in parallel without collisions. Previously, it has been proven that a Feistel network [13] with more than two rounds is a pseudo-random bijective function, provided that it uses a round function that is pseudo-random and the set size is a power of two, i.e., $n = 2^b$ [27]. In [34], it is demonstrated that the approach remains an unbiased pseudo-random generator also for set sizes that are not a power of two. This is achieved by taking the smallest bit-length b such that $2^b > n$ and applying the network repeatedly until it outputs a value in I_X . This generalised Feistel permutation generator can be given as

$$x_i^{(l)} = \begin{cases} i & , \text{if } l = 0 \\ f_k(x_i^{(l-1)}) & , \text{if } x_i^{(l-1)} \geq n \text{ and } l > 0 \\ x_i^{(l-1)} & , \text{otherwise,} \end{cases} \quad (8)$$

where l is the iteration count and $i \in I_B$. Sampling a minibatch then requires B evaluations of the Feistel network and has a computational complexity of $\mathcal{O}(B)$. These evaluations consist only of independent, parallel bitwise operations, making this approach very well-suited for GPU-acceleration.

The efficiency of the method also depends on how many iterations l are required to converge Equation 8, which has not been studied in earlier work. The probability at which the Feistel network f_k returns an output $f_k(x) < n$, given a

⁴We rely on the `fourier-accountant` package, available at <https://pypi.org/project/fourier-accountant/>, for the implementation)

⁵We rely on the fact that f_{FA} is monotonic in σ .

bit-length b such that $2^{b-1} < n < 2^b$ is

$$\begin{aligned} p &= \Pr[f_k(x_i) < n] = 1 - \Pr[f_k(x_i) \geq n] \\ &= 1 - \frac{2^{b-1} - r}{2^b} \\ &= \frac{2^{b-1} + r}{2^b}, \forall x_i < n, \end{aligned} \quad (9)$$

where we let $r = n - 2^{b-1}$, i.e., the non power of two residue of n .

Now, let L_i be the random variable of the iteration count required to converge $x_i < n, \forall i \in I_B$ and $F_i = L_i - 1$ be the penultimate iteration count where some $x_i \geq n$. F_i follows a negative binomial distribution, $\Pr[F_i = f] = (1-p)^f p$. Its expected value is

$$\mathbb{E}[F_i] = \frac{1-p}{p} = \frac{2^{b-1} - r}{2^{b-1} + r}, \quad (10)$$

and the cumulative distribution is

$$\Pr[F_i \leq f] = 1 - (1-p)^{f+1} = 1 - \left(\frac{2^{b-1} - r}{2^{b-1} + r}\right)^{f+1}. \quad (11)$$

In the worst case with $r = 1$, resulting in the largest gap to the next power of two, the expected values are

$$\mathbb{E}[F_i] = \frac{2^{b-1} - 1}{2^{b-1} + 1}, \quad \mathbb{E}[L_i] = \frac{2^b}{2^{b-1} + 1}. \quad (12)$$

Hence with non-trivial data set sizes with $b \gg 1$, the expected number of iterations required to converge the permutation is $\mathbb{E}[L_i] \approx 2$, in the worst case. To estimate the maximum number of iterations for a given percentage θ of cases, we can calculate

$$\Pr[F_i \leq f_\theta] \leq \theta \Leftrightarrow f_\theta \leq \frac{\log(1-\theta)}{\log(2^{b-1} - r) - \log(2^b)} - 1. \quad (13)$$

Setting $\theta = 0.99$, $b \gg 1$ and the worst case $r = 1$, we obtain

$$f_\theta \geq \frac{\log(1-\theta)}{\log(1/2)} - 1 \approx 5.65 \quad (14)$$

Therefore, in 99% of cases we will see no more than six failures, i.e., seven total iterations (and no more than six in 95% of cases).

4.4 Privacy Bound Selection

Requirement II (*Provide assistance for the user in finding adequate privacy bounds*) is an important piece of guidance for users inexperienced with differential privacy. Optimal choice of ϵ and δ depends on a delicate balance between the desired utility and the level of risk of privacy violation that is considered adequate by the user — a choice, therefore, that can only be made by the user but requires knowledge of how ϵ, δ relate to concrete privacy risks. Unfortunately, this relationship is still an open research question, which makes it difficult to give detailed guidance to the user. Common practice is to require that $\delta < \frac{1}{N}$, where N is the number of individual records in the data, and $\epsilon \leq 1$. d3p currently checks the provided privacy bounds and warns the user if these conditions are not met.

5 Evaluation

To demonstrate the performance of our implementation, we use a variational auto-encoder (VAE) model [23]. VAEs are a hybrid of probabilistic models and neural networks and can consist of large numbers of parameters. For this reason they provide a relevant test case for performance and have been previously used for the same purpose [3]. The model we use consists of roughly 700 thousand parameters and is used as a generative model for handwritten digits in the MNIST data set [26].

5.1 Comparison with TensorFlow Privacy

We first compare the performance of our d3p package to an implementation of the same model using the TensorFlow Probability framework [7] with a manual implementation of the variational inference algorithm and privacy enabled

Method	Framework	Sampler	Wall Time [s]	Final Loss
DP-VI	d3p	Feistel	0.62 ± 0.01	174.14 ± 0.38
	d3p	Built-in	0.71 ± 0.02	174.13 ± 0.38
	TF	Built-in	6.43 ± 0.17	171.26 ± 3.67
Non-private	NumPyro	Built-in	0.41 ± 0.01	99.75 ± 0.28
	TF	Built-in	1.58 ± 0.05	105.50 ± 1.84

Table 2: Performance comparison of d3p against TensorFlow probability with TensorFlow Privacy. d3p achieves a ~ 10 fold speed-up over TensorFlow Privacy with similar loss. Values shown in the table are runtime per epoch as well as the final loss (negative ELBO) value on test set after 20 epochs for the differentially-private DP-VI in both frameworks, using the Adam optimiser for parameter updates in all cases. For d3p we also report the runtime for minibatch sampling using built-in routines rather than our Feistel-based shuffle. All values are given as averages and standard deviation over 20 runs with different randomness seeds. The lower half of the table shows the same results for non-private inference, where NumPyro takes the place of d3p.

by the TensorFlow Privacy package [32]. Of particular interest are the respective runtime of the inference as well as a comparison of the inferred model to verify that d3p is fast and accurate. Figure 2 shows the runtime per epoch as well as the loss on the held-out test set after 20 epochs, i.e., passes over the training data set of 60,000 images. We use a minibatch size of 128, resulting in $T = 9360$ total iterations. The reported numbers are averages over 20 training processes that were run using a single NVIDIA Tesla V100 16G GPU. All runs used the Adam optimiser [22] for parameter updates after computing gradients. For the DP variants we used $\sigma = 1.5$, resulting in $\epsilon \approx 0.5$ for $\delta = 1/60000$.

From the comparison we can see that both frameworks achieve similar losses but d3p outperforms the TensorFlow (TF) implementation in terms of performance by a factor of ~ 10 . This is larger than the performance boost of ~ 4 gained by using NumPyro instead of TF Probability for non-private VI with the conventional Adam optimiser.

For d3p, we also compare using the Feistel-based GPU-optimised minibatch sampler against using JAX’s built-in `jax.random.choice` method. We observe that our optimised sampler yields a 15% relative speed-up.

5.2 Effect of Batch Size

While the vectorised implementation of the per-instance gradient computation and manipulation eliminates much of the time overhead required in the DP-VI algorithm, it does not remove it completely. This is due to the additional steps in DP-VI, such as gradient clipping, summing and perturbing, but may also be an effect of a larger memory footprint due to holding gradient values for each data instance intermittently. This necessitates a larger amount of memory accesses, which can slow down computation. We therefore investigate the effect of minibatch size on the run time of the DP-VI implementation in d3p. In Figure 3, we plot the average runtime per iteration (over 20000 iterations) over the size of minibatches for DP-VI in d3p and non-private inference in NumPyro. We see that runtime per iteration increases more steeply for DP-VI than the non-private case. However, we also observe that DP-VI runtime increases only linearly with minibatch size, which is in line with our expectations.

6 Related Work

Major popular probabilistic programming frameworks for the Python programming language are Edward2 [38], TensorFlow Probability [7], (Num)Pyro [3, 31], PyMC [14], and Stan [6]. Edward2, TensorFlow Probability, Pyro and PyMC allow the user to declare models and run the inference from the Python programming language and differ mainly in the computation framework they rely on to run the inference (Edward2 and TensorFlow Probability use TensorFlow [1], Pyro uses PyTorch [30] and PyMC uses Theano [36]; NumPyro is a direct port of Pyro to JAX). The Stan framework follows a different approach and requires models to be specified in a dedicated domain-specific language, which is then evaluated using the Stan runtime, which can be invoked from Python or other major programming languages. None of these frameworks currently offers support for privacy-preserving inference.

A number of general implementations for differentially private machine learning exist for the popular frameworks. Notable are TensorFlow Privacy [32] for TensorFlow, Opacus [12] and PyVacy [40] for PyTorch. These generally provide implementations of the DP-SGD algorithm as alternative optimisers for the computational framework. In principle they could be combined with the dominant probabilistic programming framework for the respective backend, however this integration is usually not as seamless as one would desire. These implementations of DP also often suffer from poor performance in the implementation that can usually be traced back to inefficient computation of per-instance

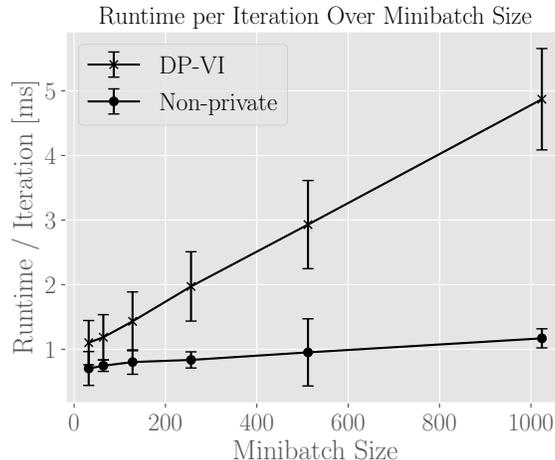


Figure 3: Influence of minibatch size on runtime performance with and without differential privacy. Results are averages over 20000 iterations. Error bars indicate standard deviation.

gradients [35]. With `d3p` we aim to provide better integration with high performance by directly targeting the NumPyro probabilistic programming framework. We are not aware of any general library of DP-SGD for the JAX framework that could be used with NumPyro to achieve the same goal. As far as we are aware, none of these libraries takes active measures to address to the previously discussed technical issues of implementing differential privacy.

7 Conclusion

We have presented our `d3p` package which extends the NumPyro probabilistic programming framework with runtime efficient differentially private inference. We demonstrated the use of our framework and the expressiveness of the probabilistic programming approach on an extensive example and highlighted the requirements and corresponding implementation choices for our software. Our goal is to provide a helpful tool that encourages use of probabilistic programming as a viable approach to modelling data for privacy practitioners, as well as lowers the threshold for adoption of privacy-preserving methods for probabilistic modelling experts.

For future work our main focus is addressing the remaining technical implementation issues of differential privacy in real computer systems, namely predictable random number generation and finite-precision number representation (cf. Sec. 2.5), as the main obstacle for deployment in production settings. Promising solutions for this are (1) use of a cryptographically secure random number generator (CSRNG) for DP perturbation and minibatch sampling and (2) adaption of the snapping mechanism described in [28, 17] to the subsampled Gaussian mechanism and analysis of the resulting privacy bounds. For the latter we envision a combination of the discrete Gaussian mechanism [5] and the discrete Fourier accountant [25].

Acknowledgements

This work was supported by the Academy of Finland (Flagship programme: Finnish Center for Artificial Intelligence FCAI, and grants 292334, 319264, 325572 and 325573) and by the Strategic Research Council at the Academy of Finland (grant 336032). We also acknowledge the computational resources provided by the Aalto Science-IT Project.

References

- [1] Martín Abadi et al. TensorFlow: Large-scale machine learning on heterogeneous systems, 2015. URL <https://www.tensorflow.org/>. Software available from [tensorflow.org](https://www.tensorflow.org/).
- [2] Martin Abadi et al. Deep learning with differential privacy. In *Proceedings of the 2016 ACM SIGSAC conference on computer and communications security*, pages 308–318, 2016.
- [3] Eli Bingham et al. Pyro: Deep Universal Probabilistic Programming. *arXiv preprint arXiv:1810.09538*, 2018.

- [4] James Bradbury, Roy Frostig, Peter Hawkins, Matthew James Johnson, Chris Leary, Dougal Maclaurin, and Skye Wanderman-Milne. JAX: composable transformations of Python+NumPy programs. <https://github.com/google/jax>, 2018.
- [5] Clément Canonne, Gautam Kamath, and Thomas Steinke. The discrete Gaussian for differential privacy. *arXiv preprint arXiv:2004.00010*, 2020.
- [6] Bob Carpenter et al. Stan: a probabilistic programming language. *Journal of Statistical Software*, 76(1), 2017.
- [7] Joshua V. Dillon et al. Tensorflow distributions. *arXiv preprint arXiv:1711.10604*, 2017.
- [8] Cynthia Dwork and Aaron Roth. The algorithmic foundations of differential privacy. *Foundations and Trends in Theoretical Computer Science*, 9(3-4):211–407, 2014.
- [9] Cynthia Dwork, Krishnaram Kenthapadi, Frank McSherry, Ilya Mironov, and Moni Naor. Our data, ourselves: Privacy via distributed noise generation. In *Annual International Conference on the Theory and Applications of Cryptographic Techniques*, pages 486–503. Springer, 2006.
- [10] Cynthia Dwork, Frank McSherry, Kobbi Nissim, and Adam Smith. Calibrating noise to sensitivity in private data analysis. In *Theory of cryptography conference*, pages 265–284. Springer, 2006.
- [11] Úlfar Erlingsson, Ilya Mironov, Ananth Raghunathan, and Shuang Song. That which we call private. *arXiv preprint arXiv:1908.03566*, 2019.
- [12] Facebook. Opacus. <https://opacus.ai/>, 2020.
- [13] Horst Feistel. Cryptography and computer privacy. *Scientific american*, 228(5):15–23, 1973.
- [14] Chris Fonnesbeck, Anand Patil, David Huard, and John Salvatier. PyMC: Bayesian stochastic modelling in python. *Astrophysics Source Code Library*, 2015.
- [15] Roy Frostig, Matthew James Johnson, and Chris Leary. Compiling machine learning programs via high-level tracing. *Systems for Machine Learning*, 2018.
- [16] Simson L. Garfinkel and Philip Leclerc. Randomness concerns when deploying differential privacy. In *Proceedings of the 19th Workshop on Privacy in the Electronic Society, WPES’20*, page 73–86, New York, NY, USA, 2020. Association for Computing Machinery. ISBN 9781450380867. doi: 10.1145/3411497.3420211.
- [17] Ivan Gazeau, Dale Miller, and Catuscia Palamidessi. Preserving differential privacy under finite-precision semantics. *Theoretical Computer Science*, 655:92–108, 2016. ISSN 0304-3975. doi: 10.1016/j.tcs.2016.01.015.
- [18] Charles R. Harris et al. Array programming with NumPy. *Nature*, 585(7825):357–362, September 2020. doi: 10.1038/s41586-020-2649-2.
- [19] Joonas Jälkö, Onur Dikmen, and Antti Honkela. Differentially private variational inference for non-conjugate models. In *Uncertainty in Artificial Intelligence 2017 Proceedings of the 33rd Conference, UAI 2017*. The Association for Uncertainty in Artificial Intelligence, 2017.
- [20] Joonas Jälkö, Eemil Lagerspetz, Jari Haukka, Sasu Tarkoma, Samuel Kaski, and Antti Honkela. Privacy-preserving data sharing via probabilistic modelling. *arXiv preprint arXiv:1912.04439*, 2019.
- [21] Michael I. Jordan, Zoubin Ghahramani, Tommi S. Jaakkola, and Lawrence K. Saul. An introduction to variational methods for graphical models. *Machine learning*, 37(2):183–233, 1999.
- [22] Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *International Conference on Learning Representations (ICLR 2015)*, 2015.
- [23] Diederik P. Kingma and Max Welling. Auto-encoding variational Bayes. In *2nd International Conference on Learning Representations (ICLR 2014)*, 2014.
- [24] Antti Koskela, Joonas Jälkö, and Antti Honkela. Computing tight differential privacy guarantees using FFT. In *International Conference on Artificial Intelligence and Statistics*, pages 2560–2569. PMLR, 2020.
- [25] Antti Koskela, Joonas Jälkö, Lukas Prediger, and Antti Honkela. Tight differential privacy for discrete-valued mechanisms and for the subsampled Gaussian mechanism using FFT. *arXiv preprint arXiv:2006.07134*, 2020.
- [26] Yann LeCun, Léon Bottou, Yoshua Bengio, and Patrick Haffner. Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11):2278–2324, 1998.
- [27] Michael Luby and Charles Rackoff. How to construct pseudorandom permutations from pseudorandom functions. *SIAM Journal on Computing*, 17(2):373–386, 1988.
- [28] Ilya Mironov. On significance of the least significant bits for differential privacy. In *Proceedings of the 2012 ACM Conference on Computer and Communications Security, CCS ’12*, page 650–661, New York, NY, USA, 2012. Association for Computing Machinery. ISBN 9781450316514. doi: 10.1145/2382196.2382264.

- [29] Ilya Mironov, Omkant Pandey, Omer Reingold, and Salil Vadhan. Computational differential privacy. In *Annual International Cryptology Conference*, pages 126–142. Springer, 2009.
- [30] Adam Paszke et al. PyTorch: An imperative style, high-performance deep learning library. In *Advances in Neural Information Processing Systems 32*, pages 8024–8035. Curran Associates, Inc., 2019.
- [31] Du Phan, Neeraj Pradhan, and Martin Jankowiak. Composable effects for flexible and accelerated probabilistic programming in NumPyro. *arXiv preprint arXiv:1912.11554*, 2019.
- [32] Carey Radebaugh and Ulfar Erlingsson. Introducing TensorFlow privacy: Learning with differential privacy for training data. TensorFlow Blog, <https://blog.tensorflow.org/2019/03/introducing-tensorflow-privacy-learning.html>, 2019.
- [33] Shuang Song, Kamalika Chaudhuri, and Anand D. Sarwate. Stochastic gradient descent with differentially private updates. In *2013 IEEE Global Conference on Signal and Information Processing*, pages 245–248. IEEE, 2013.
- [34] Daniel Stokes and Rory Michell. CUDA-Shuffle: GPU shuffle using bijective functions. <https://github.com/djns99/CUDA-Shuffle>, 2021.
- [35] Pranav Subramani, Nicholas Vadivelu, and Gautam Kamath. Enabling fast differentially private SGD via just-in-time compilation and vectorization. *arXiv preprint arXiv:2010.09063*, 2020.
- [36] Theano Development Team. Theano: A python framework for fast computation of mathematical expressions. *arXiv preprint arXiv:1605.02688*, 2016.
- [37] Michalis Titsias and Miguel Lázaro-Gredilla. Doubly stochastic variational Bayes for non-conjugate inference. In *International conference on machine learning*, pages 1971–1979, 2014.
- [38] Dustin Tran et al. Simple, distributed, and accelerated probabilistic programming. In *Neural Information Processing Systems*, 2018.
- [39] Martin J. Wainwright and Michael Irwin Jordan. *Graphical models, exponential families, and variational inference*. Now Publishers Inc, 2008.
- [40] Chris Waites. PyVacy. <https://github.com/ChrisWaites/pyvacy>, 2019.
- [41] George Y. Wong and William M. Mason. The hierarchical logistic regression model for multilevel analysis. *Journal of the American Statistical Association*, 80(391):513–524, 1985. ISSN 01621459.