

Extracting the Unknown from Long Math Problems

Ndapa Nakashole

Computer Science and Engineering
University of California, San Diego
La Jolla, CA 92093
{nnakashole}@eng.ucsd.edu

Abstract

In problem solving, understanding the problem that one seeks to solve is an essential initial step. In this paper, we propose computational methods for facilitating problem understanding through the task of recognizing the unknown in specifications of long Math problems. We focus on the topic of Probability. Our experimental results show that learning models yield strong results on the task — a promising first step towards human interpretable, modular approaches to understanding long Math problems.

1 Introduction

“It is foolish to answer a question that you do not understand. It is sad to work for an end that you do not desire— George Polya (Polya, 1957). According to Mathematician Polya’s famous problem solving heuristics, asking general common sense questions about the problem facilitates problem understanding. One such question is “What is the unknown?” (Polya, 1957). The unknown of a given problem is what the problem requires to be worked out and solved. In this paper, we propose computational models for extracting the unknown from problem specifications.

In online tutorial communities, it is not uncommon to find problems that include questions like “what is the solution I am looking for?”¹. Automated hints such as help with *identifying the unknown*, could provide timely support to self-directed learners (Guglielmino, 1978; Houle, 1988; Hiemstra, 1994). Furthermore, information about the unknown can be used as a feature in other tasks that can enhance self-directed learning, such as similar-question retrieval (Lei et al., 2016), and question-answer matching (Shen et al., 2017), as

¹<https://stats.stackexchange.com/questions/66766/>

Correlation

I have a portfolio of 14 distinct instruments. Some of the instruments returns are correlated, which means the portfolio is not as diversified as it seems. Is there a <unknown> general way to down-weight instruments which are highly correlated, and vice-versa </unknown>, to make a portfolio as diversified as it can be?

Normal Distribution

I am trying to find the <unknown> partial derivative of univariate normal cdf w.r.t σ </unknown>.

I just need some direction.

So far I have gotten this: $\frac{\partial}{\partial \sigma} \Phi(x, \mu, \sigma^2) =$

$$\frac{\partial}{\partial \sigma} \int_{-\infty}^x \frac{1}{\sqrt{2\pi}} \exp\left(-\ln(\sigma) - \frac{(x-\mu)^2}{2\sigma^2}\right) dx$$
$$= \int_{-\infty}^x \frac{\partial}{\partial \sigma} \frac{1}{\sqrt{2\pi}} \exp\left(-\ln(\sigma) - \frac{(x-\mu)^2}{2\sigma^2}\right) dx$$
$$= \int_{-\infty}^x \frac{1}{\sqrt{2\pi}} \exp\left(-\ln(\sigma) - \frac{(x-\mu)^2}{2\sigma^2}\right) \times \left(-\frac{1}{\sigma} + \frac{(x-\mu)^2}{\sigma^3}\right) dx$$
$$= \int_{-\infty}^x -\frac{1}{\sqrt{2\pi}\sigma^2} \exp\left(-\frac{(x-\mu)^2}{2\sigma^2}\right) + \frac{(x-\mu)^2}{\sqrt{2\pi}\sigma^4} \exp\left(-\frac{(x-\mu)^2}{2\sigma^2}\right) dx$$

I don't know how to proceed from there.

Figure 1: Example problems from PROBUNK, on the concepts of **top**: Correlation, **bottom**: Normal Distribution, labeled with the unknown.

well as in models for automated problem solving (Sachan et al., 2018).

The unknown is general, it not restricted to problems about a particular subject-matter. The problem can be algebraic, geometric, mathematical or nonmathematical (Polya, 1957). In this paper, we focus on the topic of *Probability* as a case study. To facilitate model training, we created a dataset, PROBUNK, containing Probability problems labeled with their unknown(s). Figure 1 shows example problems from PROBUNK.

Prior Work. Our work is related to question understanding, and modular approaches to question answering that advocate decomposing questions into smaller ones (Andreas et al., 2016; Iyyer et al., 2017; Gupta and Lewis, 2018; Talmor and Berant, 2018; Huang et al., 2018; Guo et al., 2019; Min et al., 2019; Wolfson et al., 2020). However, question decomposition in prior work is aimed at en-

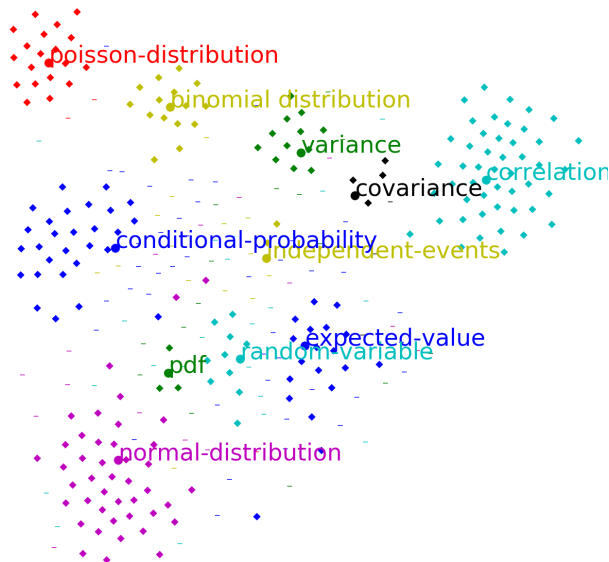


Figure 2: Concept prototypes (labeled circles) and prototypical examples (diamonds).

hancing model performance, and is generally not human friendly. Notions of interpretability are provided through attention modules (Andreas et al., 2016), or explicit meaning representations such as first-order logic (Sachan et al., 2018), or custom semantic parsing formalisms (Amini et al., 2019; Wolfson et al., 2020). In contrast, our goal is to produce output that can be used by humans, and potentially by models too. Additionally, questions in most prior work are short, containing just a single sentence. We target longer multi-sentence problems.

2 Dataset

Background Knowledge on Probability. As background knowledge, we collected information about *probability concepts*. We define a probability concept as a term that is formally defined in the first five chapters of Wasserman (2013), and appears in the index at the end of that book. This produced 69 concepts. For example, ‘Poisson Distribution’, ‘Correlation’, see appendix for full list. We augment each concept with content from DeGroot and Schervish (2012). On average per concept, we collected 1.6 definitions 1.04 worked-out examples, and 1.54 unworked-out examples, from both books.

StackExchange Probability Problems. We obtained the data dump from *stats.stackexchange*, containing 281, 265 Statistics problems. Each problem is labeled with relevant concept tags. We discarded all programming-related problems, tagged with: ‘Matlab’ and ‘R’, resulting in 139, 303 prob-

	Train	Dev	Test
Problems	904	110	157
Answers	904	110	157
Total	1,808	220	314

Table 1: Dataset statistics and split.

Method	Dev F1	Test F1	Training time
1. MaxEnt	0.534	0.673	04m32s
2. MLP	0.547	0.636	06m24s
3. LSTM	0.519	0.561	28m41s
4. GRU	0.537	0.567	25m36s
5. CNN	0.754	0.727	03m39s
6. Prototypical Nets(*)	0.787	0.782	03m21s

Table 2: Multi-label concept classification.

lems. We also pruned concept tags outside of the 69 background concepts. To avoid overly complex problems, those with > 3 tags were pruned. Lastly, we only kept problems for which there is an ‘*accepted answer*’ from the forum. Overall after pre-processing, there were 1, 171 remaining problems, spanning 11 Probability concepts, along with their answers. Table 1 shows the train/dev/test split².

Concept Classification. Given the size of our dataset, our setting falls within the limited labeled data regime (Palatucci et al., 2009; Sachan et al., 2018). To investigate whether our dataset is sufficient for training models that generalize, we considered a simple task: classifying problems by their

²Breakdown of problems by concept is in the appendix.

What's The Unknown?

Normal Distribution

- 2262 (completed)
- 3646 (completed)
- 11310 (completed)
- 11481 (completed)
- 12138 (completed)
- 12647 (completed)
- 13171 (completed)
- 14774 (completed)
- 17463 (completed)
- 18294 (completed)
- 18718 (completed)

(261793) ['normal-distribution']

What is the unknown?

Problem Specification: (9)

Partial derivative of normal cdf w.r.t sigma
 I am trying to find the partial derivative of univariate normal cdf w.r.t σ .
 I just need some direction.
 So far I have gotten this:

$$\begin{aligned} \frac{\partial}{\partial \sigma} \Phi(x, \mu, \sigma^2) &= \frac{\partial}{\partial \sigma} \int_{-\infty}^x \frac{1}{\sqrt{2\pi}} \exp\left(-\ln(\sigma) - \frac{(x-\mu)^2}{2\sigma^2}\right) dx \\ &= \int_{-\infty}^x \frac{\partial}{\partial \sigma} \frac{1}{\sqrt{2\pi}} \exp\left(-\ln(\sigma) - \frac{(x-\mu)^2}{2\sigma^2}\right) dx \\ &= \int_{-\infty}^x \frac{1}{\sqrt{2\pi}} \exp\left(-\ln(\sigma) - \frac{(x-\mu)^2}{2\sigma^2}\right) \times \left(-\frac{1}{\sigma} + \frac{(x-\mu)^2}{\sigma^3}\right) dx \end{aligned}$$

Figure 3: Labeling interface.

concepts. This is a multi-label³ classification task. We used a pretrained transformer, BERT (Devlin et al., 2019), to obtain contextualised word embeddings, and then trained⁴ various models. The results are shown in Table 2. For the **MaxEnt** model (a logistic regression classifier), and the multi-layer perceptron, **MLP**, problem representations were obtained by average pooling of the word embeddings. From initial experiments we found that using the CLS token representation, instead of average pooling, degrades performance. A Convolutional Neural Network (CNN) text classifier, kernel sizes: 3,4,5, 6, each with 192 kernels, has the strongest performance on the full problem, F1 **0.73** on test data. We also implemented **Prototypical Networks** (Snell et al., 2017), an approach designed for limited labeled data settings. We used a CNN (same settings as above) as the base model for learning prototypical vector representations. We evaluated the Prototypical Network on problems that are about a single concept, 72.7% of dev, and 75.8% of test data, and it produced strong results, F1 **0.78**. Visualizing the learned prototypes and prototypical problems, Figure 2 shows that the learned representations are meaningful. For instance, prototypical problems of type *Poisson Distribution* are closest to the prototypical vector of that concept. This is not trivially expected

³28.9% of the problems in our dataset span > 1 concepts.

⁴Training setup details are in the appendix.

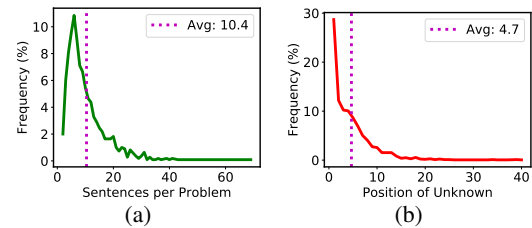


Figure 4: Distributions of (a) number of sentences per problem, and (b) position of unknown.

because there are many prototypical vectors for a concept, which are generated from different support vectors (refer to Snell et al. (2017) for details), and we randomly picked one prototypical vector for each concept.

Overall, both the quantitative results in Table 2, and the qualitative results in Figure 2, show that our dataset is adequate for learning meaningful representations, when using pre-trained contextual embeddings.

Unknown Annotation. To collect labeled data, we assume the unknown is a contiguous sequence of tokens in the problem specification. We implemented a simple labeling tool, shown in Figure 3. A problem can have multiple unknowns, each unknown is entered separately. In total, 1,171 problems were annotated. Problems whose unknowns were deemed ‘unclear’ were few: 26/904(2.9%), 4/110(3.6)%, and 2/157(1.3%) for train, dev, test,

respectively. On average the unknown(s) is (are) spread across 1.7. Figures 4(a) and 4(b) show distributions of sentences per problem, and position of the unknown.

3 Approach

Given a sentence, our goal is to predict if it contains a sequence of words that describe the unknown, $y_u = 1$, or not, $y_u = 0$. Alternative formulation is to treat the problem a sequence labeling task. However, in this initial work, the labeled data we obtained is at the sentence level. With the right granularity of labeled data, our task be cast as a sequence labeling task.

Input, Prediction, and Loss. As input, a problem specification, Q_i , and the j -th sentence, $s_{i,j} \in Q_i$, are presented to a model. A context vector, c_i , is generated from Q_i , and a sentence vector, $x_{i,j}$ is generated from $s_{i,j}$. The two vectors are concatenated to compute p_u as follows:

$$p_u = \sigma(\mathbf{w}^T[\mathbf{c}_i; \mathbf{x}_{i,j}] + b),$$

where σ is the sigmoid function, \mathbf{w} and b are learned via the cross entropy loss

$$\sum (y_u \log p_u)$$

Context Vectors. To compute the context vector, c_i , we consider different approaches.

BoW context: c_i is obtained by average pooling BERT embeddings of the tokens of Q_i .

CNN Context: c_i is generated by applying a CNN to Q_i .

GCN Context: c_i is generated from a Graph Convolutional Network (GCN) (Bruna et al., 2014; Defferrard et al.; Kipf and Welling, 2017). Given a graph with n nodes, the input to a GCN is a feature matrix $\mathbf{X} \in \mathbb{R}^{n \times m}$ where a row contains the initial representation, $x_u \in \mathbb{R}^m$ of a node u . To compute a node’s hidden representation, $h_u \in \mathbb{R}^d$, a single graph convolution layer uses the node’s neighbors $N(u)$:

$$h_u = f \left(\sum_{v \in N(u)} (\mathbf{w}x_v + b) \right)$$

, f is a non-linear activation function, $\mathbf{w} \in \mathbb{R}^{d \times m}$ and $b \in \mathbb{R}^d$ are learned. We apply the GCN recurrence for $K = 3$ steps. At every step, node

representations are re-computed using the representation of the nodes’s neighbors from the previous step, see Kipf and Welling (2017) for details.

The goal is to use the graph to learn the kinds of unknowns that pertain to different concepts, as well as to exploit relationships between problems and answers. We construct a graph with three types of *nodes*: concept, problem; and answer nodes. We have 5 *edge* types: *problem-has-type* (between problems and concepts); *problems-has-answer* (between problems and answers); and *same-section-as*, *mentioned-in-before-chapters*, *same-chapter-as* (all three between concepts). We use the concept hierarchy derived from the ordering of concepts in Wasserman (2013) to obtain the last three relationships. Our graph consists of 2,360 nodes, 5,116 edges, and 768 initial node features obtained from BERT embeddings. Node features are from average pooling the embeddings. For the concept nodes, the pooled tokens are taken from the concept definitions. The task for learning node representations is predicting the *problem-has-type* links.

4 Experimental Evaluation

We conducted experiments to evaluate performance of various models on the task of extracting the unknown. All experiments are based on the train/dev/test split in Table 1. Training and computing infrastructure details are in the appendix.

Methods under Comparison. Next to each learning method is the number of parameters.

1) **Majority.** Assigns the most common label, $p_u = 0$ to every sentence. 2-4) **n -th Sentence** assigns $p_u = 1$ to the n -th sentence, and $p_u = 0$ to all others. 5) **MaxEn (1, 537).** Uses BoW for the context vector, c_i , and the sentence vector $x_{i,j}$. 6) **MLP (1, 312, 769).** Uses the same c_i and $x_{i,j}$ as method (5). 7) **CNN (1, 414, 275).** A CNN generates both c_i , and $x_{i,j}$. 8) **CNN_NoContext (1, 166, 467).** Same as (7) but c_i is omitted, thus the CNN only encodes the sentence. 9) **CNN+Graph (1, 502, 386).** Concatenates CNN and GCN contexts to get c_i , whereas $x_{i,j}$ is obtained from just the CNN. 10) **CNN+Graph+LSTM (2, 980, 018).** c_i is as in (9), and $x_{i,j}$ is generated by an LSTM. 11) **CNN+Graph+GRU (2, 610, 610).** Same as (10) but $x_{i,j}$ is generated by a GRU.

Results. Table 3 shows our main results. Among non learning baselines, the **1st sentence (2)** base-

		DEV	TEST	Training
	Method	F1	F1	time
1.	Majority	0.456	0.456	n/a
2.	1st Sentence	0.657	0.657	n/a
3.	2nd Sentence	0.499	0.528	n/a
4.	Last Sentence	0.531	0.508	n/a
5.	MaxEnt	0.670	0.686	02m19s
6.	MLP	0.733	0.723	03m06s
7.	CNN	0.802	0.776	10m31s
8.	CNN_NoContext	0.777	0.759	09m10s
9.	CNN + Graph	0.802	0.780	16m42s
10.	CNN + Graph + LSTM	0.504	0.499	19m48s
11.	CNN + Graph + GRU	0.495	0.492	18m44s

Table 3: Unknown extraction F1.

1.	How could one derive joint pdf of $X, X - k$?
2.	How to derive the formula of the t-test of the correlation coefficient
3.	How do you calculate the expected value of e^{-X} ?
4.	I want to calculate $Var\left(\sqrt{X}/6\right)$.
5.	What is the probability that the time between trains arriving is 6 minutes or less?
6.	What is the probability that 0 people in the group are fatigued
7.	How do we prove that (X, Y) is not a bivariate normal?
8.	I want to prove that the output of f is independent of any input distribution.

Table 4: Sample positive predictions from dev and test.

line achieves the best performance, F1 is 0.66 on the test data. A CNN (7), well-understood to be a strong text classifier, achieves F1 of 0.776 on the test data. We see the context vector is important as CNN_NoContext (8) has lower performance than (7). Incorporating graph structure, CNN+Graph (9), yields F1 of 0.78. CNN+Graph+LSTM/GRU (10-11) both yield poor results. This is likely due to the size of our dataset given that these methods have about twice as many parameters as the other methods, for example, CNN+Graph+LSTM has 2,980,018 parameters vs. CNN+Graph with 1,502,386.

What cues are the methods relying on to achieve strong performance on this task? We sampled some sentences from data, a few of which are shown

in Table 4. It is clear that unambiguous cues for our task are indeed in the sentences, such as “derive”, “calculate”, “what is the probability that”, and “prove that”. In addition to these sentence cues, our results, (7) vs. (8) and (9) in Table 4 show that there are also useful signals in the context.

5 Conclusions and Future Work

Our new task, dataset, and results are only initial steps, and pave the way for future work. Beyond “what is the unknown?”, we can develop models that ask other general common sense questions that can support the problem solving process. Polya (1957) presents a list of more such questions. These questions are general, future work includes working on problems from topics other than Probability.

Additionally, future work can study who this line of work can benefit from well-studied aspects of knowledge harvesting and representation (Nakashole et al., 2010; Theobald et al., 2010; Nakashole et al., 2012; Nakashole, 2012; Kumar et al., 2017).

References

- Aida Amini, Saadia Gabriel, Peter Lin, Rik Koncel-Kedziorski, Yejin Choi, and Hannaneh Hajishirzi. 2019. Mathqa: Towards interpretable math word problem solving with operation-based formalisms. *arXiv preprint arXiv:1905.13319*.
- Jacob Andreas, Marcus Rohrbach, Trevor Darrell, and Dan Klein. 2016. Learning to compose neural networks for question answering. In *NAACL HLT*, pages 1545–1554. The Association for Computational Linguistics.
- Joan Bruna, Wojciech Zaremba, Arthur Szlam, and Yann LeCun. 2014. Spectral networks and locally connected networks on graphs. In *ICLR*.
- Michaël Defferrard, Xavier Bresson, and Pierre Vandergheynst. Convolutional neural networks on graphs with fast localized spectral filtering.
- Morris H DeGroot and Mark J Schervish. 2012. *Probability and statistics*. Pearson Education.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: pre-training of deep bidirectional transformers for language understanding. In *NAACL-HLT*, pages 4171–4186.
- Lucy M Guglielmino. 1978. *Development of the self-directed learning readiness scale*. Ph.D. thesis, ProQuest Information & Learning.
- Jiaqi Guo, Zecheng Zhan, Yan Gao, Yan Xiao, Jian-Guang Lou, Ting Liu, and Dongmei Zhang. 2019. Towards complex text-to-sql in cross-domain database with intermediate representation. In *ACL*, pages 4524–4535.
- Nitish Gupta and Mike Lewis. 2018. Neural compositional denotational semantics for question answering. In *EMNLP*, pages 2152–2161.
- R Hiemstra. 1994. *Self-directed learning*. In *T. Husen & TN Postlethwaite (Ed.). The International Encyclopedia of Education (2nd)*. Oxford: Pergamon Press.
- Elaine K Horwitz, Michael B Horwitz, and Joann Cope. 1986. Foreign language classroom anxiety. *The Modern language journal*, 70(2):125–132.
- Cyril O Houle. 1988. The inquiring mind: A study of the adult who continues to learn.
- Danqing Huang, Jin-Ge Yao, Chin-Yew Lin, Qingyu Zhou, and Jian Yin. 2018. Using intermediate representations to solve math word problems. In *ACL*, pages 419–428.
- Mohit Iyyer, Wen-tau Yih, and Ming-Wei Chang. 2017. Search-based neural structured learning for sequential question answering. In *ACL*, pages 1821–1831.
- Thomas N. Kipf and Max Welling. 2017. Semi-supervised classification with graph convolutional networks. In *ICLR*.
- Anurag Kumar, Bhiksha Raj, and Ndapandula Nakashole. 2017. Discovering sound concepts and acoustic relations in text. In *Acoustics, Speech and Signal Processing (ICASSP), 2017 IEEE International Conference on*, pages 631–635. IEEE.
- Tao Lei, Hrishikesh Joshi, Regina Barzilay, Tommi S. Jaakkola, Kateryna Tymoshenko, Alessandro Moschitti, and Lluís Màrquez. 2016. Semi-supervised question retrieval with gated convolutions. In *NAACL HLT*, pages 1279–1289.
- Sewon Min, Victor Zhong, Luke Zettlemoyer, and Hannaneh Hajishirzi. 2019. Multi-hop reading comprehension through question decomposition and rescoring. In *ACL*, pages 6097–6109.
- Ndapandula Nakashole, Mauro Sozio, Fabian M. Suchanek, and Martin Theobald. 2012. Query-time reasoning in uncertain RDF knowledge bases with soft and hard rules. In *Proceedings of the Second International Workshop on Searching and Integrating New Web Data Sources, Istanbul, Turkey, August 31, 2012*, volume 884, pages 15–20.
- Ndapandula Nakashole, Martin Theobald, and Gerhard Weikum. 2010. Find your advisor: Robust knowledge gathering from the web. In *Proceedings of the 13th International Workshop on the Web and Databases 2010, WebDB 2010, Indianapolis, Indiana, USA, June 6, 2010*. ACM.
- Ndapandula T Nakashole. 2012. Automatic extraction of facts, relations, and entities for web-scale knowledge base population.
- Mark Palatucci, Dean Pomerleau, Geoffrey E. Hinton, and Tom M. Mitchell. 2009. Zero-shot learning with semantic output codes. In *NIPS*, pages 1410–1418.
- George Polya. 1957. *How to solve it*. Doubleday, Garden City, NY.
- Bo Qu, Gao Cong, Cuiping Li, Aixin Sun, and Hong Chen. 2012. An evaluation of classification models for question topic categorization. *J. Assoc. Inf. Sci. Technol.*, 63(5):889–903.
- Mrinmaya Sachan, Kumar Avinava Dubey, Tom M. Mitchell, Dan Roth, and Eric P. Xing. 2018. Learning pipelines with limited data and domain knowledge: A study in parsing physics problems. In *NeurIPS*, pages 140–151.

Yikang Shen, Wenge Rong, Nan Jiang, Baolin Peng, Jie Tang, and Zhang Xiong. 2017. Word embedding based correlation model for question/answer matching. In *Proceedings of AAAI*, pages 3511–3517.

Jake Snell, Kevin Swersky, and Richard Zemel. 2017. Prototypical networks for few-shot learning. In *NeurIPS*, pages 4077–4087.

Alon Talmor and Jonathan Berant. 2018. The web as a knowledge-base for answering complex questions. In *NAACL-HLT*, pages 641–651.

Martin Theobald, Mauro Sozio, Fabian Suchanek, and Ndapandula Nakashole. 2010. Urdf: Efficient reasoning in uncertain rdf knowledge bases with soft and hard rules.

Larry Wasserman. 2013. *All of statistics: a concise course in statistical inference*. Springer Science & Business Media.

Tomer Wolfson, Mor Geva, Ankit Gupta, Yoav Goldberg, Matt Gardner, Daniel Deutch, and Jonathan Berant. 2020. Break it down: A question understanding benchmark. *Trans. Assoc. Comput. Linguistics*, 8:183–198.

6 Dataset

6.1 Prototypes Visualization Further Details

We defined prototypical examples as those whose closest prototypical vector is almost always (in $\geq 95\%$ of the cases) that of the gold truth concept, regardless of the choice of support problems used to generate the prototypical vector. We then randomly picked one of the prototypical vectors, plotted it, and a few of the prototypical example problems.

6.2 Background Knowledge Concepts

The 69 Background knowledge concepts collected in our dataset are shown in Table 5. Definitions, along with worked out example for each concept are in the dataset.

6.3 Stats.StackExchange Preprocessing

Excluded and ignored tags are shown in Table 7. If the tag is excluded, we remove from our dataset problems with this tag. If a tag is ignored, we can keep the problem but only if it has other tags besides an ignored tags.

6.4 Train/Dev/Test by Concept

Train/Dev/Test split of our dataset listing the number of problems in each partition per concept is shown in Table 6.

6.5 Concept Classification Training Details

Implementation. In our implementation, we used the Pytorch Library.

Computing Infrastructure. OS: 16.04.1-Ubuntu/x86_64.

GPU: GeForce GTX 1080 Ti with 12 GB of memory.

Evaluation Metrics. Evaluation metric is Macro f1_score: We used the implementation in sklearn. In python, the code is: `'from sklearn.metrics import f1_score'`

Training and Method Details. We use the ADAM optimizer, and dropout 0. Word embeddings are initialized with pretrained 768 dimensional BERT embeddings. The **MLP** has 3 hidden layers, and the dimensionality of hidden states is 512. The **LSTM** is a one layer bidirectional LSTM, with hidden dimensions 384. Concatenating backward and forward outputs of BiLSTM generates LSTM output vector of size 768. The GRU is a one layer bidirectional GRU, with hidden dimensions of 384. Concatenating backward and forward outputs of BiGRU generates GRU output vector of size 768.

Table 8 shows performance on the dev set over 11 seeds are used.

Parameter details for the methods for **concept classification** are in Table 9.

Concept	#. Items		
Probability		37. The Beta Distribution	4
1. Probability	2	38. The Uniform Distribution	1
2. Complement Of An Event	2	39. Bivariate Probability Density Function	4
3. Disjoint	3	40. Joint Mass Function	1
4. Event	12	41. Marginal Density Function	4
5. Intersection Of Events	2	42. Marginal Mass Function	2
6. Monotone Increasing	2	43. Independent Random Variables	5
7. Mutually Exclusive	3	44. Conditional Probability Density Function	5
8. Partition	2	45. Conditional Probability Mass Function	3
9. Sample Outcome	2	46. Independent And Identically Distributed	1
10. Sample Space	12	47. Multinomial	7
11. Set Difference	1	48. Multivariate Normal	1
12. Union	1	Expectation	
13. Uniform Probability Distribution	7	49. Expected Value	22
14. Independent Events	11	50. First Moment	1
15. Conditional Probability	13	51. Mean	1
16. Bayes' Theorem	8	52. Covariance And Correlation	2
Random Variables		53. Variance	8
17. Random Variable	6	54. Conditional Expectation	9
18. Cumulative Distribution Function	6	55. Conditional Variance	2
19. Inverse Cumulative Distribution Function	5	56. Moment Generating Function	11
20. Probability Density Function	3	Inequalities	
21. Probability Function	4	57. Chebyshev'S Inequality	7
22. Probability Mass Function	2	58. Hoeffding'S Inequality	2
23. Quantile Function	5	59. Markov'S Inequality	3
24. The Bernoulli Distribution	3	60. Mill'S Inequality	1
25. The Binomial Distribution	9	61. Cauchy-Schwartz Inequality	1
26. The Discrete Uniform Distribution	3	62. Jensen'S Inequality	2
27. The Geometric Distribution	1	Convergence of Random Variables	
28. The Point Mass Distribution	1	63. Converges To X In Distribution	2
29. The Poisson Distribution	10	64. Converges To X In Probability	2
30. t Distribution	1	65. Converges To X In Quadratic Mean	1
31. Cauchy Distribution	1	66. The Weak Law Of Large Numbers	2
32. Exponential Distribution	2	67. The Central Limit Theorem	2
33. Gamma Distribution	5	68. The Delta Method	1
34. Gaussian	7	69. The Multivariate Delta Method	2
35. Normal	7		
36. The χ^2	1		

Table 5: 69 Background knowledge concepts. A few concepts are synonymous, for example 34 and 35.

Concept	Train	#. Dev	Test
The Binomial Distribution	78	8	13
Conditional Probability	135	16	25
Correlation	141	15	26
Covariance	64	8	7
Expected Value	134	16	21
Independent Events	73	7	8
Normal Distribution	193	22	29
Probability Density Function	49	4	3
The Poisson Distribution	58	6	9
Random Variable	133	20	26
Variance	103	14	17
Total	1,161	136	184
#. Unique Problems	904	110	157
#. Unique Answers	904	110	157
Total	1808	220	314

Table 6: Per concept listing of problems in the train/dev/test partitions. Some problems can be categorized under multiple concepts. Each problem has a corresponding accepted answer

TAG	Excluded/Ignored	REASON
Matlab	Excluded	programming problems
R	Excluded	programming problems
Probability	Ignore	Too Generic
Mathematical-statistics	Ignore	Too Generic
Meta-analysis	Ignore	Too Generic
Hypothesis-testing'	Ignore	Too Generic
Distributions	Ignore	Too Generic
Self-study	Ignore	Too Generic
Intuition	Ignore	Too Generic
Definition	Ignore	Too Generic

Table 7: *stats.stackexchange* data dump pre-processing: excluded and ignored tags. If the tag is excluded, we remove from our dataset problems with this tag. If a tag is ignored, we can keep the problem but only if it has other tags besides an ignored tags.

Method	Dev F1
1. MaxEnt	0.528 \pm 0.003
2. MLP	0.510 \pm 0.020
3. LSTM	0.474 \pm 0.027
4. GRU	0.472 \pm 0.041
5. CNN	0.706 \pm 0.028

Table 8: Multi-label concept classification dev performance average over all 11 seeds: [0-5, 10, 100, 1000,10000, 1000000]

MaxEnt	#. Parameters	8,459
	Epochs (bounds)	[1-300]
	Epochs (best)	300
	Number of epochs search trials	31
	Choosing hyperparameter values	uniform (1, 10, 20, 30, ...
	Seed	3
MLP	#. Parameters	924,683
	Epochs (bounds)	[1-300]
	Epochs (best)	300
	Number of epochs search trials	31
	Method of choosing epoch values	uniform: 1, 10, 20, 30, ...
	Seed	1
LSTM	#. Parameters	4,469,771
	Epochs (bounds)	[1-300]
	Epochs (best)	300
	Number of epochs search trials	31
	Method of choosing epoch values	uniform: 1, 10, 20, 30, ...
	Seed	2
GRU	#. Parameters	3,583,499
	Epochs (bounds)	[1-300]
	Epochs (best)	300
	Number of epochs search trials	31
	Method of choosing epoch values	uniform: 1, 10, 20, 30, ...
	Seed	2
CNN	#. Parameters	3,138,829
	Epochs (bounds)	[1-300]
	Epochs (best)	20
	Number of epochs search trials	31
	Method of choosing epoch values	uniform: 1, 10, 20, 30, ...
	Seed	10000
	Filter Sizes (bounds)	combinations of [1,2,3,4,5,6]
	Filter Sizes (best)	[3,4,5,6]
	Method of choosing Filter Sizes	manual
	Filters (bounds)	[50-300]
	Filters (best)	[192]
Method of choosing Filters	manual	
Prototypical Networks	#. Parameters	2,214,146
	Episodes (bounds)	[10-200]
	Episodes (best)	100
	Method of choosing episode values	uniform
	Support size	10
	Query size	15

Table 9: Hyperparameter search for methods in Table 2 of the paper.

7 Experimental Evaluation

Computing Infrastructure. Operating System: 16.04.1-Ubuntu/ x86_64.
GPU: GeForce GTX 1080 Ti with 12 GB of memory.

Evaluation Metrics. Evaluation metric is Macro f1_score: We used the implementation in sklearn. In python, the code is: `'from sklearn.metrics import f1_score'`

Training and Method details The **GCN** input features are 768-dimensional, and its hidden states are 100 dimensional, and the number of convolutional layers is 3.

We use the ADAM optimizer, and dropout 0.2. Word embeddings are initialized with pretrained 768 dimensional BERT embeddings. The **MLP** has 3 hidden layers, and the dimensionalities of hidden states is 512. The **LSTM** is a one layer bidirectional LSTM, with hidden dimensions 384. The **GRU** is a one layer bidirectional GRU.

Parameter details for the methods for **unknown extraction** are in Table 10.

MaxEnt	#. Parameters Epochs (bounds) Epochs (best) Number of epochs search trials Choosing epochs values Seed	1,537 [1-100] 30 11 uniform (1, 10, 20, 30, ... 3
MLP	#. Parameters Epochs (bounds) Epochs (best) Number of epochs search trials Choosing epochs values Seed	1,312,769 [1-50] 30 6 uniform (1, 10, 20, 30, ... 10
CNN	#. Parameters Epochs (bounds) Epochs (best) Number of epochs search trials Choosing epochs values Seed Filter Sizes (bounds) Filter Sizes (best) Method of choosing Filter Sizes Filters (bounds) Filters (best) Method of choosing Filters	1,414,275 [1-100] 20 6 uniform (1, 10, 20, 30, ... 4 combinations of [1,2,3,4,5,6] [1,2] manual [50-300] [192] manual
CNN_NoContext	#. Parameters Epochs (bounds) Epochs (best) Number of epochs search trials Seed	1,166,467 [1-50] 30 6 0
CNN+Graph	#. Parameters Epochs (bounds) Epochs (best) Number of epochs search trials Seed GCN layers GCN hidden state dimensionality	1,502,386 [1-50] 30 6 0 3 100
CNN+Graph+LSTM	#. Parameters Epochs (bounds) Epochs (best) Number of epochs search trials Seed	2,980,018 [1-50] 30 6 10000
CNN+Graph+GRU	#. Parameters Epochs (bounds) Epochs (best) Number of epochs search trials Seed	2,610,610 [1-50] 30 6 10

Table 10: Hyperparameter search for methods in Table 3 of the paper.