
BOXHED2.0: SCALABLE BOOSTING OF DYNAMIC SURVIVAL ANALYSIS

A PREPRINT

Arash Pakbin
 Computer Science & Engineering
 Texas A&M University
 College Station, Texas, USA
 a.pakbin@tamu.edu

Xiaochen Wang
 Biostatistics Department
 Yale University
 New Haven, Connecticut, USA
 xcwang11@gmail.com

Bobak J. Mortazavi
 Computer Science & Engineering
 Texas A&M University
 College Station, Texas, USA
 bobakm@tamu.edu

Donald K.K. Lee
 Goizueta Business School and Department of Biostatistics & Bioinformatics
 Emory University
 Atlanta, Georgia, USA
 donald.lee@emory.edu

December 26, 2021

ABSTRACT

Modern applications of survival analysis increasingly involve time-dependent covariates. In healthcare settings, such covariates provide dynamic patient histories that can be used to assess health risks in realtime by tracking the hazard function. Hazard learning is thus particularly useful in healthcare analytics, and the open-source package BoXHED1.0 provides the first implementation of a gradient boosted hazard estimator that is fully nonparametric [1]. This paper introduces BoXHED2.0, a quantum leap over BoXHED1.0 in several ways. Crucially, BoXHED2.0 can deal with survival data that goes far beyond right-censoring and it also supports recurring events. To our knowledge, this is the only nonparametric machine learning implementation that is able to do so. Another major improvement is that BoXHED2.0 is orders of magnitude more scalable, due in part to a novel data preprocessing step that sidesteps the need for explicit quadrature when dealing with time-dependent covariates. BoXHED2.0 supports the use of GPUs and multicore CPUs, and is available from GitHub: www.github.com/BoXHED.

Keywords survival analysis · nonparametric hazard estimation · recurring events · time-dependent covariates · gradient boosting · functional data · software

1 Introduction

Survival analysis is concerned with analyzing the time T to an event of interest, and it underlies many modern healthcare analytics applications. The fundamental quantity in survival analysis is the hazard function

$$\lambda(t, X(t)),$$

which is informally the probability of $T \in [t, t + dt)$ given that the event has not yet occurred by t . Here, $X(t) \in \mathbb{R}^p$ denotes the predictable covariate process which can vary over time. We may think of the hazard as the survival analogue to the probability density function. When $X(t) = X$ is time-static, there also exists an analogue to the cumulative distribution called the survivor function $S(t|X) = \mathbb{P}(T > t|X)$, which can be derived from the hazard via

$$S(t|X) = \exp\left(-\int_0^t \lambda(u, X) du\right).$$

In general, if $X(t)$ is time-varying, the survivor function above is undefined because we do not know the future path of $\{X(u)\}_{0 < u \leq t}$. Also, if the event of interest can recur (e.g. cancer relapse), the survivor function tells us nothing about events subsequent to the first. On the other hand, the hazard is well defined in both situations and represents the realtime risk of the event (re)occurring. For example, a patient’s risk of stroke at a given point in time depends on factors such as heart rate, blood pressure, and previous stroke history. These can change over time and can be logged by wearables. The hazard as a function of these time-varying factors quantifies the patient’s real-time risk of stroke.

Given the critical role that the hazard plays in healthcare analytics, recent machine learning literature have studied the problem of nonparametric hazard learning in the presence of high-dimensional, time-dependent covariates. Specifically, [1] introduced BoXHED1.0, a novel tree-based implementation of the theoretically justified boosted hazard estimator in [2] that works in continuous time. However, BoXHED1.0 was only able to implement the special case where only right-censoring and non-recurring events are allowed, thus restricting its applicability.

To extend hazard learning to a wider range of survival settings, this paper introduces BoXHED2.0, a major advance over BoXHED1.0. First, BoXHED2.0 can handle recurring events (e.g. cancer relapse) and censoring schemes far beyond right-censoring. These features are subsumed by the multiplicative intensity model from the seminal work of [3], which uses a counting process framework to greatly expand the range of survival data that can be analyzed. To our knowledge, there is no nonparametric machine learning solution besides BoXHED2.0 for survival data at this level of generality.

Second, BoXHED2.0 is orders of magnitude more scalable than BoXHED1.0. In speed comparisons on the datasets from [1], BoXHED2.0 achieved a median speedup of an astonishing 1,400-fold per boosting iteration. One enabling factor is that BoXHED2.0 borrows from the XGBoost C++ codebase [4], a highly efficient boosting algorithm for nonfunctional data. Another factor is that BoXHED2.0 supports parallelization through GPUs and multicore CPUs. A third factor is a novel data preprocessing step that removes the computational bottleneck in BoXHED1.0: Due to the functional data nature of the time-dependent covariates, a crucial quantity used by BoXHED to choose tree splits is something that can only be expressed as a time integral. BoXHED1.0 has to repeatedly evaluate this for all potential splits at each boosting iteration. The preprocessing step in BoXHED2.0 transforms the functional data in such a way that the required numerical integration comes for free as part of the training step.

The rest of the paper is organized as follows. Section 2 begins by reviewing the survival setting for BoXHED1.0, and then extends it to the more general one that BoXHED2.0 deals with. The BoXHED2.0 algorithm is then described. Section 3 uses the numerical experiments from [1] to assess speed and accuracy improvements of BoXHED2.0 over BoXHED1.0. Additional experiments for the more general survival setting and also a scalability analysis of BoXHED2.0 are also reported.

2 BoXHED for survival data beyond right-censoring

2.1 Review of survival setting in BoXHED1.0

The right-censored survival setting with no recurring events is the most popular one in the survival machine learning literature, and it is the setting that BoXHED1.0 is designed for. The process generating the event time T can be described as follows: Conditional on the event not occurring by t , the probability that it happens in $[t, t + dt)$ equals $\lambda(t, X(t))dt$. Thus the likelihood of observing the event at T follows a sequence of coin flips at $t = 0, dt, 2dt, \dots$, i.e.

$$\begin{aligned} & \{1 - \lambda(0, X(0))dt\} \times \{1 - \lambda(dt, X(dt))dt\} \times \dots \times \lambda(T, X(T)) \\ & \xrightarrow{dt \downarrow 0} e^{-\int_0^T \lambda(t, X(t))dt} \lambda(T, X(T)). \end{aligned}$$

On the other hand, observing the event being censored at time C is equivalent to observing a sequence of coin flips that all result in ‘tails’ with likelihood $e^{-\int_0^C \lambda(t, X(t))dt}$. Thus given n functional datapoints

$$\{(X_i(t)_{t \leq \tilde{T}_i}, \tilde{T}_i, \Delta_i)\}_i \tag{1}$$

where $\tilde{T}_i = \min(T_i, C_i)$ and $\Delta_i = I(T_i \leq C_i)$, the likelihood functional for the right-censored data is

$$\prod_i e^{-\int_0^{\tilde{T}_i} \lambda(t, X(t))dt} \lambda(\tilde{T}_i, X_i(\tilde{T}_i))^{\Delta_i}.$$

Substituting $F(t, x) := \log \lambda(t, x)$ for the log-hazard function, BoXHED1.0 constructs a novel tree-boosted estimator for $\lambda(t, x)$ that is guided by minimizing the negative log-likelihood functional. In other words, the BoXHED estimator

is the boosted nonparametric MLE for the hazard. The consistency of the estimator is covered by the results in [2], which also applies to settings beyond right-censored data.

Rather than first review the BoXHED1.0 algorithm, we will present the more general BoXHED2.0 algorithm and then show how it reduces to BoXHED1.0 when there are only right-censored and non-recurring events. The BoXHED2.0 extension to more general types of survival data is made possible by casting the problem in the counting process framework of [3]. The resulting BoXHED algorithm is more elegant and far more powerful.

2.2 Survival setting for BoXHED2.0

Under the Aalen multiplicative intensity model, the probability of an event occurring in $[t, t + dt)$ is

$$\lambda(t, X(t))Y(t)dt, \quad (2)$$

where $Y(t) \in \{0, 1\}$ is a predictable process indicating whether the subject is at-risk of experiencing an event during $[t, t + dt)$. Further, let $N(t)$ be the cumulative number of events that has occurred by t . Some special cases of this intensity model include:

- Right-censored and non-recurring events: $Y(t) = I(t \leq C, N(t-) < 1)$.
- Recurring events (up to N_{\max} times): $Y(t) = I(N(t-) < N_{\max})$.
- Left-truncation and right-censoring: The likelihood for this coincides with the one obtained from setting $Y(t) = I(L \leq t \leq C)$, so the same computational procedure applies.

In contrast to the special type of data (1) for BoXHED1.0, in BoXHED2.0 the i -th functional data sample generated from the intensity model (2) is represented by

$$\{X_i(t), Y_i(t), N_i(t)\}_t. \quad (3)$$

For right-censored and non-recurring events, (3) can be reduced to (1) because $\tilde{T}_i = \max\{t : Y_i(t) = 1\}$ and $\Delta_i = N_i(\tilde{T}_i)$. For recurring events, $X_i(t)$ might include variables like time since the last event, or even $N_i(t-)$ itself.¹

Let $F(t, x) = \log \lambda(t, x)$ be the log-hazard function. Extending the likelihood derivation from Section 2.1 to the setting in (2), we obtain the *likelihood risk*, which is the negative log-likelihood functional

$$R_n(F) = \frac{1}{n} \sum_{i=1}^n \left\{ \int Y_i(t) e^{F(t, X_i(t))} dt - \int F(t, X_i(t)) dN_i(t) \right\}. \quad (4)$$

In the specialized setting of BoXHED1.0 with no recurrence and only right-censoring, $N_i(\infty) \leq 1$ and $Y_i(t) = I(t \leq \tilde{T}_i)$. The likelihood risk (4) then reduces to equation (2) in [1].

2.3 BoXHED2.0 algorithm

The idea behind BoXHED2.0 is to construct a tree ensemble for the log-hazard estimator

$$F_M(t, x) = F_0 - \nu \sum_{m=0}^{M-1} g_m(t, x)$$

that iteratively reduces the likelihood risk (4). Here, $g_0(t, x), \dots, g_{M-1}(t, x)$ are tree learners of limited depth. The initial guess $F_0 = \log \frac{\sum_i N_i(\infty)}{\sum_i \int Y_i(t) dt}$ is the best minimizing constant for (4), M is the number of boosting iterations, and ν is the learning rate, which is typically chosen to be small, e.g. 0.1. The BoXHED2.0 estimator is then given by

$$\hat{\lambda} = e^{F_M(t, x)}.$$

The key detail in the BoXHED algorithm lies with how the tree learners are constructed. In traditional gradient boosting [5], at the m -th iteration the tree g_m is constructed to approximate the gradient function of the risk at $F = F_m$. The rationale is that the negative gradient is the direction of steepest descent, and therefore an update in that direction should reduce risk. More recent implementations of boosting such as XGBoost [4] constructs g_m in a more targeted manner. Specifically, g_m is grown in order to minimize the second order Taylor approximation to the risk. The BoXHED

¹The choice of $N(t-)$ rather than $N(t)$ ensures that $X(t)$ remains a predictable process.

algorithm takes this one step further by introducing a tree construction method that is able to directly minimize the exact form of $R_n(F)$, thereby resulting in even more targeted risk reduction.

Specifically, BoXHED2.0 constructs g_m in a recursive manner. Starting with a root node, we choose the tree split that maximally reduces $R_n(F)$, and repeat the process iteratively on successive leaf nodes. Let

$$g_{m,l}(t, x) = \sum_{\ell=1}^{l+1} c_{m,k} I_{B_{m,\ell}}(t, x)$$

be the intermediate tree after l splits. Here, $B_{m,\ell}$ represents the time-covariate region for the ℓ -th leaf node of the form

$$B_\ell = \left\{ (t, x) : \begin{array}{l} t^{(\ell_0)} < t \leq t^{(\ell_0+1)} \\ x^{(1,\ell_1)} < x^{(1)} \leq x^{(1,\ell_1+1)} \\ \vdots \\ x^{(p,\ell_p)} < x^{(p)} \leq x^{(p,\ell_p+1)} \end{array} \right\}, \quad (5)$$

where $x^{(k)}$ denotes the k -th covariate. To obtain $g_{m,l+1}(t, x)$, we split one of the $B_{m,\ell}$ regions into left and right daughter regions A_L and A_R by either splitting on time t or on one of the covariates $x^{(1)}, \dots, x^{(p)}$:

$$g_{m,l+1}(t, x) = g_{m,l}(t, x) - c_{m,\ell} I_{B_{m,\ell}}(t, x) \\ + \gamma_L I_{A_L}(t, x) + \gamma_R I_{A_R}(t, x).$$

The region $B_{m,\ell}$ to split, the variable or time axis to split on and the location of the split, and also the values of (γ_L, γ_R) are all chosen to directly minimize $R_n(F_m - g_{m,l+1})$. Since the values γ_L, γ_R only apply to the subregions A_L, A_R , $R(F_m - g_{m,l+1})$ equals

$$\begin{aligned} & n^{-1} \sum_{i=1}^n \sum_k \left\{ \int_{(t, X_i(t)) \in A_k} Y_i(t) e^{F_m(t, X_i(t)) - \gamma_k} dt - \int_{(t, X_i(t)) \in A_k} [F_m(t, X_i(t)) - \gamma_k] dN_i(t) \right\} + C \\ &= n^{-1} \sum_{i=1}^n \sum_k \left\{ e^{-\gamma_k} \int_{(t, X_i(t)) \in A_k} Y_i(t) e^{F_m(t, X_i(t))} dt + \gamma_k \int_{(t, X_i(t)) \in A_k} dN_i(t) \right\} + C' \\ &= n^{-1} \sum_{k=L,R} (e^{-\gamma_k} U_k + \gamma_k V_k) + C', \end{aligned}$$

where C, C' do not depend on γ_L or γ_R , and

$$\begin{aligned} U_k &= \sum_{i=1}^n \int_{(t, X_i(t)) \in A_k} Y_i(t) e^{F_m(t, X_i(t))} dt, \\ V_k &= \sum_{i=1}^n \int_{(t, X_i(t)) \in A_k} dN_i(t). \end{aligned} \quad (6)$$

The values that minimize $R_n(F_m - g_{m,l+1})$ are then

$$\gamma_k = \log(U_k/V_k), \quad (7)$$

and the decrease in the likelihood risk due to the split is

$$\begin{aligned} d &= R_n(F_m - g_{m,l+1}) - R_n(F_m - g_{m,l}) \\ &= \frac{V_L}{n} \log\left(\frac{U_L}{V_L}\right) + \frac{V_R}{n} \log\left(\frac{U_R}{V_R}\right) - \frac{V_L + V_R}{n} \log\left(\frac{U_L + U_R}{V_L + V_R}\right). \end{aligned} \quad (8)$$

Therefore the best split, as defined by $(B_{m,\ell}, A_L, A_R)$, is that which minimizes d .

The quantities (6) and (8) are calculated for every possible split at every boosting iteration in order to determine the next split. Note that V_k is the total number of events observed in the region A_k for the n subjects, and may include more than one event per subject due to the possibility of recurring events. On the other hand, U_k is the cumulative intensity in A_k if the hazard is $e^{F_m(t,x)}$. For the specialized setting of right-censored data with no recurring events, (6) reduces to

$$\begin{aligned} \tilde{U}_k &= n^{-1} \sum_{i=1}^n \int_0^{\tilde{T}_i} I_{A_k}(t, X_i(t)) e^{F_m(t, X_i(t))} dt, \\ \tilde{V}_k &= n^{-1} \sum_{i=1}^n \Delta_i I[\{\tilde{T}_i, X_i(\tilde{T}_i)\} \in A_k]. \end{aligned}$$

Applying the BoXHED2.0 algorithm with $(\tilde{U}_k, \tilde{V}_k)$ instead of (6) recovers the BoXHED1.0 algorithm. Notice that (6) is far more compact and general though, thanks to the counting process framework.

2.4 Speedup via data preprocessing

BoXHED2.0 is several orders of magnitude faster than BoXHED1.0 due to three factors. The first is the use of C++ instead of Python for the core calculations, and the second is parallelization via multicore CPUs and GPUs. The third is a novel data preprocessing step that unclogs the computational bottleneck in the BoXHED algorithm. Recall that the integral U_k in (6) must be calculated for every possible split at every boosting iteration in order to identify the split that minimizes the split score (8). In BoXHED1.0, U_k is evaluated by numerical integration which is time-consuming to do. In BoXHED2.0 we transform the functional survival data (3) so that the required numerical integration comes for free as part of the training process.

The preprocessing step is based on the observation that the covariates $X(t)$ are always sampled at discrete (but possibly irregularly spaced) timepoints, and so their trajectories are piecewise-constant. Thus the covariate path for subject i can be broken into a series of epochs where $X_i(t)$ takes on the static value χ_{ij} between the times \mathcal{T}_{ij} and $\bar{\tau}_{ij}$:

$$\{X_i(t)\}_t \longleftrightarrow \begin{pmatrix} \mathcal{T}_{i1} & \bar{\tau}_{i1} & \chi_{i1} \\ \mathcal{T}_{i2} & \bar{\tau}_{i2} & \chi_{i2} \\ \vdots & \vdots & \vdots \\ \mathcal{T}_{iJ_i} & \bar{\tau}_{iJ_i} & \chi_{iJ_i} \end{pmatrix}.$$

Note that the first epoch need not start at $\mathcal{T}_{i1} = 0$, and the endpoint $\bar{\tau}_{ij}$ of the j -th epoch need not equal the beginning $\mathcal{T}_{i,j+1}$ of the $(j+1)$ -th epoch. This is because we only need to keep track of the epochs for which the subject is at-risk, i.e. $Y_i(t) = 1$. Furthermore, by splitting up an epoch into shorter ones if necessary, each event timepoint (i.e. $dN_i(t) = 1$) can be turned into the endpoint of an epoch. Hence, the complete functional data sample $\{X_i(t), Y_i(t), N_i(t)\}_t$ for subject i can be represented in the tabular form

$$\begin{pmatrix} \mathcal{T}_{i1} & \bar{\tau}_{i1} & \chi_{i1} & \Delta_{i1} \\ \mathcal{T}_{i2} & \bar{\tau}_{i2} & \chi_{i2} & \Delta_{i2} \\ \vdots & \vdots & \vdots & \vdots \\ \mathcal{T}_{iJ_i} & \bar{\tau}_{iJ_i} & \chi_{iJ_i} & \Delta_{iJ_i} \end{pmatrix}, \quad (9)$$

where $\Delta_{ij} = 1$ if the subject experienced an event at $\bar{\tau}_{ij}$, and is zero otherwise. The format of the data input to BoXHED2.0 follows (9). The preprocessing applied to (9) in order to sidestep numerical integration is discussed in the supplementary material. Note that the preprocessing only needs to be run once for a training set, rather than for each time the BoXHED2.0 estimator is fit with a particular set of hyperparameters during the hyperparameter tuning step.

In modern healthcare applications where data are sampled at high frequency (e.g. wearable devices that monitor patient vitals in real-time), there is negligible error in using piecewise-constant covariate paths to approximate the unknown true path. BoXHED is specifically designed for these settings which represent the emerging paradigm for healthcare analytics. In data poor environments where data are sampled sporadically, joint parametric modelling of the hazard and the covariate process can be used to interpolate the covariate paths [6]. However, substantial risk can result if the parametric families are misspecified, unlike the nonparametric BoXHED estimator.

2.5 Split search using multicore CPUs and GPUs

For a continuous covariate, traditional boosting implementations typically place candidate split points at every observed covariate value. This takes $\mathcal{O}(n)$ trials to search through all possible splits for one covariate. On the other hand, picking a pre-specified set of quantiles (e.g. every percentile) of the observed values as candidate splits reduces the search time to $\mathcal{O}(1)$. BoXHED1.0 employs every fifth percentile, but with the significant speedup in BoXHED2.0, up to 256 candidate split points are now allowed for time and for each covariate. There are two reasons for this limit. First, for GPU training of BoXHED2.0 models, the resource bottleneck is typically GPU memory. Restricting to 256 candidate splits allows the covariate values to be stored as a byte rather than as a double. Second, there is diminishing performance gain to a more granular search, and one can argue that imposing a limit can even act as a form of regularization. BoXHED2.0 offers two flavours of quantiles: Raw and time-weighted.

Raw quantiles. The set of unique values for time and for each covariate are collected, and the quantiles are obtained from this.

Weighted quantiles. In XGBoost the risk function is approximated by its second order Taylor expansion, and the Hessian is used as the weight for quantile sketch. For the time-dependent survival setting we propose a much more

natural weight, i.e. time. To explain, imagine a sample with one subject ($n = 1$) whose covariate value is $x = 1.3$ for $t \in (0, 2]$ and $x = 2$ for $t \in (2, 3]$. Under the raw quantile setting, $x = 1.3$ and $x = 2$ are each given a weight of $1/2$. However, since twice as much time was spent at $x = 1.3$ than at $x = 2$, in a weighted setting we ought to give $x = 1.3$ a weight of $2/3$, and $1/3$ for $x = 2$. Hence, for the k -th covariate we define the weighted quantile function $q_k : \mathbb{R} \rightarrow [0, 1]$ as

$$q_k(x) = \frac{\sum_{i,j: \mathcal{X}_{ij}^{(k)} \leq x} (\bar{\mathcal{T}}_{ij} - \underline{\mathcal{T}}_{ij})}{\sum_{i,j} (\bar{\mathcal{T}}_{ij} - \underline{\mathcal{T}}_{ij})}, \quad (10)$$

and for time it is

$$q_0(t) = \frac{\sum_{i,j: \bar{\mathcal{T}}_{ij} \leq t} (\bar{\mathcal{T}}_{ij} - \underline{\mathcal{T}}_{ij})}{\sum_{i,j} (\bar{\mathcal{T}}_{ij} - \underline{\mathcal{T}}_{ij})}. \quad (11)$$

2.6 Missing covariate values

In practice, it is possible for some of the covariates in (9) to be missing for an epoch. If the k -th covariate value $\mathcal{X}_{ij}^{(k)}$ in question is categorical, then ‘missingness’ can be treated as an additional factor level. Otherwise, BoXHED2.0 implements left and right splits of the form for the k -th covariate $x^{(k)}$:

$$\left\{ \left\{ x^{(k)} \leq \chi \text{ or } x^{(k)} \text{ missing} \right\}, \left\{ x^{(k)} > \chi \right\} \right\}$$

or

$$\left\{ \left\{ x^{(k)} \leq \chi \right\}, \left\{ x^{(k)} > \chi \text{ or } x^{(k)} \text{ missing} \right\} \right\}.$$

2.7 Variable importance

BoXHED2.0 inherits BoXHED1.0’s variable importance measure, albeit with the more general likelihood risk (4). Define the importance of the k -th variable (the zero-th one being time t) as

$$\mathcal{I}_k = \sum_{m=0}^{M-1} \mathcal{I}_k(g_m), \quad (12)$$

where for tree g_m with L internal nodes,

$$\mathcal{I}_k(g_m) = - \sum_{\ell=1}^L d_\ell I(v(\ell) = k) \geq 0.$$

Here, d_ℓ is the split score (8) at iteration ℓ and $v(\ell)$ is the variable used for the partition. Hence the second sum represents the total reduction in likelihood risk due to splits on the k -th variable in the m -th tree, and \mathcal{I}_k is the total reduction across the M trees. In other words, the BoXHED variable importance quantifies a variable’s contribution to reducing the likelihood risk. This is more natural than the traditional variable importance measure [5], which is defined as the reduction in mean squared error between the tree learners and the gradients of the risk at each boosting iteration.

To convert \mathcal{I}_k into a measure of relative importance between 0 and 1, it is scaled by $\max_k \mathcal{I}_k$, where a larger value confers higher importance.

3 Numerical study

BoXHED2.0 was previously applied to MIMIC-IV ICU data to predict in-ICU mortality in real-time [7]. The method was compared to other time-dependent covariate survival approaches including the Cox model and deep learning, and BoXHED2.0 was shown to perform best as measured by AUC and AUPR. Here we focus on the speed and accuracy improvements of BoXHED2.0 over BoXHED1.0 at estimating the underlying hazard function generating the survival data. As the hazard functions that generate real-world datasets are not known, we use synthetic data to assess performance. We also conduct a numerical experiment involving survival settings for which there are currently no other nonparametric machine learning solutions besides BoXHED2.0.

We use the *RMSE* for the test data as our accuracy metric. This measures the difference between the true hazard function and the BoXHED estimators:

$$RMSE = \left\{ \frac{1}{N} \sum_{i=1}^N (\hat{\lambda}_i - \lambda_i)^2 \right\}^{1/2} \geq 0,$$

where $\hat{\lambda}_i$ and λ_i denote respectively the estimated and true hazard values evaluated at the i -th test point. Smaller $RMSE$ values indicate better performance, with the minimum of zero attained if and only if $\hat{\lambda}_i = \lambda_i$ for all i . We note that another metric that is used for the prediction of survival times (but not for hazard estimation) is the time-dependent AUC [8]:

$$AUC_t = \mathbb{P} \left(\hat{S}_i(t) < \hat{S}_j(t) \mid \Delta_i = 1, T_i < t < T_j \right) \in [0, 1],$$

where $\hat{S}_i(t)$ is the conditional survival probability given the covariate trajectory $\{X_i(s) : 0 \leq s \leq t\}$, and T_i is the event time (recall from Section 2.1 that there are no recurring events in the BoXHED1.0 setting). Larger values of AUC_t indicate better performance, with a value of 0.5 corresponding to a random guess. However, unlike $RMSE$, AUC_t is not a *proper* scoring rule for hazard estimation because the true hazard λ is not the only function that can attain the maximum score of 1. For example, if we overestimate λ by a factor of 2, i.e. $\hat{\lambda}_i = 2\lambda_i$, $AUC_t = 1$ whereas $RMSE > 0$. In other words AUC_t is ineffective at detecting estimation errors.

3.1 Datasets

Comparing BoXHED2.0 to BoXHED1.0. For direct comparison to BoXHED1.0, we use the experiments in [1]. Letting $X(t)$ be a piecewise-constant covariate with values in each epoch in (9) drawn from $U(0, 1]$, we simulate event times from each of the following hazard functions:

$$\begin{aligned} \lambda_1(t, X(t)) &= B(t, 2, 2) \times B(X(t), 2, 2), t \in (0, 1], \\ \lambda_2(t, X(t)) &= B(t, 4, 4) \times B(X(t), 4, 4), t \in (0, 1], \\ \lambda_3(t, X(t)) &= \frac{1}{t} \frac{\phi(\log t - X(t))}{\Phi(X(t) - \log t)}, t \in (0, 5], \\ \lambda_4(t, X(t)) &= \frac{3}{2} t^{\frac{1}{2}} \exp \left(-\frac{1}{2} \cos(2\pi X(t)) - \frac{3}{2} \right), t \in (0, 5], \end{aligned}$$

where $B(\cdot, a, a)$ is the PDF of the Beta distribution (with shape and scale a). $\phi(\cdot)$ and $\Phi(\cdot)$ are the PDF and CDF of $N(0, 1)$. This means that λ_1 and λ_2 take the form of Beta PDFs, and λ_3 is the log-normal hazard. If the event has not occurred by $t = 1$ in the first two cases ($t = 5$ in the latter two), the subject is administratively censored at that point. In addition to $X(t)$, we add up to 40 irrelevant covariates to the dataset. For each hazard function, the event histories for 5,000 subjects are drawn for training, and 5,000 are drawn for testing.

Recurring events and beyond right-censoring. The previous experiments involve only right-censored data, and subjects do not experience recurring events. To our knowledge, BoXHED2.0 is the only nonparametric machine learning implementation that is able to handle the more general setting described in Section 2.2. To study its performance under this setting, we extend the previous experiments in two ways:

1. When an epoch $(\underline{\tau}_{ij}, \bar{\tau}_{ij})$ is generated for subject i , the value of its at-risk indicator Y_{ij} is drawn from a Bernoulli trial with probability $1 - p_{drop}$. If $Y_{ij} = 0$ then the epoch is excluded from (9) because the subject is not at-risk during that period. The next epoch is then simulated to start from $\bar{\tau}_{ij}$. We experiment with $p_{drop} \in \{0.1, 0.2, 0.3\}$, with larger values generating sparser data.
2. A subject may experience more than one event, i.e. it is possible to experience another event after a past occurrence.

3.2 Results

Table 1 reports the accuracy ($RMSE$) and speed for BoXHED2.0 and BoXHED1.0 when applied to the experiments from [1]. While BoXHED2.0 outperforms BoXHED1.0 in all test cases, unsurprisingly the difference is not substantial given that both algorithms are equivalent for right-censored non-recurring events. The improvement is due mainly to using more candidate splits for time and for each covariate in BoXHED2.0 (256 candidate splits each). By contrast, due to slower runspeed, [1] used only 10 splits for time and 20 for the covariates in BoXHED1.0. Another difference is in how the complexity of the tree learners are defined. BoXHED1.0 uses trees with a fixed number of splits (k splits produces $k + 1$ terminal nodes), whereas BoXHED2.0 employs trees of fixed depth (depth k hosts 2^k terminal nodes).

The four right-most columns of Table 1 report the computation times for BoXHED2.0 and BoXHED1.0,² evaluated on a server with two Intel Xeon CPU E5-2650 v4 2.20GHz processors and 512 GB of RAM. The total runtime for

²The multicore CPU option is employed for BoXHED2.0, where we utilize 20 threads for the experiments. BoXHED1.0 does not support multicore CPU or GPU processing.

Table 1: A comparison of accuracy and speed: BoXHED2.0 vs. BoXHED1.0. The speedup factor is calculated as the time taken to train BoXHED1.0 divided by the total runtime for BoXHED2.0 (preprocessing, hyperparameter tuning, training). The multicore CPU option is employed for BoXHED2.0, where we utilize 20 threads. BoXHED1.0 does not support multicore CPU or GPU processing.

hazard	#irrelevant covariates	mean $RMSE$ (95% C.I.)		runtime (sec)			speedup factor
		BoXHED2.0	BoXHED1.0	BoXHED2.0 preprocessing	BoXHED2.0 training	BoXHED1.0 training	
λ_1	0	0.14 (0.14, 0.15)	0.17 (0.17, 0.17)	2.1	0.007	290	140
	20	0.18 (0.17, 0.18)	0.20 (0.20, 0.20)	2.6	0.006	3400	1300
	40	0.18 (0.17, 0.18)	0.21 (0.20, 0.21)	3.0	0.007	7700	2600
λ_2	0	0.14 (0.13, 0.14)	0.23 (0.23, 0.24)	2.2	0.019	330	150
	20	0.19 (0.18, 0.20)	0.25 (0.25, 0.26)	2.6	0.006	4100	1600
	40	0.21 (0.20, 0.21)	0.26 (0.26, 0.27)	3.2	0.007	6500	2100
λ_3	0	0.037 (0.036, 0.038)	0.038 (0.037, 0.040)	1.2	0.006	190	160
	20	0.040 (0.039, 0.041)	0.047 (0.046, 0.049)	1.5	0.005	2400	1600
	40	0.044 (0.043, 0.045)	0.050 (0.048, 0.051)	1.8	0.016	4500	2500
λ_4	0	0.040 (0.039, 0.041)	0.049 (0.048, 0.050)	1.5	0.014	280	180
	20	0.053 (0.051, 0.054)	0.060 (0.059, 0.062)	1.8	0.019	2200	1200
	40	0.062 (0.060, 0.063)	0.069 (0.067, 0.070)	2.3	0.008	5200	2300

BoXHED2.0 includes data preprocessing, hyperparameter tuning via K -fold cross-validation, and training with the chosen hyperparameters. Evaluating the values of the fitted estimator took a negligible amount of time. The median speedup for BoXHED2.0 is over 1,400 times faster than the training time for BoXHED1.0, and that is even before factoring in the time taken to tune BoXHED1.0 hyperparameters.

Table 2 provides results for the more general survival setting described in Section 3.1. Two competing forces are at play. On one hand the data is more sparse because $p_{drop} > 0$, which lowers estimation accuracy. On the other hand, subjects can now experience multiple events, which contribute additional information about the hazard. For the particular set of experiments considered here, the net effect is that even for the highest p_{drop} value of 0.3, the accuracies still match those in Table 1.

Table 2: BoXHED2.0 accuracy for the more general survival setting described in Section 3.1.

hazard	#irrelevant covariates	mean $RMSE$ (95% C.I.)		
		BoXHED2.0		
		$p_{drop} = 0.3$	$p_{drop} = 0.2$	$p_{drop} = 0.1$
λ_1	0	0.11 (0.11, 0.11)	0.11 (0.11, 0.12)	0.10 (0.10, 0.10)
	20	0.15 (0.15, 0.15)	0.14 (0.14, 0.14)	0.12 (0.12, 0.12)
	40	0.16 (0.16, 0.16)	0.15 (0.15, 0.15)	0.14 (0.14, 0.14)
λ_2	0	0.14 (0.14, 0.14)	0.15 (0.14, 0.15)	0.16 (0.16, 0.17)
	20	0.19 (0.19, 0.19)	0.18 (0.17, 0.18)	0.20 (0.20, 0.20)
	40	0.21 (0.21, 0.22)	0.19 (0.18, 0.19)	0.21 (0.21, 0.22)
λ_3	0	0.039 (0.039, 0.040)	0.034 (0.034, 0.034)	0.029 (0.029, 0.029)
	20	0.043 (0.042, 0.043)	0.040 (0.040, 0.041)	0.035 (0.035, 0.035)
	40	0.046 (0.046, 0.046)	0.043 (0.042, 0.043)	0.036 (0.036, 0.036)
λ_4	0	0.042 (0.042, 0.043)	0.034 (0.034, 0.034)	0.038 (0.038, 0.038)
	20	0.045 (0.045, 0.045)	0.042 (0.042, 0.042)	0.050 (0.049, 0.050)
	40	0.050 (0.050, 0.050)	0.048 (0.048, 0.048)	0.052 (0.052, 0.053)

Finally, to assess how BoXHED2.0's runtime scales with the number of data rows (i.e. number of epochs in (9)), Figure 1 plots compute time against the number of rows used to train the model (up to 10 million). Both the data preprocessing time and training time scale linearly with the number of rows when the candidate splits are chosen based on raw quantiles. Recall that we only need to run the preprocessing step once for a training set, rather than for each time the BoXHED2.0 estimator is fit with a particular set of hyperparameters during the hyperparameter tuning step.

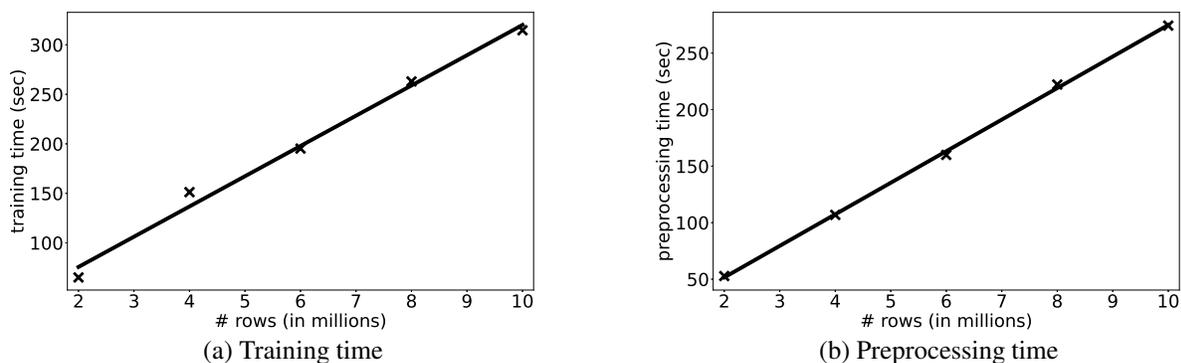


Figure 1: Scalability analysis of BoXHED2.0 for increasing number of data rows (epochs). We set the hazard function to λ_1 and allow for recurring events. 40 irrelevant features. The multicore CPU option is employed where we utilize 20 threads.

4 Discussion

To our knowledge, BoXHED2.0 is the only nonparametric machine learning implementation for time-dependent survival settings beyond the classic right-censoring setup, and it also supports recurring events data. BoXHED2.0 is based on a theoretically justified procedure, and its performance has been validated before on real ICU data and now on numerical experiments. It exhibits leadership performances in both cases, as well as astonishing speedup relative to BoXHED1.0. With the increasing availability of high-frequency health data captured by wearables, BoXHED2.0 is particularly well-suited for creating real-time early warning signals for adverse health events.

References

- [1] X. Wang, A. Pakbin, B. J. Mortazavi, H. Zhao, and D. K. K. Lee. BoXHED: Boosted eXact Hazard Estimator with Dynamic covariates. In *International Conference on Machine Learning*, pages 9973–9982. PMLR, 2020.
- [2] D. K. K. Lee, N. Chen, and H. Ishwaran. Boosted nonparametric hazards with time-dependent covariates. *Annals of Statistics*, 49(4):2101–2128, 2021.
- [3] O. O. Aalen. Nonparametric inference for a family of counting processes. *Annals of Statistics*, 6(4):701–726, 1978.
- [4] T. Chen and C. Guestrin. XGBoost: A scalable tree boosting system. In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 785–794. ACM, 2016.
- [5] J. H. Friedman. Greedy function approximation: A gradient boosting machine. *Annals of Statistics*, 29:1189–1232, 2001.
- [6] D. Rizopoulos. *Joint models for longitudinal and time-to-event data: With applications in R*. CRC press, 2012.
- [7] Z. Nowroozilarki, A. Pakbin, J. Royalty, D. K. K. Lee, and B. J. Mortazavi. Real-time mortality prediction using MIMIC-IV ICU data via boosted nonparametric hazards. In *2021 IEEE EMBS International Conference on Biomedical and Health Informatics (BHI)*, pages 1–4. IEEE, 2021.
- [8] P. Blanche, M. W. Kattan, and T. A. Gerds. The c-index is not proper for the evaluation of t -year predicted risks. *Biostatistics*, 20(2):347–357, 2019.

Supplementary materials

Preprocessing the input data (9)

For convenience, the BoXHED2.0 input data (9) is provided again here:

$$\begin{pmatrix} \underline{\tau}_{i1} & \bar{\tau}_{i1} & \chi_{i1} & \Delta_{i1} \\ \underline{\tau}_{i2} & \bar{\tau}_{i2} & \chi_{i2} & \Delta_{i2} \\ & & \vdots & \\ \underline{\tau}_{iJ_i} & \bar{\tau}_{iJ_i} & \chi_{iJ_i} & \Delta_{iJ_i} \end{pmatrix},$$

where $X_i(t) = \chi_{ij}$ between $\underline{\tau}_{ij} < t \leq \bar{\tau}_{ij}$. If subject i experienced an event at $\bar{\tau}_{ij}$ then $\Delta_{ij} = 1$, otherwise $\Delta_{ij} = 0$. The goal is to preprocess the data so that the quantities (6),

$$U_k = \sum_{i=1}^n \int_{(t, X_i(t)) \in A_k} Y_i(t) e^{F_m(t, X_i(t))} dt,$$

$$V_k = \sum_{i=1}^n \int_{(t, X_i(t)) \in A_k} dN_i(t)$$

defined for the left and right daughter regions A_L and A_R can be computed efficiently without numerical integration.

The insight behind the preprocessing step stems from the observation that the tree learners $g_0(t, x), g_1(t, x), \dots$ in $F_m(t, x) = F_0 - \nu \sum_{q=0}^{m-1} g_q(t, x)$ are piecewise-constant over the disjoint time-covariate regions (5):

$$B_\ell = \left\{ (t, x) : \begin{array}{l} t^{(\ell_0)} < t \leq t^{(\ell_0+1)} \\ x^{(1, \ell_1)} < x^{(1)} \leq x^{(1, \ell_1+1)} \\ \vdots \\ x^{(p, \ell_p)} < x^{(p)} \leq x^{(p, \ell_p+1)} \end{array} \right\},$$

where $\{t^{(\ell_0)}\}_{\ell_0}$ is the set of candidate split points for time t , and $\{x^{(k, \ell_k)}\}_{\ell_k}$ is the set of candidate splits for the k -th covariate $x^{(k)}$. It follows that for a fixed value of x , $F_m(t, x)$ is a constant function of time between any two consecutive candidate split points $t^{(\ell_0)}$ and $t^{(\ell_0+1)}$. Suppose for a moment that each epoch $(\underline{\tau}_{ij}, \bar{\tau}_{ij}]$ in the input data is completely contained within some interval $(t^{(\ell_0)}, t^{(\ell_0+1)}]$. Since each daughter region $A_{k \in \{L, R\}}$ is the union of some subset of the regions (5), U_k and V_k reduce to the weighted sums

$$U_k = \sum_{(\underline{\tau}_{ij}, \chi_{ij}) \in A_k} w_{ij} e^{F_m(\underline{\tau}_{ij}, \chi_{ij})},$$

$$V_k = \sum_{(\underline{\tau}_{ij}, \chi_{ij}) \in A_k} \Delta_{ij},$$
(S.1)

where $w_{ij} = \bar{\tau}_{ij} - \underline{\tau}_{ij}$. The curious choice of using $\underline{\tau}_{ij}$ in lieu of $\bar{\tau}_{ij}$ in (S.1) will be explained later. It turns out this is crucial because most boosting implementations, including XGBoost, use tree splits of the form ‘<’ for the left daughter and ‘≥’ for the right.

Similarly, the likelihood risk (4) evaluated at $F_m, R_n(F_m)$, can be computed as the sum

$$\frac{1}{n} \sum_{ij} \left\{ w_{ij} e^{F_m(\underline{\tau}_{ij}, \chi_{ij})} - \Delta_{ij} F_m(\underline{\tau}_{ij}, \chi_{ij}) \right\}.$$
(S.2)

Thus the ‘sufficient statistics’ for BoXHED2.0 are $\{\underline{\tau}_{ij}, w_{ij}, \chi_{ij}, \Delta_{ij}\}_{ij}$, and (S.1)-(S.2) can be easily computed from the tree ensemble predictions for $F_m(t, x)$.

To excise explicit numerical integration from BoXHED2.0, we need to put the data (9) in a form where each epoch is completely contained within some interval $(t^{(\ell_0)}, t^{(\ell_0+1)}]$. This is done by applying four operations to the rows of (9). The first two are:

1. Any epoch $(\underline{\tau}_{ij}, \bar{\tau}_{ij}]$ that contains one of the candidate split points $t^{(\ell_0)}$ is split into $(\underline{\tau}_{ij}, t^{(\ell_0)}]$ and $(t^{(\ell_0)}, \bar{\tau}_{ij}]$. If an epoch spans multiple split points then it is split into a number of shorter epochs.

2. Transform the (newly created) rows $\{\underline{\tau}_{ij}, \bar{\tau}_{ij}, \chi_{ij}, \Delta_{ij}\}_{ij}$ into $\{\underline{\tau}_{ij}, w_{ij}, \chi_{ij}, \Delta_{ij}\}_{ij}$.

The time complexity for achieving the above is $\mathcal{O}(n \log |\{t^{(\ell_0)}\}_{\ell_0}|)$. Figure S.1 illustrates the operations on a simple numerical example. The left table describes the event histories for two subjects. The first subject experienced an event at the end of their first epoch ($t = 0.13$), returns to the sample at $t = 0.15$, and becomes lost to follow up at $t = 0.25$. A similar story can be told for the second subject. The candidate split points $\{t^{(\ell_0)}\}_{\ell_0}$ for this example are set as $\{0.01, 0.10, 0.15\}$.

The second set of required operations stem from the fact that most boosting implementations, including XGBoost, use tree splits of the form ‘<’ for the left daughter and ‘≥’ for the right. In particular, this implies time splits of the form $[\cdot, \cdot)$. This is incompatible with the epochs for survival data, which are intrinsically of the form $(\cdot, \cdot]$. To see why, consider for example a subject who experiences an event at a candidate split point $t^{(\ell_0)}$. Since the candidate split points are not sampled from an absolutely continuous distribution, but are instead chosen from the observed data, the probability of this happening is not zero. Under the splitting convention $[\cdot, \cdot)$, the observed event will be counted towards some region $[t^{(\ell_0)}, t^{(\ell'_0)})$, even though the subject was never at-risk there. The hazard MLE for that region would then be one (number of events in region) divided by zero (time spent at-risk in region).³ For mathematical consistency, the lower end of the time interval must be open and the upper end closed. For notational consistency we will also apply the same convention to each covariate.

Fortunately, through additional processing, we can still use XGBoost’s splitting convention to fit trees with leaf nodes of the form $(t^{(\ell_0)}, t^{(\ell'_0)}] \times \dots \times (x^{(p, \ell_p)}, x^{(p, \ell'_p)}]$. Let us first discuss the processing of covariates. Suppose that a leaf region $B_{m, \ell}$ contains an epoch whose k -th covariate value $\chi_{ij}^{(k)}$ coincides with one of the candidate split points $x^{(k, \ell_k)}$. A XGBoost cut at that location would assign the epoch to the right daughter $B_{m, \ell} \cap \{x^{(k)} \geq x^{(k, \ell_k)}\}$. To ensure that it will be assigned to the left daughter $B_{m, \ell} \cap \{x^{(k)} < x^{(k, \ell_k)}\}$ instead, we apply the map

3. $\chi_{ij}^{(k)} \mapsto x^{(k, \ell_k - 1)}$ for $\chi_{ij}^{(k)} \in (x^{(k, \ell_k - 1)}, x^{(k, \ell_k)}]$.

Note that the covariate values in the interior of $(x^{(k, \ell_k - 1)}, x^{(k, \ell_k)}]$ are also mapped to the candidate split point $x^{(k, \ell_k - 1)}$. This reduces the number of unique covariate values in the data to no more than 256, so the values can be stored as a byte. This is useful for GPU training given that GPU memory is scarce.

With the application of Step 3, the fitted value for a region $[x^{(k, \ell_k)}, x^{(k, \ell'_k)})$ in fact represents the fitted value for $(x^{(k, \ell_k)}, x^{(k, \ell'_k)}]$ in the BoXHED2.0 hazard estimator. Accordingly, the `predict` function in BoXHED2.0 maps any new covariate value that coincides with a candidate split point $x^{(k, \ell_k)}$ back to $x^{(k, \ell_k - 1)}$, before running it through the fitted trees to obtain predictions.

For the processing of time, this was already partly accomplished by our indexing of the epoch $(\underline{\tau}_{ij}, \bar{\tau}_{ij}]$ with $\underline{\tau}_{ij}$ rather than $\bar{\tau}_{ij}$ in (S.1) and (S.2). Therefore, if a leaf region $B_{m, \ell}$ is split on time into daughters $B_{m, \ell} \cap \{t < \underline{\tau}_{ij}\}$ and $B_{m, \ell} \cap \{t \geq \underline{\tau}_{ij}\}$, the epoch will be correctly assigned to the latter. Thus even if $\underline{\tau}_{ij}$ coincides with a candidate split point $t^{(\ell_0)}$, there is no need to re-map. However, given the GPU memory discussion above, we still need to perform the following:

4. $\underline{\tau}_{ij} \mapsto t^{(\ell_0 - 1)}$ for $\underline{\tau}_{ij} \in (t^{(\ell_0 - 1)}, t^{(\ell_0)})$.

Steps 3 and 4 are illustrated in Figure S.2.

Similar to the covariate regions, the fitted value for $[t^{(\ell_0)}, t^{(\ell'_0)})$ represents the fitted value for $(t^{(\ell_0)}, t^{(\ell'_0)}]$ in the BoXHED2.0 hazard estimator. Hence the `predict` function in BoXHED2.0 also maps any new time value that coincides with a candidate split point $t^{(\ell_0)}$ back to $t^{(\ell_0 - 1)}$.

³The format for the BoXHED1.0 data allowed for similar situations where $V_k > 0$ while $U_k = 0$. An ad-hoc imputation was used to remove the pathology (§4.1.2 in [1]). The BoXHED2.0 data format is designed to rule out this possibility from the start.

Figure S.1: Numerical illustration of Steps 1 and 2. The candidate split points $\{t^{(\ell_0)}\}_{\ell_0}$ are set as $\{0.01, 0.10, 0.15\}$. The first epoch in the original data (left) is split into the first two rows in the middle table, and the last epoch in the original data is split into the last two rows in the middle table.

$$\begin{pmatrix} i & \tau & \bar{\tau} & \chi & \Delta \\ \hline 1 & 0.01 & 0.13 & 0.27 & 1 \\ 1 & 0.15 & 0.25 & 0.51 & 0 \\ 2 & 0.06 & 0.10 & 0.81 & 1 \\ 2 & 0.13 & 0.25 & 0.92 & 0 \end{pmatrix} \rightarrow \begin{pmatrix} i & \tau & \bar{\tau} & \chi & \Delta \\ \hline 1 & 0.01 & \mathbf{0.10} & 0.27 & \mathbf{0} \\ \mathbf{1} & \mathbf{0.10} & \mathbf{0.13} & \mathbf{0.27} & \mathbf{1} \\ 1 & 0.15 & 0.25 & 0.51 & 0 \\ 2 & 0.06 & 0.10 & 0.81 & 1 \\ 2 & 0.13 & \mathbf{0.15} & 0.92 & \mathbf{0} \\ \mathbf{2} & \mathbf{0.15} & \mathbf{0.25} & \mathbf{0.92} & \mathbf{0} \end{pmatrix} \rightarrow \begin{pmatrix} i & \tau & w & \chi & \Delta \\ \hline 1 & 0.01 & \mathbf{0.09} & 0.27 & 0 \\ 1 & 0.10 & \mathbf{0.03} & 0.27 & 1 \\ 1 & 0.15 & \mathbf{0.10} & 0.51 & 0 \\ 2 & 0.06 & \mathbf{0.04} & 0.81 & 1 \\ 2 & 0.13 & \mathbf{0.02} & 0.92 & 0 \\ 2 & 0.15 & \mathbf{0.10} & 0.92 & 0 \end{pmatrix}$$

Figure S.2: Steps 3 and 4 of processing the last table in Figure S.1. The candidate split points $\{x^{(1,\ell_1)}\}_{\ell_1}$ for the covariate are set as $\{0.51, 0.81\}$ in this example. Notice that the covariate value for the third row, 0.51, coincides with the smallest candidate split point. In the table on the right, we set it to the smallest value observed in the data, but it can be set to anything strictly smaller than 0.51.

$$\begin{pmatrix} i & \tau & w & \chi & \Delta \\ \hline 1 & 0.01 & 0.09 & 0.27 & 0 \\ 1 & 0.10 & 0.03 & 0.27 & 1 \\ 1 & 0.15 & 0.10 & 0.51 & 0 \\ 2 & 0.06 & 0.04 & 0.81 & 1 \\ 2 & 0.13 & 0.02 & 0.92 & 0 \\ 2 & 0.15 & 0.10 & 0.92 & 0 \end{pmatrix} \rightarrow \begin{pmatrix} i & \tau & w & \chi & \Delta \\ \hline 1 & 0.01 & 0.09 & 0.27 & 0 \\ 1 & 0.10 & 0.03 & 0.27 & 1 \\ 1 & 0.15 & 0.10 & \mathbf{0.27} & 0 \\ 2 & \mathbf{0.01} & 0.04 & \mathbf{0.51} & 1 \\ 2 & \mathbf{0.10} & 0.02 & \mathbf{0.81} & 0 \\ 2 & 0.15 & 0.10 & \mathbf{0.81} & 0 \end{pmatrix}$$