

Embracing the Disharmony in Medical Imaging: A Simple and Effective Framework for Domain Adaptation

Rongguang Wang^{*1,3}, Pratik Chaudhari^{1,2}, Christos Davatzikos^{1,3,4}, †

¹Department of Electrical and Systems Engineering, University of Pennsylvania, PA, USA

²General Robotics, Automation, Sensing and Perception (GRASP) Laboratory, University of Pennsylvania

³Center for Biomedical Image Computing and Analytics (CBICA), University of Pennsylvania

⁴Department of Radiology, Perelman School of Medicine, University of Pennsylvania

†for the iSTAGING consortium⁵, the PHENOM consortium⁶, and the Alzheimer’s Neuroimaging consortium⁷ †

Email: rgw@seas.upenn.edu, pratikac@seas.upenn.edu, christos.davatzikos@penndmedicine.upenn.edu

Abstract

Domain shift, the mismatch between training and testing data characteristics, causes significant degradation in the predictive performance in multi-source imaging scenarios. In medical imaging, the heterogeneity of population, scanners and acquisition protocols at different sites presents a significant domain shift challenge and has limited the widespread clinical adoption of machine learning models. Harmonization methods which aim to learn a representation of data invariant to these differences are the prevalent tools to address domain shift, but they typically result in degradation of predictive accuracy. This paper takes a different perspective of the problem: we embrace this disharmony in data and design a simple but effective framework for tackling domain shift. The key idea, based on our theoretical arguments, is to build a pretrained classifier on the source data and adapt this model to new data. The classifier can be fine-tuned for intra-site domain adaptation. We can also tackle situations where we do not have access to ground-truth labels on target data; we show how one can use auxiliary tasks for adaptation; these tasks employ covariates such as age, gender and race which are easy to obtain but nevertheless correlated to the main task. We demonstrate substantial improvements in both intra-site domain adaptation and inter-site domain generalization on large-scale real-world 3D brain MRI datasets for classifying Alzheimer’s disease and schizophrenia.

Keywords: Heterogeneity · Distribution shift · Domain adaptation · Domain generalization · MRI

1 Introduction

Deep learning models have shown great promise in several fields related to medicine, including medical imaging diagnostics (Esteva et al., 2017; Rathore et al., 2017) and predictive modeling (Bashyam et al., 2020b). Applications of medical imaging range from relatively common segmentation tasks (Menze et al., 2014), to more complex and high level decision-support functions, such as estimating different patterns of brain diseases (Dong et al., 2015; Varol et al., 2017; Chand et al., 2020) and producing personalized prognosis (Rathore et al., 2018). However, despite their promise, complex deep learning models tend to have poor reproducibility across hospitals, scanners, and patient cohorts, since these

*Corresponding author: rgw@seas.upenn.edu, 3700 Hamilton Walk, 7th Floor, Center for Biomedical Image Computing and Analytics, University of Pennsylvania, Philadelphia, PA 19104, USA.

†See investigators in Habes et al. (2021) for ⁵, Chand et al. (2020) for ⁶, and Jack Jr et al. (2008) for ⁷.

high-dimensional models can overfit specific datasets, and hence achieve modest generalization performance (Davatzikos, 2019; Zhou et al., 2020). While a potential solution to this weakness is to train on very large databases of diverse datasets, this approach is limited in several ways. Firstly, characteristics of imaging devices change constantly, and hence even amply trained models are bound to face the same generalization challenges, on new datasets. Secondly, training labels, such as clinical or molecular classifications, or treatment measurements, are often scarce and hard to obtain. It is therefore impractical to expect that such ample training is possible in many problems. Finally, even if it were possible to train a model on large and diverse databases that would cover all possible variations across images, such a model would almost certainly sacrifice accuracy in favor of generalization under diverse conditions, i.e. it would have to rely on coarse imaging features that are stable across imaging devices and patient populations, and might fail to capture subtle and highly informative detail.

Herein, we propose a domain adaptation framework, which overcomes these limitations by allowing trained models to adapt to new imaging conditions in two paradigms: intra-site adaptation and inter-site generalization. To improve the prediction accuracy of a model on heterogeneous images within each single site, intra-site adaptation strategy fast adapts a model which is pre-trained on the entire site to each sub-groups, e.g. age range, race, scanner type, by fine-tuning. We use label information in the re-training process in this situation. For adaptation between different site, our inter-site generalization method avoid using ground-truth from the unseen site in view of the scarcity of labels in medical imaging. Fundamental in our approach is the utilization of “auxiliary tasks”, i.e., learning tasks that can be performed on readily available data from a new imaging condition (scanner, site, or population), and which can be used to adapt the primary trained model (e.g. disease classification) to these new conditions. An example of auxiliary tasks are estimation of readily available demographic characteristics, since such data is amply available in most practical settings. Essentially, the auxiliary tasks help an already trained model adapt to new imaging conditions, by adapting the features extracted by networks that are shared between the primary learning task, and the auxiliary tasks. We conducted extensive experiments on clinical large-scale datasets of 2,614 3D T1-MRI scans to evaluate the effectiveness of the proposed framework for both Alzheimer’s disease and schizophrenia classification tasks. Experimental results indicate that our proposed framework substantially improves the performance in both intra-site adaptation and inter-site generalization paradigms.

Contributions Our main contributions are as follows.

- We discuss the necessity of adaptation instead of learning invariant representations for accurate prediction. We also introduce a regularization term in fine-tuning process of domain adaptation for diverse population and imaging devices.
- We propose a novel auxiliary task based domain generalization method, that is able to adapt a model to an unseen site without accessing to prediction labels, with the guidance of easily accessible demographic information.
- We conduct extensive experiments on two classification tasks to evaluate the effectiveness of the proposed method. Our framework is superior to the baseline models according to the experimental comparison results.

Organization of the manuscript We have organized this manuscript as follows. We first provide a detailed description of related work on domain adaptation and domain generalization in Section 2. Our goal is to compare and contrast existing methods and motivate our approach, which is described in detail in Section 3. Next, we discuss the iSTAGING and PHENOM consortia, and details of the experimental setup in Section 4, followed by experimental results on intra-site and inter-site

classification in Section 5. We provide a detailed discussion of these results along with pointers for future work in Section 6.

2 Related Work

We discuss related literature in this section. We focus on the main techniques that have been shown to be suitable to handle domain shift in the medical imaging and computer vision literature.

Non-deep-learning-based methods for harmonization Several non-deep learning-based methods for harmonization have been proposed to correct the bias in multi-site medical imaging data, e.g., the effect of the scanner. Methods based on parametric empirical Bayes (Morris, 1983) such as ComBat methods (Johnson et al., 2007; Pomponio et al., 2020) remove sources of variability, specifically site differences, by performing location and scale adjustments to the data. A linear model estimates the location and scale differences in cross-site data, while preserving other biologically-relevant covariates, such as sex and age. Methods such as Wachinger et al. (2021) explicitly add features pertaining to non-biological variability, e.g., scanner manufacturer’s ID or magnetic field strength, into the model to tackle the fact that Combat algorithms may be insensitive to these variabilities.

Distribution alignment to learn invariant features Building representations of the source and target data that are invariant to their differences has been achieved using two main directions, (i) by employing discrepancy measures between two distributions and (ii) by using adversarial losses to build invariance. This suite of techniques are also called distribution alignment. Methods in first group use maximum mean discrepancy (MMD) (Tzeng et al., 2014; Long et al., 2015) or correlation distance (Sun et al., 2016) to measure distribution alignment. Adversarial adaptation methods such as Ganin et al. (2016); Tzeng et al. (2017); Liu et al. (2018); Meng et al. (2020b); Dinsdale et al. (2020) use a convolutional deep network to approximate the discrepancy. Domain classifier (discriminator) and domain-adversarial loss are used to learn features that are invariant across domains. The key issue with these methods is that the feature space of 3D MRI data is more complex than RGB data where these techniques have been primarily developed. This makes it difficult to measure distributional discrepancies and align the feature distribution for source and target data. Also, although adversarial adaptation techniques work well, optimizing adversarial objectives is very challenging and unstable in practice, especially for MRI data.

Learning disentangled representations An alternative to aligning the entire distribution of features is to disentangle the representation; in this case one learns two sets of features, the first which are specific to source or target data (also known as nuisances) and a second set of features (sufficient statistics) that are common to the two and thereby useful to build a robust classifier. Mutual information-based criteria are popular to disentangle the features. For instance, Meng et al. (2020a) aims to extract generalized categorical features by explicitly disentangling categorical features and domain features via mutual information (MI) minimization. Since computing mutual information for real-valued features is very difficult, methods based on generative models such as Moyer et al. (2018, 2020) disentangle the latent representation using conditional variational autoencoders (VAEs) (Kingma and Welling, 2013; Sohn et al., 2015). Related works such as Dewey et al. (2020) disentangle the latents by extracting high-resolution anatomical information and low-dimensional scanner-related components separately. A common trait and disadvantage of these methods is that they require access to data from multiple sources *during training*. While this is reasonable for situations where

agreements between different stake-holders make such sharing of data possible, it would be ideal if a method did not require data from all sources at training time.

Domain translation methods To better model variations in the data, domain translation methods seek to learn image-to-image transformation between the source and target tasks. Recent works such as Hoffman et al. (2018); Bashyam et al. (2020a); Robey et al. (2020); Robinson et al. (2020) utilize generative adversarial networks (GANs) (Goodfellow et al., 2014; Zhu et al., 2017; Huang et al., 2018) to learn source-to-target domain mapping for images, where cycle-consistency is enforced for learning a domain-invariant feature representation. Other works such as Shin et al. (2020) transfer the knowledge from MR images to positron emission tomography (PET) images by utilizing GANs for better diagnosis of Alzheimer’s disease. However, heterogeneity in data that comes from gender, age, ethnicity, and pathology, might not be preserved in an unpaired translation, especially when subjects are different in the source and target data. Furthermore, it is inefficient and ineffective to train multiple generative models in order to learn all mappings between multiple sites / domains. GANs, in particular for MRI data, are also notoriously difficult to train.

Building robust representations using techniques in causality Several recent studies incorporate causal inference (Schölkopf, 2019) for learning robust representations. This is conceptually an extension of the idea of learning disentangled representations where one is interested in ensuring that the classifier only uses features that are causal predictors of the outcome. Causality-aware models (Arjovsky et al., 2019; Heinze-Deml and Meinshausen, 2021) learn invariant features using regularizers on domain-specific information in the training data; this allows the representation to generalize to new domains. There are also other works such as Li et al. (2020) that extend this idea, or Zhang et al. (2020b) which uses a graphical model to encode the domain variation and treats domain adaptation as Bayesian inference problem. Similarly Zhang et al. (2020a) build a causal graph to generate perturbation (intervention) for data augmentation.

Transfer learning and few-shot learning-based methods Few-shot learning methods seek to adapt a machine learning model to new classes with few labeled data by pretraining on other classes which may have abundant data available to train with. The broader problem is known as meta-learning or “learning to learn” (Thrun and Pratt, 2012). This has also found import in medical problems, e.g., Qiu et al. (2020) utilize meta-learning to learn a new task with few samples in cancer survival analysis, while Dou et al. (2019) introduce global class alignment as well as local sample clustering regularization in a meta-learning scheme for domain generalization. A theme that has emerged in recent literature is that transfer learning, i.e., training a classifier on the abundant training data using standard classification losses and fine-tuning it to the new data, is an effective strategy to tackle few-shot problems (Dhillon et al., 2019; Kolesnikov et al., 2019). Our methods for intra-site domain adaptation, where we pretrain a classifier on all available data but adapt it to data from a specific sub-group of the population, e.g., all people within a specific age-group, are directly motivated from the success of transfer and few-shot learning.

3 Methods

This section gives the details of our technical approach. We will first introduce notation and concepts using intra-site domain generalization problems where we also provide theoretical arguments that are the foundation of our approach. We then elaborate upon our techniques for inter-site domain generalization.

3.1 Problem Formulation

Let (x, y) denote the input datum and ground-truth labels respectively. Labels $y \in C$ belong to a finite set. The training dataset consists of N samples $D = \{(x^i, y^i)_{i=1}^N\}$ where each pair is drawn from the probability distribution $(x^i, y^i) \sim P$. A deep neural network is a machine learning model that predicts the probability of each output $y \in C$ given the input datum x^i using parameters (weights) $\theta \in \mathbb{R}^n$. We denote the output of a deep network as a probability distribution over labels $p_\theta(y | x)$. The goal of learning is to achieve good generalization, i.e., obtain accurate predictions over samples from the probability distribution P that may not be a part of the training set D . The best weights for this purpose are

$$\theta^* = \underset{\theta}{\operatorname{argmin}} R(\theta) := \mathbb{E}_{(x,y) \sim P} [-\log p_\theta(y | x)], \quad (1)$$

where the prediction of the model is $\hat{y}(\theta) = \operatorname{argmax}_{y \in C} p_\theta(y | x)$. The quantity $R(\theta)$ is called the population risk of the model. However, we only have access to samples D from the distribution P and therefore find the best weights that fit a training dataset. This is achieved by minimizing the cross-entropy objective

$$\hat{\theta} = \underset{\theta}{\operatorname{argmin}} \frac{1}{|D|} \sum_{(x,y) \in D} -\log p_\theta(y | x) + \Omega(\theta), \quad (2)$$

where $\Omega(\theta)$ is a regularization term, e.g., $\Omega(\theta) = \lambda \|\theta\|_2^2 / 2$ for some constant $\lambda > 0$, that controls the amount of over-fitting on the training data. This objective is minimized using stochastic gradient descent (Bottou, 2010).

3.2 The Need for Adaptation

If training data is diverse, the training procedure above may not work well. To understand this, consider the case when the true distribution P is a mixture of two sub-groups, i.e., $P = (P^{g_1} + P^{g_2})/2$ and similarly $D = D^{g_1} \cup D^{g_2}$. In the context of the present paper, these sub-groups may consist of data from subjects within a specific age range, gender, race or inputs with the same scanner type. We seek to understand how the model $\hat{\theta}$ trained using (2) on the entire training data performs on one of the groups, say g_2 , as compared to the best model trained only on D^{g_2} . The development of Ben-David et al. (2010) shows that with probability at least $1 - \delta$ over independent draws of the training dataset from the distribution P ,

$$R^{g_2}(\hat{\theta}) \leq R^{g_2}(\theta^{*g_2}) + c \sqrt{\frac{V - \log \delta}{N}} + \frac{d(P^{g_1}, P^{g_2})}{2} + R(\theta^*); \quad (3)$$

here c is a constant, $R^{g_2}(\hat{\theta})$ is the population risk on group g_2 using our learned weights $\hat{\theta}$ using the training data and $R^{g_2}(\theta^{*g_2})$ is the best population risk on g_2 that one could have obtained by using (1) using data only from distribution P^{g_2} . The constant V is the Vapnik-Chervonenkis dimension (Blumer et al., 1989) that characterizes the complexity of a deep network architecture. The third term $d(P^{g_1}, P^{g_2})$ is a measure of the diversity of data from the two sub-groups and the final term is the best population risk using data from both groups. This inequality, and an analogous expression for group g_1 , is particularly illuminating. Note that we want the population risk on group g_2 , i.e., the left-hand side $R^{g_2}(\hat{\theta})$ using our chosen weights $\hat{\theta}$ to be as close as possible to the best population risk $R^{g_2}(\theta^{*g_2})$ for that sub-group. Ideally, the last three terms on the right-hand side should be small. First, if $R(\theta^*)$ is large, i.e., there does not exist a well-performing model of our chosen architecture that can fit both sub-groups, then we expect the learned model $\hat{\theta}$ to also work

poorly on the group g_2 . This directly suggests that one must use a deep network with large learning capacity if the sub-groups are diverse. Second, larger the deep network, larger the capacity V and more the data N necessary to achieve a good generalization. Third, the term $d(P^{g_1}, P^{g_2})$ suggests that fixed the capacity V and number of data N , if data from the two sub-groups is diverse then the learned model $\hat{\theta}$ may not be accurate on any of the sub-groups.

In practice, data from different sub-groups such as age range, gender, race, and scanner type, can be quite diverse. The above discussion suggests that it is difficult to learn machine learning models that generalize well for each sub-group using data from the entire heterogeneous population. This is a fundamental hurdle to building performant machine learning models for clinical applications and we next propose a simple solution to this problem.

3.3 Intra-Site Domain Generalization

Consider the situation when we wish to obtain accurate predictions on one sub-group of the population, corresponding to the subset of the training data $D^g \subset D$. A naive way of doing so is to simply sequester the training dataset and employ (2) to learn a model $\hat{\theta}^g$ using only data D^g . If we have m mutually exclusive sub-groups in the training data $D = D^{g_1} \cup D^{g_2} \dots \cup D^{g_m}$, all say with equal amounts data N/m , then a classical bound (Wellner et al., 2013) on the generalization performance for each sub-group of this naive sequestering is given by

$$R^g(\hat{\theta}^g) \leq R^g(\theta^{*g}) + c\sqrt{\frac{m(V - \log \delta)}{N}}; \quad (4)$$

notice that the second term has degraded by a factor of \sqrt{m} as compared to the situation if there were only one sub-group in the data. This degradation occurs because the model $\hat{\theta}^g$ is fitted only on data from sub-group g . In this paper, we avoid this degradation by a simple modification to (2). Roughly speaking, our goal is to fit a classifier D^g on a restricted class of classifiers, namely the ones that are close to the classifier $\hat{\theta}$ trained on the entire training dataset and reduce the factor of \sqrt{m} above. To that end, we solve the optimization problem given by

$$\hat{\theta}_{\text{DR}}^g = \underset{\theta}{\operatorname{argmin}} \frac{1}{|D^g|} \sum_{(x,y) \in D^g} -\log p_{\theta}(y | x) + \frac{\alpha}{2} \|\theta - \hat{\theta}\|_2^2, \quad (5)$$

where $\hat{\theta}$ is the model trained on the entire dataset D using (2). The objective is quite similar to the cross-entropy objective in (2) except that we have included an additional term, which we call a “proximal” term, that depends upon the hyper-parameter $\alpha > 0$. This term encourages the new weights θ^g to be close to the original learned weights $\hat{\theta}$. Roughly speaking, if α is large, the optimization problem keeps the weights close to the pre-trained weights $\hat{\theta}$. It is therefore beneficial to pick a large value of α if the number of samples in the subset D^g is small, or D^g is too different from the rest of the training data in D . A small value of α is ideal for the complementary cases, namely if D^g has a large number of samples which enables fitting a low-variance classifier in (5), or if the sub-group D^g has data similar to the other sub-groups.

The technical argument for intra-site domain generalization for a restricted class of classifiers

We next present a mathematically precise argument for our intra-site domain generalization methodology using the doubly robust estimation framework (Reddi et al., 2015). We will work in the restricted setting of a kernel-based binary classifier, i.e., $C = \{-1, 1\}$, denoted by $f : X \mapsto Y$, that maps the inputs $x \in X$ to their labels $y \in Y$. In the kernel setting we can write $f(x) = \sum_{i=1}^N \theta_i k(x^i, x)$

where $k(\cdot, \cdot)$ is called the “kernel” that measures the similarity between a new datum x and datum x^i from the training set. The parameters θ_i parametrize the classifier in terms of these similarities and are conceptually similar to the weights of a neural network. In this case, a bound on the Vapnik-Chervonenkis dimension V in (4) can be explicitly computed and the population risk which we denote by $R(f)$ is a convex function of the classifier f . As done in (2), let \hat{f} be the classifier

$$\hat{f} = \underset{f: \Omega(f) \leq \nu}{\operatorname{argmin}} \frac{1}{n} \sum_{i=1}^n \ell(f, x^i, y^i); \quad (6)$$

that minimizes the average misprediction loss $\ell(f, x^i, y^i)$ over all the training data. We have written the regularization $\Omega(\theta)$ in (2) slightly differently here. We have written the training as a constrained minimization problem with the constraint $\Omega(f) \leq \nu$; the two versions are equivalent to each other. In the kernel setting, the regularization akin to $\Omega(\theta) = \lambda \|\theta\|_2^2 / 2$ employed in (2) is written as $\Omega(f) = \lambda \|f\|^2 / 2 = \frac{1}{2} \sum_{i,j} \theta_i \theta_j k(x^i, x^j)$ where the norm is an appropriate function-space norm (the so-called Reproducing Kernel Hilbert Space (RKHS) norm). The error bound from (4) now looks like

$$R^g(\hat{f}^g) \leq R^g(f^{*g}) + c \sqrt{\frac{m(\nu^2 \operatorname{Tr}(K) - \log \delta)}{N}}, \quad (7)$$

with probability at least $1 - \delta$ over draws of the dataset (Bartlett and Mendelson, 2002); here $c > 0$ is a constant, $\operatorname{Tr}(K)$ is the trace of a certain kernel matrix of the training dataset and f^* is the classifier that minimizes the population risk on the distribution P .

If we now perform intra-site domain generalization to fit data from sub-group g , we should compute

$$\hat{f}_{\text{DR}}^g = \underset{f: \Omega(f - \hat{f}) \leq \nu_{\text{DR}}}{\operatorname{argmin}} \frac{1}{|D^g|} \sum_{(x,y) \in D^g} \ell(f, x, y); \quad (8)$$

the important thing to note here is that we are restricting the solution to be in the neighborhood of the pre-trained classifier \hat{f} using the regularization $\Omega(f - \hat{f}) \leq \nu_{\text{DR}}$. The result from Reddi et al. (2015, Theorem 4) then gives the following: with probability at least $1 - \delta$ over draws of the training dataset,

$$R^g(\hat{f}_{\text{DR}}^g) \leq R^g(f^{*g}) + c \sqrt{\frac{\nu'^2 \operatorname{Tr}(K) - \log \delta}{N}} + \frac{c' \|\hat{f}\|}{N}. \quad (9)$$

where $\nu' = \nu_{\text{DR}} + \sqrt{\frac{\nu^2 \operatorname{Tr}(K) - \log \delta}{N}}$. The most important aspect of the above inequality, that directly motivates our approach in this paper, is that we have traded off the multiplicative factor of \sqrt{m} in (7) with the additive term proportional to $\frac{\|\hat{f}\|}{N}$. If the norm of the pretrained classifier $\|\hat{f}\|$ is small (conceptually this means that the hypothesis \hat{f} is a “simple” function) then the right-hand side of (9) can be much smaller than that of (7). There are recent theoretical results that suggest that even non-kernel-based classifiers such as deep networks when trained with stochastic optimization algorithms result in simple hypotheses (Belkin et al., 2019). Roughly speaking, we have traded the variance in the classifier caused by the small sample size in (7) for the bias in (9) that arises from restricting the class of functions that are fitted to the new sub-group. Doing so is likely to be beneficial if the sub-group g has few samples.

3.4 Inter-Site Domain Generalization

In this section, we extend our arguments to inter-site domain generalization. Our approach builds upon intra-site generalization described in the previous section. In simple words, we would like to

pretrain a classifier on the source site using (2) and then adapt (or fine-tune) it to data from the target site (5). The crucial difference however is that we may not have access to the ground-truth labels of the data from the target site and therefore cannot directly employ (5). We must therefore adapt the pretrained classifier using some other means, which leads us to our main innovation for inter-site domain generalization.

Using auxiliary tasks for domain generalization Let us denote the training data for the source site by $D^s = \{(x^i, y^i, y_a^i)\}_{i=1}^{N^s}$. We assume that we have access to two kinds of ground-truth labels, the first y^i are the labels for the primary task, e.g., predicting the cognitive normal versus Alzheimer’s disease. The labels y_a^i for $a \in A$ consist of auxiliary attributes such as age, gender and race. The ideal auxiliary attribute is something that is readily available on both the source and the target site, and is correlated with the primary task label. Given target site data $D^t = \{(x^i, y^i, y_a^i)\}_{i=1}^{N^t}$, our domain generalization framework from the previous section can be now employed as follows.

We build a deep network with the architecture depicted in Fig. 1. It consists of three parts, a feature extractor whose weights we denote by θ_{base} , a multi-layer neural network-based primary (main) classifier with weights φ_{main} which takes these features as inputs and predicts the primary task labels and another auxiliary classifier with weights φ_{aux} which predicts all auxiliary labels using these features. Training these three networks proceeds in three steps discussed below.

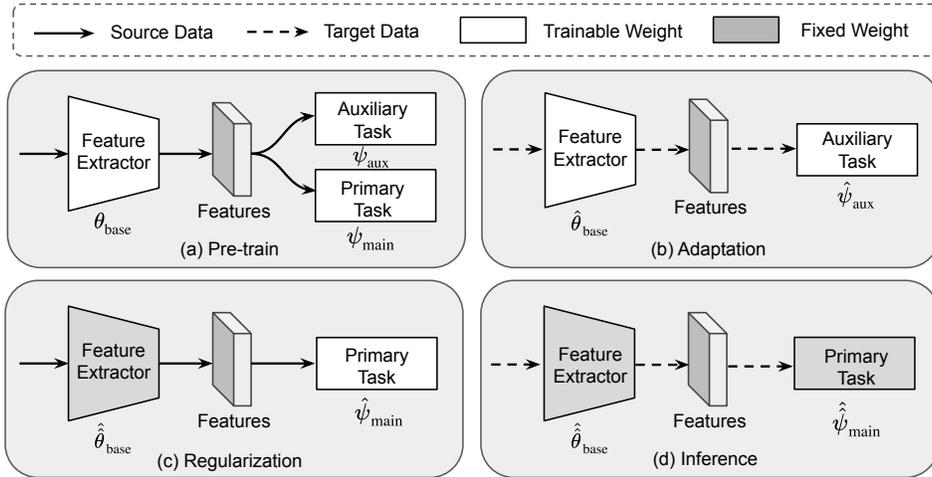


Figure 1: **Inter-site domain generalization framework.** There are four sequential phases in the framework: (a) pre-train, (b) adaptation, (c) regularization, and (d) inference. We use source-site data D^s in phase (a) and (c); target-site data D^t in phase (b) and (d). The source and target data flows are denoted as solid and dashed lines. White and grey blocks indicate trainable network and frozen network separately. We have denoted the weights of the various blocks in the picture, which are computed using Eqs. (10) to (12).

Step 1: Pretraining We pretrain a classifier on the source site to predict both labels of the primary task and the auxiliary labels. This involves solving

$$\hat{\theta}_{\text{base}}, \hat{\varphi}_{\text{main}}, \hat{\varphi}_{\text{aux}} = \operatorname{argmin}_{\theta_{\text{base}}, \varphi_{\text{main}}, \varphi_{\text{aux}}} \frac{1}{|D^s| |A|} \sum_{a \in A} \sum_{(x, y, y_a) \in D} -\log p_{\theta_{\text{base}}, \varphi_{\text{main}}}(y | x) + \beta_a \ell_a(\theta_{\text{base}}, \varphi_{\text{aux}}, x, y_a) + \Omega(\theta_{\text{base}}, \varphi_{\text{main}}, \varphi_{\text{aux}}). \quad (10)$$

We use multiple auxiliary tasks, each with its own specific mis-prediction loss ℓ_a and coefficients β_a that are hyper-parameters chosen via cross-validation. This step is analogous to building the classifier \hat{f} in (6) using data from the entire training set.

Step 2: Adaptation the feature extractor We next fine-tune the pretrained feature extractor and the classifier for the auxiliary tasks using data from the *target site*.

$$\hat{\theta}_{\text{base}}, \hat{\varphi}_{\text{aux}} = \operatorname{argmin}_{\theta_{\text{base}}, \varphi_{\text{aux}}} \frac{1}{|D^t| |A|} \sum_{a \in A} \sum_{(x, y_a) \in D^t} \ell_a(\theta_{\text{base}}, \varphi_{\text{aux}}, x, y_a) + \frac{\alpha}{2} \|\theta_{\text{base}} - \hat{\theta}_{\text{base}}\|_2^2. \quad (11)$$

This step is a key innovation of our approach: since labels for auxiliary tasks such as age, gender and race are easily available, we can adapt the feature extractor to learn features that better suited to making predictions on the target data. Note that we do not perform any regularization on the weights of the auxiliary classifier, this enables large changes to the auxiliary classifier to predict on the target data accurately. This step is similar to the fine-tuning step in (5) or its kernel version (8) but instead of using a proximal penalty on both θ_{base} and φ_{aux} , we use the penalty only on θ_{base} to let the auxiliary classifier fit to the target data without any constraints. The rationale of doing so is to let the auxiliary classifier capture the variability between the source and target data through the auxiliary tasks without changing the feature extractor significantly.

Step 3: Adaptation of the primary task classifier With the feature extractor fixed to its value $\hat{\theta}_{\text{base}}$ from Step 2, we fine-tune the primary classifier on the source data to get

$$\hat{\varphi}_{\text{main}} = \operatorname{argmin}_{\varphi_{\text{main}}} \frac{1}{|D^s|} \sum_{(x, y) \in D^s} -\log p_{\hat{\theta}_{\text{base}}, \varphi_{\text{main}}}(y | x) + \Omega(\varphi_{\text{main}} - \hat{\varphi}_{\text{main}}). \quad (12)$$

This step adapts the primary classifier to the modified features generated by $\hat{\theta}_{\text{base}}$. Its goal is to obtain the primary classifier $\hat{\varphi}_{\text{main}}$ that can accurately classify the primary task on the *source* site using the modified features provided by the feature extractor $\hat{\theta}_{\text{base}}$. Conceptually, this is nothing but the pretraining phase in (2) or (6) except that weights of the feature extractor do not change and weights of the primary classifier are the only ones that change.

Step 4: Inference on new data from the target task is performed using weights of the feature extractor $\hat{\theta}_{\text{base}}$ and weights of the primary classifier $\hat{\varphi}_{\text{main}}$.

4 Experiments

4.1 Materials

We validate our proposed methods on 2,614 3D T1-weighted brain magnetic resonance imaging (MRI) scans from two large-scale imaging consortia: iSTAGING (Habes et al., 2021) and PEHNOM (Sat-

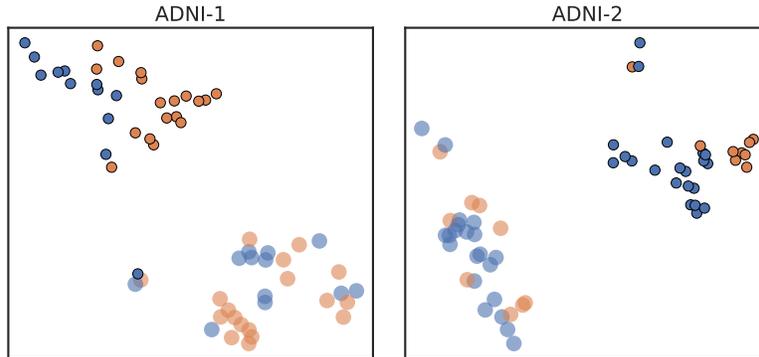


Figure 2: **t-SNE (Van der Maaten and Hinton, 2008) embeddings of the features for ADNI-1 and ADNI-2 studies from a model trained on PENN.** Colors denote the ground-truth labels. Translucent markers and opaque markers denote the embeddings before and after adaptation respectively. The figures show 2D t-SNE embeddings mapped from high-dimensional features that are extracted from the feature extractor. We observe that samples (translucent markers) from two two categories are entangled with each other before adaptation. After performing auxiliary task based adaptation, the samples (opaque markers) are well separated to two groups.

Table 1: **Summary of participant demographics in iSTAGING consortium.** CN and AD denote cognitive normal and Alzheimer’s disease respectively. Age is described in format: mean \pm std [min, max]. F and M in gender represent female and male separately. W, AA and A in race represent white, African American, and Asian separately.

Study	Subjects	CN	AD	Age	Gender (F/M)	Race (W/AA/A)
ADNI-1	369	178	191	75.5 \pm 6.5 [55.0, 90.9]	178 / 191	341 / 21 / 5
ADNI-2/GO	407	261	146	73.1 \pm 6.8 [55.4, 90.3]	206 / 201	369 / 21 / 9
ADNI-3	27	24	3	71.0 \pm 7.1 [55.8, 89.2]	18 / 9	27 / 0 / 0
PENN	572	229	343	72.0 \pm 11.9 [22.6, 95.2]	361 / 211	432 / 116 / 10
AIBL	568	481	87	-	-	-

Table 2: **Summary of participant demographics in PHENOM consortium.** NC and SCZ denote normal control and Schizophrenia respectively. Age is described in format: mean \pm std [min, max]. F and M in gender represent female and male separately.

Study	Subjects	NC	SCZ	Age	Gender (F/M)	Field Strength
Penn	227	131	96	30.5 \pm 7.2 [16.2, 45.0]	121 / 106	3.0T
China	142	76	66	31.2 \pm 7.5 [17.0, 45.0]	69 / 73	3.0T
Munich	302	157	145	29.4 \pm 6.9 [18.0, 45.0]	79 / 223	1.5T

terthwaite et al., 2010; Wolf et al., 2014; Zhang et al., 2015; Zhu et al., 2016; Zhuo et al., 2016;

Rozycki et al., 2018; Chand et al., 2020). In the iSTAGING consortium, we investigate data from three sites, including the Alzheimer’s Disease Neuroimaging Initiative (ADNI) (Jack Jr et al., 2008), Penn Memory Center (PENN), and the Australian Imaging, Biomarkers and Lifestyle (AIBL) (Ellis et al., 2010). Cognitive normal (CN) and Alzheimer’s disease (AD) are the two diagnosis groups that considered in this dataset. The detailed description and clinical variables including age, gender, and race, are shown in Table 1. In the PHENOM consortium, we use data from multiple centers, including Penn, China, and Munich. There are two diagnosis groups: normal control (NC) and Schizophrenia (SCZ) patients. A detailed description of clinical variables including age and gender is shown in Table 2. We also show site differences in terms of scanner type, magnetic strength, and acquisition parameters in Appendix A. For image preprocessing, we use a minimal pipeline since neural networks perform can extract rich features automatically. All images are first bias-field corrected with N4ITK (Tustison et al., 2010), and then aligned to a standard MNI (Fonov et al., 2009) space using ANTs (Avants et al., 2008). Registered images have $193 \times 229 \times 193$ with 1 mm^3 isotropic voxels. We perform intensity normalization on the data before feeding them into the network.

4.2 Network and Implementations

Our deep networks is designed to be small to improve memory requirements and computational efficiency; it is based on the architecture of Wen et al. (2020). The feature extractor consists of five blocks where each block consists of one convolution layer, batch-normalization (Ioffe and Szegedy, 2015), rectified linear units (ReLU) nonlinearity, and max pooling. We enlarge the receptive field by using a $5 \times 5 \times 5$ convolutional kernel. A three-layer multilayer perceptron (MLP) with ReLU nonlinearity is used as the classifier for the primary task; the classifier for the auxiliary task is the same. More details of the architecture are provided in Appendix B. All models are implemented using PyTorch (Paszke et al., 2019).

Hyper-parameters We are keenly interested in developing robust methods that perform well across a wide variety of evaluation benchmarks. *Our architectures and hyper-parameters are consistent across all experiments.* We use Adam (Kingma and Ba, 2014) with initial learning rate 10^{-4} and weight decay 10^{-5} for optimization. A learning rate scheduler with cyclic cosine annealing (He et al., 2019) is used for better convergence. We use batch size of 6 and train for 60 epochs. During training, we augment the input data using a Gaussian blur filter. For fine-tuning in intra-site domain adaptation experiments, we use $\lambda = 0.1$ and $\alpha = 0.01$. For inter-site experiments, we choose $\beta_a = 1.0$ for cross-entropy loss in auxiliary task, and $\beta_a = 0.1$ for those who use Huber loss as loss function.

5 Results

5.1 Intra-Site Alzheimer’s Disease Classification

We perform Alzheimer’s disease (AD) classification on the ADNI, PENN, and AIBL studies from iSTAGING consortium separately. First, we train a base model on all available data for each study individually and then evaluate each base model using its classification accuracy across five-fold cross-validation. Next, we fine-tune the models by training on data from each domain-specific group to boost the classification accuracy. In ADNI, we fine-tune the base model to four age groups: 3.4% participants with age less than 60, 25.8% participants with age between 60 and 70, 51.5% participants with age between 70 and 80, and 19.3% participants with age greater than 80. As shown in Fig. 3 (a),



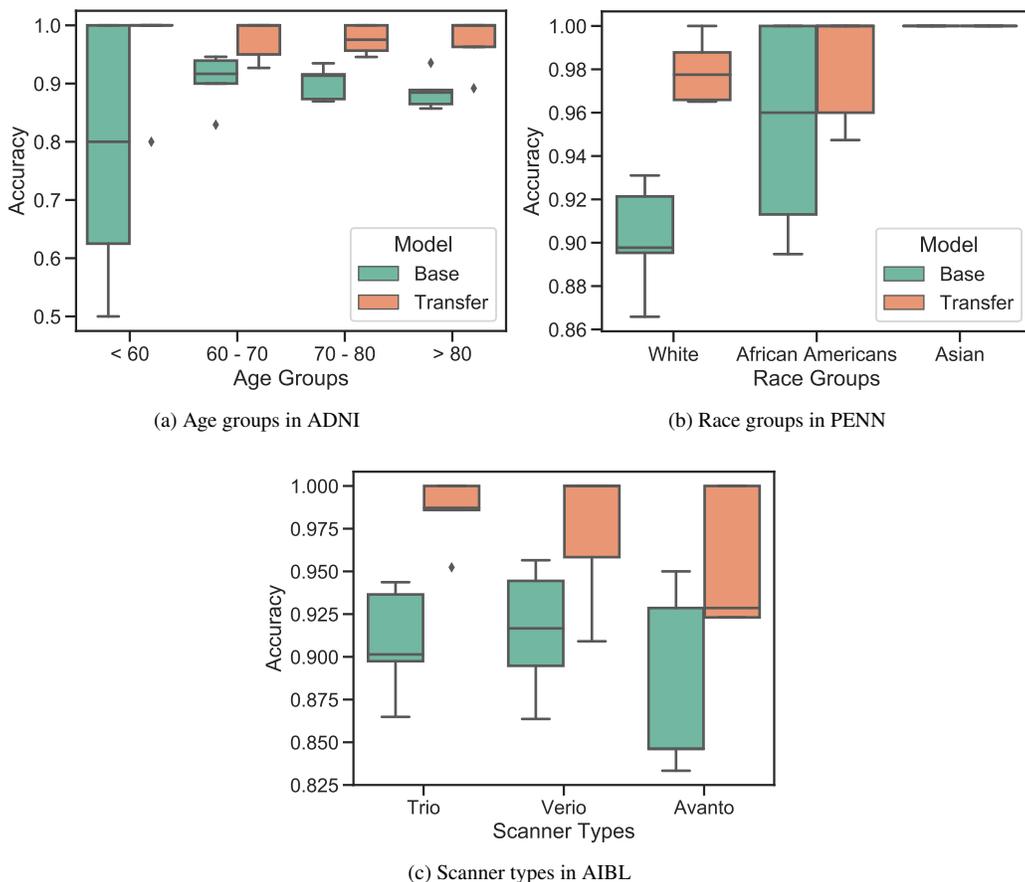


Figure 3: **Intra-site Alzheimer’s disease classification accuracy on domain-specific groups in iSTAGING consortium.** The transfer (adapted) models in each sub-group achieve higher accuracies and reduced variance compared to the base models in all studies.


the AD classification of each transfer model increased significantly compared to the corresponding base models in all age groups. Similarly, we split data in PENN study into three race groups: 77.4% Caucasians, 20.8% African American, and 1.8% Asian. We find that the mean classification accuracy increases and the variance is reduced for both Caucasians and African Americans in Fig. 3 (b). Since there are only 10 Asian subjects, we couldn’t observe any substantive improvement in this group. For the AIBL study, images are collected from three types of Siemens scanner including 65.0% from Trio, 18.5% from Verio, 16.5% from Avanto. In Fig. 3 (c), we also observe a substantial improvement for all scanner subgroups. The domain adaptation approach can help in providing more precise and accurate predictions compared to the base model when domain-related information, such as age, race and scanner are available.

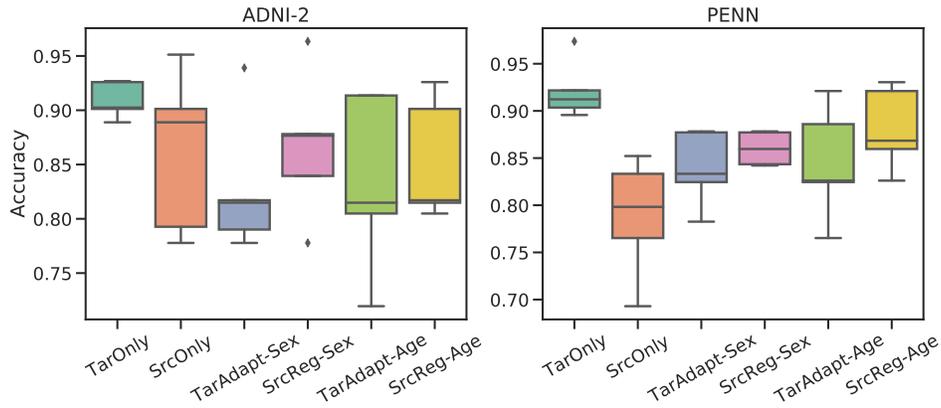

(a) Train on ADNI-1 and test on ADNI-2 and PENN.

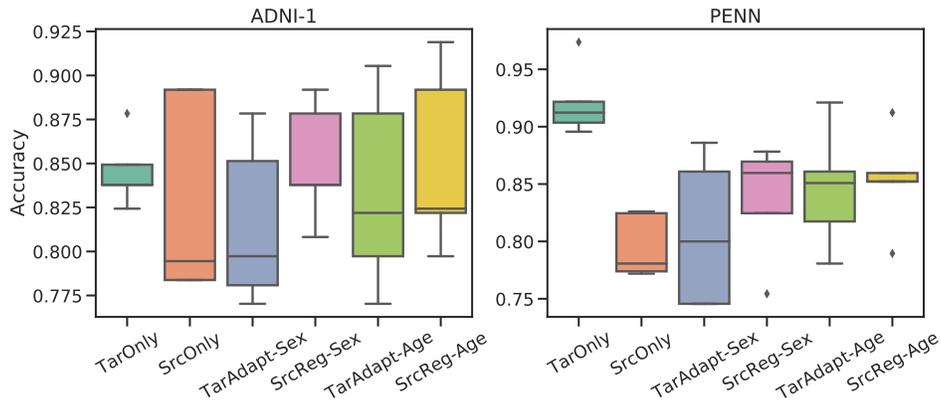

(b) Train on ADNI-2 and test on ADNI-1 and PENN.

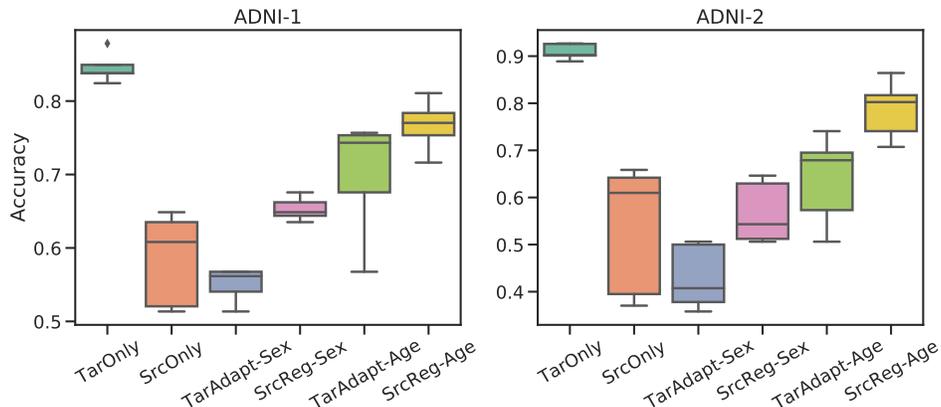

(c) Train on PENN and test on ADNI-1 and ADNI-2.

Figure 4: Alzheimer’s disease classification accuracy comparison in iSTAGING consortium. We show results with auxiliary tasks of both sex and age predictions. SrcOnly and TarOnly are vanilla models trained on source-site and target-site respectively. TarAdapt and SrcReg corresponding to the two adaptation steps in the framework. Adapted models show substantial improvements.

Table 3: **Inter-site Alzheimer’s disease classification accuracy (%) for the iSTAGING consortium data.** We report the mean accuracy and standard deviation (in round brackets) across 5-fold cross-validation. We use sex classification and age regression as auxiliary tasks separately. TarOnly and SrcOnly denote models trained on target-site and source-site respectively. JointSup represents training on both primary and auxiliary tasks. TarAdapt and SrcReg are adapted models from the second and third phases of the proposed method. Adapted models achieve higher accuracies and reduced variance compared to SrcOnly models.

	Study	TarOnly	SrcOnly	Sex			Age		
				JointSup	TarAdapt	SrcReg	JointSup	TarAdapt	SrcReg
Source	ADNI-1	-	84.55 (1.82)	84.54 (4.07)	-	-	78.60 (9.47)	-	-
Target	ADNI-2	90.91 (1.49)	86.24 (6.65)	80.31 (7.53)	82.78 (5.76)	86.71 (6.04)	80.14 (8.58)	83.33 (7.35)	85.28 (5.04)
Target	PENN	92.14 (2.76)	78.84 (5.63)	82.69 (1.53)	83.92 (3.58)	86.01 (1.56)	78.68 (4.31)	84.46 (5.40)	88.12 (3.92)
Source	ADNI-2	-	90.91 (1.49)	89.67 (5.34)	-	-	90.91 (3.15)	-	-
Target	ADNI-1	84.55 (1.82)	82.92 (5.14)	80.21 (2.66)	81.56 (4.20)	85.08 (3.03)	82.38 (4.48)	83.47 (5.02)	85.09 (4.63)
Target	PENN	92.14 (2.76)	79.54 (2.46)	78.30 (6.14)	80.76 (5.78)	83.73 (4.53)	80.59 (4.44)	84.62 (4.68)	85.32 (3.40)
Source	PENN	-	92.14 (2.76)	91.26 (2.33)	-	-	92.67 (2.61)	-	-
Target	ADNI-1	84.55 (1.82)	58.52 (5.72)	53.39 (1.72)	55.02 (2.08)	65.31 (1.43)	57.73 (6.10)	69.93 (7.22)	76.69 (3.15)
Target	ADNI-2	90.91 (1.49)	53.51 (12.57)	38.82 (4.22)	42.99 (6.18)	56.75 (5.91)	47.94 (9.45)	63.88 (8.61)	78.64 (5.58)

5.2 Inter-Site Alzheimer’s Disease Classification

We next demonstrate inter-site domain generalization to tackle domain shift. We use auxiliary task that are different from the primary task for training on the source site. In this work, we consider two supervised auxiliary tasks: sex classification and age prediction; the rationale for picking these auxiliary tasks is that they are both tasks where ground-truth labels are readily accessible. The pretrained feature extractor is then adapted with these auxiliary tasks on data from the target site. Next, the pre-trained classifier for primary task is regularized on features from the source-site extracted from the adapted feature extractor. Finally, we test the model with the adapted feature extractor and primary task classifier on data from the target site.

As shown in Table 3, we perform AD classification on ADNI-1, ADNI-2 and PENN studies with one site as source site and the other two sites as target site respectively. For comparison, we train vanilla models (SrcOnly) on the source-sites and test the model on the target sites. We find that there are very large gaps between the testing accuracies of SrcOnly classifiers on target-sites and the validation results of the TarOnly models that are directly trained on the target-sites, highlighting poor generalization. For example, a SrcOnly model trained on ADNI-1 shows 78.84% accuracy when tested on PENN, which is much lower than the TarOnly accuracy 92.14%. In contrast, *our*


Table 4: **Inter-site Schizophrenia classification accuracy (%) comparison in PHENOM consortium.** We report the mean accuracy and standard deviation (in round brackets) across 5-fold cross-validation. We use sex classification and age regression as auxiliary tasks separately. TarOnly and SrcOnly denote models trained on target-site and source-site respectively. JointSup represents training on both primary and auxiliary tasks. TarAdapt and SrcReg are adapted models from the second and third phases of the proposed method. Adapted models achieve higher accuracies and reduced variance compared to SrcOnly models.

	Study	TarOnly	SrcOnly	Sex			Age		
				JointSup	TarAdapt	SrcReg	JointSup	TarAdapt	SrcReg
Source	Penn	-	73.12 (2.63)	73.15 (4.54)	-	-	74.46 (3.46)	-	-
Target	China	78.94 (5.65)	54.29 (8.81)	55.67 (8.41)	62.04 (7.10)	64.11 (10.50)	53.55 (2.94)	62.68 (6.92)	68.47 (12.79)
Target	Munich	64.22 (4.56)	51.02 (3.74)	46.68 (3.57)	55.96 (2.31)	59.24 (4.81)	55.30 (4.21)	61.60 (7.63)	61.91 (5.65)
Source	China	-	78.94 (5.65)	73.99 (3.19)	-	-	74.01 (4.84)	-	-
Target	Penn	73.12 (2.63)	57.71 (5.66)	51.55 (6.46)	63.86 (4.16)	63.43 (3.84)	56.84 (5.05)	66.07 (3.41)	61.26 (3.30)
Target	Munich	64.22 (4.56)	51.64 (2.91)	49.35 (2.85)	56.62 (7.76)	55.62 (3.29)	51.34 (3.80)	58.31 (8.29)	60.26 (8.01)
Source	Munich	-	64.22 (4.56)	65.23 (3.95)	-	-	66.87 (6.51)	-	-
Target	Penn	73.12 (2.63)	48.89 (4.57)	52.39 (4.88)	50.65 (5.39)	60.36 (2.30)	44.95 (3.45)	61.23 (2.69)	63.87 (4.35)
Target	China	78.94 (5.65)	46.48 (1.09)	46.48 (1.09)	61.26 (3.97)	66.80 (8.88)	45.07 (2.55)	65.39 (8.20)	66.13 (7.54)


auxiliary task-assisted adaptation improves test accuracies substantially on all source-target settings for every auxiliary task. We also report the comparison graphically in Fig. 4 and observe that our proposed models show higher accuracies and reduced uncertainty in target-site prediction compared to SrcOnly models. Most noticeably, auxiliary task with age regression outperforms the one with sex classification in nearly all setups. We believe the reason for this is that age regression is more challenging task than a binary classification task like sex classification where the classifier need not be changed much.

5.3 Inter-Site Schizophrenia Classification


Similar to the setup in Section 5.2, we also perform schizophrenia (SCZ) classification on the PHENOM consortium with three different sites: Penn, China, and Munich. Based on existing results on this data (as discussed in the following section) we believe this is a more challenging problem compared to AD classification. As shown in Table 4 and Fig. 5, the gap in accuracy between different sites in this case are rather significant. SrcOnly classifiers achieve around 50% classification accuracies when testing on target sites; this is chance accuracy for this binary classification problem. Our methods significantly increased the testing accuracies on the target-sites in all source-target

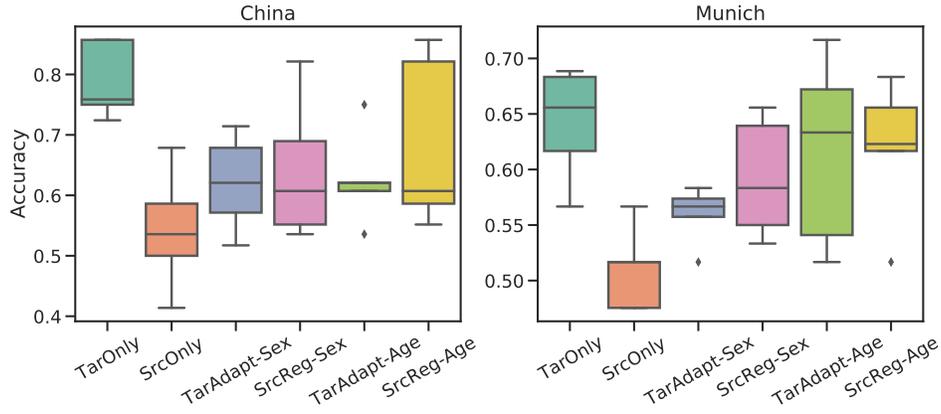

(a) Train on Penn and test on China and Munich.

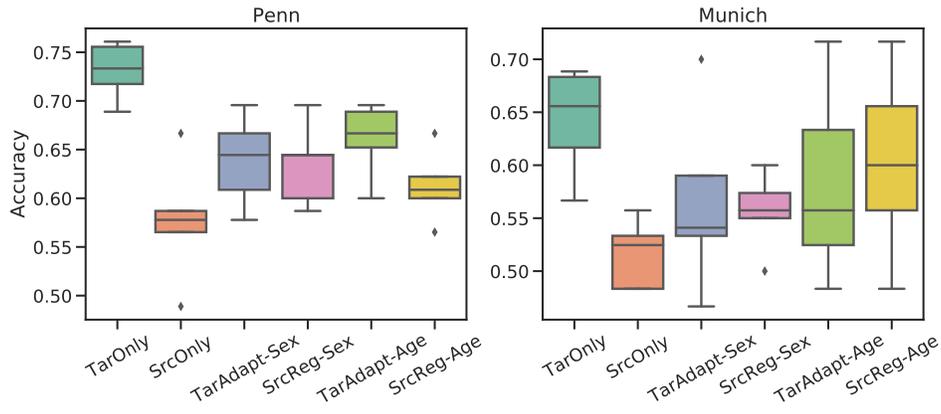

(b) Train on China and test on Penn and Munich.

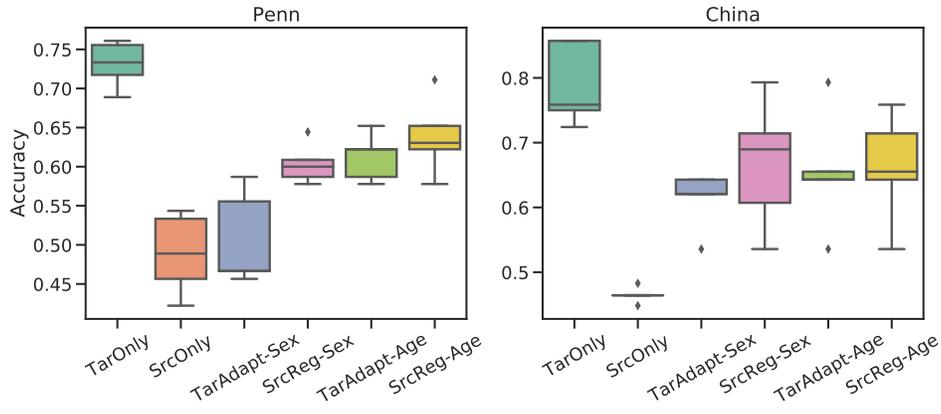

(c) Train on Munich and test on Penn and China.

Figure 5: **Schizophrenia classification accuracy comparison in PHENOM consortium.** We show results with auxiliary tasks of both sex and age predictions. SrcOnly and TarOnly are vanilla models trained on source-site and target-site respectively. TarAdapt and SrcReg corresponding to the two adaptation steps in the framework. Adapted models show substantial improvements.

settings for both auxiliary tasks compared the SrcOnly models.

6 Discussion

Wide adoption of deep learning in medical imaging has been challenged by domain shift, i.e., changes in imaging characteristics/protocols across different sites and populations, which can significantly decrease generalization performance of models learned in a reference dataset. In this work, we present a systematic framework for improving the prediction accuracy of a deep learning model on both single-site and multi-site data with shifted distributions. In the single-site scenario, we adopt transfer learning with a weight-constraint penalty term to fine-tune a pre-trained model with a sub-group of data, e.g., age range, race, and scanner type. In the multi-site scenario, we adapt a source site-trained model to the target-site with the assistance of the auxiliary task, e.g., sex classification and age regression, which is widely accessible in the target domain and helps capture imaging characteristics of domain shift. By leveraging the demographic information of each participant, we train the primary task (prediction) and auxiliary task simultaneously with the source-site data where features are extracted for both tasks. To generalize the model on the target-site, we fine-tune the feature-extractor by training on the auxiliary task and regularize the parameters associated with the primary task (prediction) by re-playing on the source-site. From extensive experiments, we observed that our method significantly improved the models' prediction accuracy and stability for different age, race, and scanner groups in single-site scenario. Additionally, both sex and age based auxiliary tasks helped in transferring models between sites when labels are not available in the target-site.

Transfer learning and domain-shift remediation might help reduce health care disparities

Biomedical data inequality between different age, ethnic, and scanner groups is set to generate new health care disparities (Gao and Cui, 2020). Insufficient training data in a particular group might lead to under-trained deep learning model with sub-optimal prediction performance. Thus, the health care received by the data-disadvantaged minority groups may be weakened. For example, in ADNI dataset, there's only 19.3% participants with age greater than 80, whereas 51.5% of the participants are aged between 70 and 80. The AD classification accuracy for participants in age group 70 – 80 is 90.14% and 88.62% for > 80 age group. Biases from such data inequalities among age groups can be partially remedied by transfer learning. The transferred model on age group > 80 achieved 97.10% accuracy in AD classification. Similarly, in ethnic groups, we improved the prediction accuracy in African-American group who represented 20.8% of the PENN dataset from 95.36% to 98.15%. On the other hand, transfer learning also helps in the majority groups. For example, the prediction accuracy of Caucasians (77.4% in PENN) is 90.23% and a transferred model reached 97.93%. Similarly, in scanner groups, Siemens Trio contributed 65.0% in AIBL dataset which has an AD classification accuracy of 90.88%, whereas the improved model achieved 98.51%.

Pathology-specific classification benefits from gender and age guided features

In the inter-site domain generalization experiments, we utilize gender and age guided auxiliary tasks to help adapt a model trained on the source site to the target site for two disease-specific classification tasks, namely Alzheimer's disease and schizophrenia classification. We observed that high-level information like age and gender helped in extracting neuroimaging-related features for disease classification across sites, presumably because the domain shift in imaging features used for the auxiliary tasks was accounted for in a way that also helped the main (disease) classification tasks. We also find that age prediction consistently outperforms sex classification as an auxiliary task, in all experimental setups for both diseases (Alzheimer's disease and schizophrenia). This might be due to the fact that

brain aging is closely connected to neurodegeneration. Since brain shrinkage in different regions is associated with many diseases, age prediction is likely to naturally help in correcting for domain shift in pathology-specific features. This is also reported in (Bashyam et al., 2020b) where a brain age prediction model could better capture high-level abstract neuroimaging features in transfer learning.

Deep learning models generalize poorly under small sample size In the schizophrenia classification experiments, the PHENOM consortium consists of 227, 142, and 302 subjects in Penn, China, and Munich sites separately. Since the neuropathologic patterns of schizophrenia are indistinct and varied, and the training samples are limited, the classification task is difficult. We observed that models trained on one site could not generalize to another site. For example, model trained on Penn achieved 73.12% prediction accuracy but only 51.02% is reported when testing on Munich. A similar phenomenon has been reported in (Bashyam et al., 2020a) for schizophrenia classification with neural networks on MR images. In contrast, traditional machine learning algorithms (Koutsouleris et al., 2015; Rozycki et al., 2018), such as supported vector machine (SVM), have shown adequate generalization ability on human-designed features, e.g. regional volumetric maps (RAVENS) (Davatzikos et al., 2001) that quantify gray matter volume at each voxel, extracted from MR images. By utilizing the proposed method, we improved the classification accuracy substantially on the target-site.

The proposed framework can easily be adapted to any auxiliary tasks that are accessible to different applications. One possible direction for future research is to explore the generalizability of the self-supervised learning, e.g. contrastive learning, when labels are not available.

Acknowledgments

This work was supported by the National Institute on Aging (grant numbers RF1AG054409 and U01AG068057) and the National Institute of Mental Health (grant number R01MH112070). Pratik Chaudhari would like to acknowledge the support of cloud computing credits through the Amazon Machine Learning Research Award.

References

- Arjovsky, M., Bottou, L., Gulrajani, I., and Lopez-Paz, D. (2019). Invariant risk minimization. *arXiv preprint arXiv:1907.02893*.
- Avants, B. B., Epstein, C. L., Grossman, M., and Gee, J. C. (2008). Symmetric diffeomorphic image registration with cross-correlation: evaluating automated labeling of elderly and neurodegenerative brain. *Medical image analysis*, 12(1):26–41.
- Bartlett, P. L. and Mendelson, S. (2002). Rademacher and gaussian complexities: Risk bounds and structural results. *Journal of Machine Learning Research*, 3(Nov):463–482.
- Bashyam, V. M., Doshi, J., Erus, G., Srinivasan, D., Abdulkadir, A., Habes, M., Fan, Y., Masters, C. L., Maruff, P., Zhuo, C., et al. (2020a). Medical image harmonization using deep learning based canonical mapping: Toward robust and generalizable learning in imaging. *arXiv preprint arXiv:2010.05355*.
- Bashyam, V. M., Erus, G., Doshi, J., Habes, M., Nasrallah, I. M., Truelove-Hill, M., Srinivasan, D., Mamourian, L., Pomponio, R., Fan, Y., et al. (2020b). Mri signatures of brain age and disease over the lifespan based on a deep brain network and 14 468 individuals worldwide. *Brain*, 143(7):2312–2324.
- Belkin, M., Hsu, D., Ma, S., and Mandal, S. (2019). Reconciling modern machine-learning practice and the classical bias–variance trade-off. *Proceedings of the National Academy of Sciences*, 116(32):15849–15854.
- Ben-David, S., Blitzer, J., Crammer, K., Kulesza, A., Pereira, F., and Vaughan, J. W. (2010). A theory of learning from different domains. *Machine learning*, 79(1):151–175.
- Blumer, A., Ehrenfeucht, A., Haussler, D., and Warmuth, M. K. (1989). Learnability and the vapnik-chervonenkis dimension. *Journal of the ACM (JACM)*, 36(4):929–965.
- Bottou, L. (2010). Large-scale machine learning with stochastic gradient descent. In *Proceedings of COMPSTAT’2010*, pages 177–186. Springer.
- Chand, G. B., Dwyer, D. B., Erus, G., Sotiras, A., Varol, E., Srinivasan, D., Doshi, J., Pomponio, R., Pigoni, A., Dazzan, P., et al. (2020). Two distinct neuroanatomical subtypes of schizophrenia revealed using machine learning. *Brain*, 143(3):1027–1038.
- Davatzikos, C. (2019). Machine learning in neuroimaging: Progress and challenges. *NeuroImage*, 197:652.
- Davatzikos, C., Genc, A., Xu, D., and Resnick, S. M. (2001). Voxel-based morphometry using the ravens maps: methods and validation using simulated longitudinal atrophy. *NeuroImage*, 14(6):1361–1369.
- Dewey, B. E., Zuo, L., Carass, A., He, Y., Liu, Y., Mowry, E. M., Newsome, S., Oh, J., Calabresi, P. A., and Prince, J. L. (2020). A disentangled latent space for cross-site mri harmonization. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 720–729. Springer.
- Dhillon, G. S., Chaudhari, P., Ravichandran, A., and Soatto, S. (2019). A baseline for few-shot image classification. *arXiv preprint arXiv:1909.02729*.

- Dinsdale, N. K., Jenkinson, M., and Namburete, A. I. (2020). Unlearning scanner bias for mri harmonisation. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 369–378. Springer.
- Dong, A., Honnorat, N., Gaonkar, B., and Davatzikos, C. (2015). Chimera: clustering of heterogeneous disease effects via distribution matching of imaging patterns. *IEEE transactions on medical imaging*, 35(2):612–621.
- Dou, Q., Castro, D. C., Kamnitsas, K., and Glocker, B. (2019). Domain generalization via model-agnostic learning of semantic features. *arXiv preprint arXiv:1910.13580*.
- Ellis, K. A., Rowe, C. C., Villemagne, V. L., Martins, R. N., Masters, C. L., Salvado, O., Szoeki, C., Ames, D., Group, A. R., et al. (2010). Addressing population aging and alzheimer’s disease through the australian imaging biomarkers and lifestyle study: Collaboration with the alzheimer’s disease neuroimaging initiative. *Alzheimer’s & dementia*, 6(3):291–296.
- Esteva, A., Kuprel, B., Novoa, R. A., Ko, J., Swetter, S. M., Blau, H. M., and Thrun, S. (2017). Dermatologist-level classification of skin cancer with deep neural networks. *nature*, 542(7639):115–118.
- Fonov, V. S., Evans, A. C., McKinstry, R. C., Almlí, C., and Collins, D. (2009). Unbiased nonlinear average age-appropriate brain templates from birth to adulthood. *NeuroImage*, (47):S102.
- Ganin, Y., Ustinova, E., Ajakan, H., Germain, P., Larochelle, H., Laviolette, F., Marchand, M., and Lempitsky, V. (2016). Domain-adversarial training of neural networks. *The Journal of Machine Learning Research*, 17(1):2096–2030.
- Gao, Y. and Cui, Y. (2020). Deep transfer learning for reducing health care disparities arising from biomedical data inequality. *Nature communications*, 11(1):1–8.
- Goodfellow, I., Pouget-Abadie, J., Mirza, M., Xu, B., Warde-Farley, D., Ozair, S., Courville, A., and Bengio, Y. (2014). Generative adversarial nets. In *Advances in neural information processing systems*, pages 2672–2680.
- Habes, M., Pomponio, R., Shou, H., Doshi, J., Mamourian, E., Erus, G., Nasrallah, I., Launer, L. J., Rashid, T., Bilgel, M., et al. (2021). The brain chart of aging: Machine-learning analytics reveals links between brain aging, white matter disease, amyloid burden, and cognition in the istaging consortium of 10,216 harmonized mr scans. *Alzheimer’s & Dementia*, 17(1):89–102.
- He, T., Zhang, Z., Zhang, H., Zhang, Z., Xie, J., and Li, M. (2019). Bag of tricks for image classification with convolutional neural networks. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 558–567.
- Heinze-Deml, C. and Meinshausen, N. (2021). Conditional variance penalties and domain shift robustness. *Machine Learning*, 110(2):303–348.
- Hoffman, J., Tzeng, E., Park, T., Zhu, J.-Y., Isola, P., Saenko, K., Efros, A., and Darrell, T. (2018). Cycada: Cycle-consistent adversarial domain adaptation. In *International conference on machine learning*, pages 1989–1998. PMLR.
- Huang, X., Liu, M.-Y., Belongie, S., and Kautz, J. (2018). Multimodal unsupervised image-to-image translation. In *Proceedings of the European conference on computer vision (ECCV)*, pages 172–189.

- Ioffe, S. and Szegedy, C. (2015). Batch normalization: Accelerating deep network training by reducing internal covariate shift. In *International conference on machine learning*, pages 448–456. PMLR.
- Jack Jr, C. R., Bernstein, M. A., Fox, N. C., Thompson, P., Alexander, G., Harvey, D., Borowski, B., Britson, P. J., L. Whitwell, J., Ward, C., et al. (2008). The alzheimer’s disease neuroimaging initiative (adni): Mri methods. *Journal of Magnetic Resonance Imaging: An Official Journal of the International Society for Magnetic Resonance in Medicine*, 27(4):685–691.
- Johnson, W. E., Li, C., and Rabinovic, A. (2007). Adjusting batch effects in microarray expression data using empirical bayes methods. *Biostatistics*, 8(1):118–127.
- Kingma, D. P. and Ba, J. (2014). Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*.
- Kingma, D. P. and Welling, M. (2013). Auto-encoding variational bayes. *arXiv preprint arXiv:1312.6114*.
- Kolesnikov, A., Beyer, L., Zhai, X., Puigcerver, J., Yung, J., Gelly, S., and Houlsby, N. (2019). Big transfer (bit): General visual representation learning. *arXiv preprint arXiv:1912.11370*, 6(2):8.
- Koutsouleris, N., Meisenzahl, E. M., Borgwardt, S., Riecher-Rössler, A., Frodl, T., Kambitz, J., Köhler, Y., Falkai, P., Möller, H.-J., Reiser, M., et al. (2015). Individualized differential diagnosis of schizophrenia and mood disorders using neuroanatomical biomarkers. *Brain*, 138(7):2059–2073.
- Li, H., Wang, Y., Wan, R., Wang, S., Li, T.-Q., and Kot, A. C. (2020). Domain generalization for medical imaging classification with linear-dependency regularization. *arXiv preprint arXiv:2009.12829*.
- Liu, Y.-C., Yeh, Y.-Y., Fu, T.-C., Wang, S.-D., Chiu, W.-C., and Wang, Y.-C. F. (2018). Detach and adapt: Learning cross-domain disentangled deep representation. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 8867–8876.
- Long, M., Cao, Y., Wang, J., and Jordan, M. (2015). Learning transferable features with deep adaptation networks. In *International conference on machine learning*, pages 97–105.
- Meng, Q., Rueckert, D., and Kainz, B. (2020a). Learning cross-domain generalizable features by representation disentanglement. *arXiv preprint arXiv:2003.00321*.
- Meng, Q., Rueckert, D., and Kainz, B. (2020b). Unsupervised cross-domain image classification by distance metric guided feature alignment. In *Medical Ultrasound, and Preterm, Perinatal and Paediatric Image Analysis*, pages 146–157. Springer.
- Menze, B. H., Jakab, A., Bauer, S., Kalpathy-Cramer, J., Farahani, K., Kirby, J., Burren, Y., Porz, N., Slotboom, J., Wiest, R., et al. (2014). The multimodal brain tumor image segmentation benchmark (brats). *IEEE transactions on medical imaging*, 34(10):1993–2024.
- Morris, C. N. (1983). Parametric empirical bayes inference: theory and applications. *Journal of the American statistical Association*, 78(381):47–55.
- Moyer, D., Gao, S., Brekelmans, R., Galstyan, A., and Ver Steeg, G. (2018). Invariant representations without adversarial training. In *Advances in Neural Information Processing Systems*, pages 9084–9093.
- Moyer, D., Ver Steeg, G., Tax, C. M., and Thompson, P. M. (2020). Scanner invariant representations for diffusion mri harmonization. *Magnetic Resonance in Medicine*.

- Paszke, A., Gross, S., Massa, F., Lerer, A., Bradbury, J., Chanan, G., Killeen, T., Lin, Z., Gimelshein, N., Antiga, L., et al. (2019). Pytorch: An imperative style, high-performance deep learning library. In *Advances in neural information processing systems*, pages 8026–8037.
- Pomponio, R., Erus, G., Habes, M., Doshi, J., Srinivasan, D., Mamourian, E., Bashyam, V., Nasrallah, I. M., Satterthwaite, T. D., Fan, Y., et al. (2020). Harmonization of large mri datasets for the analysis of brain imaging patterns throughout the lifespan. *NeuroImage*, 208:116450.
- Qiu, Y. L., Zheng, H., Devos, A., Selby, H., and Gevaert, O. (2020). A meta-learning approach for genomic survival analysis. *Nature communications*, 11(1):1–11.
- Rathore, S., Akbari, H., Rozycki, M., Abdullah, K. G., Nasrallah, M. P., Binder, Z. A., Davuluri, R. V., Lustig, R. A., Dahmane, N., Bilello, M., et al. (2018). Radiomic mri signature reveals three distinct subtypes of glioblastoma with different clinical and molecular characteristics, offering prognostic value beyond idh1. *Scientific reports*, 8(1):1–12.
- Rathore, S., Habes, M., Iftikhar, M. A., Shacklett, A., and Davatzikos, C. (2017). A review on neuroimaging-based classification studies and associated feature extraction methods for alzheimer’s disease and its prodromal stages. *NeuroImage*, 155:530–548.
- Reddi, S., Póczos, B., and Smola, A. (2015). Doubly robust covariate shift correction. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 29.
- Robey, A., Hassani, H., and Pappas, G. J. (2020). Model-based robust deep learning. *arXiv preprint arXiv:2005.10247*.
- Robinson, R., Dou, Q., Castro, D., Kamnitsas, K., de Groot, M., Summers, R., Rueckert, D., and Glocker, B. (2020). Image-level harmonization of multi-site data using image-and-spatial transformer networks. *arXiv preprint arXiv:2006.16741*.
- Rozycki, M., Satterthwaite, T. D., Koutsouleris, N., Erus, G., Doshi, J., Wolf, D. H., Fan, Y., Gur, R. E., Gur, R. C., Meisenzahl, E. M., et al. (2018). Multisite machine learning analysis provides a robust structural imaging signature of schizophrenia detectable across diverse patient populations and within individuals. *Schizophrenia bulletin*, 44(5):1035–1044.
- Satterthwaite, T. D., Wolf, D. H., Loughhead, J., Ruparel, K., Valdez, J. N., Siegel, S. J., Kohler, C. G., Gur, R. E., and Gur, R. C. (2010). Association of enhanced limbic response to threat with decreased cortical facial recognition memory response in schizophrenia. *American Journal of Psychiatry*, 167(4):418–426.
- Schölkopf, B. (2019). Causality for machine learning. *arXiv preprint arXiv:1911.10500*.
- Shin, H.-C., Ihsani, A., Xu, Z., Mandava, S., Sreenivas, S. T., Forster, C., Cha, J., Initiative, A. D. N., et al. (2020). Gandalf: Generative adversarial networks with discriminator-adaptive loss fine-tuning for alzheimer’s disease diagnosis from mri. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 688–697. Springer.
- Sohn, K., Lee, H., and Yan, X. (2015). Learning structured output representation using deep conditional generative models. *Advances in neural information processing systems*, 28:3483–3491.
- Sun, B., Feng, J., and Saenko, K. (2016). Return of frustratingly easy domain adaptation. In *Thirtieth AAAI Conference on Artificial Intelligence*.

- Thrun, S. and Pratt, L. (2012). *Learning to learn*. Springer Science & Business Media.
- Tustison, N. J., Avants, B. B., Cook, P. A., Zheng, Y., Egan, A., Yushkevich, P. A., and Gee, J. C. (2010). N4itk: improved n3 bias correction. *IEEE transactions on medical imaging*, 29(6):1310–1320.
- Tzeng, E., Hoffman, J., Saenko, K., and Darrell, T. (2017). Adversarial discriminative domain adaptation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 7167–7176.
- Tzeng, E., Hoffman, J., Zhang, N., Saenko, K., and Darrell, T. (2014). Deep domain confusion: Maximizing for domain invariance. *arXiv preprint arXiv:1412.3474*.
- Van der Maaten, L. and Hinton, G. (2008). Visualizing data using t-sne. *Journal of machine learning research*, 9(11).
- Varol, E., Sotiras, A., Davatzikos, C., Initiative, A. D. N., et al. (2017). Hydra: revealing heterogeneity of imaging and genetic patterns through a multiple max-margin discriminative analysis framework. *Neuroimage*, 145:346–364.
- Wachinger, C., Rieckmann, A., Pölsterl, S., Initiative, A. D. N., et al. (2021). Detect and correct bias in multi-site neuroimaging datasets. *Medical Image Analysis*, 67:101879.
- Wellner, J. et al. (2013). *Weak convergence and empirical processes: with applications to statistics*. Springer Science & Business Media.
- Wen, J., Thibeau-Sutre, E., Diaz-Melo, M., Samper-González, J., Routier, A., Bottani, S., Dormont, D., Durrleman, S., Burgos, N., Colliot, O., et al. (2020). Convolutional neural networks for classification of alzheimer’s disease: Overview and reproducible evaluation. *Medical Image Analysis*, page 101694.
- Wolf, D. H., Satterthwaite, T. D., Kantrowitz, J. J., Katchmar, N., Vandekar, L., Elliott, M. A., and Ruparel, K. (2014). Amotivation in schizophrenia: integrated assessment with behavioral, clinical, and imaging measures. *Schizophrenia bulletin*, 40(6):1328–1337.
- Zhang, C., Zhang, K., and Li, Y. (2020a). A causal view on robustness of neural networks. *arXiv preprint arXiv:2005.01095*.
- Zhang, K., Gong, M., Stojanov, P., Huang, B., Liu, Q., and Glymour, C. (2020b). Domain adaptation as a problem of inference on graphical models. *arXiv preprint arXiv:2002.03278*.
- Zhang, T., Koutsouleris, N., Meisenzahl, E., and Davatzikos, C. (2015). Heterogeneity of structural brain changes in subtypes of schizophrenia revealed using magnetic resonance imaging pattern analysis. *Schizophrenia bulletin*, 41(1):74–84.
- Zhou, S. K., Greenspan, H., Davatzikos, C., Duncan, J. S., van Ginneken, B., Madabhushi, A., Prince, J. L., Rueckert, D., and Summers, R. M. (2020). A review of deep learning in medical imaging: Image traits, technology trends, case studies with progress highlights, and future promises. *arXiv preprint arXiv:2008.09104*.
- Zhu, J., Zhuo, C., Liu, F., Xu, L., and Yu, C. (2016). Neural substrates underlying delusions in schizophrenia. *Scientific reports*, 6(1):1–10.

Zhu, J.-Y., Park, T., Isola, P., and Efros, A. A. (2017). Unpaired image-to-image translation using cycle-consistent adversarial networks. In *Proceedings of the IEEE international conference on computer vision*, pages 2223–2232.

Zhuo, C., Ma, X., Qu, H., Wang, L., Jia, F., and Wang, C. (2016). Schizophrenia patients demonstrate both inter-voxel level and intra-voxel level white matter alterations. *PLoS One*, 11(9):e0162656.

A Site differences

We show the MRI scanner manufacturers, magnetic strength, and acquisition protocols, such as repetition time (TR), time to echo (TE), inversion time (TI), and field-of-view (FOV) in Table 5.

Table 5: **Scanner manufacturers and acquisition protocols cross studies.** The scans are sampled from diverse scanner manufacturers and acquisition protocols cross-studies, which indicates the strong heterogeneous property of the data.

Study	Scanner	Mag Strength	TR (ms)	TE (ms)	TI (ms)	FOV (mm)
ADNI-1	GE, Philips, Siemens	1.5T	1900	3.4	-	250 × 256 × 256
ADNI-2/GO	GE, Philips, Siemens	3.0T	2300	-	900	208 × 240 × 256
PENN	Siemens	3.0T	1600	3.87	950	-
AIBL	Siemens	1.5T, 3.0T	1900	2.13	900	240 × 256 × 160
Penn	Siemens	3.0T	1810	3.51	1100	240 × 180 × 160
China	GE	3.0T	8.2	3.2	450	256 × 256 × 188
Munich	Siemens	1.5T	11.6	4.9	-	230 × 256 × 126

B Details of the neural architecture

Table 6: **Feature extractor network.** Padding for max-pooling layers depends on the input: columns of zeros are added along a dimension until the size along this dimension is a multiple of the stride size.

Layer	Kernel Size	Feature #	Stride	Padding	Out Size
Conv + BN + ReLU	5 × 5 × 5	8	1	1	8 × 193 × 229 × 193
MaxPool	2 × 2 × 2	-	2	adaptive	8 × 97 × 115 × 97
Conv + BN + ReLU	5 × 5 × 5	16	1	1	16 × 97 × 115 × 97
MaxPool	2 × 2 × 2	-	2	adaptive	16 × 49 × 58 × 49
Conv + BN + ReLU	5 × 5 × 5	32	1	1	32 × 49 × 58 × 49
MaxPool	2 × 2 × 2	-	2	adaptive	32 × 25 × 29 × 25
Conv + BN + ReLU	5 × 5 × 5	64	1	1	64 × 25 × 29 × 25
MaxPool	2 × 2 × 2	-	2	adaptive	64 × 13 × 15 × 13
Conv + BN + ReLU	5 × 5 × 5	128	1	1	128 × 13 × 15 × 13
MaxPool	2 × 2 × 2	-	2	adaptive	128 × 7 × 8 × 7

Table 7: **Architecture of the classifier for the primary and auxiliary task.** The feature size (n) of the final layer is depends on the task; for sex classification the output has two logits whereas for age regression, the output is single real-valued output.

Layer	Feature #	Dropout Rate	Out Size
Dropout	-	0.5	19,200
Linear + ReLU	1,300	-	1,300
Linear + ReLU	50	-	50
Linear	n	-	n