

A Statistical Analysis of Summarization Evaluation Metrics using Resampling Methods

Daniel Deutsch, Rotem Dror, and Dan Roth
Department of Computer and Information Science

University of Pennsylvania
{ddeutsch, rtmdrr, danroth}@seas.upenn.edu

Abstract

The quality of a summarization evaluation metric is quantified by calculating the correlation between its scores and human annotations across a large number of summaries. Currently, it is not clear how precise these correlation estimates are, nor whether differences between two metrics' correlations reflects a true difference or if it is due to random chance. In this work, we address these two problems by proposing methods for calculating confidence intervals and running hypothesis tests for correlations using two resampling methods, bootstrapping and permutation. After evaluating which of the proposed methods is most appropriate for summarization through two simulation experiments, we analyze the results of applying these methods to several different automatic evaluation metrics across three sets of human annotations. We find that the confidence intervals are rather wide, demonstrating high uncertainty in how reliable automatic metrics truly are. Further, although many metrics fail to show statistical improvements over ROUGE, two recent works, QAEval and BERTScore, do in some evaluation settings.¹

1 Introduction

Accurately estimating the quality of a summary is critical for understanding whether one summarization model produces better summaries than another. Because manually annotating summary quality is costly and time consuming, researchers have developed automatic metrics that approximate human judgments (Lin, 2004; Tratz and Hovy, 2008; Gianakopoulos et al., 2008; Zhao et al., 2019; Deutsch et al., 2020, *i.a.*).

Currently, automatic metrics themselves are evaluated by calculating the correlations between their

scores and human-annotated quality scores. The value of a metric's correlation represents how similar its scores are to humans', and one metric is said to be a better approximation of human judgments than another if its correlation is higher.

However, there is no standard practice in summarization for calculating confidence intervals for the correlation values or running hypothesis tests on the difference between two metrics' correlations. This leaves the community in doubt about how effective automatic metrics really are at replicating human judgments as well as whether the difference between two metrics' correlations is truly reflective of one metric being better than the other or if it is an artifact of random chance.

In this work, we propose methods for calculating confidence intervals and running hypothesis tests for summarization metrics. After demonstrating the usefulness of our methods through a pair of simulation experiments, we then analyze the results of applying the statistical analyses to a set of summarization metrics and three datasets.

The methods we propose are based on the resampling techniques of bootstrapping (Efron and Tibshirani, 1994) and permutation (Noreen, 1989). Resampling techniques are advantageous because, unlike parametric methods, they do not make assumptions which are invalid in the case of summarization (§3.1; §4.1). Bootstrapping and permutation techniques use a subroutine that samples a new dataset from the original set of observations. Since the correlation of an evaluation metric to human judgments is a function of matrices of values (namely the metric's scores and human annotations for many different systems across many different inputs; §2), this subroutine must sample new matrices. Standard applications of bootstrapping and permutation operate on vectors of numbers, so they are no longer viable. To that end, we propose three different bootstrapping (§3.2) and permutation (§4.3) techniques for resampling matrices, each of which

¹Our code is available at <https://github.com/CogComp/stat-analysis-experiments>.

makes different assumptions about whether the systems or inputs are constant or variable in the calculation.

In order to evaluate which resampling methods are most appropriate for summarization metrics, we perform two simulations. The first demonstrates that the resampling technique which assumes both the systems and inputs are variable during bootstrapping produces confidence intervals that generalize the best to held-out data (§5.1). The second shows that the permutation test which makes the same assumption has more statistical power than the equivalent bootstrapping method and Williams’ test (Williams, 1959), a parametric hypothesis test that is popular in machine translation (§5.2).

Finally, we analyze the results of estimating confidence intervals and applying hypothesis testing to a set of summarization metrics using annotations on single- and multi-document datasets (Dang and Owczarzak, 2008; Fabbri et al., 2020; Bhandari et al., 2020). We find that the confidence intervals for the metrics’ correlations are all rather wide, indicating that the summarization community has relatively low certainty in how similarly automatic metrics rank summaries with respect to humans (§6.1). Additionally, the hypothesis tests reveal that QAEval (Deutsch et al., 2020) and BERTScore (Zhang et al., 2019) emerge as the best metrics in several of the experimental settings, whereas no metric consistently achieves statistically better performance than ROUGE (Lin, 2004) in others (§6.2).

Although we focus on summarization, the techniques we propose can be applied to metrics for other text generation tasks, such as machine translation or structure-to-text. The contributions of this work include (1) a proposal of methods for calculating confidence intervals and running hypothesis tests for summarization metrics, (2) simulation experiments that provide evidence for which methods are most appropriate for summarization, and (3) an analysis of the results of the statistical analyses applied to various summarization metrics on three datasets.

2 Preliminaries: Evaluating Metrics

Summarization evaluation metrics are typically used to either argue that a summarization system generates better summaries than another or that an individual summary is better than another for the same input. How similarly an automatic met-

ric does these two tasks with respect to humans is quantified as follows.

Let \mathcal{X} be an evaluation metric that is used to approximate some ground-truth metric \mathcal{Z} . For example, \mathcal{X} could be ROUGE and \mathcal{Z} could be a human-annotated summary quality score. The similarity of \mathcal{X} and \mathcal{Z} is evaluated by calculating two different correlation terms on a set of summaries. First, the summaries from summarization systems $\mathcal{S} = \{S_1, \dots, S_N\}$ on input document(s) $\mathcal{D} = \{D_1, \dots, D_M\}$ are scored using \mathcal{X} and \mathcal{Z} . We refer to these scores as matrices $X, Z \in \mathbb{R}^{N \times M}$ in which x_i^j and z_i^j are the scores of \mathcal{X} and \mathcal{Z} on the summary output by system S_i on input D_j . Then, the correlation between X and Z is calculated at one of the following levels:

$$r_{\text{SYS}}(X, Z) = \text{CORR} \left(\left\{ \left(\frac{1}{M} \sum_j x_i^j, \frac{1}{M} \sum_j z_i^j \right) \right\}_{i=1}^N \right)$$

$$r_{\text{SUM}}(X, Z) = \frac{1}{M} \sum_j \text{CORR} \left(\left\{ \left(x_i^j, z_i^j \right) \right\}_{i=1}^N \right)$$

where $\text{CORR}(\cdot)$ typically calculates the Pearson, Spearman, or Kendall correlation coefficients.²

These two correlations quantify how similarly \mathcal{X} and \mathcal{Z} score systems and individual summaries per-input for systems \mathcal{S} and documents \mathcal{D} . The system-level correlation r_{SYS} calculates the correlation between the scores for each system (equal to the average score across inputs), and the summary-level correlation r_{SUM} calculates an average of the correlations between the scores per-input.

The correlations r_{SYS} and r_{SUM} are also used to reason about whether \mathcal{X} is a better approximate of \mathcal{Z} than another metric \mathcal{Y} is, typically by showing that $r(X, Z) > r(Y, Z)$ for either r .

3 Correlation Confidence Intervals

Although the strength of the relationship between \mathcal{X} and \mathcal{Z} on one dataset is quantified by the correlation levels r_{SYS} and r_{SUM} , each r is only a point estimate of the true correlation of the metrics, denoted ρ , on input documents and systems distributed similarly to those in \mathcal{D} and in \mathcal{S} . Since metrics are used to evaluate summaries produced by systems not in \mathcal{S} on input documents not in \mathcal{D} , it is more meaningful to quantify the quality of \mathcal{X} with ρ instead of r . Although we cannot directly measure

²For clarity, we will refer to r_{SUM} and r_{SYS} as correlation levels and Pearson, Spearman, and Kendall as correlation coefficients.

ρ , it is possible to estimate it through a confidence interval.

3.1 The Fisher Transformation

The standard method for calculating a confidence interval for a correlation is the Fisher transformation (Fisher, 1992). The transformation maps a correlation coefficient to a normal distribution, calculates the confidence interval on the normal curve, and applies the reverse transformation to obtain the upper and lower bounds:

$$z_r = \operatorname{arctanh}(r)$$

$$r_u, r_\ell = \tanh\left(z_r \pm z_{\alpha/2} \cdot c / \sqrt{n - b}\right)$$

where r is the correlation coefficient, n is the number of observations, $z_{\alpha/2}$ is the critical value of a normal distribution, and b and c are constants.³

Applying the Fisher transformation to calculate confidence intervals for ρ_{SYS} and ρ_{SUM} is potentially problematic. First, it assumes that the input variables are normally distributed (Bonett and Wright, 2000). Metrics' scores and human annotations for summarization are frequently not normally distributed. Thus, this assumption is violated (see Appendix A for more details on normality testing). Second, it is not clear whether the transformation should be applied to the summary-level correlation since its final value is an average of correlations, which is not strictly a correlation.⁴

3.2 Bootstrapping

A popular nonparametric method of calculating a confidence interval is bootstrapping (Efron and Tibshirani, 1994). Bootstrapping is a procedure that estimates the distribution of a test statistic by repeatedly sampling with replacement from the original dataset and calculating the test statistic on each sample. Unlike the Fisher transformation, bootstrapping is a very flexible procedure that does not assume the data is normally distributed nor that the test statistic is a correlation, making it appropriate for summarization.

However, it is not clear how to perform the bootstrap sample for correlation levels. Consider a more

³ $b = 3, 3, 4$ and $c = 1, \sqrt{1 + r^2/2}, \sqrt{.437}$ for Pearson, Spearman, and Kendall respectively (Bonett and Wright, 2000).

⁴Correlation coefficients cannot be averaged because they are not additive in the arithmetic sense, however it is standard practice in summarization.

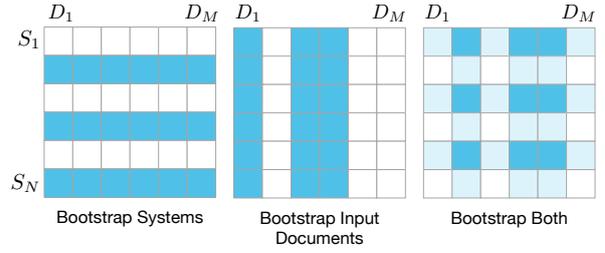


Figure 1: An illustration of the three methods for sampling matrices during bootstrapping. The dark blue color marks values selected by the sample. Only 3 system and input samples are shown here, when N and M are actually sampled with replacement.

standard bootstrapped confidence interval calculation for the mean accuracy of a question-answering model on a dataset with k instances. Since the mean accuracy is a function of the k individual correct/incorrect labels, each bootstrap sample can be constructed by sampling with replacement from the original k instances k times. In contrast, the correlation levels are functions of the matrices X and Z , so each bootstrap sample should also be a pair of matrices of the same size that are sampled from the original data.

There are at least three potential methods for sampling the matrices:

1. **BOOT-SYSTEMS**: Randomly sample with replacement N systems from \mathcal{S} , then select the sampled system scores for all of the input documents.
2. **BOOT-INPUTS**: Randomly sample with replacement M input documents from \mathcal{D} , then select all of the system scores for the sampled input documents.
3. **BOOT-BOTH**: Randomly sample with replacement M input documents from \mathcal{D} and N systems from \mathcal{S} , then select the sampled system scores for the sampled input documents.

Once the samples are taken, the corresponding values from X and Z are selected to create the sampled matrices. An illustration of each method is shown in Figure 1.

Each sampling method makes its own assumptions about the degrees of freedom in the sampling process that results in different interpretations of the corresponding confidence intervals. **BOOT-INPUTS** assumes that there is only uncertainty on the inputs while the systems are held constant. Confidence intervals derived from this sampling tech-

Algorithm 1 Bootstrap Confidence Interval

Input: $X, Z \in \mathbb{R}^{N \times M}$, $k \in \mathbb{N}$, $\alpha \in [0, 1]$
Output: $(1 - \alpha) \times 100\%$ -confidence interval

- 1: samples \leftarrow an empty list
- 2: **for** k iterations **do**
- 3: $S \leftarrow$ samp. $\{1, \dots, N\}$ w/ repl. N times
- 4: $D \leftarrow$ samp. $\{1, \dots, M\}$ w/ repl. M times
- 5: $X_s, Z_s \leftarrow$ empty $N \times M$ matrices
- 6: **for** $(i, j) \in \{1, \dots, N\} \times \{1, \dots, M\}$ **do**
- 7: $X_s[i, j] \leftarrow X[S[i], D[j]]$
- 8: $Z_s[i, j] \leftarrow Z[S[i], D[j]]$
- 9: **end for**
- 10: Append $r(X_s, Z_s)$ to samples
- 11: **end for**
- 12: $\ell, u \leftarrow (\alpha/2) \times 100$ and $(1 - \alpha/2) \times 100$ percentiles of samples
- 13: **return** ℓ, u

nique would express a range of values for the true correlation ρ between \mathcal{X} and \mathcal{Z} for the *specific* set of systems \mathcal{S} and inputs from the same distribution as those in \mathcal{D} . The opposite assumption is made for BOOT-SYSTEMS (uncertainty in systems, inputs are fixed). BOOT-BOTH, which can be viewed as sampling systems followed by sampling inputs, is the most general and assumes uncertainty on both the systems and the inputs. Therefore the corresponding confidence interval estimates ρ for systems and inputs distributed the same as those in \mathcal{S} and \mathcal{D} .

Algorithm 1 contains the pseudocode for calculating a confidence interval via bootstrapping using the BOOT-BOTH sampling method. In §5.1 we experimentally evaluate the Fisher transformation and the three bootstrap sampling methods, then analyze the confidence intervals of several different metrics in §6.1.

4 Significance Testing

Although confidence intervals express the strength of the correlation between two metrics, they do not directly express whether one metric \mathcal{X} correlates to another \mathcal{Z} better than \mathcal{Y} does due to their shared dependence on \mathcal{Z} . This statistical analysis is performed by hypothesis testing. The specific one-tailed hypothesis test we are interested in is:

$$\begin{aligned} H_0 &: \rho(\mathcal{X}, \mathcal{Z}) - \rho(\mathcal{Y}, \mathcal{Z}) \leq 0 \\ H_1 &: \rho(\mathcal{X}, \mathcal{Z}) - \rho(\mathcal{Y}, \mathcal{Z}) > 0 \end{aligned}$$

4.1 Williams' Test

One method for hypothesis testing the difference between two correlations with a dependent variable

that is used frequently to compare machine translation metrics is Williams' test (Williams, 1959). It uses the pairwise correlations between X , Y , and Z to calculate a t -statistic and corresponding p -value.⁵ Williams' test is frequently used to compare machine translation metrics' performances at the system-level (Mathur et al., 2020, *i.a.*).

However, the test faces the same issues as the Fisher transformation: It assumes the input variables are normally distributed (Dunn and Clark, 1971), and it is not clear whether the test should be applied at the summary-level.

4.2 Paired Bootstrapping

Bootstrapping can also be used to address the shortcomings of Williams' test for hypothesis testing in the form of a paired bootstrap test. A paired bootstrap test applied to two paired samples estimates the distribution of the test statistic under H_0 by repeatedly calculating the test statistic on new resampled datasets. Each resampled dataset is constructed by sampling the original paired values with replacement. Then, the p -value for the observed value of the test statistic is calculated by comparing the statistic on the resampled datasets to the observed value. We refer the reader to Berg-Kirkpatrick et al. (2012) for more details.

For summarization, the bootstrap sample can be taken in the same way as described in §3.2, and the sample is used to create new parallel X , Y , and Z matrices. Each sampling method has a corresponding interpretation for how the results of the test will generalize. For instance, a significant result obtained by BOOT-SYSTEMS implies \mathcal{X} is better than \mathcal{Y} on inputs \mathcal{D} and systems similar to those in \mathcal{S} . For BOOT-BOTH, the conclusion would apply to both inputs and systems similar to those in \mathcal{D} and \mathcal{S} . The pseudocode for the paired bootstrap test applied to summarization metrics can be found in Appendix B.

4.3 Permutation Tests

An alternative nonparametric hypothesis test which is closely related to bootstrapping is the permutation test (Noreen, 1989). Permutation tests tend to be used more frequently than paired bootstrap tests for hypothesis testing because they directly test whether any observed difference between two values is due to random chance. In contrast, paired

⁵The full equation is omitted for space. See Graham and Baldwin (2014) for details.

Algorithm 2 Permutation Hypothesis Test

Input: $X, Y, Z \in \mathbb{R}^{N \times M}$, $k \in \mathbb{N}$, $\alpha \in [0, 1]$
Output: p -value

- 1: Standardize X and Y
- 2: $c \leftarrow 0$
- 3: $\delta \leftarrow r(X, Z) - r(Y, Z)$
- 4: **for** k iterations **do**
- 5: $X_s, Y_s \leftarrow$ empty $N \times M$ matrices
- 6: **for** $(i, j) \in \{1, \dots, N\} \times \{1, \dots, M\}$ **do**
- 7: **if** random Boolean is true **then** \triangleright swap
- 8: $X_s[i, j] \leftarrow Y[i, j]$
- 9: $Y_s[i, j] \leftarrow X[i, j]$
- 10: **else** \triangleright do not swap
- 11: $X_s[i, j] \leftarrow X[i, j]$
- 12: $Y_s[i, j] \leftarrow Y[i, j]$
- 13: **end if**
- 14: **end for**
- 15: $\delta_s \leftarrow r(X_s, Z) - r(Y_s, Z)$
- 16: **if** $\delta_s > \delta$ **then**
- 17: $c \leftarrow c + 1$
- 18: **end if**
- 19: **end for**
- 20: **return** c/k

bootstrap tests indirectly reason about this difference by estimating the variance of the test statistic.

Similarly to bootstrapping, a permutation test applied to two paired samples estimates the distribution of the test statistic under H_0 by calculating its value on new resampled datasets. In contrast to bootstrapping, the resampled datasets are constructed by randomly permuting which sample each observation in a pair belongs to (i.e., resampling without replacement). This relies on assuming the pair is exchangeable under H_0 , which means H_0 is true for either sample assignment for the pair. Then, the p -value is calculated as the proportion of times the test statistic across all possible permutations is greater than the observed value. A significant p -value implies the observed test statistic is very unlikely to occur if H_0 were true, resulting in its rejection. In practice, calculating the distribution of H_0 across all possible permutations is intractable, so it is instead estimated on a large number of randomly sampled permutations.⁶

For example, a permutation test applied to testing the difference between two QA models’ mean accuracies on the same dataset would sample a permutation by swapping the models’ outputs for the same input. Under H_0 , the models’ mean accuracies are equal, so randomly exchanging the outputs

is not expected to change their means. In the case of evaluation metrics, each permutation sample can be taken by randomly swapping the scores in X and Y . There are at least three ways of doing so:

1. PERM-SYSTEMS: For each system, swap its scores for all inputs with probability 0.5.
2. PERM-INPUTS: For each input document, swap its scores for all systems with probability 0.5.
3. PERM-BOTH: For each summary, swap its scores with probability 0.5.

To account for differences in scale, we standardize X and Y before performing the permutation. Fig. 2 contains an illustration of each method, and the pseudocode for a permutation test using the PERM-BOTH method is provided in Alg. 2.

Similarly to the bootstrap sampling methods, each of the permutation methods makes assumptions about whether the systems and input documents are variable or fixed when resampling datasets. This results in different interpretations of how the tests’ conclusions will generalize. Since PERM-SYSTEMS randomly assigns system scores for all documents in \mathcal{D} to either sample, we only expect the test’s conclusion to generalize to a system distributed similarly to those in \mathcal{S} evaluated on the *specific* set of documents \mathcal{D} . The opposite is true for PERM-INPUTS. The results for PERM-BOTH (which can be viewed as first swapping systems followed by swapping inputs) are expected to generalize for both systems and documents distributed similarly to those in \mathcal{S} and \mathcal{D} .

In §5.2 we run a simulation to compare the different hypothesis testing approaches, then analyze the results of hypothesis tests applied to summarization metrics in §6.2.

5 Simulation Experiments

We run two sets of simulation experiments in order to determine which confidence interval (§5.1) and hypothesis test (§5.2) methods are most appropriate for summarization metrics.

The datasets used in the simulations are the multi-document summarization dataset TAC’08 (Dang and Owczarzak, 2008) and two subsets of the single-document summarization CNN/DM dataset (Nallapati et al., 2016) annotated by Fabri et al. (2020) and Bhandari et al. (2020). These

⁶This is known as an approximate randomization test.

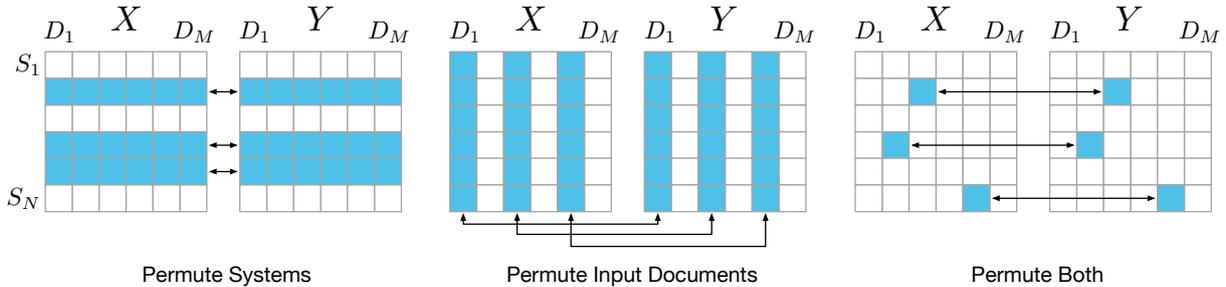


Figure 2: An illustration of the three permutation methods which swap system scores, document scores, or scores for individual summaries between X and Y .

datasets have $N = 58/16/25$ summarization models and $M = 48/100/100$ inputs, respectively. The summaries were assigned overall responsiveness, relevance, or Lightweight Pyramid (Shapira et al., 2019) scores, respectively, by human annotators. The scores of the automatic metrics are correlated to these human annotations.

5.1 Confidence Interval Simulation

In practice, evaluation metrics are almost always used to score summaries produced by systems S' on inputs D' such that S' and D' are disjoint (or nearly disjoint) from and distributed similarly to the data that was used to calculate a confidence interval, S and D . It is still desirable to use the confidence interval as an estimate of the correlation of a metric on S' and D' , however this scenario violates assumptions made by some of the bootstrapping sampling methods (e.g., BOOT-SYSTEMS assumes that D is fixed). This experiment simulates this setup and aims to quantify the consequences that violating the assumptions have on the accuracy of the confidence intervals.

Setup. The simulation works as follows. The systems S and inputs D are each randomly partitioned into two equally sized disjoint sets $S_A, S_B, D_A,$ and D_B . Then the submatrices $X_A, Z_A, X_B,$ and Z_B are selected from X and Z based on the system and input partitions. Matrices X_A and Z_A are used to calculate a 95% confidence interval using one of the methods described in §3, and then it is checked whether sample correlation $r(X_B, Z_B)$ is contained by the confidence interval. The entire procedure is repeated 1000 times, and the proportion of times the confidence interval contains the sample correlation is calculated.

It is expected that a confidence interval which generalizes well to the held-out data should contain the sample correlation 95% of the time under the

CI Method	TAC'08		Fabbri et al.		Bhandari et al.	
	ρ_{SYS}	ρ_{SUM}	ρ_{SYS}	ρ_{SUM}	ρ_{SYS}	ρ_{SUM}
Fisher	0.72	1.00	0.87	1.00	0.85	1.00
BOOT-SYSTEMS	0.76	0.72	0.81	0.73	0.80	0.72
BOOT-INPUTS	0.58	0.70	0.70	0.73	0.68	0.62
BOOT-BOTH	0.82	0.92	0.98	0.93	0.94	0.88

Table 1: The proportion of times the 95% confidence interval for the true correlations ρ of QAEval-F₁ calculated using Pearson contains the sample correlation of a held-out set of systems and inputs for the different methods of calculating confidence intervals. Values in bold are closest to 0.95 (and less than 1.0) and significantly different under a one-tailed difference of proportions z -test at $\alpha = 0.05$.

assumption that the data in A and B is distributed similarly. The larger the difference from 95%, the worse the confidence interval is at estimating the correlation on the held-out data.

The results of the simulation calculated on TAC'08 and CNN/DM using both the Fisher transformation and the different bootstrap sampling methods to confidence intervals for QAEval-F₁ (Deutsch et al., 2020) are shown in Table 1.⁷

BOOT-BOTH generalizes the best. Among the bootstrap methods, BOOT-BOTH produces confidence intervals that come closest to the ideal 95% rate. Any deviations from this number reflect that the assumption that all of the inputs and systems are distributed similarly is not true, but overall violating this assumption does not have a major impact.

The other bootstrap methods, which sample only systems or inputs, captures the correlation on the held-out data far less than 95% of the time. For instance, the confidence intervals for ρ_{SYS} on Bhandari et al. (2020) only successfully estimate the held-out correlation on 80% and 68% of trials. This

⁷The Fisher transformation was directly applied to the averaged summary-level correlation.

means that a 95% confidence interval calculated using BOOT-INPUTS is actually only a 68% confidence interval on the held-out data. This pattern is the same across the different correlation levels and datasets. The lower values for only sampling inputs indicates that more variance comes from the systems rather than the inputs.

Fisher analysis. The Fisher transformation at the system-level creates confidence intervals that generalize worse than BOOT-BOTH. The summary-level confidence interval captures the held-out sample correlation 100% of the time, implying that the confidence interval width is too large to be useful. We believe this is due to the fact that as the absolute value of $r(X, Z)$ decreases, the width of the Fisher confidence interval increases. Summary-level correlations are lower than system-level correlations (see §6.1), and therefore Fisher results in a worse confidence interval estimate at the summary-level.

Conclusion. This experiment presents strong evidence that violating the assumptions that either the systems/inputs are fixed or that the data is normally distributed does result in worse confidence intervals. Therefore, the BOOT-BOTH method provides the most accurate confidence intervals for scenarios in which summarization metrics are almost always used.

5.2 Power Analysis

The power of a hypothesis test is the probability of accepting the alternative hypothesis given that it is actually true (equal to 1.0 – the type-II error rate). It is desirable to have as high of a power as possible in order to avoid missing a significant difference between metrics. This simulation estimates the power of each of the hypothesis tests.

Setup. Measuring power requires a scenario in which it is known that ρ is greater for one metric than another (i.e., H_1 is true). Since this is not known to be true for any pair of proposed evaluation metrics, we artificially create such a scenario by adding randomness to the calculation of ROUGE-1. We define \mathcal{R}_k to be ROUGE-1 calculated using a random $k\%$ of the candidate summary’s tokens. We assume that since \mathcal{R}_k only evaluates a summary with $k\%$ of its tokens, it must be a worse metric than standard ROUGE-1 for $k < 100$.

To estimate the power, we score summaries with ROUGE-1 and \mathcal{R}_k for different k and count how frequently each hypothesis test rejects H_0 in favor

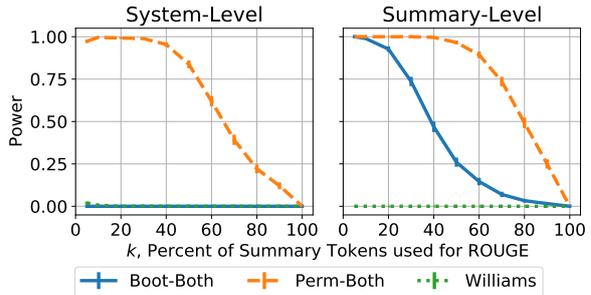


Figure 3: The system- and summary-level Pearson estimates of the power of the BOOT-BOTH, PERM-BOTH, and Williams hypothesis test methods calculated on the annotations from Fabbri et al. (2020). The power for BOOT-BOTH and Williams at the system-level is ≈ 0 for all values.

of identifying ROUGE-1 as a superior metric. This trial is repeated 1000 times, and the proportion of significant results is the estimate of the power.

Since the various hypothesis tests make different assumptions about whether the systems and inputs are fixed or variable, it is not necessarily fair to directly compare their powers. Because the assumptions of BOOT-BOTH and PERM-BOTH most closely align with the typical use case of summarization, we compare their powers. We additionally include Williams’ test because it is frequently used for machine translation metrics and it produces interesting results, discussed below.

PERM-BOTH has the highest power. Fig. 3 plots the power curves for various values of k on the CNN/DM annotations by Fabbri et al. (2020). We find that PERM-BOTH has the highest power among the three tests for all values of k . As k approaches 100%, the difference between ROUGE-1 and \mathcal{R}_k becomes smaller and harder to detect, thus the power for all methods approaches 0.

BOOT-BOTH has lower power than PERM-BOTH both at the summary-level and system-level, in which it is near 0. This result is consistent with permutation tests being more useful for hypothesis testing than their bootstrapping counterparts. We believe the system- and summary-level power differences are due to the variance of the two correlation levels. As we observe in §6.1, the system-level confidence intervals have significantly larger variance than at the summary-level, making it harder for the paired bootstrap to reject the system-level H_0 .

Williams’ test has low power. Interestingly, the power of Williams’ test for all k is ≈ 0 , implying

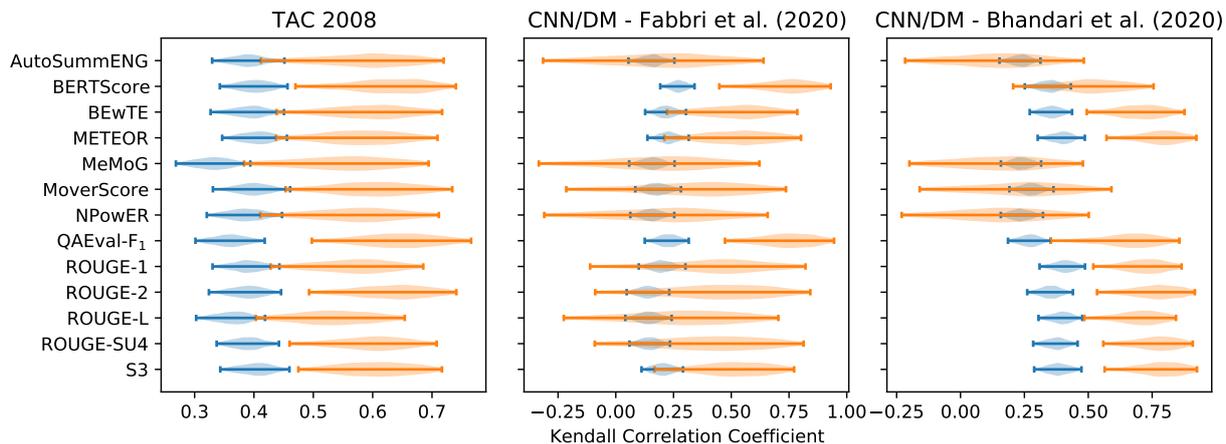


Figure 4: The 95% confidence intervals for ρ_{SUM} (blue) and ρ_{SYS} (orange) calculated using Kendall’s correlation coefficient on TAC’08 (left) and CNN/DM summaries (middle, Fabbri et al. (2020); right, Bhandari et al. (2020)) are rather large, reflecting the uncertainty about how well these metrics agree with human judgments of summary quality.

the test never rejects H_0 in this simulation. This is surprising because Williams’ test is frequently used to compare machine translation metrics at the system-level and does find differences between metrics. We believe this is due to the strength of the correlations of ROUGE-1 to the ground-truth judgments as follows.

The p -value calculated by Williams is a function of the pairwise correlations of X , Y , and Z and the number of observations. The closer both $r(X, Z)$ and $r(Y, Z)$ are to 0, the higher the p -value. The correlation of ROUGE-1 in this simulation is around 0.6 and 0.3 at the system- and summary-levels. In contrast, the system-level correlations for the metrics submitted to the Workshop on Machine Translation (WMT) 2019’s metrics shared task for de-en are on average 0.9 (Ma et al., 2019). Among the 231 possible pairwise metric comparisons in WMT’19 for de-en, Williams’ test yields 81 significant results. If the correlations are shifted to have an average value of 0.6, only 3 significant results are found. Thus, Williams’ test’s power is worse for detecting differences between lower correlation values.

Because this simulation is performed with summarization metrics on a real summarization dataset, we believe it is faithful enough to a realistic scenario to conclude that Williams’ test does indeed have low power when applied to summarization metrics. However, we do not expect Williams’ test to have 0 power when used to detect differences between machine translation metrics.

Conclusion. Since PERM-BOTH has the best statistical power at both the system- and summary-levels, we recommend it for hypothesis testing summarization metrics.

6 Summarization Analysis

We run two experiments that calculate confidence intervals (§6.1) and run hypothesis tests (§6.2) for many different summarization metrics on the TAC’08 and CNN/DM datasets described in §5. Each experiment also includes an analysis which discusses the implications of the results for the summarization community.

The metrics used for experimentation are the following: AutoSummENG (Giannakopoulos et al., 2008), BERTScore (Zhang et al., 2019), BEwT-E (Tratz and Hovy, 2008), METEOR (Denkowski and Lavie, 2014), MeMoG (Giannakopoulos and Karkaletsis, 2010), MoverScore (Zhao et al., 2019), NPower (Giannakopoulos and Karkaletsis, 2013), QAEval (Deutsch et al., 2020), ROUGE (Lin, 2004), and S^3 (Peyrard et al., 2017). We use the metrics’ implementations in the SacreROUGE library (Deutsch and Roth, 2020).

6.1 Confidence Intervals

Fig. 4 shows the 95% confidence intervals calculated via BOOT-BOTH for ρ_{SUM} and ρ_{SYS} for each metric calculated using Kendall’s correlation coefficient. Since ROUGE is the most commonly used metric, the following discussion will mostly focus on its results, however the conclusions largely apply to other metrics as well.

Confidence intervals are large. The most apparent observation is that the confidence intervals are rather large, especially for ρ_{SYS} . The ROUGE-2 ρ_{SYS} confidence intervals are $[.49, .74]$ for TAC’08 and $[-.09, .84]$ on CNN/DM using the annotations from Fabbri et al. (2020). The wide range of values demonstrates that there is a large amount of uncertainty around how precise the correlations reported in the literature truly are.

The size of the confidence intervals has serious implications for how trustable existing automatic evaluations are. Since Kendall’s τ is a function of the number of pairs of systems in which the automatic metric and ground-truth agree on their rankings, the metrics’ confidence intervals can be translated to upper- and lower-bounds on the number of incorrect rankings. Specifically, ROUGE-2’s system-level confidence interval on Fabbri et al. (2020) implies it incorrectly ranks systems with respect to humans 9-54% of the time. This means that potentially more than half of the time ROUGE ranks one summarization model higher than another on CNN/DM, it is wrong according to humans, a rather surprising result.

Comparing CNN/DM annotations. The confidence intervals calculated on the annotations by Bhandari et al. (2020) are in general higher and more narrow than on Fabbri et al. (2020). We believe this is due to how the two different sets of summaries were selected to be annotated in each dataset. Bhandari et al. (2020) selected summaries based on a stratified sample of automatic metric scores, whereas Fabbri et al. (2020) selected summaries uniformly at random. Therefore, the summaries in Bhandari et al. (2020) are likely easier to score (due to a mix of high- and low-quality summaries) and are less representative of the real data distribution than those in Fabbri et al. (2020).

Conclusion. These results suggest that the summarization community has very little confidence in how well automatic metrics replicate human annotations. An improved ROUGE score does not necessarily mean a model produces better summaries. Likewise, not improving ROUGE should not disqualify a model from further consideration. Consequently, researchers should rely less heavily on automatic metrics for determining the quality of summarization models than they currently do. Instead, the community needs to develop more robust evaluation methodologies, whether it be task-specific

downstream evaluations or faster and cheaper human evaluation.

6.2 Hypothesis Testing

Although nearly all of the confidence intervals for the metrics are overlapping, this does not necessarily mean that no metric is statistically better than another since the differences between two metrics’ correlations could be significant.

In Fig. 5, we report the p -values for testing $H_0 : \rho(\mathcal{X}, \mathcal{Z}) - \rho(\mathcal{Y}, \mathcal{Z}) \leq 0$ using the PERM-BOTH permutation test at the system- and summary-levels on TAC’08 and CNN/DM (see Sadeqi Azer et al. (2020) for a discussion about how to interpret p -values). The tests were run between all possible metric combinations. The Bonferroni correction (which lowers the significance level for rejecting each individual null hypothesis such that the probability of making one or more type-I errors is bounded by α ; Bonferroni, 1936; Dror et al., 2017) was applied to test suites grouped by the \mathcal{X} metric at $\alpha = 0.05$.⁸ A significant result means that we conclude that $\rho(\mathcal{X}, \mathcal{Z}) > \rho(\mathcal{Y}, \mathcal{Z})$.

The metrics which are identified as being statistically superior to others at the system-level on TAC’08 and CNN/DM using the annotations from Fabbri et al. (2020) are QAEval and BERTScore. They are statistically indistinguishable from each other on Fabbri et al. (2020), although QAEval does have significantly better results than all other metrics on TAC’08, whereas BERTScore does not. At the summary-level, BERTScore has significantly better results than all other metrics. Overall, none of the other metrics consistently out-perform all variants of ROUGE.

The results on the CNN/DM annotations provided by Bhandari et al. (2020) are less clear. The ROUGE variants appear to perform well, a conclusion also reached by Bhandari et al. (2020). The hypothesis tests also find that S3 is statistically better than most other metrics. S3 scores systems using a learned combination of features which includes ROUGE scores, likely explaining this result. Similarly to the confidence interval experiment, the results on the annotations provided by Bhandari et al. (2020) and Fabbri et al. (2020) are rather different, likely due to differences in how the datasets were sampled. We believe the dataset of Fabbri

⁸Although the entire matrix of p -values should be analyzed as a single test suite using Bonferroni’s correction, we only apply it per metric to simulate the results that each individual paper would have reported with our evaluation setup.

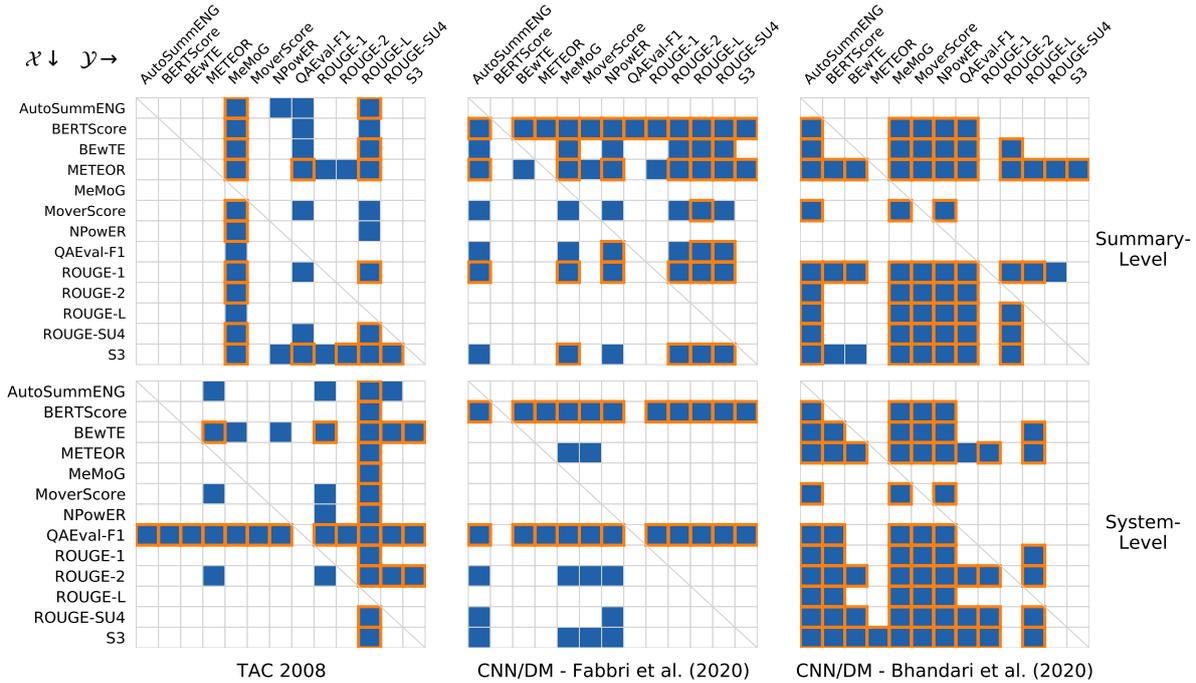


Figure 5: The results of running the PERM-BOTH hypothesis test to find a significant difference between metrics’ Pearson correlations. A blue square means the test returned a significant p -value at $\alpha = 0.05$, indicating the row metric has a higher correlation than the column metric. An orange outline means the result remained significant after applying the Bonferroni correction.

et al. (2020) is more likely to reflect the real data distribution.

7 Related Work

Summarization How confidence intervals and hypothesis testing has been done for summarization evaluation metrics has been performed over the years – if at all – is relatively inconsistent. To the best of our knowledge, this is the first study to calculate confidence intervals for summarization metrics’ correlations. Some works do report statistical significance, but it is not clear exactly how the statistical test was run (Tratz and Hovy, 2008; Giannakopoulos et al., 2008). Others report whether or not the correlation itself is significantly different from 0 (Lin, 2004), which does not quantify the strength of the correlation nor allow for comparisons between them.

Some studies apply Williams’ test to compare summarization metrics. For instance, Graham (2015) use it to compare BLEU (Papineni et al., 2002) and several variants of ROUGE, and Bhandari et al. (2020) use it to compare several different metrics at the system-level. However, our experiments demonstrated in §5.2 that Williams’ test has lower power than the bootstrap or permutation tests

due to the lower correlation values.

As an alternative to comparing metrics’ correlations, Owczarzak et al. (2012) argue for comparing based on the number of system pairs in which both human judgments and metrics agree on statistically significant differences between the systems, a metric also used in the TAC shared-task for summarization metrics (Dang and Owczarzak, 2009, *i.a.*). This value counts the number of system pairs in which both human judgments and the automatic metric agreed on statistically significant differences between the systems. This can be viewed similarly to Kendall’s τ in which only statistically significant differences between systems are counted as concordant. However, the differences in discriminative power across metrics was not statistically tested itself.

Machine Translation The summarization and machine translation (MT) communities face the same problem of developing and evaluating automatic metrics to evaluate the outputs of models. Since 2008, the Workshop on Machine Translation (WMT) has run a shared-task for developing evaluation metrics (Mathur et al., 2020, *i.a.*). Although the methodology has changed over the

years, they have converged on comparing metrics' system-level correlations using Williams' test (Graham and Baldwin, 2014). Since Williams' test assumes the input data is normally distributed and our experiments show it has low power for summarization, we do not recommend it for comparing summarization metrics. However, human annotations for MT are standardized to be normally distributed, and the metrics have higher correlations to human judgments. Therefore, we hypothesize that Williams' test will have higher power when applied to MT metrics. Nevertheless, the methods proposed in this work can be directly applied to MT metrics as well.

8 Conclusion

In this work, we proposed several different methods for estimating confidence intervals and hypothesis testing for summarization evaluation metrics using resampling methods. Our simulation experiments demonstrate that assuming variability in both the systems and input documents leads to the best generalization for confidence intervals and that permutation-based hypothesis testing has the highest statistical power. Finally, our experiments on several different evaluation metrics across three datasets demonstrate high uncertainty in how well metrics correlate to human judgments and that two recently proposed metrics, QAEval and BERTScore, do achieve higher correlations than ROUGE in some settings.

References

- Taylor Berg-Kirkpatrick, David Burkett, and Dan Klein. 2012. An empirical investigation of statistical significance in nlp. In *Proceedings of the 2012 Joint Conference on Empirical Methods in Natural Language Processing and Computational Natural Language Learning*, pages 995–1005.
- Manik Bhandari, Pranav Narayan Gour, Atabak Ashfaq, Pengfei Liu, and Graham Neubig. 2020. [Re-evaluating Evaluation in Text Summarization](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 9347–9359, Online. Association for Computational Linguistics.
- Douglas G Bonett and Thomas A Wright. 2000. Sample size requirements for estimating Pearson, Kendall and Spearman correlations. *Psychometrika*, 65(1):23–28.
- Carlo E. Bonferroni. 1936. *Teoria statistica delle classi e calcolo delle probabilita*. Libreria internazionale Seeber.
- Hoa Trang Dang and Karolina Owczarzak. 2008. Overview of the tac 2008 update summarization task. In *TAC*.
- Hoa Trang Dang and Karolina Owczarzak. 2009. Overview of the tac 2009 summarization track. In *proceedings of the Text Analysis Conference*.
- Michael J. Denkowski and Alon Lavie. 2014. [Meteor universal: Language specific translation evaluation for any target language](#). In *Proceedings of the Ninth Workshop on Statistical Machine Translation, WMT@ACL 2014, June 26-27, 2014, Baltimore, Maryland, USA*, pages 376–380. The Association for Computer Linguistics.
- Daniel Deutsch, Tania Bedrax-Weiss, and Dan Roth. 2020. [Towards Question-Answering as an Automatic Metric for Evaluating the Content Quality of a Summary](#).
- Daniel Deutsch and Dan Roth. 2020. [SacreROUGE: An Open-Source Library for Using and Developing Summarization Evaluation Metrics](#).
- Rotem Dror, Gili Baumer, Marina Bogomolov, and Roi Reichart. 2017. Replicability analysis for natural language processing: Testing significance with multiple datasets. *Transactions of the Association for Computational Linguistics*, 5:471–486.
- Olive Jean Dunn and Virginia Clark. 1971. Comparison of tests of the equality of dependent correlation coefficients. *Journal of the American Statistical Association*, 66(336):904–908.
- Bradley Efron and Robert J Tibshirani. 1994. *An introduction to the bootstrap*. CRC press.
- Alexander R Fabbri, Wojciech Kryściński, Bryan McCann, Caiming Xiong, Richard Socher, and Dragomir Radev. 2020. Summeval: Re-evaluating summarization evaluation. *arXiv preprint arXiv:2007.12626*.

- Ronald Aylmer Fisher. 1992. Statistical methods for research workers. In *Breakthroughs in statistics*, pages 66–70. Springer.
- George Giannakopoulos and Vangelis Karkaletsis. 2010. [Summarization system evaluation variations based on n-gram graphs](#). In *Proceedings of the Third Text Analysis Conference, TAC 2010, Gaithersburg, Maryland, USA, November 15-16, 2010*. NIST.
- George Giannakopoulos and Vangelis Karkaletsis. 2013. [Summary evaluation: Together we stand npower-ed](#). In *Computational Linguistics and Intelligent Text Processing - 14th International Conference, CICLing 2013, Samos, Greece, March 24-30, 2013, Proceedings, Part II*, volume 7817 of *Lecture Notes in Computer Science*, pages 436–450. Springer.
- George Giannakopoulos, Vangelis Karkaletsis, George A. Vouros, and Panagiotis Stamatopoulos. 2008. [Summarization system evaluation revisited: N-gram graphs](#). *TSLP*, 5(3):5:1–5:39.
- Yvette Graham. 2015. [Re-evaluating automatic summarization with BLEU and 192 shades of ROUGE](#). In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, pages 128–137, Lisbon, Portugal. Association for Computational Linguistics.
- Yvette Graham and Timothy Baldwin. 2014. Testing for significance of increased correlation with human judgment. In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 172–176.
- Chin-Yew Lin. 2004. [ROUGE: A package for automatic evaluation of summaries](#). In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Qingsong Ma, Johnny Wei, Ondřej Bojar, and Yvette Graham. 2019. Results of the wmt19 metrics shared task: Segment-level and strong mt systems pose big challenges. In *Proceedings of the Fourth Conference on Machine Translation (Volume 2: Shared Task Papers, Day 1)*, pages 62–90.
- Nitika Mathur, Johnny Wei, Markus Freitag, Qingsong Ma, and Ondřej Bojar. 2020. Results of the wmt20 metrics shared task. In *Proceedings of the Fifth Conference on Machine Translation*, pages 688–725.
- Ramesh Nallapati, Bowen Zhou, Cícero Nogueira dos Santos, Çağlar Gülçehre, and Bing Xiang. 2016. [Abstractive text summarization using sequence-to-sequence rnns and beyond](#). In *Proceedings of the 20th SIGNLL Conference on Computational Natural Language Learning, CoNLL 2016, Berlin, Germany, August 11-12, 2016*, pages 280–290. ACL.
- Eric W Noreen. 1989. Computer intensive methods for hypothesis testing: An introduction. *Wiley, New York*, 19:21.
- Karolina Owczarzak, John Conroy, Hoa Trang Dang, and Ani Nenkova. 2012. An assessment of the accuracy of automatic evaluation in summarization. In *Proceedings of workshop on evaluation metrics and system comparison for automatic summarization*, pages 1–9.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a method for automatic evaluation of machine translation. In *Proceedings of the 40th annual meeting of the Association for Computational Linguistics*, pages 311–318.
- Maxime Peyrard, Teresa Botschen, and Iryna Gurevych. 2017. [Learning to Score System Summaries for Better Content Selection Evaluation](#). In *Proceedings of the Workshop on New Frontiers in Summarization, NFiS@EMNLP 2017, Copenhagen, Denmark, September 7, 2017*, pages 74–84. Association for Computational Linguistics.
- Nornadiah Mohd Razali and Yap Bee Wah. 2011. Power comparisons of shapiro-wilk, kolmogorov-smirnov, lilliefors and anderson-darling tests. *Journal of statistical modeling and analytics*, 2(1):21–33.
- Erfan Sadeqi Azer, Daniel Khashabi, Ashish Sabharwal, and Dan Roth. 2020. [Not All Claims are Created Equal: Choosing the Right Statistical Approach to Assess Hypotheses](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5715–5725, Online. Association for Computational Linguistics.

- Ori Shapira, David Gabay, Yang Gao, Hadar Ronen, Ramakanth Pasunuru, Mohit Bansal, Yael Amsterdamer, and Ido Dagan. 2019. [Crowdsourcing lightweight pyramids for manual summary evaluation](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pages 682–687. Association for Computational Linguistics.
- Samuel Sanford Shapiro and Martin B Wilk. 1965. An analysis of variance test for normality (complete samples). *Biometrika*, 52(3/4):591–611.
- Stephen Tratz and Eduard H. Hovy. 2008. [Summarization evaluation using transformed basic elements](#). In *Proceedings of the First Text Analysis Conference, TAC 2008, Gaithersburg, Maryland, USA, November 17-19, 2008*. NIST.
- Evan James Williams. 1959. *Regression analysis*, volume 14. wiley.
- Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q. Weinberger, and Yoav Artzi. 2019. [Bertscore: Evaluating text generation with BERT](#). *CoRR*, abs/1904.09675.
- Wei Zhao, Maxime Peyrard, Fei Liu, Yang Gao, Christian M. Meyer, and Steffen Eger. 2019. [Moverscore: Text generation evaluating with contextualized embeddings and earth mover distance](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing, EMNLP-IJCNLP 2019, Hong Kong, China, November 3-7, 2019*, pages 563–578. Association for Computational Linguistics.

Metric	TAC'08		Fabbri et al.		Bhandari et al.	
	r_{SUM}	r_{SYS}	r_{SUM}	r_{SYS}	r_{SUM}	r_{SYS}
Resp/Rel/Pyr	100.0	0.00	32.0	0.52	75.0	0.84
AutoSummENG	18.8	0.26	33.0	0.01	28.0	0.55
MeMoG	37.5	0.53	33.0	0.01	28.0	0.55
NPowER	29.2	0.36	33.0	0.01	28.0	0.55
BERTScore	35.4	0.00	26.0	0.15	28.0	0.18
BEwTE	22.9	0.06	37.0	0.00	33.0	0.68
METEOR	27.1	0.15	27.0	0.00	30.0	0.61
MoverScore	47.9	0.25	35.0	0.00	31.0	0.50
QAEval-F1	58.3	0.00	40.0	0.01	45.0	0.21
ROUGE-1	33.3	0.06	32.0	0.00	30.0	0.91
ROUGE-2	31.2	0.71	34.0	0.00	61.0	0.62
ROUGE-L	25.0	0.13	26.0	0.13	37.0	0.12
ROUGE-SU4	29.2	0.44	32.0	0.00	44.0	0.84
S3	20.8	0.32	26.0	0.00	47.0	0.66

Table 2: For r_{SYS} the p -value of the Shapiro-Wilk test. For r_{SUM} , the percent of the per-input document tests which had a significant result at $\alpha = 0.05$. A significant p -value means the null hypothesis that the data is distributed normally is rejected. For r_{SUM} , the larger the percentage the more the data appears to be not normally distributed.

A Normality Testing

Some methods for calculating the confidence interval or running hypothesis tests for correlation coefficients assumes the input variables are normally distributed. To understand if this assumption holds for the summarization data, we ran the Shapiro-Wilk test for normality (Shapiro and Wilk, 1965), which was reported to have the highest power out of several alternatives (Razali and Wah, 2011). For each correlation level, the data which would be used to calculate the correlation coefficient was tested. For instance, the system-level test was run on the systems’ scores averaged across inputs.

The results of the tests for the ground-truth responsiveness scores and automatic metrics are in Table 2. For r_{SYS} the p -value of the test is reported. For r_{SUM} , the percentage of the M tests (one calculated per input document) which had significant results at $\alpha = 0.05$ is shown. A significant result (p -value $< \alpha$) means the null hypothesis that the data is distributed normally is rejected.

In general, the p -values are significant, meaning applying a statistical test which assumes normality is incorrect in general.

B Bootstrap Hypothesis Testing Pseudocode

The pseudocode for running a hypothesis test with bootstrapping and the BOOT-BOTH sampling method is shown in Algorithm 3.

Algorithm 3 Paired Bootstrap Hypothesis Test

Input: $X, Y, Z \in \mathbb{R}^{N \times M}$, $k \in \mathbb{N}$, $\alpha \in [0, 1]$

Output: p -value

```

1:  $c \leftarrow 0$ 
2:  $\delta \leftarrow r(X, Z) - r(Y, Z)$ 
3: for  $k$  iterations do
4:    $S \leftarrow \text{samp. } \{1, \dots, N\}$  w/ repl.  $N$  times
5:    $D \leftarrow \text{samp. } \{1, \dots, M\}$  w/ repl.  $M$  times
6:    $X_s, Y_s, Z_s \leftarrow \text{empty } N \times M$  matrices
7:   for  $(i, j) \in \{1, \dots, N\} \times \{1, \dots, M\}$  do
8:      $X_s[i, j] \leftarrow X[S[i], D[j]]$ 
9:      $Y_s[i, j] \leftarrow Y[S[i], D[j]]$ 
10:     $Z_s[i, j] \leftarrow Z[S[i], D[j]]$ 
11:   end for
12:    $\delta_s \leftarrow r(X_s, Z_s) - r(Y_s, Z_s)$ 
13:   if  $\delta_s > 2 \cdot \delta$  then
14:      $c \leftarrow c + 1$ 
15:   end if
16: end for
17: return  $c/k$ 

```
