

Distributed synchronous and asynchronous algorithms for semi-definite programming with diagonal constraints

Xia Jiang, Xianlin Zeng, *Member, IEEE*, Jian Sun, *Member, IEEE*, and Jie Chen, *Fellow, IEEE*

Abstract—This paper develops distributed synchronous and asynchronous algorithms for the large-scale semi-definite programming with diagonal constraints, which has wide applications in combination optimization, image processing and community detection. The information of the semi-definite programming is allocated to multiple interconnected agents such that each agent aims to find a solution by communicating to its neighbors. Based on low-rank property of solutions and the Burer-Monteiro factorization, we transform the original problem into a distributed optimization problem over unit spheres to reduce variable dimensions and ensure positive semi-definiteness without involving semi-definite projections, which are computationally expensive. For the distributed optimization problem, we propose distributed synchronous and asynchronous algorithms, both of which reduce computational burden and storage space compared with existing centralized algorithms. Specifically, the distributed synchronous algorithm almost surely escapes strict saddle points and converges to the set of optimal solutions to the optimization problem. In addition, the proposed distributed asynchronous algorithm allows communication delays and converges to the set of critical points to the optimization problem under mild conditions. By applying proposed algorithms to image segmentation applications, we illustrate the efficiency and convergence performance of the two proposed algorithms.

Index Terms—Semi-definite programming with diagonal constraints, synchronous and asynchronous algorithms, low-rank matrices, distributed optimization.

I. INTRODUCTION

SEMI-DEFINITE programming (SDP) is an active subfield of convex optimization and has attracted considerable attention due to its widely applications in diverse fields such

This work was supported in part by the National Natural Science Foundation of China (Nos. 61720106011, U1613225, 62073035, 61925303), Program for Changjiang Scholars and Innovative Research Team in University (IRT1208), the Youth ChangJiang Scholars Program, the National Key Research and Development Program of China under Grant 2018YFB1700100 and Beijing Institute of Technology Research Fund Program for Young Scholars. (*Corresponding author: Jian Sun.*)

X. Jiang (jiangxia@bit.edu.cn) and J. Sun (sunjian@bit.edu.cn) are with Key Laboratory of Intelligent Control and Decision of Complex Systems, School of Automation, Beijing Institute of Technology, Beijing, 100081, China, and also with the Beijing Institute of Technology Chongqing Innovation Center, Chongqing 401120, China

X. Zeng (xianlin.zeng@bit.edu.cn) is with Key Laboratory of Intelligent Control and Decision of Complex Systems, School of Automation, Beijing Institute of Technology, Beijing, 100081, China

J. Chen (chenjie@bit.edu.cn) is with Beijing Advanced Innovation Center for Intelligent Robots and Systems (Beijing Institute of Technology), Key Laboratory of Biomimetic Robots and Systems (Beijing Institute of Technology), Ministry of Education, Beijing, 100081, China, and also with the School of Electronic and Information Engineering, Tongji University, Shanghai, 200082, China

as control theory [1]–[3], combinatorial optimization [4], [5], operations research [6], [7], and machine learning [8]–[10]. Formally, it aims to maximize or minimize a linear objective function subject to a constraint that is an affine combination of positive semi-definite matrices. One important class of SDP problem is the SDP with diagonal constraints, which is a relaxation of the “maximum cut” problem [11] and also appears in phase retrieval [12] and $\mathbb{Z}/2\mathbb{Z}$ synchronization [13].

Various algorithms have been developed to solve SDP with diagonal constraints but tend to be computational demanding as variable dimensions scale. On one hand, the arithmetic cost scales badly as the dimension of matrices increases, especially for high-order algorithms. For example, each iteration costs $O(n^3)$ arithmetic operations with an interior-point solver, which solves SDP in polynomial time [14], and the computation may run out of memory and time if n is greater than several thousands [15]. On the other hand, the storage cost of each iteration may scale beyond the memory of single computer if the number of unknowns reaches tens of thousands [16]. Hence, the design of efficient algorithms for large-scale SDP with diagonal constraints is still a challenging problem.

To reduce the computational burden of large-scale SDP, there are many explorations of efficient centralized works in recent years^{[15], [17]–[19]}. One key idea is using the Burer-Monteiro factorization that exploits the low-rank property of matrix solutions by replacing the original large scale positive semi-definite matrix as the product of two “tall” matrices with lower dimensions to reduce storage cost and avoid computing the semi-definite projection. Using this idea, in [15], [17], [20], [21], authors transform general SDP into non-convex optimization problems by making use of the low-rank property of solutions, and propose augmented Lagrangian algorithms and Riemannian manifold methods. In addition, the challenging positive semi-definite constraints are eliminated with the cost of introducing non-convexity to the optimization problems. Surprisingly, this change to non-convex problems does not cause many difficulties because local solutions tend to recover the optimal solution in practice. Despite these advances, the existing augmented Lagrangian algorithms and Riemannian manifold methods do not guarantee converging to global optima, and suffer from slow convergence and difficulties in selecting step sizes. For SDP with diagonal constraints, some recent works [18], [22] developed block-coordinate algorithms with rigorous convergence analysis, which have free parameters and better optimization performance than prior works^{[15], [17], [20], [21]}. All these centralized algorithms own fine

practical evidences for the transformed non-convex optimizations. However, as the matrix dimension grows too large, the lower dimensional matrices in these algorithms may still take too much storage space for a single computer, such as these in some image processing problems. In addition, some information and data of practical problems may be generated and stored at different locations and cannot be communicated due to privacy considerations. Hence, these centralized algorithms can not be applied directly to large scale problems with distributed information and distributed algorithms are in need for large-scale SDP.

Distributed optimization algorithms offer a promising approach to address large scale matrix problems by using the problem setup that the information is allocated over different agents^{[231]–[29]}. In distributed setting, agents have access to local information and communicate with their neighbors to seek for a global optimal solution^{[30]–[32]}. For large-scale SDP, many works in [1], [33]–[36] exploited the sparse structure of SDP and introduced additional consensus constraints to the transformed distributed problems. These works proposed distributed algorithms based on alternating direction method of multipliers (ADMM) with iterative message-passing. Whereas, in ADMM, agents need to solve sub-semidefinite problems at each iteration and have considerable computational burden. Focusing on SDP with tree structures, [37] proposed a distributed primal-dual interior-point algorithm for constrained semi-definite programming without introducing consensus constraints. The algorithm in [37] is a second-order algorithm that conducts a recursion over the tree structure to compute the exact search directions and factorizes a relatively small matrix during each iteration. Recently, [38] proposed a distributed optimization design for solving continuous-time algebraic Riccati inequalities, which have applications in distributed control of multi-agent systems. This design is a first-order algorithm and has well intuitive interpretations, but it needs computing semi-definite projections, which are expensive for large-scale matrices.

In this paper, we develop distributed first-order algorithms for large-scale semi-definite programs with diagonal constraints by taking advantage of low-rank property of solutions and the inherent sparsity of problems. The contributions of this paper are summarized as follows.

- This paper proposes a study on the distributed algorithms for SDP with diagonal constraints and distributed coefficient matrices information. This study extends the works in [15], [18], [20], [22] to distributed setups, which have wide applications in power flow problems^{[11], [33]} and distributed state estimation/control^{[35], [58]}. In addition, the SDP problem in this paper does not require tree structures as in [37].
- This paper designs distributed synchronous and asynchronous algorithms for SDP with diagonal constraints by solving an equivalent nonconvex optimization problem, which is obtained using the Burer-Monteiro factorization. In particular, the distributed algorithms reduce the computational burden and storage cost on single agent compared with the existing centralized algorithms [18],

[22] for SDP with diagonal constraints and show a superior numerical performance in simulation experiments. With the Burer-Monteiro factorization, the proposed algorithms avoid the computational burden of projection to semi-definite cone^{[33]–[36]}. Compared with the distributed second-order interior-point algorithm in [37], the proposed first-order algorithms have lower complexity and the distributed asynchronous algorithm performs well without a global synchronous clock.

- This paper analyzes the convergence of our proposed distributed algorithms. For the distributed synchronous algorithm, we show that the variables converge to the set of global optimal solutions almost surely under random initializations, despite of the non-convexity of feasible sets. For the distributed asynchronous algorithm, we show that the variables converge to the set of critical points of the nonconvex problem under mild conditions.

The remainder of the paper is organized as follows. Mathematical notations are given in section II. The semi-definite programming description and distributed algorithms are proposed in section III. The convergence properties of the proposed algorithms are analyzed theoretically in section IV. The efficiency of distributed algorithms is verified by simulations in section V and the conclusion is made in section VI.

II. MATHEMATICAL NOTATIONS

We denote \mathbb{R} as the set of real numbers, \mathbb{R}^n as the set of n -dimensional real column vectors, $\mathbb{R}^{n \times m}$ as the set of n -by- m real matrices, \mathbb{N} as the set of natural numbers, \mathbb{S}^n as the set of n by n symmetric matrices, \mathbb{S}_+^n as the set positive semi-definite matrices, \emptyset as the empty set, respectively. All vectors in the paper are column vectors, unless otherwise noted. The notation 0_n denotes an $n \times 1$ vector with all elements of 0. For a real vector v , $\|v\|$ is the Euclidean norm and $\|v\|_1$ is 1-norm defined by the sum of absolute values of elements. We denote A' as the transpose of matrix A , $\lambda_{\min}(A)$ as the minimum eigenvalue of the matrix A . For a symmetric matrix A , $A \succeq 0$ denotes that A is positive semi-definite and $A_{(i,j)}$ is the (i,j) th element of matrix A . For real matrices A and B with same dimensions, $\langle A, B \rangle$ denotes the Frobenius inner product of two real matrices such that $\langle A, B \rangle = \text{tr}(A'B) = \sum_{i,j} A_{(i,j)}B_{(i,j)}$. In addition, $A \circ B$ denotes Hadamard product of two matrices, whose elements are defined by $[A \circ B]_{(i,j)} = A_{(i,j)}B_{(i,j)}$. For a twice-continuously differentiable function $f(x)$, its gradient and Hessian matrix are denoted as $\nabla f(x)$ and $\nabla^2 f(x)$.

For a set \mathcal{S} , $|\mathcal{S}|$ denotes the number of elements in the set \mathcal{S} . For sets \mathcal{S}_1 and \mathcal{S}_2 , $\mathcal{S}_1 \subset \mathcal{S}_2$ means that \mathcal{S}_1 is a subset of \mathcal{S}_2 , $\mathcal{S}_1 \cup \mathcal{S}_2$ is the union of \mathcal{S}_1 and \mathcal{S}_2 , $\mathcal{S}_1 \cap \mathcal{S}_2$ is the intersection of \mathcal{S}_1 and \mathcal{S}_2 , and $\mathcal{S}_1 \setminus \mathcal{S}_2 = \mathcal{S}_1 - (\mathcal{S}_1 \cap \mathcal{S}_2)$. For a real number a , $\lceil a \rceil$ is the smallest integer greater than a . For a non-zero vector $x \in \mathbb{R}^n$, the notation $\text{normal}(x)$ is $\frac{x}{\|x\|}$ and $A = \text{diag}(x) \in \mathbb{R}^{n \times n}$ denotes a matrix with diagonal element $A_{(i,i)} = x_i$.

Let \mathcal{X} be a smooth manifold. Let $f : \mathcal{X} \rightarrow \mathbb{R}$ be a real-valued twice-continuously differentiable function. A point x^* is a critical point of f if $\nabla f(x^*) = 0_d$. If, in addition, $\lambda_{\min}(\nabla^2 f(x^*)) < 0$, x^* is a strict saddle point of f .

III. PROBLEM DESCRIPTION AND DISTRIBUTED ALGORITHM DESIGN

In this section, we present the problem of solving semi-definite programming with diagonal constraints in a distributed way. Then, we reformulate the problem into a distributed non-convex optimization using the low-rank property of solutions, and propose distributed synchronous and asynchronous discrete-time algorithms.

A. Problem description and transformation

Let $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ be an arbitrary simple, undirected and connected graph with the node set $\mathcal{V} = \{1, \dots, m\}$ and the edge set $\mathcal{E} = \mathcal{V} \times \mathcal{V}$. Let $X \in \mathbb{S}_+^n$ be the variable. For each $\tilde{i} \in \mathcal{V}$, define $J_{\tilde{i}} \subset \{1, \dots, n\}$ as an ordered set, where $n > m$. Throughout this paper, we use (\cdot) to denote the index of agent in \mathcal{G} and (\cdot) to denote an element of $J_{(\cdot)}$. For example, $\tilde{i} \in \mathcal{V}$ denotes agent \tilde{i} of \mathcal{G} and $j \in J_{\tilde{i}}$ is element j in $J_{\tilde{i}}$. If $J_{\tilde{i}} \cap J_{\tilde{j}} \neq \emptyset$, then $(\tilde{i}, \tilde{j}) \in \mathcal{E}$ such that agents \tilde{i} and \tilde{j} can communicate with each other.

The distributed semi-definite programming with diagonal constraints is

$$\min_{X \in \mathbb{S}_+^n} \sum_{\tilde{i}=1}^m \langle \bar{M}^{\tilde{i}}, X \rangle, \quad (1a)$$

$$\text{s. t. } X_{(j,j)} = 1, \quad j \in \{1, \dots, n\}, \quad (1b)$$

where $\bar{M}^{\tilde{i}} \in \mathbb{S}^n$ is a coefficient matrix such that $\bar{M}_{(j,k)}^{\tilde{i}} = 0$ if $(j, k) \notin J_{\tilde{i}} \times J_{\tilde{i}}$, and $\sum_{\tilde{i}=1}^m \bar{M}^{\tilde{i}} = M$. Define $E_{J_{\tilde{i}} \times J_{\tilde{i}}} \in \mathbb{R}^{n \times n}$ as the 0-1 matrix with $E_{(l,k)} = 1$ for $(l, k) \in J_{\tilde{i}} \times J_{\tilde{i}}$ and $E_{(l,k)} = 0$ otherwise. It is clear that $\langle \bar{M}^{\tilde{i}}, X \rangle = \langle \bar{M}^{\tilde{i}}, E_{J_{\tilde{i}} \times J_{\tilde{i}}} \circ X \rangle$ for all $\tilde{i} \in \{1, \dots, n\}$. Without affecting solutions, the local variable $\bar{X}^{\tilde{i}} \in \mathbb{S}_+^n$ to be determined by agent $\tilde{i} \in \mathcal{V}$ is defined as $\bar{X}^{\tilde{i}} = E_{J_{\tilde{i}} \times J_{\tilde{i}}} \circ X$. The objective of this paper is to design a distributed algorithm for solving (1) such that each agent $\tilde{i} \in \mathcal{V}$ only knows local information $\bar{M}^{\tilde{i}} \in \mathbb{S}^n$.

Example 3.1: Figure 1 illustrates the relationship of global optimization variable X and local variables $\bar{X}^{\tilde{i}}$ ($\tilde{i} \in \{1, \dots, 4\}$), where elements with same indices in different colored matrices are the same.

Remark 3.1: The centralized version of problem (1) is

$$\min_{X \in \mathbb{S}_+^n} \langle M, X \rangle, \quad \text{s. t. } X_{i,i} = 1, \quad i \in \{1, \dots, n\}, \quad (2)$$

which is a special case of generic semi-definite programming. It appears as a convex relaxation to many problems, such as the maximum cut (MAXCUT) problems^[11], community detection^[39] and image segmentation^[40]. In practical problems such as roadmaps or social networks, the dimension n may be several millions or even billions, which makes centralized computation hard. Hence, the development of distributed algorithms for (1) is of great importance.

Remark 3.2: There are two scenarios in which the problem (1) arises. In the first scenario, an arbitrary sparse SDP problem in the standard centralized form is converted into a distributed SDP with multiple positive semi-definite matrices

$X^{\tilde{i}}$ by the idea of chordal decomposition of positive semi-definite cones in [41]. In the second scenario, it is assumed that the SDP is associated with a multi-agent network and matches the formulation in (1) exactly, such as large-scale image segmentation by multiple agents in section Simulation.

Since $\langle \bar{M}^{\tilde{i}}, X \rangle$ only depends on elements with indices in $J_{\tilde{i}} \times J_{\tilde{i}}$ of variable $X \in \mathbb{S}_+^n$, define matrix $M^{\tilde{i}} \in \mathbb{S}^{|J_{\tilde{i}}|}$ ($X^{\tilde{i}} \in \mathbb{S}^{|J_{\tilde{i}}|}$) as the remaining matrix by deleting elements of $\bar{M}^{\tilde{i}} \in \mathbb{S}_+^n$ ($\bar{X}^{\tilde{i}} \in \mathbb{S}_+^n$), whose indices are not in $J_{\tilde{i}} \times J_{\tilde{i}}$. For ease of notation, we define $X_{\{j,k\}}^{\tilde{i}} \triangleq \bar{X}_{(j,k)}^{\tilde{i}}$ for $(j, k) \in J_{\tilde{i}} \times J_{\tilde{i}}$ and $\tilde{i} \in \mathcal{V}$. Similarly, define $M_{\{j,k\}}^{\tilde{i}} \triangleq \bar{M}_{(j,k)}^{\tilde{i}}$ for $(j, k) \in J_{\tilde{i}} \times J_{\tilde{i}}$ and $\tilde{i} \in \mathcal{V}$. Hence, problem (1) is equivalent to

$$\min_{X^{\tilde{i}} \in \mathbb{S}_+^{|J_{\tilde{i}}|}, \tilde{i} \in \mathcal{V}} \sum_{\tilde{i}=1}^m f_{\tilde{i}}(X^{\tilde{i}}), \quad f_{\tilde{i}}(X^{\tilde{i}}) = \langle M^{\tilde{i}}, X^{\tilde{i}} \rangle, \quad (3a)$$

$$\text{s. t. } X_{\{j,j\}}^{\tilde{i}} = 1, \quad j \in J_{\tilde{i}}, \quad (3b)$$

$$X_{\{l,k\}}^{\tilde{i}} = X_{\{l,k\}}^{\tilde{j}}, \quad \forall l, k \in J_{\tilde{i}} \cap J_{\tilde{j}}, \quad (\tilde{i}, \tilde{j}) \in \mathcal{E}, \quad (3c)$$

where agent $\tilde{i} \in \mathcal{V}$ knows $M^{\tilde{i}}$ and computes a positive semi-definite matrix variable $X^{\tilde{i}} \in \mathbb{S}_+^{|J_{\tilde{i}}|}$, $(\tilde{i}, \tilde{j}) \in \mathcal{E}$ specifies an overlap between the local variables $X^{\tilde{i}}$ and $X^{\tilde{j}}$ of agents \tilde{i} and \tilde{j} .

In most existing distributed works^{[33], [34]} for (1), the updating of local variable $X^{\tilde{i}}$ often involves a projection operator to the positive semi-definite cone. If the dimension of local $X^{\tilde{i}}$ of large-scale SDP is large, the projection operator is difficult and time-consuming. Hence, based on prior works on the low-rank property of matrix variables, we further reduce the computational and storage burden by representing $X \in \mathbb{R}^{n \times n}$ by $V'V$ with $V = [v_1, \dots, v_n] \in \mathbb{R}^{p \times n}$ to avoid the projection operator. It is well-known that the rank of an optimal solution is at most $\lceil \sqrt{2n} \rceil$ (see [42]). Let $v_s^{\tilde{i}}$ be the estimate of v_s by agent \tilde{i} for $s \in J_{\tilde{i}}$ and $\tilde{i} \in \mathcal{V}$. Without causing confusions, we define $V^{\tilde{i}} = [v_{s_1}^{\tilde{i}}, \dots, v_{s_{|J_{\tilde{i}}|}}^{\tilde{i}}] \in \mathbb{R}^{p \times |J_{\tilde{i}}|}$, where $\{s_1, \dots, s_{|J_{\tilde{i}}|}\} = J_{\tilde{i}}$, $s_1 < \dots < s_{|J_{\tilde{i}}|}$, and $\tilde{i} \in \mathcal{V}$. Hence, the local variable $X^{\tilde{i}}$ is replaced by $X^{\tilde{i}} = V^{\tilde{i}'} V^{\tilde{i}}$, where $V^{\tilde{i}} \in \mathbb{R}^{p \times |J_{\tilde{i}}|}$, $p > \sqrt{2n}$. Then the semi-definite programming (3) is rewritten as the following non-convex optimization problem on unit spheres:

$$\min_{V^{\tilde{i}}, \tilde{i} \in \mathcal{V}} \sum_{\tilde{i}=1}^m \tilde{f}_{\tilde{i}}(V^{\tilde{i}}), \quad \tilde{f}_{\tilde{i}}(V^{\tilde{i}}) = \langle M^{\tilde{i}}, V^{\tilde{i}'} V^{\tilde{i}} \rangle \quad (4a)$$

$$\text{s. t. } \|v_j^{\tilde{i}}\| = 1, \quad \forall \tilde{i} \in \mathcal{V}, \quad j \in J_{\tilde{i}} \quad (4b)$$


$$v_s^{\tilde{i}} = v_s^{\tilde{j}}, \quad \forall s \in J_{\tilde{i}} \cap J_{\tilde{j}}, \quad (\tilde{i}, \tilde{j}) \in \mathcal{E}, \quad (4c)$$

where $V^{\tilde{i}} \in \mathbb{R}^{p \times |J_{\tilde{i}}|}$ is local variable and $M^{\tilde{i}} \in \mathbb{S}^{|J_{\tilde{i}}|}$ is local coefficient matrix known by agent $\tilde{i} \in \mathcal{V}$.

The following assumption is needed.

Assumption 3.1:

- (1) Graph \mathcal{G} is undirected and connected.
- (2) Each element of global coefficient matrix $M = \sum_{\tilde{i}=1}^m \bar{M}^{\tilde{i}}$ is non-negative and diagonal elements of M are zero.

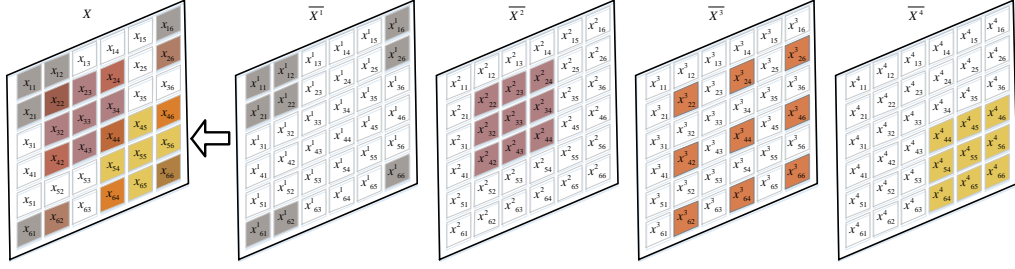
 Fig. 1. Matrix decomposition of global variable X over four agents.

(3) The integer p satisfies $p > \sqrt{2n}$.

Remark 3.3: Assumption 3.1 (1) is general in distributed optimization. Since the norm of column variables v_i is fixed as one, $M_{(i,i)} = 0$ does not affect the solution of optimization problem. In addition, because elements of coefficient matrix in MAXCUT problems and community detection are non-negative, Assumption 3.1 (2) is practical for problem (1). Assumption 3.1 (3) is a sufficient condition that optimal solutions for V^i 's recover optimal solutions for X^i 's.

B. Distributed synchronous optimization algorithm

In this subsection, we propose a distributed synchronous algorithm for the transformed distributed non-convex optimization problem (4).

To present the algorithm, we need additional definitions and notations. We define ‘‘children’’ and ‘‘parents’’ in graph \mathcal{G} . For the problem (4), there is an edge between agents \tilde{i} and \tilde{j} if $J_{\tilde{i}} \cap J_{\tilde{j}} \neq \emptyset$. Without loss of generality, if indices $\tilde{j} < \tilde{i}$ and $J_{\tilde{i}} \cap J_{\tilde{j}} \neq \emptyset$, the agent \tilde{j} is called the *parent* of agent \tilde{i} , denoted by $\text{par}(\tilde{i})$, and the set of *children* of agent \tilde{i} is denoted by $\text{ch}(\tilde{i})$. The message passed from agent $\tilde{r} \in \text{ch}(\tilde{i})$ to agent $\tilde{i} \in \mathcal{V}$ is denoted by $\varpi^{\tilde{r},\tilde{i}}$. Define the *coupling set* of indices between column variables of agent \tilde{i} and its parent $\text{par}(\tilde{i})$ as $\mathcal{S}_{\tilde{i},\text{par}(\tilde{i})} = J_{\tilde{i}} \cap J_{\text{par}(\tilde{i})}$ and the *uncoupling set* of indices as $\mathcal{R}_{\tilde{i},\text{par}(\tilde{i})} = J_{\tilde{i}} \setminus \mathcal{S}_{\tilde{i},\text{par}(\tilde{i})}$. In addition, column variables $v_j^{\tilde{i}}$'s with $j \in \mathcal{S}_{\tilde{i},\text{par}(\tilde{i})}$ are called *coupling variables* of agent \tilde{i} and its parent $\text{par}(\tilde{i})$, and column variables $v_j^{\tilde{i}}$'s with $j \in \mathcal{R}_{\tilde{i},\text{par}(\tilde{i})}$ are called *uncoupling variables* of agent \tilde{i} and its parent $\text{par}(\tilde{i})$. Accordingly, we have the similar notations $\mathcal{S}_{\text{ch}(\tilde{i}),\tilde{i}}$ and $\mathcal{R}_{\text{ch}(\tilde{i}),\tilde{i}}$.


Example 3.2: Fig. 2 gives a network to show the previous definitions of $\mathcal{S}_{\cdot,\cdot}$ and $\mathcal{R}_{\cdot,\cdot}$. Noted that $\mathcal{S}_{\text{ch}(\tilde{i}),\tilde{i}}$ is an empty set for agent \tilde{i} with no children, such as agents $\tilde{3}, \tilde{4}, \tilde{5}$. Accordingly, the message $\varpi^{\tilde{r},\tilde{i}}$, $\tilde{r} \in \text{ch}(\tilde{i})$ passed from children agents is zero for $\tilde{i} = \tilde{3}, \tilde{4}, \tilde{5}$. The similar case $\mathcal{S}_{\tilde{i},\text{par}(\tilde{i})} = \emptyset$ holds for the root agent, which have no parents.

For each agent $\tilde{i} \in \mathcal{V}$ and $j \in \mathcal{R}_{\tilde{i},\text{par}(\tilde{i})}$, define

$$p_j^{\tilde{i}}(t) \triangleq \sum_{l < j, l \in J_{\tilde{i}}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t+1) + \sum_{l > j, l \in J_{\tilde{i}}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t).$$

Define the step-size $\theta_j^{\tilde{i}}$ as

$$\theta_j^{\tilde{i}} \in \left(0, \frac{1}{\sum_{\tilde{s} \in (\tilde{i}, \text{ch}(\tilde{i}))} \|M_{\{j,\cdot\}}^{\tilde{s}}\|_1}\right), \quad j \in \mathcal{R}_{\tilde{i},\text{par}(\tilde{i})} \quad (5)$$

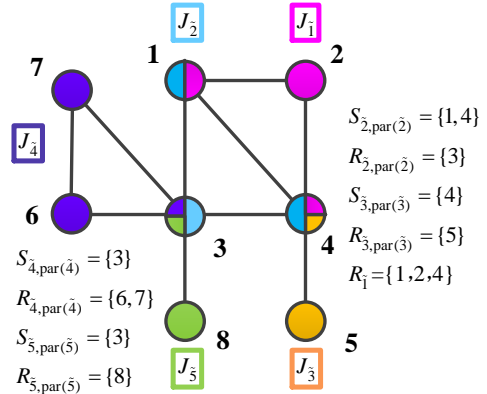
 Fig. 2. The coupling and uncoupling variables over a sparse graph. The subscript elements (\cdot) of set \mathcal{S} or \mathcal{R} denote different agents and the elements (\cdot) in the brace denote the indices of coupling variables among different agents.

where $M_{\{j,\cdot\}}^{\tilde{s}}$ denotes the j th row of matrix $\overline{M}^{\tilde{s}}$.

The message passed from agent $\tilde{r} \in \text{ch}(\tilde{i})$ to its parent $\tilde{i} \in \mathcal{V}$ is defined as

$$\varpi_j^{\tilde{r},\tilde{i}}(t+1) \triangleq \sum_{l \in J_{\tilde{r}}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t+1) \quad \forall j \in \mathcal{S}_{\tilde{r},\tilde{i}}. \quad (6)$$

and $\varpi_j^{\tilde{r},\tilde{i}}(t+1) = 0$ for $j \in \mathcal{R}_{\tilde{r},\text{par}(\tilde{i})} \setminus \mathcal{S}_{\tilde{r},\tilde{i}}$.

For $\tilde{i} \in \mathcal{V}$ and $j \in \mathcal{R}_{\tilde{i},\text{par}(\tilde{i})}$, the variable $v_j^{\tilde{i}}(t+1)$ is updated as

$$v_j^{\tilde{i}}(t+1) = \text{normal} \left(v_j^{\tilde{i}}(t) - \theta_j^{\tilde{i}} [p_j^{\tilde{i}}(t) + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \varpi_j^{\tilde{r},\tilde{i}}(t+1)] \right). \quad (7)$$

The message sent from agent $\tilde{i} \in \mathcal{V}$ to its parent $\text{par}(\tilde{i})$ is

$$\varpi_j^{\tilde{i},\text{par}(\tilde{i})} = \sum_{l \in J_{\tilde{i}}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t+1) + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \varpi_j^{\tilde{r},\tilde{i}}(t+1), \quad (8)$$

where $j \in \mathcal{S}_{\tilde{i},\text{par}(\tilde{i})}$.

Define $\mathbf{V} = (V^1, \dots, V^m)$. The distributed synchronous algorithm is given in Algorithm 1.

Algorithm 1 Distributed Synchronous Algorithm (DSA)

```

1: Initialization: Initialize  $v_j^{\tilde{i}} = v_0 \in \mathbb{R}^p$  such that  $\|v_0\| = 1$ 
   for all  $\tilde{i} \in \mathcal{V}$  and  $j \in J_{\tilde{i}}$ .
2: while the stopping criteria is not satisfied do
3:   for  $\tilde{i} = m$  to  $\tilde{i} = 1$  do
4:     for  $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$  do
5:       if  $j \in \mathcal{S}_{\text{ch}(\tilde{i}), \tilde{i}}$  then
6:         agent  $\tilde{i}$  receives  $\varpi_j^{\tilde{i}}(t+1)$  (computed by
       (6) from its child  $\tilde{r} \in \text{ch}(\tilde{i})$ .
7:         end if
8:         agent  $\tilde{i}$  updates variable  $v_j^{\tilde{i}}(t+1)$  following (7).
9:         if  $j \in \mathcal{S}_{\text{ch}(\tilde{i}), \tilde{i}}$  then
10:          agent  $\tilde{i}$  sends  $v_j^{\tilde{i}}(t+1)$  to its child  $\tilde{r} \in \text{ch}(\tilde{i})$ ,
   i.e.,
           
$$v_j^{\tilde{r}}(t+1) = v_j^{\tilde{i}}(t+1). \quad (9)$$

11:        end if
12:      end for
13:    for  $j \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}$  do
14:      if  $j \in \mathcal{S}_{\text{ch}(\tilde{i}), \tilde{i}}$  then
15:        agent  $\tilde{i}$  receives information  $\varpi_j^{\tilde{r}, \tilde{i}}$  from its
        child  $\tilde{r} \in \text{ch}(\tilde{i})$ .
16:        end if
17:        agent  $\tilde{i}$  sends message  $\varpi_j^{\tilde{i}, \text{par}(\tilde{i})}$  (computed by
        (8) to its parent  $\text{par}(\tilde{i})$ .
18:      end for
19:    end for
20:     $t \leftarrow t + 1$ .
21: end while

```

The convergence performance of Algorithm 1 is provided in the following theorem, whose proof is given in the next section.

Theorem 3.1: Let Assumption 3.1 hold and $\{\mathbf{V}(t)\}$ be a sequence generated by Algorithm 1. Then $\mathbf{V}(t)$ converges to global optimal solutions to (4) almost surely under random initialization as $t \rightarrow \infty$.

Remark 3.4: Note that there may be several parents for each agent in practice. In this paper, we only consider the case that each agent owns one parent for convenience of analysis. However, the algorithm can be easily extended to cases where agents have multiple parents. We provide examples in simulations to demonstrate the cases of tree-structured graphs of which one agent has a unique parent and graphs of which one agent may have multiple parents.

Remark 3.5: Compared with the existing centralized works [18], [43], the proposed algorithm decentralizes the storage space and computational burden of large-scale SDP over different agents at the cost of network communication. In addition, the proposed algorithm is applicable for the scenario where global information is located on geographically separated agents such that centralized algorithms can not handle.

C. Distributed asynchronous optimization algorithm

The synchronous algorithm given by Algorithm 1 needs a global clock and the updating rate of variables is limited by

the slowest agent. Whereas, asynchronous algorithms update variables by local clocks and allow communication time-delays, then the variables updating of one agent will not be limited by other agents. Hence, in this subsection, we provide a distributed asynchronous algorithm for solving problem (4).

Let $T^{\tilde{i}}$ be the set of times at which agent \tilde{i} updates local variable $V^{\tilde{i}}$. Noted that agent \tilde{i} may not have access to the most recent value of other agents' variables. Then, we define that the updating time of variables v_j at parent or child node, $\tau_j^{\tilde{i}}(t)$, satisfies

$$0 \leq \tau_j^{\tilde{i}}(t) \leq t, \quad \forall t \in T^{\tilde{i}}, \quad (10)$$

where $j \in J_{\text{ch}(\tilde{i})} \cup J_{\text{par}(\tilde{i})} \cup J_{\tilde{i}}$. If $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$, then $\tau_j^{\tilde{i}}(t) = t$. The difference $(t - \tau_j^{\tilde{i}}(t))$ between the current time t and $\tau_j^{\tilde{i}}(t)$ is viewed as a form of communication delay between agent \tilde{i} and its parents or children.

For the communication delay between agents, we assume that the following condition holds.

Assumption 3.2: (Partial Asynchronism) There exists a positive integer B such that:

- For each agent \tilde{i} and $t \geq 0$, at least one element of the set $\{t, t+1, \dots, t+B-1\}$ belongs to $T^{\tilde{i}}$.
- There holds

$$\max\{0, t-B+1\} \leq \tau_j^{\tilde{i}}(t) \leq t,$$

for all agent $\tilde{i} \in \mathcal{V}$ and $j \in \{1, \dots, n\}$ and all $t \geq 0$.

In the distributed asynchronous Algorithm 2, local variable $V^{\tilde{i}}$ is updated by the time-delayed messages communicated from neighbors and local information. For each agent \tilde{i} , define

$$p_j^{\tilde{i}}(t) = \sum_{l \in J_{\tilde{i}}} M_{\{j, l\}}^{\tilde{i}} v_l^{\tilde{i}}(t),$$

and the step-size $\theta_j^{\tilde{i}}$ satisfies

$$\theta_j^{\tilde{i}} \in (0, \frac{1}{(1+B+nB)L}), \quad (11)$$

where $L = \max_{\tilde{i} \in \mathcal{V}} \{l_1, \dots, l_m\}$, $l_{\tilde{i}}$ is the best Lipschitz constant of $\nabla f_{\tilde{i}}(V^{\tilde{i}})$ ($f_{\tilde{i}}(V^{\tilde{i}})$ was defined in (4)) and B is defined in Assumption 3.2.

The message passed from child $\tilde{r} \in \text{ch}(\tilde{i})$ to parent \tilde{i} is defined as

$$\varpi_j^{\tilde{r}, \tilde{i}}(\tau^{\tilde{i}}(t)) = \sum_{l \in J_{\tilde{r}}} M_{\{j, l\}}^{\tilde{r}} v_l^{\tilde{r}}(\tau_l^{\tilde{i}}(t)) \quad \forall j \in \mathcal{S}_{\tilde{r}, \tilde{i}},$$

and for variables with indices $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \setminus \mathcal{S}_{\tilde{r}, \tilde{i}}$, $\varpi_j^{\tilde{r}, \tilde{i}}(\tau^{\tilde{i}}(t)) = 0$.

If $t \in T^{\tilde{i}}$, the variable $v_j^{\tilde{i}}(t+1)$ is updated as

$$v_j^{\tilde{i}}(t+1) = \text{normal} \left(v_j^{\tilde{i}}(t) - \theta_j^{\tilde{i}} [p_j^{\tilde{i}}(t) + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \varpi_j^{\tilde{r}, \tilde{i}}(\tau^{\tilde{i}}(t))] \right),$$

$$j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}, \quad (12a)$$

$$v_j^{\tilde{i}}(t+1) = v_j^{\text{par}(\tilde{i})}(\tau_j^{\tilde{i}}(t)), \quad j \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}. \quad (12b)$$

For times $t \notin T^{\tilde{i}}$, the variable $v_j^{\tilde{i}}$ is unchanged,

$$v_j^{\tilde{i}}(t+1) = v_j^{\tilde{i}}(t), \quad \forall j \in J_{\tilde{i}}.$$

The message sent from agent $\tilde{i} \in \mathcal{V}$ to its parent $\text{par}(\tilde{i})$ is

$$\varpi_j^{\tilde{i}, \text{par}(\tilde{i})} = \sum_{l \in J_{\tilde{i}}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t+1) + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \varpi_j^{\tilde{r}, \tilde{i}}(\tau^{\tilde{i}}(t)), \quad j \in J_{\tilde{i}}. \quad (13)$$

Algorithm 2 Distributed Asynchronous Algorithm (DAA) - from the view of agent \tilde{i}

- 1: **Initialization:** Initialize $v_j^{\tilde{i}} = v_0 \in \mathbb{R}^p$ such that $\|v_0\| = 1$ for all $\tilde{i} \in \mathcal{V}$ and $j \in J_{\tilde{i}}$.
- 2: **while** the stopping criteria is not satisfied **do**
- 3: for each agent \tilde{i} , keep receiving information $\varpi_j^{\tilde{r}, \tilde{i}}(\tau^{\tilde{i}}(t))$ from children and receiving information $v_j^{\text{par}(\tilde{i})}(\tau_j^{\tilde{i}}(t))$ from parent.
- 4: **if** $t \in T^{\tilde{i}}$ **then**
- 5: **for** $j \in J_{\tilde{i}}$ **do**
- 6: agent \tilde{i} updates variable $v_j^{\tilde{i}}(t+1)$ following (12).
- 7: **if** $j \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}$ **then**
- 8: agent \tilde{i} sends message $\varpi_j^{\tilde{i}, \text{par}(\tilde{i})}$ (computed by (13)) to its parent,
- 9: **end if**
- 10: **if** $j \in \mathcal{S}_{\tilde{i}, \tilde{l}}, \tilde{l} \in \text{ch}(\tilde{i})$ **then**
- 11: agent \tilde{i} sends local variable $v_j^{\tilde{i}}(t+1)$ to each child \tilde{l} that has coupling variable $v_j^{\tilde{i}}, j \in \mathcal{S}_{\tilde{i}, \tilde{l}}$.
- 12: **end if**
- 13: **end for**
- 14: **end if**
- 15: $t \leftarrow t + 1$.
- 16: **end while**

Before providing the convergence performance of DAA, we need one additional assumption, which is vital in the transformation of proposed algorithm.

Assumption 3.3: Each element of matrix M is only accessible to one agent, which implies that for each agent $\tilde{i} \in \mathcal{V}$, $M_{\{l,k\}}^{\tilde{i}} = M_{(l,k)}$ holds for $(l,k) \in J_{\tilde{i}} \times J_{\tilde{i}}$.

Next, the convergence performance of DAA is provided in the following theorem, whose analysis is shown in the section IV-B.

Theorem 3.2: Under Assumptions 3.1-3.3, the sequence $\{\mathbf{V}(t)\}$ generated by DAA converges to critical points to (4) as $t \rightarrow \infty$.

Remark 3.6: In the implementation of DAA, each agent receives communication information from its neighbors and stores it in local buffer. The local received data may be out-of-date due to time-delays. Each agent $\tilde{i} \in \mathcal{V}$ updates local variables using data in local buffer at the time $t \in T^{\tilde{i}}$ and does not have to wait for the point when other local communicating messages become available. It allows some agents to compute faster and execute more iterations than others.

IV. THEORETICAL ANALYSIS

In this section, we present theoretical proofs for the convergence properties of proposed distributed synchronous and asynchronous algorithms, respectively.

A. Convergence analysis for synchronous algorithm

Firstly, we develop a compact form of the proposed synchronous algorithm containing all agent's updates.

For any $j \in \{1, \dots, n\}$, let $v_j \triangleq v_j^{\tilde{i}}$, where $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$ and $v_j^{\tilde{i}}$ is a column vector of the variable of agent $\tilde{i} \in \mathcal{V}$. Then we define the global variable

$$V = [v_1, \dots, v_n] \in \mathbb{R}^{p \times n}. \quad (14)$$

Remark 4.1: For $j \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}$, by the updating design (9), there is a parent of \tilde{i} , $\tilde{j} \in \text{par}(\tilde{i})$, such that $j \in \mathcal{R}_{\tilde{j}, \text{par}(\tilde{j})}$ and $v_j^{\tilde{i}}(t) = v_j^{\tilde{j}}(t)$. Hence, in the following analysis, for convenience, we consider the global variable V instead of \mathbf{V} .

Without loss of generality, we make the following assumptions in the analysis.

Assumption 4.1: Take any $\tilde{i} \in \mathcal{V}$. Indices $j \in \mathcal{R}_{\text{ch}(\tilde{i}), \tilde{i}}$, $l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$ and $p \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}$ satisfy that $p > l > j$.

Notice that for each column vector v_j with index $j \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}$, there must exist one agent \tilde{j} such that $j \in \mathcal{R}_{\tilde{j}, \text{par}(\tilde{j})}$.

Assumption 4.2: We assume that there is no shared variables between agents $\text{ch}(\tilde{i})$ and $\text{par}(\tilde{i})$ for any $\tilde{i} \in \mathcal{V}$. That is, $\mathcal{S}_{\text{ch}(\tilde{i}), \tilde{i}} \cap \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} = \emptyset$ for all $\tilde{i} \in \mathcal{V}$.

Note that Assumptions 4.1 and 4.2 are not needed in the proposed synchronous algorithm, which is developed for the convenience of proof.

Define $\Theta \in \mathbb{R}^{n \times n}$ as a diagonal matrix with diagonal elements,

$$\Theta_{(j,j)} = \theta_j^{\tilde{i}} \quad \text{if } j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}. \quad (15)$$

Then, under the above assumptions, we obtain the following result.

Lemma 4.1: Under Assumptions 4.1 and 4.2, the distributed synchronous algorithm is equivalent to

$$v_j(t+1) = \text{normal}(v_j(t) - \Theta_{(j,j)} \mathbf{g}_j(t)), \quad \forall j \in \{1, \dots, n\}, \quad (16)$$

where $\mathbf{g}_j(t) = \sum_{l \in \{1, \dots, j-1\}} M_{(j,l)} v_l(t+1) + \sum_{l \in \{j+1, \dots, n\}} M_{(j,l)} v_l(t)$.

Proof: For variables $v_j^{\tilde{i}}$ of agent \tilde{i} such that $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$, we substitute (6) to the updating (7) and get

$$v_j^{\tilde{i}}(t+1) = \text{normal}(v_j^{\tilde{i}}(t) - \theta_j^{\tilde{i}} \mathbf{g}_j^{\tilde{i}}(t)), \quad j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \quad (17)$$

where

$$\begin{aligned} \mathbf{g}_j^{\tilde{i}}(t) &= \sum_{l \in \{1, \dots, j-1\}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t+1) \\ &\quad + \sum_{l \in \{j+1, \dots, n\}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t) \\ &\quad + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in J_{\tilde{r}}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t+1). \end{aligned} \quad (18)$$

The condition $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$ holds in the whole process of proof. For convenience, in the following analysis, we omit this condition.

Since $M_{\{j,l\}}^{\tilde{r}} = \overline{M}_{\{j,l\}}^{\tilde{r}}$, for $(j,l) \in \mathcal{J}_{\tilde{r}} \times \mathcal{J}_{\tilde{r}}$ and $\tilde{r} \in \mathcal{V}$, we have

$$\sum_{\tilde{r} \in \{\tilde{i}, \text{ch}(\tilde{i})\}} M_{\{j,l\}}^{\tilde{r}} = \sum_{\tilde{r}=1}^m \overline{M}_{\{j,l\}}^{\tilde{r}} = M_{(j,l)}, \quad (19)$$

$$j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \subset \cup_{\tilde{r} \in \{\tilde{i}, \text{ch}(\tilde{i})\}} \mathcal{J}_{\tilde{r}}, l \in \cup_{\tilde{r} \in \{\tilde{i}, \text{ch}(\tilde{i})\}} \mathcal{J}_{\tilde{r}},$$

where the first equality holds because for agent $\tilde{j} \in \{1, \dots, m\} \setminus \{\tilde{i}, \text{ch}(\tilde{i})\}$, $M_{\{j,l\}}^{\tilde{j}} = 0$, where $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \subset \cup_{\tilde{r} \in \{\tilde{i}, \text{ch}(\tilde{i})\}} \mathcal{J}_{\tilde{r}}, l \in \cup_{\tilde{r} \in \{\tilde{i}, \text{ch}(\tilde{i})\}} \mathcal{J}_{\tilde{r}}$.

By (19), the term $\sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{J}_{\tilde{r}}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t+1)$ in (18) satisfies

$$\begin{aligned} & \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{J}_{\tilde{r}}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t+1) \\ &= \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{S}_{\tilde{r}, \tilde{i}}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t+1) + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{R}_{\tilde{r}, \tilde{i}}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t+1) \\ &= \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{S}_{\tilde{r}, \tilde{i}}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t+1) + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{R}_{\tilde{r}, \tilde{i}}} M_{\{j,l\}}^{\tilde{r}} v_l(t+1) \\ &= \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{S}_{\tilde{r}, \tilde{i}} \cap \{l < j\}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t+1) \\ & \quad + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{S}_{\tilde{r}, \tilde{i}} \cap \{l > j\}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t) \\ & \quad + \sum_{l \in \mathcal{R}_{\tilde{r} \in \text{ch}(\tilde{i}), \tilde{i}}} M_{(j,l)} v_l(t+1) \end{aligned} \quad (20)$$

where the last equality holds because variables $v_l^{\tilde{r}}$ with indices satisfying $l > j, j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$ are not updated by the algorithm design and $M_{\{j,l\}}^{\tilde{i}} = 0$ for $l \in \mathcal{R}_{\tilde{r}, \tilde{i}}$.

Then, by substituting (20) to $\mathbf{g}_j^{\tilde{i}}$ in (18), we obtain

$$\mathbf{g}_j^{\tilde{i}}(t) = \zeta_j(t+1) + \iota_j(t) \quad (21)$$

where

$$\begin{aligned} \zeta_j(t+1) &= \sum_{l \in \{1, \dots, j-1\}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t+1) \\ & \quad + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{S}_{\tilde{r}, \tilde{i}} \cap \{l < j\}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t+1) \\ & \quad + \sum_{l \in \mathcal{R}_{\tilde{r} \in \text{ch}(\tilde{i}), \tilde{i}}} M_{(j,l)} v_l(t+1), \end{aligned}$$

and

$$\begin{aligned} \iota_j(t) &= \sum_{l \in \{j+1, \dots, n\}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t) \\ & \quad + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{S}_{\tilde{r}, \tilde{i}} \cap \{l > j\}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t). \end{aligned}$$

Then, we will discuss variables $\zeta_j(t+1)$ and $\iota_j(t)$ respectively.

(1) Consider ζ_j composed of variables with indices l in the set $\{l | l < j, j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}\}$. Let $MR \triangleq \sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l < j\}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t+1)$ and

$MS \triangleq \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{S}_{\tilde{r}, \tilde{i}} \cap \{l < j\}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t+1)$. The sum of MS and MR is

$$\begin{aligned} & MS + MR \\ &= \sum_{\tilde{r} \in \{\tilde{i}, \text{ch}(\tilde{i})\}} \sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l < j\}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t+1) \\ &= \sum_{\tilde{r} \in \{\tilde{i}, \text{ch}(\tilde{i})\}} \sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l < j\}} M_{\{j,l\}}^{\tilde{r}} v_l(t+1) \\ &= \sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l < j\}} M_{(j,l)} v_l(t+1). \end{aligned} \quad (22)$$

where the first equality holds because of the condition $\mathcal{S}_{\text{ch}(\tilde{i}), \tilde{i}} \subseteq \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$, and the last equality holds due to the relationship (19).

By Assumption 4.1, any index l in $\mathcal{R}_{\tilde{r} \in \text{ch}(\tilde{i}), \tilde{i}}$ satisfies $l < j$ for $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$. Then, with (22),

$$\begin{aligned} & \zeta_j(t+1) \\ &= \sum_{l \in \mathcal{R}_{\tilde{r} \in \text{ch}(\tilde{i}), \tilde{i}}} M_{(j,l)} v_l(t+1) + \sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l < j\}} M_{(j,l)} v_l(t+1) \\ &= \sum_{l \in \{l < j, j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}\}} M_{(j,l)} v_l(t+1). \end{aligned} \quad (23)$$

(2) Consider ι_j composed of variables with indices l in the set $\{l | l > j, j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}\}$. The term $\sum_{l > j} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t)$ in $\iota_j(t)$ satisfies

$$\begin{aligned} & \sum_{l \in \{1, \dots, n\} \cap \{l > j\}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t) \\ &= \sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l > j\}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t) + \sum_{l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l > j\}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t). \end{aligned} \quad (24)$$

It follows from a similar analysis in (22) that the sum of $\sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{S}_{\tilde{r}, \tilde{i}} \cap \{l > j\}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t)$ in $\iota_j(t)$ and $\sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l > j\}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t)$ in (24) is

$$\begin{aligned} & \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{S}_{\tilde{r}, \tilde{i}} \cap \{l > j\}} M_{\{j,l\}}^{\tilde{r}} v_l^{\tilde{r}}(t) + \sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l > j\}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t) \\ &= \sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l > j\}} M_{(j,l)} v_l(t). \end{aligned} \quad (25)$$

Then, consider the term $\sum_{l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l > j\}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t)$ in (24). Because all column variables are initialized as a same value and the condition $\mathcal{S}_{\text{ch}(\tilde{i}), \tilde{i}} \subset \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$ in Assumption 4.2, $v_l^{\tilde{i}}(t) = v_l^{\text{par}(\tilde{i})}(t) = v_l(t), \forall l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}$, by Algorithm 1. By (19), we have, for $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$,

$$\begin{aligned} & \sum_{l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l > j\}} M_{\{j,l\}}^{\tilde{i}} v_l^{\tilde{i}}(t) \\ &= \sum_{l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l > j\}} M_{(j,l)} v_l(t), \end{aligned} \quad (26)$$

where the equality holds because for each child $\tilde{r} \in \text{ch}(\tilde{i})$, $M_{\{j,l\}}^{\tilde{r}} = 0$, for $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}, l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}$.

Then, with (25) and (26),

$$\begin{aligned}
 & \iota_j(t) \\
 = & \sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l > j\}} M_{(j,l)} v_l(t) + \sum_{l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})} \cap \{l > j\}} M_{(j,l)} v_l(t) \\
 = & \sum_{l \in \{j+1, \dots, n\}} M_{(j,l)} v_l(t). \tag{27}
 \end{aligned}$$

Hence, by (21), (23) and (27), the updating (17) of agent \tilde{i} for any vector variable with index $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$ is

$$v_j^{\tilde{i}}(t+1) = \text{normal}(v_j^{\tilde{i}}(t) - \Theta_{(j,j)} \mathbf{g}_j^{\tilde{i}}(t)), \tag{28}$$

where $\mathbf{g}_j^{\tilde{i}}(t) = \sum_{l \in \{l < j, j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}\}} M_{(j,l)} v_l(t+1) + \sum_{l \in \{j+1, \dots, n\} \cap \{j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}\}} M_{(j,l)} v_l(t)$ and $\Theta_{(j,j)} = \theta_j^{\tilde{i}}$, which is defined in (5). Since (28) holds for each agent \tilde{i} , we obtain the desire result (16) with (14). ■

Next, we will discuss the convergence properties of proposed distributed synchronous algorithm. Because the optimization problem (4) is a non-convex minimization problem, there may exist several local minima and saddle points, which are regarded as major obstacles for global minima search over continuous spaces. For the semi-definite programming like (1), it has been known that the low-rank transformed problem (4) has no local optima except the global ones if $p > \sqrt{2n}$ [15].

Thus, the main work is to discuss whether the proposed algorithm escapes strict saddle points and converges to global optimal solutions. At first, we provide the definition of unstable critical points. Denote the update of V generated by DSA as $V(t+1) = h_{SM}(V(t))$.

Definition 4.1: Define unstable critical points as the set of critical points where the Jacobian of variable updating $h_{SM}(V)$ has at least a single eigenvalue with magnitude greater than one ^[43],

$$\mathcal{A}_g^* = \{V : h_{SM}(V) = V, \max_i |\lambda_i(Dh_{SM}(V))| > 1\}.$$

Following the work in [43], we have the following property, which was investigated in [18].

Lemma 4.2: If $p > \sqrt{2n}$, each strict saddle point V^* of the updating h_{SM} is an unstable critical point, meaning $\mathcal{X}^* \subset \mathcal{A}_g^*$, where \mathcal{X}^* is the set of strict saddle points.

Proof: Consider the equivalent form in Lemma 4.1 of the proposed synchronous algorithm. It follows from the proof in [18] that the Jacobi of proposed algorithm has eigenvalues containing those of the Jacobi of a standard Gauss-Seidel updating proposed in [43]. Based on the discussions of standard Gauss-Seidel updating in [43], we obtain the desirable result. ■

From Lemma 4.2, we deduce that all non-optimal critical points are unstable fixed points. Next, we will prove that the updating h_{SM} is a diffeomorphism, which is an invertible function that maps one differentiable manifold to another such that both the function and its inverse are smooth.

Lemma 4.3: Under Assumptions 4.1 and 4.2, the distributed synchronous updating h_{SM} is a diffeomorphism.

Proof: By the designed variable updating in Algorithm 1 and Lemma 4.1, h_{SM} is equivalent to

$$h_{SM}(V) = [\psi_n(\psi_{n-1}(\dots \psi_1(V)))]$$

where each column variable updating is defined as

$$(\psi_i(V))_{s=1 \dots n} = \begin{cases} \frac{v_i - \Theta_{(i,i)} VM_{(:,i)}}{\|v_i - \Theta_{(i,i)} VM_{(:,i)}\|} & \text{if } s = i \\ v'_s & \text{otherwise.} \end{cases}$$

Because a composition of diffeomorphisms is still a diffeomorphism ^[44], to prove this lemma, we only need to prove that $\psi_i(V)$ is a diffeomorphism for $i = 1, \dots, n$.

In (16), the step size takes a constant $\Theta_{(i,i)} \in (0, \frac{1}{\|M_{(:,i)}\|_1})$. Because M is symmetric, it is equivalent to taking $\frac{1-\sigma}{\|M_{(:,i)}\|_1}$ for a constant $\sigma \in (0, 1)$ and from the triangular inequality,

$$\|VM_{(:,i)}\| = \left\| \sum_{j=1}^n M_{(i,j)} v_j \right\| \leq \sum_{j=1}^n |M_{(i,j)}| \|v_j\| = \|M_{(:,i)}\|_1.$$

Hence, $\|\Theta_{(i,i)} VM_{(:,i)}\| \leq 1 - \sigma < 1$. Thus, we have $\|v_i - \Theta_{(i,i)} VM_{(:,i)}\| \geq 1 - \|\Theta_{(i,i)} VM_{(:,i)}\| \geq \sigma > 0$. Note that the function ψ_i is only non-smooth at the point where the denominator term $\|v_i - \Theta_{(i,i)} VM_{(:,i)}\| = 0$ and we have proved that the term is greater than 0. Therefore, the function ψ_i and its inverse function are valid and smooth. By the work in [18, Lemma C.2], ψ_i is a diffeomorphism. Since $h_{SM}(\cdot)$ is the composition of $\psi_i(\cdot)$ s, the mapping of $h_{SM}(V)$ is also a diffeomorphism. ■

Next, with the definition of global variable V in (14), we provide one equivalent form of objective function in optimization problem (4), which will be used in the analysis of Lemma 4.5.

Lemma 4.4: With the definition (14) and Assumptions 4.1, 4.2, the objective function of (4) at time t $\sum_{\tilde{i}=1}^m \langle M^{\tilde{i}}, V^{\tilde{i}}(t) V^{\tilde{i}}(t) \rangle = \langle M, V(t)' V(t) \rangle$.

Proof: The objective function of optimization problem (4) is $\sum_{\tilde{i}=1}^m \langle M^{\tilde{i}}, V^{\tilde{i}} V^{\tilde{i}} \rangle$. By the algorithm design, after one iteration t , $v_j^{\tilde{i}}(t) = v_j(t)$ for all $j \in J_{\tilde{i}}$, which holds because the coupling variables $v_j^{\tilde{i}}$ with $j \in S_{\tilde{i}, \text{par}(\tilde{i})}$ are equal to the uncoupling variables $v_j^{\text{par}(\tilde{i})}$. Hence, the constraints (4b) and (4c) in (4) hold. Then, we obtain

$$\begin{aligned}
 & \sum_{\tilde{i}=1}^m \langle M^{\tilde{i}}, V^{\tilde{i}}(t) V^{\tilde{i}}(t) \rangle \\
 = & \sum_{\tilde{i}=1}^m \sum_{l, h \in J_{\tilde{i}}} M_{\{l, h\}}^{\tilde{i}} v_l^{\tilde{i}}(t) v_h^{\tilde{i}}(t) \\
 = & \sum_{\tilde{i}=1}^m \sum_{l, h \in J_{\tilde{i}}} M_{\{l, h\}}^{\tilde{i}} v_l(t) v_h(t) \\
 = & \sum_{l, h \in J_{\tilde{i}}} M_{(l, h)} v_l(t) v_h(t) \\
 = & \langle M, V(t)' V(t) \rangle,
 \end{aligned}$$

where the second to last equation holds because $M_{\{l, h\}}^{\tilde{i}} = \overline{M}_{(l, h)}^{\tilde{i}}$ and $\sum_{\tilde{i}=1}^m \overline{M}^{\tilde{i}} = M$. ■

With Lemma 4.4, before updating v_i , all variable v_j except for v_i are given and fixed, then the global function is rewritten as

$$\begin{aligned} f(V) &= \langle M, V'V \rangle \\ &= \sum_{i=1}^n \sum_{j=1}^n M_{(i,j)} v_i' v_j \\ &= 2v_i' \mathbf{g}_i + \text{constant}, \end{aligned} \quad (29)$$

where the last equation holds since the matrix M is symmetric. Note that \mathbf{g}_i is defined in Lemma 4.1 and is independent of v_i because $M_{(i,i)} = 0$. Then, we have the following Lemma stating the monotonous decreasing property of the global function value generated by the proposed synchronous algorithm.

Lemma 4.5: For the proposed synchronous algorithm with step size Θ , let $V(t+1) = h_{SM}(V(t))$. Under Assumptions 4.1 and 4.2, we have

$$f(V(t)) - f(V(t+1)) = \sum_{i=1}^n \frac{1 + y_i(t)}{\Theta_{(i,i)}} \|v_i(t) - v_i(t+1)\|^2, \quad (30)$$

where $y_i(t) = \|v_i(t) - \Theta_{(i,i)} \mathbf{g}_i(t)\|$ and $\mathbf{g}_i(t) = \sum_{l < i} M_{(i,l)} v_l(t+1) + \sum_{l > i} M_{(i,l)} v_l(t)$.

Proof: By (29), the function difference after updating $v_i(t)$ to $v_i(t+1)$ is $2\mathbf{g}_i'(v_i(t) - v_i(t+1))$. Then, by the updating in (16), $v_i(t+1) = (v_i(t) - \Theta_{(i,i)} \mathbf{g}_i(t))/y_i(t)$, we have

$$\begin{aligned} & 2\mathbf{g}_i(t)'(v_i(t) - v_i(t+1)) \\ &= 2(\mathbf{g}_i(t) + \frac{v_i(t) - \Theta_{(i,i)} \mathbf{g}_i(t)}{\Theta_{(i,i)}})'(v_i(t) - v_i(t+1)) \\ & \quad - 2(\frac{v_i(t) - \Theta_{(i,i)} \mathbf{g}_i(t)}{\Theta_{(i,i)}})'(v_i(t) - v_i(t+1)) \\ &= 2\frac{1}{\Theta_{(i,i)}} v_i(t)'(v_i(t) - v_i(t+1)) \\ & \quad - 2\frac{y_i(t)}{\Theta_{(i,i)}} v_i(t+1)'(v_i(t) - v_i(t+1)) \\ &= \frac{1 + y_i(t)}{\Theta_{(i,i)}} 2(1 - v_i(t)'v_i(t+1)) \\ &= \frac{1 + y_i(t)}{\Theta_{(i,i)}} \|v_i(t) - v_i(t+1)\|^2, \end{aligned} \quad (31)$$

where the third equality holds due to the condition $\|v_i\| = 1$. Then, the result holds from summing the above equation over $i = 1, \dots, n$. ■

Now, we are ready to prove the result in Theorem 3.1.

Proof of Theorem 3.1: Assume Assumptions 4.1 and 4.2 hold. From Lemma 4.2 and the nonexistence of local optima, all non-optimal critical points are unstable fixed points. Recall that h_{SM} is a diffeomorphism by Lemma 4.3 and non-optimal critical points of $h_{SM}(\cdot)$ are unstable fixed points by Lemma 4.2. It follows from the center-stable manifold theorem (Theorem III.5 of [45]) that the proposed algorithm escapes all non-optimal critical points almost surely under random initialization. By Lemma 4.5 and the fact that $\frac{1+y_i(t)}{\Theta_{(i,i)}}$ in (30) is always positive over iterations, the objective function value

is strictly decreasing. Because the objective function value generated by the proposed algorithm is strictly decreasing and the objective value is lower bounded, the generated variables converge to the set of first-order critical points. Thus, the almost sure divergence from the non-optimal critical points and the convergence to critical points imply that $v_j^{\tilde{i}}, j \in J_{\tilde{i}}$ in the updating h_{SM} converges to corresponding column of global optimal solutions of (4) almost surely under random initialization.

Next, we show that the result of this theorem holds if Assumptions 4.1 and 4.2 are removed. If Assumption 4.1 does not hold, the indices of variables can be rearranged manually such that the indices in uncoupling set $\mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$ are smaller than the indices in coupling set $\mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}$ for each agent \tilde{i} . Hence, the above analysis still holds without Assumptions 4.1. If Assumption 4.2 does not hold, in (26) of Lemma 4.1, for each variable $v_l^{\tilde{i}}, l \in \mathcal{S}_{\text{ch}(\tilde{i}), \tilde{i}} \cap \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}$, there must be a parent agent \tilde{j} such that $l \in \mathcal{R}_{\tilde{j}, \text{par}(\tilde{j})}$ by algorithm design. Then, $v_l^{\tilde{i}}(t) = v_l^{\tilde{j}}(t) = v_l(t)$. Thus, the analysis in (26) analogously holds and the rest of theoretical deductive is true. ■

B. Convergence analysis for asynchronous algorithm

For distributed asynchronous algorithm 2, let $T^{\tilde{i}}$ be the set of times at which agent \tilde{i} updates variable $V^{\tilde{i}}$. In addition, agent \tilde{i} may not have access to the most recent value of other agents' variables. To collect communicated information from neighbors, define a set $\mathcal{J}_{\tilde{i}}$ as the union $J_{\tilde{i}} \cup \mathcal{R}_{\tilde{r} \in \text{ch}(\tilde{i}), \tilde{i}}$. Thus, define one possibly outdated variable of agent \tilde{i} , $\mathbf{V}^{\tilde{i}}(t) \in \mathbb{R}^{p \times |\mathcal{J}_{\tilde{i}}|}$, as

$$\mathbf{V}^{\tilde{i}}(t) = [v_{s_1}^{\tilde{i}}(\tau_{s_1}^{\tilde{i}}(t)), \dots, v_{s_{|\mathcal{J}_{\tilde{i}}|}}^{\tilde{i}}(\tau_{s_{|\mathcal{J}_{\tilde{i}}|}}^{\tilde{i}}(t))], \quad (32)$$

where $\{s_1, \dots, s_{|\mathcal{J}_{\tilde{i}}|}\} = \mathcal{J}_{\tilde{i}}$, $\tau_j^{\tilde{i}}(t)$ is assumed to satisfy the condition (10). Recall that, if $s_j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$, then $\tau_{s_j}^{\tilde{i}}(t) = t$. $\mathbf{V}^{\tilde{i}} \in \mathbb{R}^{p \times |\mathcal{J}_{\tilde{i}}|}$ collects time-delayed transmitted information from children and parents.

With additional assumption in Assumption 3.3 that each element of global coefficient matrix M is only accessible to one agent, the relationship $M_{\{l,k\}}^{\tilde{i}} = M_{(l,k)}$ holds for all agent \tilde{i} . Then, the updating proposed in DAA is rewritten as a compact form as shown in the following lemma, where each column variable v_j of global variable V defined in (14) is expressed by outdated transmitted information.

Lemma 4.6: Under Assumption 3.3, each column variable v_j generated by DAA with index $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$ is equivalent to

$$\begin{cases} v_j(t+1) = \text{normal}(v_j(t) - \Theta_{(j,j)} \mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t))), & t \in T^{\tilde{i}}, \\ v_j(t+1) = v_j(t), & t \notin T^{\tilde{i}} \end{cases} \quad (33)$$

where $\mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t)) = [\sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})} \setminus \{j\}} M_{(j,l)} v_l(t) + \sum_{l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})} \setminus \{j\}} M_{(j,l)} v_l(\tau_l^{\tilde{i}}(t)) + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{R}_{\tilde{r}, \tilde{i}}} M_{(j,l)} v_l(\tau_l^{\tilde{i}}(t))]$, $\Theta_{(j,j)} = \theta_j^{\tilde{i}}$ was defined in (11).

Proof: By (12) in DAA, agent \tilde{i} updates local uncoupling variable v_j with index in $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$ according to

$$\begin{aligned}
 & v_j^{\tilde{i}}(t+1) \\
 &= \text{normal}\left(v_j^{\tilde{i}}(t) - \theta_j^{\tilde{i}} \left[p_j^{\tilde{i}} + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \varpi_j^{\tilde{r}, \tilde{i}}(\tau_l^{\tilde{i}}(t)) \right]\right) \\
 &= \text{normal}\left(v_j^{\tilde{i}}(t) - \theta_j^{\tilde{i}} \left[\sum_{l \in J_{\tilde{i}}} M_{\{j, l\}}^{\tilde{i}} v_l^{\tilde{i}}(t) \right. \right. \\
 &\quad \left. \left. + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in J_{\tilde{r}}} M_{\{j, l\}}^{\tilde{r}} v_l^{\tilde{r}}(\tau_l^{\tilde{i}}(t)) \right]\right) \\
 &= \text{normal}\left(v_j^{\tilde{i}}(t) - \theta_j^{\tilde{i}} \left[\sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}} M_{(j, l)} v_l^{\tilde{i}}(t) \right. \right. \\
 &\quad \left. \left. + \sum_{l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}} M_{(j, l)} v_l^{\text{par}(\tilde{i})}(\tau_l^{\tilde{i}}(t)) \right. \right. \\
 &\quad \left. \left. + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{R}_{\tilde{r}, \tilde{i}}} M_{(j, l)} v_l^{\tilde{r}}(\tau_l^{\tilde{i}}(t)) \right]\right) \quad (34)
 \end{aligned}$$

where the last equality holds because $M_{\{j, l\}}^{\tilde{r}} = 0$, for $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$, $l \in \mathcal{S}_{\tilde{r}, \tilde{i}}$, by the assumption that each element of M is only accessible to one agent.

For the second term $\sum_{l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}} M_{(j, l)} v_l^{\text{par}(\tilde{i})}(\tau_l^{\tilde{i}}(t))$ of (34), similarly to the discussions of (26) in the synchronous case, we obtain

$$\sum_{l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}} M_{(j, l)} v_l^{\text{par}(\tilde{i})}(\tau_l^{\tilde{i}}(t)) = \sum_{l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}} M_{(j, l)} v_l(\tau_l^{\tilde{i}}(t)). \quad (35)$$

Then, substituting (35) to (34), we have

$$\begin{aligned}
 & v_j(t+1) \\
 &= \text{normal}\left(v_j(t) - \Theta_{(j, j)} \left[\sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}} M_{(j, l)} v_l^{\tilde{i}}(t) \right. \right. \\
 &\quad \left. \left. + \sum_{l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}} M_{(j, l)} v_l(\tau_l^{\tilde{i}}(t)) \right. \right. \\
 &\quad \left. \left. + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{R}_{\tilde{r}, \tilde{i}}} M_{(j, l)} v_l^{\tilde{r}}(\tau_l^{\tilde{i}}(t)) \right]\right) \\
 &= \text{normal}\left(v_j(t) - \Theta_{(j, j)} \left[\sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}} M_{(j, l)} v_l(t) \right. \right. \\
 &\quad \left. \left. + \sum_{l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}} M_{(j, l)} v_l(\tau_l^{\tilde{i}}(t)) \right. \right. \\
 &\quad \left. \left. + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{R}_{\tilde{r}, \tilde{i}}} M_{(j, l)} v_l(\tau_l^{\tilde{i}}(t)) \right]\right), \quad t \in T^{\tilde{i}}, \quad (36)
 \end{aligned}$$

where $\mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t)) = \left[\sum_{l \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}} M_{(j, l)} v_l(t) + \sum_{l \in \mathcal{S}_{\tilde{i}, \text{par}(\tilde{i})}} M_{(j, l)} v_l(\tau_l^{\tilde{i}}(t)) + \sum_{\tilde{r} \in \text{ch}(\tilde{i})} \sum_{l \in \mathcal{R}_{\tilde{r}, \tilde{i}}} M_{(j, l)} v_l(\tau_l^{\tilde{i}}(t)) \right]$, $\Theta_{(j, j)} = \theta_j^{\tilde{i}}$ for $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$. For $t \notin T^{\tilde{i}}$, $v_j(t+1) = v_j(t)$ holds naturally. ■

Define the updating direction s_j ($j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$) as,

$$s_j(t) = \frac{1}{\Theta_{(j, j)}} (v_j(t+1) - v_j(t)). \quad (37)$$

If $t \in T^{\tilde{i}}$,

$$s_j(t) = \frac{1}{\Theta_{(j, j)}} \left(\text{normal}(v_j(t) - \Theta_{(j, j)} \mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t))) - v_j(t) \right), \quad (38)$$

and if $t \notin T^{\tilde{i}}$, $s_j(t) = 0$.

In the following lemma, we present a vital descent property of local variable iteration, which will be used in the proof of Theorem 3.2.

Lemma 4.7: Suppose Assumption 3.3 holds. For any agent \tilde{i} and time t , we have

$$s_j(t)' \mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t)) \leq -\|s_j(t)\|^2, \quad j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}. \quad (39)$$

Proof: If $t \notin T^{\tilde{i}}$, the inequality (39) is true since both sides are zero. If $t \in T^{\tilde{i}}$, by the definition of $s_j(t)$ in (37) and by Lemma 4.6, $v_j(t+1) = (v_j(t) - \Theta_{(j, j)} \mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t))) / y_j(t)$ for $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$, where $y_j(t) = \|v_j(t) - \Theta_{(j, j)} \mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t))\|$, we have

$$\begin{aligned}
 & s_j(t)' \mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t)) \\
 &= \frac{-1}{\Theta_{(j, j)}} (v_j(t) - v_j(t+1))' \mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t)) \\
 &= \frac{-1}{\Theta_{(j, j)}} \left[\left(\mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t)) \right. \right. \\
 &\quad \left. \left. + \frac{v_j(t) - \Theta_{(j, j)} \mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t))}{\Theta_{(j, j)}} \right)' (v_j(t) - v_j(t+1)) \right. \\
 &\quad \left. - \left(\frac{v_j(t) - \Theta_{(j, j)} \mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t))}{\Theta_{(j, j)}} \right)' (v_j(t) - v_j(t+1)) \right] \\
 &= \frac{-1}{\Theta_{(j, j)}} \left[\frac{1}{\Theta_{(j, j)}} v_j(t)' (v_j(t) - v_j(t+1)) \right. \\
 &\quad \left. - \frac{y_j(t)}{\Theta_{(j, j)}} v_j(t+1)' (v_j(t) - v_j(t+1)) \right] \\
 &= -\frac{1 + y_j(t)}{\Theta_{(j, j)}^2} \|v_j(t+1) - v_j(t)\|^2 \\
 &= -(1 + y_j(t)) \|s_j(t)\|^2 \\
 &\leq -\|s_j(t)\|^2,
 \end{aligned}$$

where the last inequality holds because y_j is non-negative. ■

Making use of Lemma 4.7, we discuss the relationship of global variable V and local variables $\mathbf{V}^{\tilde{i}}$, and the gradient of objective function at the point $V(t_k)$ when $k \rightarrow \infty$ in Theorem 3.2. Before discussions, it should be noted that $\mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t))$ defined in Lemma 4.6 is exactly the gradient of global function f with respect to column variable $v_j(t)$, where $j \in \mathcal{R}_{\tilde{i}, \text{par}(\tilde{i})}$, so for convenience, we use $\mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t))$ in the following analysis. The proof follows the studies of gradient-like optimization algorithms in Proposition 5.1, section 7, [46].

Proof of Theorem 3.2: We follow the proof of Proposition 5.1 in [46]. By Assumption 3.1 (2), the objective function of

(4) satisfies $\sum_{i=1}^m f_i \geq 0$. In addition, with the analysis in Lemma 4.7, we have, for $j \in \{1, \dots, n\}$,

$$\begin{aligned} s_j(t)' \mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t)) &\geq -\|s_j(t)\| \|\mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t))\| \\ -(1 + y_j(t)) \|s_j(t)\|^2 &\geq -\|s_j(t)\| \|\mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t))\| \\ (1 + y_j(t)) \|s_j(t)\|^2 &\leq \|s_j(t)\| \|\mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t))\| \\ \|s_j(t)\| &\leq \frac{1}{1 + y_j(t)} \|\mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t))\|, \end{aligned}$$

where the last inequality holds because y_j is non-negative. Then, there is a positive constant $K_3 = 1$ such that $\|s_j(t)\| \leq K_3 \|\mathbf{h}_j(\mathbf{V}^{\tilde{i}}(t))\|$. What's more, with the block-descent property in Lemma 4.7, the assumptions in Proposition 5.1 [46] hold, where the product is replaced by inner product of vectors and the term $|s_j(t)|$ is replaced by $\|s_j(t)\|$. Then, by a similar analysis as Proposition 5.1 in [46], we obtain that

$$\lim_{t \rightarrow \infty} s_j(t) = 0, \quad (40)$$

for each $j \in \{1, \dots, n\}$. In addition, by (37), we obtain

$$\lim_{t \rightarrow \infty} \|V(t+1) - V(t)\| = 0. \quad (41)$$

Then, consider the boundeness of $\|v_j^{\tilde{i}}(t) - v_j(t)\|$.

$$\begin{aligned} \|v_j^{\tilde{i}}(t) - v_j(t)\| &= \|v_j^{\tilde{i}}(\tau_j^{\tilde{i}}(t)) - v_j(t)\| \\ &= \Theta_{(j,j)} \left\| \sum_{\tau=\tau_j^{\tilde{i}}(t)}^{t-1} s_j(\tau) \right\| \\ &\leq \Theta_{(j,j)} \sum_{\tau=t-B}^{t-1} \|s_j(\tau)\|. \end{aligned} \quad (42)$$

With (40) and (42), we also obtain

$$\lim_{t \rightarrow \infty} \|v_j^{\tilde{i}}(t) - v_j(t)\| = 0, \quad \forall j \in \mathcal{R}_{i, \text{par}(\tilde{i})}. \quad (43)$$

In addition, for each $j \in \{1, \dots, n\}$, there is a unique agent \tilde{i} such that $j \in \mathcal{R}_{i, \text{par}(\tilde{i})}$ and the equation (43) holds.

Define V^* as a limit point of $V(t)$ and $\{t_k\}$ as a sequence such that $\lim_{k \rightarrow \infty} V(t_k) = V^*$. Let τ_k be such that $|t_k - \tau_k| \leq B$ and $\tau_k \in T^{\tilde{i}}$. Then, by equations (41) and (43), $v_j(\tau_k)$ converges to v_j^* , which is j th column of V^* , and $v_j^{\tilde{i}}(\tau_k)$ converges to v_j^* such that $\mathbf{V}^{\tilde{i}}(\tau_k)$ converges. Then, we have

$$\begin{aligned} &\lim_{k \rightarrow \infty} (\text{normal}(v_j^{\tilde{i}}(\tau_k) - \Theta_{(j,j)} \mathbf{h}_j(\mathbf{V}^{\tilde{i}}(\tau_k)) - v_j^{\tilde{i}}(\tau_k)) \\ &= \lim_{k \rightarrow \infty} \Theta_{(j,j)} s_j(\tau_k) = 0. \end{aligned}$$

Since it holds for each $j \in \{1, \dots, n\}$, we get the desired result. \blacksquare

V. SIMULATION

In this section, numerical tests and large-scale image segmentation application are presented to show the efficiency of the proposed distributed algorithms.

Example 1: We present one special sparse coupling numerical optimization problem, which has been investigated in [34], [37], [47] and of which the corresponding connected graph is one clique tree. More detailed information of clique trees

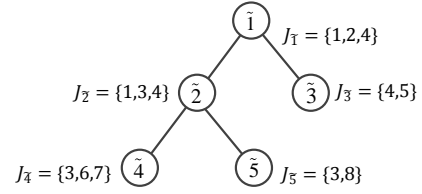


Fig. 3. Clique tree of simulation problem

can be found in [37]. Here we only introduce some brief concepts and focus on the discussions about the numerical convergence performance of proposed algorithms. For the coupling optimization (1), we assume that the dimension of global matrix variable X is $n = 8$, the number of local functions is $N = 6$, the corresponding dependent element indices set are $C_1 = \{1, 3\}$, $C_2 = \{1, 2, 4\}$, $C_3 = \{4, 5\}$, $C_4 = \{3, 4\}$, $C_5 = \{3, 6, 7\}$, $C_6 = \{3, 8\}$. By the clique tree transformations in [47], the corresponding clique tree owns five agents, shown in Fig.3. It shows that the number of agents in corresponding problem (4) is $m = 5$, which implies that one agent has multiple local functions. The local functions assigned to i th agent are denoted by a function set $\phi_{\tilde{i}}$. Then, the function sets of the clique tree are $\phi_{\tilde{1}} = \{f_2\}$, $\phi_{\tilde{2}} = \{f_1, f_4\}$, $\phi_{\tilde{3}} = \{f_3\}$, $\phi_{\tilde{4}} = \{f_5\}$, $\phi_{\tilde{5}} = \{f_6\}$. In addition, the ordered index sets are $J_{\tilde{1}} = \{1, 2, 4\}$, $J_{\tilde{2}} = \{1, 3, 4\}$, $J_{\tilde{3}} = \{4, 5\}$, $J_{\tilde{4}} = \{3, 6, 7\}$, $J_{\tilde{5}} = \{3, 8\}$. More specifically, we provide the decomposed diagram of sparse coefficient matrix M over five different agents as following. Elements with different colors are assigned to different agents.

$$\begin{bmatrix} W_{11} & W_{12} & W_{13} & W_{14} & 0 & 0 & 0 & 0 \\ W_{21} & W_{22} & 0 & W_{24} & 0 & 0 & 0 & 0 \\ W_{31} & 0 & W_{33} & W_{34} & 0 & W_{36} & W_{37} & W_{38} \\ W_{41} & W_{42} & W_{43} & W_{44} & W_{45} & 0 & 0 & 0 \\ 0 & 0 & 0 & W_{54} & W_{55} & 0 & 0 & 0 \\ 0 & 0 & W_{63} & 0 & 0 & 0 & W_{67} & 0 \\ 0 & 0 & W_{73} & 0 & 0 & W_{76} & W_{77} & 0 \\ 0 & 0 & W_{83} & 0 & 0 & 0 & 0 & W_{88} \end{bmatrix}.$$

Since the diagonal elements will not influence the optimization result, they are assigned to any agent without effect. Let f^* be the optimal function value of the optimization problem (1), which is solved by the solver YALMIP when the dimension n is not too large.

1) We use the proposed distributed synchronous, asynchronous algorithms and the centralized algorithm SDPLR [20], which are all coded by MATLAB, to solve the sparse optimization problem. The simulation results are shown in Figs. 4(a)-4(c). The original global variable value is $X(k) = V(k)'V(k)$. In Fig. 4(a), the proposed algorithms and SDPLR all converge to the optimal function value f^* , which is calculated by the solver YALMIP. It is observed that distributed algorithms converge much faster than the SDPLR algorithm for the MAXCUT problem. In Fig. 4(b), the trajectories of $\|X(k+1) - X(k)\|_F$, where the trajectories $\{X(k)\}$ are generated by the proposed algorithms DSA and DAA respectively, are shown to converge to zeros. It shows that





 (a) The trajectories of f by DSA, DAA and SDPLR

 (b) The trajectories of $\|X(k+1) - X(k)\|_F$ along time

 (c) The trajectories of gradient of f along time

Fig. 4. Convergent trajectories generated by proposed algorithms and SDPLR

variable $X(k)$ converges to one limiting point. The norm of the Riemannian gradient of f is defined as $\|\text{grad}f\|_F^2 = \sum_{i=1}^n (\|g_i\|^2 - \langle v_i, g_i \rangle^2)$, where $\|\cdot\|_F$ represents the Frobenius norm of a matrix, and $g_i = \sum_{j=1}^n M_{(i,j)} v_j$. The trajectories of $\|\text{grad}f(k)\|_F$ are shown in Fig. 4(c) and converge to zeros, which implies that the generated sequences $\{V(k)\}$ converge

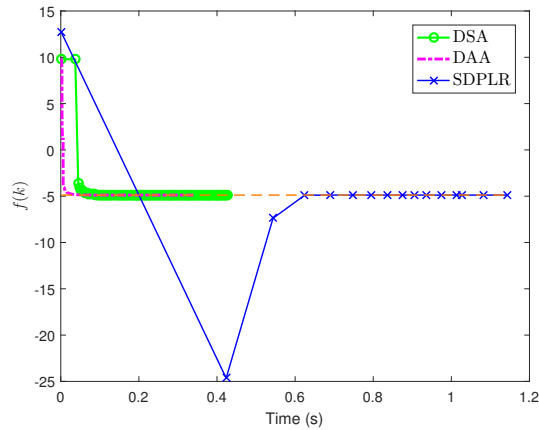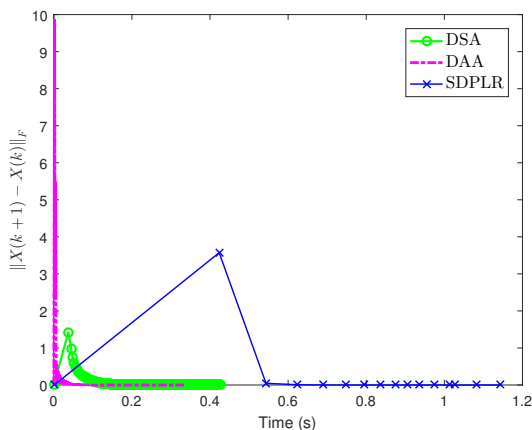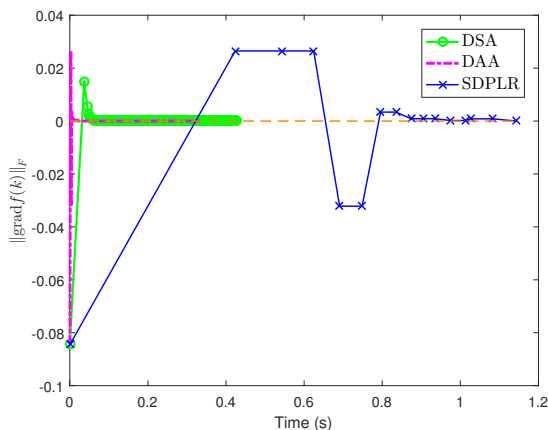to critical points. In addition, by the numerical experiments, for most cases, we have observed that the asynchronous algorithm converges faster than the synchronous algorithm. In addition, in the next simulation, we provide quantitative comparisons of convergence rates between DAA and DSA.

2) In order to compare the performance of the proposed distributed algorithms with the inspired centralized algorithm, which is proposed in [18], we make use of MPICH distributed model, which is a high-performance message passing interface, to develop a multi-processors environment on one computer with a Core(TM) I5-8250U CPU, 1.6GHz. Both centralized algorithm and distributed algorithms are coded by C language. For the distributed algorithms, we use five processes to deal with the optimization problem.

We provide two experiments with different dimensions and collect the number of iterations and executive time of different algorithms. In each experiment, the stop criterion of iterations reaches an expected error between the function value $f(k)$ and optimal value f^* . In addition, we use sn to denote the number of shared variables over the multi-agent network, e.g., the sn of network shown in Fig. 3 is 5. The executed time comparisons of centralized algorithm and distributed algorithms are listed in following table I.

By the comparative test, the distributed synchronous and asynchronous algorithms both converge faster than the centralized Mixing algorithm. As the dimension of problem increases, the role of distributed design is more important, especially when communication between different agents is sparse. In addition, by the simulation, we observe that distributed asynchronous algorithm often converges faster than distributed synchronous algorithm. It should be pointed out that although communication time-delay will not make asynchronous algorithm diverge, coordinating the trade-off between communication and computation may further improve the convergence performance of distributed asynchronous algorithm in practice, which is one future research direction of our work.

 TABLE I
 THE EXECUTION TIME COMPARISONS

Dimension	Algorithm	sn	Iterations	Time (s)	Error
8	Mixing	0	291	20	0.00023
	DSA	5	150	5	0.00023
	DAA	5	150	4	0.00023
18	Mixing	0	600	41	0.0058
	DSA	8	390	16	0.0058
	DAA	8	361	10	0.0058

Example 2: We apply the proposed distributed asynchronous algorithm to solving MAXCUT problems from image segmentation over a multi-agent system, as shown in Fig. 5. There is one edge between agents if there exists an intersection between image pixels of different local images. Hence, there exist several parents for one agent, which is different from the first example, where each agent has only one parent. In this example, we will show that the proposed distributed algorithm efficiently achieves image segmentation.

There have been some works applying general graph cut algorithms to image segmentation [48]–[51]. For image segmentation, we need to create a graph representation of the

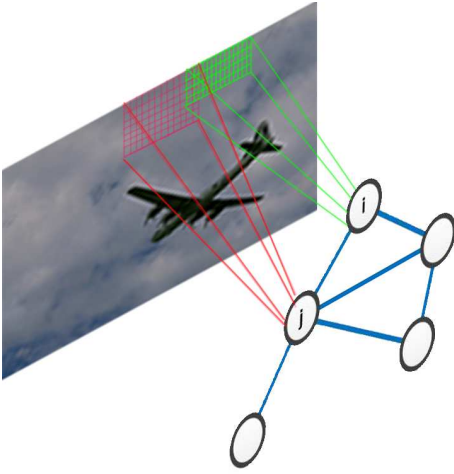


Fig. 5. Distributed image segmentation set-up. Each agent only has access to a subset (colored grids) of the whole image pixels.

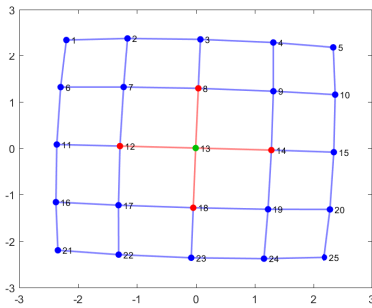


Fig. 6. The four-connected neighborhood of image segmentation set-up.

image. One algorithm is to consider assigning each pixel of the image as a node and using a four-connected neighborhood to create the edges [50], as shown in Fig. 6. We here only utilize the intensity components of the RGB of all pixels to provide one simple connected matrix M , whose (i, j) th element related to nodes (i, j) is defined by the following equation [50]

$$M_{i,j} = \max((2\|rgb(i) - rgb(j)\|_2 > t) - 1)\|rgb(i) - rgb(j)\|_2, 0),$$


where $rgb(i)$ is the intensity vector of RGB of the i th pixel, t is adjustable threshold value. The output of operator $\max(a, 0)$ is the bigger one of a and 0. Then, the generated matrix M is a typical large-scale sparse matrix. For some algorithms which add seeds to different regions, the only change is the development of matrix elements. We only use the simplest RGB information between different pixels to segment image. However, it should be noted that the proposed algorithms are applicable for general MAXCUT problems (1) that include more involved development of coefficient matrix elements. In some intelligent algorithms, the graph cut problem is often used as an important pretreatment [52]. Therefore, the large-scale sparse graph cut problem is vital in image segmentation.

We apply the proposed distributed asynchronous algorithm on images of the Berkeley database [53]. We have computed


the results for three images (Airplane, Church, Bird) in Figure 7. It is seen that the proposed distributed algorithm achieves image segmentation efficiently. While the existing centralized algorithms can not deal with image segmentation because of the large dimension of image data.



(a) Airplane segmentation



(b) Church segmentation



(c) Bird segmentation

Fig. 7. Segmentation results of images from Berkeley database

VI. CONCLUSION

This paper has studied distributed synchronous and asynchronous algorithms for solving large-scale SDP with diagonal constraints by making use of the inherent sparsity of programming and low-rank property of solutions. Each agent updates its local variables by local information and communicating messages over the underlying topology. To handle the communication delays in networks, one distributed asynchronous algorithm is proposed without global clocks. Although the transformed optimization problem is non-convex, variables of distributed synchronous and asynchronous algorithms eventually converge to optimal solutions and critical points of SDP, respectively. The efficiency of proposed distributed algorithms is verified by the numerical simulations.

Future work involves developing and analyzing communication-efficient distributed algorithms, which balance the computational and communication cost of different agents, for SDP with diagonal constraints. The objective SDP problem of this paper has diagonal constraints. In future, we will further attempt to extend the distributed algorithms to more general semi-definite programs with linear constraints.

REFERENCES

- [1] E. Dall'Anese, H. Zhu, and G. B. Giannakis, "Distributed optimal power flow for smart microgrids," *IEEE Transactions on Smart Grid*, vol. 4, no. 3, pp. 1464–1475, 2013.
- [2] F. R. Segundo Sevilla, I. M. Jaimoukha, B. Chaudhuri, and P. Korba, "A semidefinite relaxation procedure for fault-tolerant observer design," *IEEE Transactions on Automatic Control*, vol. 60, no. 12, pp. 3332–3337, 2015.
- [3] P. A. Parrilo and S. Lall, "Semidefinite programming relaxations and algebraic optimization in control," *European Journal of Control*, vol. 9, no. 2, pp. 307–321, 2003.
- [4] S. J. Benson, Y. Ye, and X. Zhang, "Solving large-scale sparse semidefinite programs for combinatorial optimization," *SIAM Journal on Optimization*, vol. 10, no. 2, pp. 443–461, 2000. [Online]. Available: <https://doi.org/10.1137/S1052623497328008>
- [5] Y. T. Lee, A. Sidford, and S. C. Wong, "A faster cutting plane method and its implications for combinatorial and convex optimization," in *2015 IEEE 56th Annual Symposium on Foundations of Computer Science*, 2015, pp. 1049–1065.
- [6] M. Kim, J. Park, K. Kim, and J. Kim, "Exact ML criterion based on semidefinite relaxation for MIMO systems," *IEEE Signal Processing Letters*, vol. 21, no. 3, pp. 343–346, 2014.
- [7] R. A. Jabr, "Solution to economic dispatching with disjoint feasible regions via semidefinite programming," *IEEE Transactions on Power Systems*, vol. 27, no. 1, pp. 572–573, 2012.
- [8] E. L. Hu and J. T. Kwok, "Low-rank matrix learning using biconvex surrogate minimization," *IEEE Transactions on Neural Networks and Learning Systems*, vol. 30, no. 11, pp. 3517–3527, 2019.
- [9] E. Hu, S. Chen, D. Zhang, and X. Yin, "Semisupervised kernel matrix learning by kernel propagation," *IEEE Transactions on Neural Networks*, vol. 21, no. 11, pp. 1831–1841, 2010.
- [10] C. Shen, J. Kim, and L. Wang, "Scalable large-margin Mahalanobis distance metric learning," *IEEE Transactions on Neural Networks*, vol. 21, no. 9, pp. 1524–1530, 2010.
- [11] M. X. Goemans and D. P. Williamson, "Improved approximation algorithms for maximum cut and satisfiability problems using semidefinite programming," *Journal of the ACM*, vol. 42, no. 6, pp. 1115–1145, 1995.
- [12] I. Waldspurger, A. d'Aspremont, and S. Mallat, "Phase recovery, maxcut and complex semidefinite programming," *Mathematical Programming*, vol. 149, no. 1-2, pp. 47–81, 2012.
- [13] E. Abbe, A. S. Bandeira, and G. Hall, "Exact recovery in the stochastic block model," *IEEE Transactions on Information Theory*, vol. 62, no. 1, pp. 471–487, 2014.
- [14] B. Borchers and J. G. Young, "Implementation of a primal–dual method for SDP on a shared memory parallel architecture," *Computational Optimization and Applications*, vol. 37, no. 3, pp. 355–369, 2007.
- [15] N. Boumal, V. Voroninski, and A. S. Bandeira, "The non-convex Burer–Monteiro approach works on smooth semidefinite programs," in *Proceedings of the 30th International Conference on Neural Information Processing Systems*, ser. NIPS'16. Red Hook, NY, USA: Curran Associates Inc., 2016, p. 2765–2773.
- [16] E. J. Candes, X. Li, and M. Soltanolkotabi, "Phase retrieval via Wirtinger flow: Theory and algorithms," *IEEE Transactions on Information Theory*, vol. 61, no. 4, 2015.
- [17] S. Mei, T. Misiakiewicz, A. Montanari, and R. I. Oliveira, "Solving SDPs for synchronization and maxcut problems via the grothendieck inequality," *arXiv:Optimization and Control*, 2017.
- [18] P.-W. Wang, W.-C. Chang, and J. Z. Kolter, "The Mixing method: low-rank coordinate descent for semidefinite programming with diagonal constraints," *arXiv:Optimization and Control*, 2017.
- [19] M. Zhang, "A second order mehrotra-type predictor-corrector algorithm for semidefinite optimization," *Journal of Systems Science and Complexity*, vol. 25, no. 6, pp. 1108–1121, 2012.
- [20] S. Burer and R. D. Monteiro, "A nonlinear programming algorithm for solving semidefinite programs via low-rank factorization," *Mathematical Programming*, vol. 95, no. 2, pp. 329–357, 2003.
- [21] M. Journée, F. Bach, P.-A. Absil, and R. Sepulchre, "Low-rank optimization on the cone of positive semidefinite matrices," *SIAM Journal on Optimization*, vol. 20, no. 5, pp. 2327–2351, 2010. [Online]. Available: <https://doi.org/10.1137/080731359>
- [22] M. A. Erdogdu, A. Ozdaglar, P. A. Parrilo, and N. D. Vanli, "Convergence rate of block-coordinate maximization Burer-Monteiro method for solving large SDPs," *arXiv:Optimization and Control*, 2018.
- [23] W. Deng, X. Zeng, and Y. Hong, "Distributed computation for solving the sylvester equation based on optimization," *IEEE Control Systems Letters*, vol. 4, no. 2, pp. 414–419, 2020.
- [24] G. Shi, B. D. O. Anderson, and U. Helmke, "Network flows that solve linear equations," *IEEE Transactions on Automatic Control*, vol. 62, no. 6, pp. 2659–2674, 2017.
- [25] W. Deng, Y. Hong, B. Anderson, and G. Shi, "Network flows that solve sylvester matrix equations," *arXiv: Optimization and Control*, 2019.
- [26] J. Yang, X. Meng, and M. W. Mahoney, "Implementing randomized matrix algorithms in parallel and distributed environments," *Proceedings of the IEEE*, vol. 104, no. 1, pp. 58–92, 2016.
- [27] W. Li, X. Zeng, Y. Hong, and J. Haibo, "Distributed design for nuclear norm minimization of linear matrix equation with constraints," *IEEE Transactions on Automatic Control*, pp. 1–1, 2020.
- [28] X. Jiang, X. Zeng, J. Sun, and J. Chen, "Distributed solver for discrete-time Lyapunov equations over dynamic networks with linear convergence rate," *IEEE Transactions on Cybernetics*, pp. 1–10, 2020.
- [29] Z. Deng and Y. Hong, "Multi-agent optimization design for autonomous lagrangian systems," *Unmanned Systems*, vol. 4, no. 1, pp. 5–13, 2016.
- [30] A. Fontan, G. Shi, X. Hu, and C. Altafini, "Interval consensus for multiagent networks," *IEEE Transactions on Automatic Control*, vol. 65, no. 5, pp. 1855–1869, 2020.
- [31] S. Liang, L. Y. Wang, and G. Yin, "Distributed smooth convex optimization with coupled constraints," *IEEE Transactions on Automatic Control*, vol. 65, no. 1, pp. 347–353, 2020.
- [32] K. Wang, Z. Fu, Q. Xu, D. Chen, L. Wang, and W. Yu, "Distributed fixed step-size algorithm for dynamic economic dispatch with power flow limits," *Science China Information Sciences*, vol. 64, no. 1, p. 112202, 2020.
- [33] R. Madani, A. Kalbat, and J. Lavaei, "ADMM for sparse semidefinite programming with applications to optimal power flow problem," in *2015 54th IEEE Conference on Decision and Control (CDC)*, Osaka, 2015, pp. 5932–5939.
- [34] A. Kalbat and J. Lavaei, "A fast distributed algorithm for decomposable semidefinite programs," in *2015 54th IEEE Conference on Decision and Control (CDC)*, Osaka, 2015, pp. 1742–1749.
- [35] H. Zhu and G. B. Giannakis, "Power system nonlinear state estimation using distributed semidefinite programming," *IEEE Journal of Selected Topics in Signal Processing*, vol. 8, no. 6, pp. 1039–1050, 2014.
- [36] C. Chang, J. Cortés, and S. Martínez, "Scheduled-asynchronous distributed algorithm for optimal power flow," *IEEE Transactions on Control of Network Systems*, vol. 6, no. 1, pp. 261–275, 2019.
- [37] S. K. Pakazad, A. Hansson, M. S. Andersen, and I. Nielsen, "Distributed primal–dual interior-point methods for solving tree-structured coupled convex problems using message-passing," *Optimization Methods and Software*, vol. 32, no. 3, pp. 401–435, 2017.
- [38] X. Zeng, J. Chen, and Y. Hong, "Distributed optimization design for computation of algebraic Riccati inequalities," *IEEE Transactions on Cybernetics*, pp. 1–12, 2020.
- [39] A. S. Bandeira, N. Boumal, and V. Voroninski, "On the low-rank approach for semidefinite programs arising in synchronization and community detection," in *29th Annual Conference on Learning Theory*, ser. Proceedings of Machine Learning Research, V. Feldman, A. Rakhlin, and O. Shamir, Eds., vol. 49. Columbia University, New York, New York, USA: PMLR, 23–26 Jun 2016, pp. 361–382.
- [40] Y. Boykov and V. Kolmogorov, "An experimental comparison of min-cut/max-flow algorithms for energy minimization in vision," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 26, no. 9, pp. 1124–1137, 2004.
- [41] R. P. Mason and A. Papachristodoulou, "Chordal sparsity, decomposing SDPs and the Lyapunov equation," in *2014 American Control Conference*, Portland, USA, 2014, pp. 531–537.
- [42] G. Pataki, "On the rank of extreme matrices in semidefinite programs and the multiplicity of optimal eigenvalues," *Mathematics of Operations Research*, vol. 23, no. 2, pp. 339–358, 1998.
- [43] J. D. Lee, I. Panageas, G. Piliouras, M. Simchowitz, M. I. Jordan, and B. Recht, "First-order methods almost always avoid strict saddle points," *Mathematical Programming*, vol. 176, no. 1, pp. 311–337, 7 2019.
- [44] H. Inci, T. Kappeler, and P. Topalog, "On the regularity of the composition of diffeomorphisms," *arXiv:Analysis of PDEs*, 2012.
- [45] M. Shub, *Global stability of dynamical systems*. Springer Science & Business Media, 2013.
- [46] D. P. Bertsekas and J. N. Tsitsiklis, *Parallel and distributed computation: numerical methods*. Belmont Massachusetts: Athena Scientific, 1997.
- [47] S. K. Pakazad, A. Hansson, M. S. Andersen, and A. Rantzer, "Distributed semidefinite programming with application to large-scale system analysis," *IEEE Transactions on Automatic Control*, vol. 63, no. 4, pp. 1045–1058, 2018.

- [48] F. Yi and I. Moon, "Image segmentation: A survey of graph-cut methods," in *2012 International Conference on Systems and Informatics (ICSAI2012)*, Yantai, 2012, pp. 1936–1941.
- [49] S. Vicente, V. Kolmogorov, and C. Rother, "Graph cut based image segmentation with connectivity priors," in *2008 IEEE Conference on Computer Vision and Pattern Recognition*, Anchorage, AK, 2008, pp. 1–8.
- [50] S. de Sousa, Y. Haxhimusa, and W. Kropatsch, "Estimation of distribution algorithm for the Max-Cut problem," in *Graph-Based Representations in Pattern Recognition (GbrPR 2013)*, vol. 7877, Berlin, Heidelberg, 2013, pp. 244–253.
- [51] Y. Boykov and G. Funka-Lea, "Graph cuts and efficient ND image segmentation," *International Journal of Computer Vision*, vol. 70, no. 2, pp. 109–131, 2006.
- [52] P. Arbelaez, M. Maire, C. Fowlkes, and J. Malik, "Contour detection and hierarchical image segmentation," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 33, no. 5, pp. 898–916, 2011.
- [53] D. Martin, C. Fowlkes, D. Tal, and J. Malik, "A database of human segmented natural images and its application to evaluating segmentation algorithms and measuring ecological statistics," in *Proceedings Eighth IEEE International Conference on Computer Vision. ICCV 2001*, vol. 2, British Columbia, Canada, 2001, pp. 416–423.