

# Understanding Continual Learning Settings with Data Distribution Drift Analysis

Timothée Lesort, Massimo Caccia, and Irina Rish

Université de Montréal, MILA - Quebec AI Institute

## Abstract

Classical machine learning algorithms often assume that the data are drawn i.i.d. from a stationary probability distribution. Recently, *continual learning* emerged as a rapidly growing area of machine learning where this assumption is relaxed, namely, where the data distribution is non-stationary, i.e., changes over time. However, data distribution drifts may interfere with the learning process and erase previously learned knowledge; thus, continual learning algorithms must include specialized mechanisms to deal with such distribution drifts. A distribution drift may change the class labels distribution, the input distribution, or both. Moreover, distribution drifts might be abrupt or gradual. In this paper, we aim to identify and categorize different types of data distribution drifts and potential assumptions about them, to better characterize various continual-learning scenarios. Moreover, we propose to use the distribution drift framework to provide more precise definitions of several terms commonly used in the continual learning field.

## 1 Introduction

Continual learning (CL) involves the ability to learn from a non-stationary data stream and accumulate knowledge over time, while successfully dealing with the *catastrophic forgetting* problem [22], i.e. the interference between the new knowledge and the previously learned one.

CL algorithms are usually classified based on the type of “memory” mechanisms they use, including replay [38, 13, 3, 6, 39, 67, 29, 9], dynamic architecture [21, 57, 43] and regularization [34, 68, 55, 58, 42]. However, it is not always clear how each specific approach can benefit a particular continual learning scenario. In this paper, we start by assuming that catastrophic forgetting (or learning interference) is caused by changes in the data distribution or changes in the learning criterion. We will refer to these changes as drifts. There are multiple types of drifts, and it is unlikely that any specific approach can work well for all of them. This hypothesis looks reasonable since the CL problem is NP-Hard [35]. We could therefore characterize CL algorithms by their ability to learn under specific types of distribution drifts, associated with different CL settings.

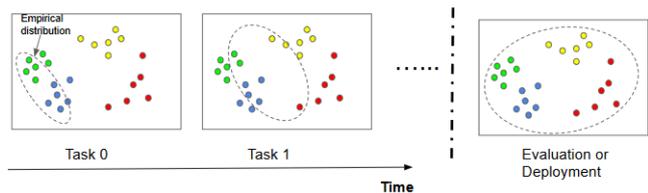


Figure 1: Example of a continual learning scenario. The learning algorithm can only access the empirical data distribution determined by a set of training samples. The empirical distribution drifts continually, allowing to explore the full underlying data distribution. The goal of continual learning is to produce a model that generalizes well to this full data distribution.

The paper is organized as follows. In Section 2, we give a brief overview of other fields dealing with data distribution drifts. In Section 3, we discuss how to use the various types of data distribution drifts to describe non-iid characteristics of continual learning problems. Furthermore, in Section 4 we discuss evaluation criteria for continual learning algorithms. Next, in Section 5, we present different types of assumptions about the distribution drifts that can be used to improve CL algorithms. In Sec. 6, we benefit from the drifts types to propose a detailed description for incremental learning and lifelong learning. Moreover, in Sec. 7 we discuss the benefits and limitations of meta-learning approaches for continual learning and implicit supervision that can be provided for learning algorithms. Finally, we conclude by summarizing the benefits of the proposed description of continual-learning scenarios.

## 2 Related work

The topic of distribution drifts (or shifts) is well-studied in machine learning and statistics. For example, the field of *out-of-distribution (OOD) generalization* aims at developing learning algorithms able to perform well on test distributions that are different from training distribution [5, 2, 36]. A typical assumption is the existence of some invariant (causal) mechanism underlying the data distribution, besides variations due to other factors; a common approach is to train a model on multiple datasets, or “environments”, in order to learn a robust predictor based on invariant rather than spurious features.

Other closely related fields include transfer learning [66] and domain adaptation [7, 65], which aim at adapting a model trained on one distribution, or domain, to a new data distribution, but without necessarily remembering the past distribution. For example, in robotics, many approaches are focused on transferring a model trained in a simulated environment to real environments [49, 62, 31].

Continual learning is a more challenging problem since the goal here not only to adapt to new data distributions but also to avoid interference with already acquired knowledge from past data distributions [41]. To tackle this challenge across a wide range of problem settings in a robust and scalable way, continual learning approaches can borrow ideas and techniques from other research domains such as few-shot learning [37, 20], transfer learning [50, 70], knowledge distillation [26], meta-learning [8, 28], learning from sparse supervision and anomaly/concept-drift/out-of-distribution detection [23]. However, the goal of learning from a potentially infinite sequence of varying datasets without forgetting the previously learned knowledge, in order to ultimately build versatile, "broad" AI agents (as opposed to the current "narrow" AI), is the specific goal of continual learning. However, originally the specific goal of continual learning is more specifically focused on learning from a potentially infinite sequence of varying tasks without forgetting the previously learned knowledge. This skill would ultimately help to build versatile, "broad" AI agents (as opposed to the current "narrow" AI).

### 3 Context drifts in continual learning

A clear characterization of the data stream evolution is necessary to better understand the capabilities and limitations of continual learning approaches. Below we attempt at providing such characterization.

#### 3.1 Continual learning and context drift

We introduce here a hidden context variable  $C$  that determines the current state of the data distribution, similarly to [10]. Let  $\mathbb{C}$  denote the set of all possible contexts. We use the change, or drift, in the context variable to characterize the data distribution drift. In this section, we describe different types of context drift in continual learning scenarios.


Given the context  $c$ , data can be sampled i.i.d. from  $P(X = x, Y = y|C = c)$ . In a supervised setting,  $x$  is the input sample and  $y$  is the class label. In reinforcement learning (RL),  $y$  can be viewed as the action taken by an agent. Changes in the data distribution are assumed to be caused by changes in the context variable, i.e. by the *context drift* (not to be confused with the *concept drift*, a specific type of context drift discussed in section 3.2). In other words, the data non-stationarity is caused by a hidden stochastic process  $\{C_t\}_{t=1}^T$ , where  $C_t$  is the context variable at time  $t$ .

In many continual settings, a period within which a context remains fixed (corresponding to a stationary data distribution) is called a *task*, and usually corresponds to a learning experience determined by some specific learning purpose [41]. Switching from one task to another is usually associated with a change in the learning process, involving a new context or a new learning objective.

In the next section, we present a characterization of context drifts.

#### 3.2 Types of drifts

As it was mentioned above, a *context drift* is a change in the context variable, associated with a change in the data distribution; it is similar to "population drifts" [33]. We distinguish between the two kinds of context drifts that we refer to as real concept drifts and virtual drifts [23, 24].

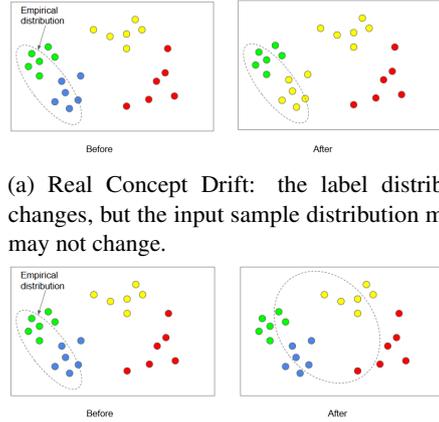

(a) Real Concept Drift: the label distribution changes, but the input sample distribution may or may not change.

(b) Virtual Drift: the input sample distribution changes but not the label distribution.


Figure 2: Real concept vs Virtual concept drift. Same-color points belong to the same class. For example, a real concept drift can be found in voting behaviour, if  $P(Y = y|X = x)$  is the probability of person  $x$  to vote for  $y$ ; this probability may change over time (if the person  $x$  changes its opinion). A virtual drift would correspond to a change in  $P(Y = y|X = x)$  due to sampling new people only.

**Real concept drifts: drift in  $P(y|x)$  with  $P(x)$  fixed.** Real concept drifts [23, 24] happen when the relation between the input and the target changes (Fig 2.a). Specifically,  $P_t(y|x) \neq P_{t+1}(y|x)$  whilst  $P_t(x) = P_{t+1}(x)$ , with  $P_t(y|x)$  being the probability  $P(Y = y|X = x)$  at time  $t$ . For example in recommendation systems, a user's mood could change (the context variable), which would lead the user to choose or not different recommended items (the labels).


**Virtual drift [23]: Drift in  $P(x)$  without affecting  $P(y|x)$ .** In this case, the variation in the data distribution does not affect the relation between input and labels (Fig 2.b). This drift is also known as covariate shift [60] or dataset shift [51, 47]. We distinguish two specific kinds of virtual drifts:

- **Virtual concept drift: Drift in  $P(y)$  without affecting  $P(y|x)$ .** Data points sampled after the drift are from new concepts of the data distribution without affecting the labels of previously seen data. In supervised learning, it involves observing new data from new classes  $y$ . Specifically, the joint distribution  $P_t(y, x)$  shifts through  $P_t(y) \neq P_{t+1}(y)$  while  $P_t(x|y) = P_{t+1}(x|y)$ . This type of drift is also known as "label shift" [69].

- **Domain drift:** Drift in  $P(x)$  without affecting  $P(y|x)$  nor  $P(y)$ . Data points sampled after the drift are new, i.e. new data of the same label space.

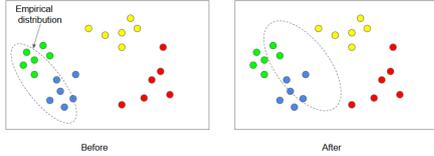

(a) Domain drift: drifts in samples, but the concepts do not change.

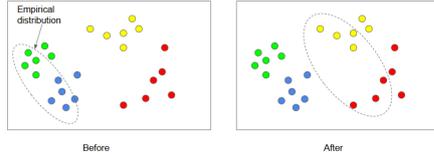

(b) Virtual concept drifts: drifts in targets, but  $P(y|x)$  did not change

Figure 3: Virtual drifts: special cases. Domain drifts happen when new data are explored in known classes, virtual concept drifts happen when new data are explored from new classes. In the figures, points with same colors are points within a same class.

We can think of a new type of drifts in the learning process which is the *criterion drift*: The data does not change but the learning criterion does: e.g. the loss. For example, in reinforcement learning, algorithms have to maximize their accumulated rewards. For this, a classic strategy is an exploration-exploitation strategy. We can assume that the loss for exploitation and the loss for exploration are two different losses. Therefore, while the algorithm learns how to explore, it should not forget what has been learned while it was exploiting some reward sources. Changes in the loss function (or in the weights of loss function) might lead to catastrophic forgetting and should therefore be addressed in an adapted way. However, *criterion drift* and *real concept drift* affect the learning process in the same way, i.e. the expected behaviour changes. Hence, algorithms might deal with both in the same way. The difference is that criterion drifts are caused by the algorithm’s choices and not by changes in the data distribution (as real concept drift). Learning algorithms should then be always aware of criterion drifts.

In most cases, it is fundamental to distinguish the different types of drifts since they will not affect the learning process in the same way. We detailed the differences it involves in section 6. Besides the drifts type, the annotation or the automatic detection of drift is also crucial for CL algorithms to enable a memorization process at the right time.

### 3.3 Drift Annotations

In classical machine learning, learning paradigms are dependent on the type of supervision available, mainly, supervised learning relies on label supervision, reinforcement learning on reward supervision.

In continual learning, algorithms do not *only* rely on those types of supervision but also on drifts categorization [41].

Indeed, data distribution drifts (or context drift) might be annotated by “drift labels” to help algorithms to prevent interferences.

In continual learning-benchmarks, the drift labels often give the task boundaries or task index. It is referred to as “task labels”  $t$ . In the continual-learning literature, we find several specific scenarios based on the availability of task labels [41]. Hence, the tasks index might be available (1) for training, (2) for training and testing or (3) not provided at all. The cases (1) and (2) have been associated to, respectively, “task-incremental learning” and “domain-incremental learning” (or “class-incremental learning”) in [63]. The last one has also been associated to “task-agnostic learning”.

It is important to note the task label  $t$  is different from the context variable  $c$ .  $c$  is a theoretical latent variable that represents the data distribution state. Hence,  $t$  is only an information about  $c$  or about  $c$ ’s evolution.

With tasks labels can come also supplementary information such as the type of drift, the number of new concepts, or other a priori knowledge about the new task.

On the other hand, the learning scenario does not always have clear task boundaries, so a more general hypothesis is to suppose that the drift labels might signal (some) variations in the data distribution and not necessarily task transitions.

In this paper, we wish to define types of scenarios based on the data distribution drifts and not on the availability of task labels. The task labels availability only changes how difficult the task is. Similarly to classification where the more data labels are available the easier the learning task is.

## 4 Evaluation Protocols in Continual Learning scenarios

The characterization of data distributions in continual learning is a clear starting point to describe learning scenario characteristics. However, the evaluation process is also important to describe what are the expectations for a given approach. In this section, we describe in a general way continual learning scenarios and associated evaluation protocols.

### 4.1 Evaluation protocols: Cumulative and Current Performance

The evaluation protocol defines what is expected from a continual-learning algorithm: its goal. Algorithms learn to optimize their evaluation protocols. We again assume a stream of contexts (or tasks)  $\{C_t\}_{t=1}^T$  which the learner is exposed to.

In continual learning, we distinguish two types of evaluation: maximizing the performance of the model’s final state or maximizing the performance while learning. The first is the most used performance evaluation in continual learning often referred to as “final performance” [13, 34, 59, 40], however in a more general scope, it evaluates the **current performance** of an algorithm on a test task at a particular point in time.

$$\sum_{t=0}^T \mathbb{E}_{(x,y) \sim P(x,y|c_t)} [\ell(f_{\theta_T}(y|x))] \quad (1)$$

where  $\ell(\cdot)$  is the criterion and  $f_{\theta_T}(\cdot)$  is the function learned at the end of the sequence, i.e. in the final state  $t = T$ .

The second measures the algorithms **cumulative performance** throughout its *life*, it is referred to as *Online Cumulative Performance* [10].

$$Cumul_{\{C_t\}_{t=1}^T} = \sum_{t=0}^T \sum_{(x,y) \sim P(x,y|c_t)} \ell(f_{\theta}(y|x)) \quad (2)$$

It evaluates the performance of “learning while doing” where the goal is the results achieved while learning, i.e. while  $\theta$  changes and not with a fixed  $\theta$  as for current/final performance evaluation.

The expected future cumulative performance might be maximized in a meta-learning approach. The meta-algorithm goal is to maximize cumulative performance for the next task sequence, i.e. maximize  $\mathbb{E}[Cumul_{\{C_t\}_{t=T}^{T+T'}}]$ , with  $T'$  the length of the future sequence.

*Current performance* evaluates the expected results on data distributions similar to the training ones, whilst *cumulative performance* computes the performance of an algorithm while learning on a sequence of tasks.

Those two evaluation protocols are used for different kinds of applications. The cumulative performance is mainly suited for algorithms that continue to learn while deployment, e.g. reinforcement learning agents that continuously improve at their tasks. The current performance evaluates the quality of a given model with fixed weights. It is more suited for use cases where models are deployed *frozen* or when models expect external validation before deployment.

To integrate the evolution of current performance at different steps of the training process, we can average several “current performance” from different points of time as in [53].

The evaluation protocol chosen for an algorithm defines its objective, either by evaluating the performance while learning or the final performance. In the next section, we detailed the specific types of drifts that can happen in training data distribution. We will also describe the assumptions that could help algorithms to deal with those drifts.

## 5 Drift Assumptions

To ease the learning process, reduce the solution space or reduce the need for supervision, algorithms may rely on assumptions about data. In continual learning, we may assume the characteristics of context drifts. For example, we can assume that certain types of drifts described in Sec 3 do not happen locally or permanently, or we can assume some useful underlying patterns in drifts or drifts characteristics.

### 5.1 Stationarities

Stationarity aspects of the learning process, for example in the context variable. Hence, we may assume local stationarities or general stationarities. In this section, we describe common assumptions that might hold in a continual-learning environment.

**Concept stationarity** The number of concepts (e.g. classes, environment...) is fixed by the designer at the beginning and it does not change through time. This is akin to domain-incremental learning [63]. Example: A urban camera that detects bicycles continually improve. No other concepts than bicycle vs no-bicycle.

**Target/Reward stationarity** In this case, we consider that the label associated with a data point  $x$  is fixed, i.e.  $P(x|y)$  (or  $P(y|x)$ ) is static. Example: In many classification scenarios, the data annotation never changes.

**Finite World** The data’s possible instances are fixed and finite. Therefore at a certain point, all instances possible have been seen. Example: Board games.

**Criterion stationarity** The objective function is constant. Example: A camera that detects bikes has also a fixed objective even if the input distribution changes through time.

**Non-backtracking chain** The non-backtracking chain assumption means that we assume that everything is learned just once and will never append again in the training process. This assumption is applicable in most continual learning benchmarks, e.g., in disjoint scenarios (class-incremental). The non-backtracking chain helps to evaluate which task has been forgotten or not. However, this assumption is rarely true in real scenarios, therefore it should not be exploited by approaches in continual learning benchmarks. A notable continual-learning setting [10] relaxes this assumption.

The stationarities are the simplest (and the strongest) assumptions, in some cases, we can also make assumptions on drift patterns.

### 5.2 Drift Patterns and Assumptions

Drift in the data distribution can be subject to patterns, for example, variation in traffic prediction might depend on the hour and the date. Those patterns can be incorporated into continual-learning approaches to improves results. The simplest pattern is to assume no drifts, e.g. no real concept drift, either locally or permanently.

We call a data stream  $\alpha$ -locally-invariant when  $P(C_t = c | C_{t-1} = c) = \alpha$  [10]. Namely, the data distribution is locally stationary, i.e. stationary within a local time window. Those local stationarities are assumed in most continual learning benchmarks, they help to train models but also to evaluate them by keeping drifts sparse.

The context set can also be assumed finite, i.e. closed world assumption [48]. the set  $\mathbb{C}$  containing all contexts is finite. At some point in time, all the contexts are explored and all drifts will lead to context already explored. For example, a robot that explores a building. At some point in time, the robot will have explored all the rooms and will never find new rooms or places in the building. This assumption is useful when a model is deployed static, we assume that contexts have all been explored sufficiently while training the algorithms can make good predictions on future observations. By sufficiently, we mean that if a new context happens at test time the model can generalize to it without retraining.

The opposite of a closed world is an open-ended world [15] where a *never-ending drift* might happens with infinite unexplored contexts.

A last type of pattern is the recurrent concept drift [23]. In this case, the drifts obey some kinds of cyclic patterns. Continual learning approaches may try to take advantage of them to predict future contexts and improve algorithms’ performance as in the traffic example of the introduction.

### 5.3 Drift Intensity

Drifts might happen with various intensities, suddenly or smoothly. The intensity of drift is then characterized by the variation in the context variable in a short period. When the drift is annotated the drift intensity is not crucial. However, if a context drift is not labeled, algorithms might need to detect them automatically to learn without forgetting. The smoothness is then an important parameter to consider to detect drifts successfully. A slow drift can be mistaken with noise.

Hence, the assumptions on the intensity of drifts might help to disentangle context drifts from spurious variations in data. Moreover, the memory mechanisms might be adapted to the abruptness of the drifts to take advantage of specific settings.

To summarize this section, in order to handle efficiently the different types of scenarios, algorithms may formulate assumptions on their drifts.

The assumptions might be seen as a weakness of approaches since it makes them dependant on conditions. However, assumptions help to reduce the search space and ease the learning process. They may help to reduce the need for supervision and make unsolvable problems solvable. Nevertheless, it is important to describe clearly assumptions needed to train an algorithm to understand the approach and potential transfer to other scenarios.

## 6 Continual Learning Terminology and Real-Life Scenarios

Continual-learning research fields are linked to potential real-life use cases. However, those use-cases might be variate and one type of approach might not be able to solve them all. Therefore, to develop specialized approaches for different types of scenarios, it is necessary to identify the main scenarios’ differentiating factors. We propose to use the data distribution drifts characteristics to create three types of scenarios. We believe it is more pertinent to target those continual learning scenarios independently than continual learning in general.

### 6.1 Incremental Learning:

In a wide part of continual learning literature, incremental learning is associated with the “disjoint class scenarios” (virtual concept drifts) [6, 67, 17]. One of the specificities of incremental learning is the addition of different concepts (classes, objects, actions) into a single model. Hence, the output space of the learning model grows through time.

Incremental learning could be formalized as follow:

We consider two context  $c_1$  and  $c_2$ , we learn concepts incrementally, with  $\Omega_{c_1} \cap \Omega_{c_2}$  the set of concepts of context  $c_1$  and  $c_2$ :

$$\forall(x_1, y_1) \sim P(x, y|c_1), \forall(x_2, y_2) \sim P(x, y|c_2), \quad (3)$$

$$x_1 \neq x_2 \wedge y_1 \neq y_2$$

**Specifications:** Context drifts happen in the labels and observations,  $\Omega_{c_1} \cap \Omega_{c_2} = \emptyset$ , criterion are invariant, no real concept drifts

In incremental learning, the learning model has to learn to differentiate data from different contexts. Hence, the learned function  $f_\theta(\cdot)$  must respect:

$$\forall(x_1, y_1) \sim P(x, y|c_1), \forall(x_2, y_2) \sim P(x, y|c_2), \quad (4)$$

$$f_\theta(x_1) \neq f_\theta(x_2)$$

In this case, the goal is to incrementally train a model with the output space that grow through time. This is typically the case of a trained classification model that should learn a new class without forgetting the previous ones. From a practical point of view, it consists in using different output for different tasks and preferably to be able to make predictions without knowing tasks label. The challenge is then to learn the difference between concepts that are not available simultaneously. In reinforcement learning different outputs of the model correspond to different actions, then incremental learning in reinforcement learning is about learning tasks that use different set of actions. For example, because in some tasks, some actions are invalid [30], [masking-rl-blogpost].

#### Real life example: Adding classes to a classifier

*A classifier is pretrained to recognized all known species of frogs. However, a researcher discovers a new species. This researcher would like to train the classifier to classify this new species correctly, but it does not have all the other species data. Then, he/she will need an incremental learning method to improve the classifier without forgetting.*

#### Note on supervised incremental learning:

In supervised incremental scenarios, drifts bring new classes. Hence, class labels are sufficient to detect new tasks and task labels are not necessary to detect drifts. Nevertheless, at test time, the availability of task index might still be required, e.g., to choose the right head in a multi-head architecture.

### 6.2 Lifelong Learning

*Lifelong learning* [61, 14] has often been use as a synonym of continual learning, however, we propose to associate it to a mode specific research field where a skills should be learn through a life-long task. We can associate it with domain driftscenarios (cf section 3) [24, 63] where the concepts to learn in a task stays the same but the stream of data bring new data instances. We consider it as a synonym to *Never-Ending learning* [11, 46].

We can formalize it as follow:

We consider two context  $c_1$  and  $c_2$ , with  $\Omega_{c_1} \cap \Omega_{c_2}$  the set of concepts of context  $c_1$  and  $c_2$ :

$$\forall(x_2, y_2) \sim P(x, y|c_2), \exists(x_1, y_1) \sim P(x, y|c_1), \quad (5)$$

$$x_1 \neq x_2 \wedge y_1 = y_2$$

**Specifications:** The observation distribution changes through time,  $\Omega_{c_2} \subseteq \Omega_{c_1}$ , criterion are invariant, no real concept drifts

In lifelong learning, the challenge is to learn the similarity between data from different contexts. Hence, the function  $f_\theta(\cdot)$  to learn must respect:

$$\begin{aligned} \forall(x_2, y_2) \sim P(x, y|c_2), \exists(x_1, y_1) \sim P(x, y|c_1), \\ f_\theta(x_1) = f_\theta(x_2) \end{aligned} \quad (6)$$

The output space of  $f_\theta(\cdot)$  is fixed.

In Lifelong learning, the agent’s goal is to always improve at understanding concepts and generalizing them. In classification, it would be learning on the same set of classes with more and more data of each task. In reinforcement learning, lifelong learning consists of improving at using a set of actions in more and more contexts with fixed reward function. It could be essential for applications where smart agents need to keep improving and gain efficiency from experiences on a specific task or set of tasks.

**Example: Predicting Weather**

*A model is trained to predict the weather. Hence, it should understand the dynamic of the weather and predict future weather from current observations. However, with global warming, this dynamic changes. Therefore, the algorithms need to adapt to this new dynamic to make good predictions with this new context (warmer global temperature). The model will need a lifelong learning approach to improve on the same task with different contexts and observations.*

### 6.3 Learning under real-concept drifts

Learning in a sequence of tasks where the labels change for a given sample has been less explored in continual learning recent literature, but many research studied it in the online learning literature [27].

In a learning scenario, real concept drifts can be written as:

$$\begin{aligned} \forall(x_2, y_2) \sim P(x, y|c_2), \exists(x_1, y_1) \sim P(x, y|c_1), \\ x_1 = x_2 \wedge y_1 \neq y_2 \end{aligned} \quad (7)$$

As explained in Sec 3.2, real-concept drifts and criterion drift are similar in appearance and they can be treated similarly.

Real-concept drifts in classification scenarios are quite unusual since labels rarely change through time. However, in detection or segmentation, such drifts might happen when objects are annotated first as background and later as a specific object [12, 16]. The real-concept drifts might also happen if labels get more precise through time [1]. Real-concept drift scenarios might be approached in two ways, either we consider that the current label is the true one, and previous ones should be forgotten, either we consider than both have values and everything worth remembering.

In reinforcement learning, learning under real concept drift can happen when there is a change in the reward function.

**Specifications:** The label/reward for a given observation/action changes through time.

**Example: Diseases terminology update**

*A model is trained to recognized diseases from a set of symptoms observations. However, the research community regularly update the terminology of diseases. For example, it might consider different two diseases that were previously considered as the same. Therefore, the model needs to adapt to make predictions compatible with this new terminology. The data potentially stayed the same, but the labels changed. We are in a real-concept drift scenario.*

To resume:

- Virtual Concept Drifts → Incremental learning scenario
- Domain Drifts → Lifelong learning scenario
- Real Concept Drifts (or criterion drifts) → Learning under real-concept drift scenario

Those three scenarios make a clear separation of the different challenges of continual learning. They can also be combined into hybrid scenarios. However, addressing them independently will probably be easier to measure approach qualities. It is important to note that for a fair comparison between scenarios they should be used with the same drift annotation policy and under the same assumptions, as described in sections 5 and 3.3.

## 7 Discussion

Continual learning is a vast field that gathered researchers who strive to develop algorithms that learn as animals or humans do in similar environments and others who aim to create algorithms that can simply accumulate knowledge incrementally. In any case, continual learning is about learning under context drifts. In this section, we discuss the algorithms’ autonomy level, the promises and limitations of meta-learning for continual learning, and the importance of distinguishing benchmarks from use cases to experiment algorithms performances.

### 7.1 Autonomy and Indirect Supervision

To address real-life scenario problems, algorithms need external supervision signals. This supervision might be the labels/rewards but it can also be indirect supervision given by the designer. For example, the way that data are selected and pre-processed for learning and validation can be seen as a supervision signal. The model selection is generally also an external intervention. In continual learning, the model may also have some insight of future tasks, such as the number of classes or difficulty [4, 19]. More generally any external intervention from the designer can be seen as supervision.

On the other hand, indirect supervision might be necessary for the algorithm to identify what is the task to solve. Hence, before aiming for a fully autonomous system or unsupervised learning, it might be interesting to differentiate supervision essential to understand the task from the supervision that just helps to learn.

The problem of autonomy in continual learning is often mentioned, and many approaches aim at fully unsupervised continual algorithms. However, a fully unsupervised learning algorithm can not identify the task to solve or the change in

tasks and therefore can not solve any continual learning setting. Even if the reduction of supervision in continual learning is interesting and valuable, it should be done carefully to not aim at impossible problems.

## 7.2 Meta-Learning

In recent years, meta-learning [28] has been used in many continual-learning approaches [54, 64, 52, 32, 44] to solve their perilous sequence of tasks. Meta-learning is a way to learn to continually learn. For this, meta-algorithms are trained on several continual tasks (support tasks) and tested on other continual tasks (test tasks). Meta-learning has also been used in continual learning for fast remembering an old task [25, 10].

In the general case, meta-learning is a way to learn to learn by using support tasks to optimize parameters and/or hyper-parameters for future tasks. For example, it might find the best initialization for solving a future task. Meta-learning is a powerful framework to solve difficult learning tasks.

Nevertheless, the success of meta-learning depends on the similarity between support and test tasks.

In the case of continual learning, if we suppose that meta-continual learning is used to train an algorithm for future (unknown) continual tasks. The similarity between training and test tasks is assumed from the beginning. If the future tasks are not as expected, the algorithm might fail to solve the tasks. Unfortunately, it is not clear what kind of “similarity” between the train and test tasks is needed to make algorithms able to generalize to new continual tasks. In continual learning, it might be related to the kind of drifts in the support tasks and the test tasks or to assumptions that hold in both cases.

## 7.3 Benchmarks vs Use Cases

Algorithm evaluation is supported by benchmarks. In continual learning various of them can be used such as Split Mnist/Cifar/ImageNet, Permutation Mnist and more recent ones such as Core50 [45] or Stream-51 [56].

However, it is important to note that evaluation benchmarks should be used properly to be useful. Benchmarks are often simplified scenarios where data and assumptions can be overfitted easily. This simplicity of benchmarks is justified because it helps for a clearer evaluation. For example, the non-backtracking chain helps to evaluate the capacity of models to remember. Moreover, some assumptions such as the closed world assumption or assumptions on the future number of classes/tasks can also be used by some approaches even if they can rarely be made in real scenarios. One should then stay vigilant to use benchmarks properly to not exploit assumptions or knowledge irrelevant or unavailable in continual learning application scenarios.

Recent discussions in the continual learning community pointed out that current benchmarks are too limited and are not realistic enough to look like real-life scenarios. However, the goal of benchmarks is not to look like real-life use cases but to evaluate a set of criteria. Those criteria should be defined clearly by the benchmark designer and preferably useful for real-life scenarios. On one hand, benchmark evaluation should indeed be done carefully and toy examples, such as MNIST-derived datasets, do not provide any proof of potential

real-life applications. However, on the other hand, real-life use cases should not replace benchmarks for evaluation. Use cases can be used as a proof of concept but the results they provide are not as valuable as those from a carefully designed benchmark.

Hence, benchmarks should be selected primarily for their evaluation quality and users should stay vigilant when maximizing performance to not overfit benchmarks data and assumptions. The creation of a well-designed dataset for continual learning remains an important challenge for the community notably because they are many types of application scenarios and many data types [18].

## 8 Conclusion

Continual learning is about learning in non-iid settings. In those settings, the data distribution may drift in various ways which disrupt the learning process.

In this paper, we start from the hypothesis that different drift types can not be processed in the same way by learning algorithms. Therefore, we describe the various kind of drifts and propose to use them to design a detailed description of continual-learning scenarios. The scenarios proposed in this paper are mainly characterized by their data distribution drifts. However, they are meant to be used with a clear drift annotations policy, and a well-defined set of assumptions. The goal is to use well-characterized scenarios to evaluate continual learning algorithms and to measure how suited they are to deal with specific types of drifts under specific conditions.

Our description method should be a step toward a better understanding of benchmarks and the algorithm’s capacity. We believe that a better understanding of benchmarks will lead to easier transfer into real-life use cases.

## References

- [1] M. Abdelsalam, M. Faramarzi, S. Sodhani, and S. Chandar. Iirc: Incremental implicitly-refined classification, 2021. [6](#)
- [2] K. Ahuja, K. Shanmugam, K. R. Varshney, and A. Dhurandhar. Invariant risk minimization games, 2020. [1](#)
- [3] R. Aljundi, L. , E. Belilovsky, M. Caccia, M. Lin, L. Charlin, and T. Tuytelaars. Online continual learning with maximal interfered retrieval. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d’Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems 32*, pages 11849–11860. Curran Associates, Inc., 2019. [1](#)
- [4] R. Aljundi, M. Rohrbach, and T. Tuytelaars. Selfless sequential learning. In *International Conference on Learning Representations*, 2019. [6](#)
- [5] M. Arjovsky, L. Bottou, I. Gulrajani, and D. Lopez-Paz. Invariant risk minimization. *arXiv preprint arXiv:1907.02893*, 2019. [1](#)
- [6] E. Belouadah and A. Popescu. Deesil: Deep-shallow incremental learning. In *Proceedings of the European Conference on Computer Vision (ECCV)*, pages 0–0, 2018. [1, 5](#)
- [7] S. Ben-David, J. Blitzer, K. Crammer, and F. Pereira. Analysis of representations for domain adaptation. In B. Schölkopf, J. Platt, and T. Hoffman, editors, *Advances in Neural Information Processing Systems*, volume 19. MIT Press, 2007. [2](#)

- [8] P. Brazdil, C. Giraud-Carrier, C. Soares, and R. Vilalta. *Metalearning: Applications to Data Mining*. Springer Publishing Company, Incorporated, 1 edition, 2008. 2
- [9] L. Caccia, E. Belilovsky, M. Caccia, and J. Pineau. Online learned continual compression with adaptative quantization module. *arXiv preprint arXiv:1911.08019*, 2019. 1
- [10] M. Caccia, P. Rodriguez, O. Ostapenko, F. Normandin, M. Lin, L. Caccia, I. Laradji, I. Rish, A. Lacoste, D. Vazquez, and L. Charlin. Online fast adaptation and knowledge accumulation: a new approach to continual learning. *NeurIPS*, 2020. 2, 4, 7
- [11] A. Carlson, J. Betteridge, B. Kisiel, B. Settles, E. R. Hruschka Jr, and T. M. Mitchell. Toward an architecture for never-ending language learning. In *AAAI*, volume 5, page 3. Atlanta, 2010. 5
- [12] F. Cermelli, M. Mancini, S. R. Bulò, E. Ricci, and B. Caputo. Modeling the background for incremental learning in semantic segmentation, 2020. 6
- [13] A. Chaudhry, M. Ranzato, M. Rohrbach, and M. Elhoseiny. Efficient lifelong learning with a-gem. In *ICLR*, 2019. 1, 3
- [14] Z. Chen and B. Liu. Lifelong machine learning. *Synthesis Lectures on Artificial Intelligence and Machine Learning*, 12(3):1–207, 2018. 5
- [15] S. Doncieux, D. Filliat, N. Díaz-Rodríguez, T. Hospedales, R. Duro, A. Coninx, D. M. Roijers, B. Girard, N. Perrin, and O. Sigaud. Open-ended learning: A conceptual framework based on representational redescription. *Frontiers in Neurobotics*, 12:59, 2018. 4
- [16] A. Douillard, Y. Chen, A. Dapogny, and M. Cord. Plop: Learning without forgetting for continual semantic segmentation, 2020. 6
- [17] A. Douillard, M. Cord, C. Ollion, T. Robert, and E. Valle. Podnet: Pooled outputs distillation for small-tasks incremental learning. In *Proceedings of the IEEE European Conference on Computer Vision (ECCV)*, 2020. 5
- [18] A. Douillard and T. Lesort. Continuum: Simple management of complex continual learning scenarios, 2021. 7
- [19] A. Douillard, E. Valle, C. Ollion, T. Robert, and M. Cord. Insights from the Future for Continual Learning. *arXiv e-prints*, page arXiv:2006.13748, June 2020. 6
- [20] L. Fei-Fei, R. Fergus, and P. Perona. One-shot learning of object categories. *IEEE transactions on pattern analysis and machine intelligence*, 28(4):594–611, 2006. 2
- [21] C. Fernando, D. Banarse, C. Blundell, Y. Zwols, D. Ha, A. A. Rusu, A. Pritzel, and D. Wierstra. Pathnet: Evolution channels gradient descent in super neural networks. *CoRR*, abs/1701.08734, 2017. 1
- [22] R. M. French. Catastrophic forgetting in connectionist networks. *Trends in Cognitive Sciences*, 3(4):128–135, 1999. 1
- [23] J. Gama, I. Žliobaitė, A. Bifet, M. Pechenizkiy, and A. Bouchachia. A survey on concept drift adaptation. *ACM computing surveys (CSUR)*, 46(4):1–37, 2014. 2, 5
- [24] A. Gepperth and B. Hammer. Incremental learning algorithms and applications. In *European Symposium on Artificial Neural Networks (ESANN)*, Bruges, Belgium, 2016. 2, 5
- [25] X. He, J. Sygnowski, A. Galashov, A. A. Rusu, Y. W. Teh, and R. Pascanu. Task agnostic continual learning via meta learning. *ArXiv*, abs/1906.05201, 2019. 7
- [26] G. Hinton, O. Vinyals, and J. Dean. Distilling the Knowledge in a Neural Network. In *NIPS Deep Learning and Representation Learning Workshop (2015)*, pages 1–9, 2015. 2
- [27] S. C. Hoi, D. Sahoo, J. Lu, and P. Zhao. Online learning: A comprehensive survey. *arXiv preprint arXiv:1802.02871*, 2018. 6
- [28] T. Hospedales, A. Antoniou, P. Micaelli, and A. Storkey. Meta-learning in neural networks: A survey. *arXiv preprint arXiv:2004.05439*, 2020. 2, 7
- [29] S. Hou, X. Pan, C. C. Loy, Z. Wang, and D. Lin. Learning a unified classifier incrementally via rebalancing. In *The IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2019. 1
- [30] S. Huang and S. Ontañón. A closer look at invalid action masking in policy gradient algorithms, 2020. 5
- [31] S. James, P. Wohlhart, M. Kalakrishnan, D. Kalashnikov, A. Irpan, J. Ibarz, S. Levine, R. Hadsell, and K. Bousmalis. Sim-to-real via sim-to-sim: Data-efficient robotic grasping via randomized-to-canonical adaptation networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 12627–12637, 2019. 2
- [32] K. Javed and M. White. Meta-learning representations for continual learning. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d’Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems 32*, pages 1818–1828. Curran Associates, Inc., 2019. 7
- [33] M. G. Kelly, D. J. Hand, and N. M. Adams. The impact of changing populations on classifier performance. In *Proceedings of the fifth ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 367–371, 1999. 2
- [34] J. Kirkpatrick, R. Pascanu, N. Rabinowitz, J. Veness, G. Desjardins, A. A. Rusu, K. Milan, J. Quan, T. Ramalho, A. Grabska-Barwinska, et al. Overcoming catastrophic forgetting in neural networks. *Proc. of the national academy of sciences*, 2017. 1, 3
- [35] J. Knoblauch, H. Husain, and T. Diethe. Optimal continual learning has perfect memory and is np-hard. *arXiv preprint arXiv:2006.05188*, 2020. 1
- [36] D. Krueger, E. Caballero, J.-H. Jacobsen, A. Zhang, J. Binas, D. Zhang, R. L. Priol, and A. Courville. Out-of-distribution generalization via risk extrapolation (rex), 2021. 1
- [37] B. Lake, R. Salakhutdinov, J. Gross, and J. Tenenbaum. One shot learning of simple visual concepts. In *Proceedings of the Annual Meeting of the Cognitive Science Society*, volume 33, 2011. 2
- [38] T. Lesort. Continual learning: Tackling catastrophic forgetting in deep neural networks with replay processes, 2020. 1
- [39] T. Lesort, H. Caselles-Dupré, M. Garcia-Ortiz, J.-F. Goudou, and D. Filliat. Generative models from the perspective of continual learning. In *IJCNN - International Joint Conference on Neural Networks*, Budapest, Hungary, Jul 2019. 1
- [40] T. Lesort, A. Gepperth, A. Stoian, and D. Filliat. Marginal replay vs conditional replay for continual learning. In *International Conference on Artificial Neural Networks*, pages 466–480. Springer, 2019. 3
- [41] T. Lesort, V. Lomonaco, A. Stoian, D. Maltoni, D. Filliat, and N. Díaz-Rodríguez. Continual learning for robotics: Definition, framework, learning strategies, opportunities and challenges. *Information Fusion*, 58:52 – 68, 2020. 2, 3
- [42] T. Lesort, A. Stoian, and D. Filliat. Regularization shortcomings for continual learning. *arXiv preprint arXiv:1912.03049*, 2019. 1
- [43] Z. Li and D. Hoiem. Learning without forgetting. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2017. 1

- [44] Q. Liu, O. Majumder, A. Achille, A. Ravichandran, R. Bhotika, and S. Soatto. Incremental few-shot meta-learning via indirect discriminant alignment. 2020. [7](#)
- [45] V. Lomonaco and D. Maltoni. CORE50: a New Dataset and Benchmark for Continuous Object Recognition. In S. Levine, V. Vanhoucke, and K. Goldberg, editors, *Proceedings of the 1st Annual Conference on Robot Learning*, volume 78 of *Proceedings of Machine Learning Research*, pages 17–26. PMLR, 13–15 Nov 2017. [7](#)
- [46] T. Mitchell, W. Cohen, E. Hruscha, P. Talukdar, J. Betteridge, A. Carlson, B. Dalvi, M. Gardner, B. Kisiel, J. Krishnamurthy, N. Lao, K. Mazaitis, T. Mohammad, N. Nakashole, E. Platanios, A. Ritter, M. Samadi, B. Settles, R. Wang, D. Wijaya, A. Gupta, X. Chen, A. Saparov, M. Greaves, and J. Welling. Never-ending learning. In *AAAI*, 2015. : Never-Ending Learning in *AAAI-2015*. [5](#)
- [47] J. G. Moreno-Torres, T. Raeder, R. Alaiz-Rodríguez, N. V. Chawla, and F. Herrera. A unifying view on dataset shift in classification. *Pattern Recognition*, 45(1):521 – 530, 2012. [2](#)
- [48] M. Mundt, Y. W. Hong, I. Pliushch, and V. Ramesh. A wholistic view of continual learning with deep neural networks: Forgotten lessons and the bridge to active and open world learning. 2020. [4](#)
- [49] X. B. Peng, M. Andrychowicz, W. Zaremba, and P. Abbeel. Sim-to-real transfer of robotic control with dynamics randomization. In *2018 IEEE international conference on robotics and automation (ICRA)*, pages 3803–3810. IEEE, 2018. [2](#)
- [50] L. Y. Pratt. Discriminability-based transfer between neural networks. In *Advances in neural information processing systems*, pages 204–211, 1993. [2](#)
- [51] J. Quionero-Candela, M. Sugiyama, A. Schwaighofer, and N. D. Lawrence. *Dataset Shift in Machine Learning*. The MIT Press, 2009. [2](#)
- [52] J. Rajasegaran, S. Khan, M. Hayat, F. S. Khan, and M. Shah. itaml: An incremental task-agnostic meta-learning approach. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13588–13597, 2020. [7](#)
- [53] S.-A. Rebuffi, A. Kolesnikov, G. Sperl, and C. H. Lampert. icarl: Incremental classifier and representation learning. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 2001–2010, 2017. [4](#)
- [54] M. Riemer, I. Cases, R. Ajemian, M. Liu, I. Rish, Y. Tu, and G. Tesauro. Learning to learn without forgetting by maximizing transfer and minimizing interference. *arXiv preprint arXiv:1810.11910*, 2018. [7](#)
- [55] H. Ritter, A. Botev, and D. Barber. Online structured laplace approximations for overcoming catastrophic forgetting. In *Advances in Neural Information Processing Systems*, pages 3738–3748, 2018. [1](#)
- [56] R. Roady, T. L. Hayes, H. Vaidya, and C. Kanan. Stream-51: Streaming classification and novelty detection from videos. In *The IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) Workshops*, June 2020. [7](#)
- [57] A. A. Rusu, N. C. Rabinowitz, G. Desjardins, H. Soyer, J. Kirkpatrick, K. Kavukcuoglu, R. Pascanu, and R. Hadsell. Progressive neural networks. *ArXiv e-prints*, jun 2016. [1](#)
- [58] J. Schwarz, J. Luketina, W. M. Czarnecki, A. Grabska-Barwinska, Y. W. Teh, R. Pascanu, and R. Hadsell. Progress & compress: A scalable framework for continual learning. In *ICML*, 2018. [1](#)
- [59] H. Shin, J. K. Lee, J. Kim, and J. Kim. Continual learning with deep generative replay. In *Advances in Neural Information Processing Systems*, pages 2990–2999, 2017. [3](#)
- [60] M. Sugiyama and M. Kawanabe. *Machine Learning in Non-Stationary Environments: Introduction to Covariate Shift Adaptation*. The MIT Press, 2012. [2](#)
- [61] S. Thrun and T. M. Mitchell. Lifelong robot learning. In *The biology and technology of intelligent autonomous agents*, pages 165–196. Springer, 1995. [5](#)
- [62] R. Traoré, H. Caselles-Dupré, T. Lesort, T. Sun, G. Cai, N. D. Rodríguez, and D. Filliat. Discorl: Continual reinforcement learning via policy distillation. *CoRR*, abs/1907.05855, 2019. [2](#)
- [63] G. M. van de Ven and A. S. Tolias. Three scenarios for continual learning. *arXiv preprint arXiv:1904.07734*, 2019. [3](#), [4](#), [5](#)
- [64] R. Vuorio, D.-Y. Cho, D. Kim, and J. Kim. Meta continual learning. *arXiv preprint arXiv:1806.06928*, 2018. [7](#)
- [65] M. Wang and W. Deng. Deep visual domain adaptation: A survey. *Neurocomputing*, 312:135–153, 2018. [2](#)
- [66] K. Weiss, T. M. Khoshgoftaar, and D. Wang. A survey of transfer learning. *Journal of Big data*, 3(1):1–40, 2016. [2](#)
- [67] Y. Wu, Y. Chen, L. Wang, Y. Ye, Z. Liu, Y. Guo, and Y. Fu. Large scale incremental learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 374–382, 2019. [1](#), [5](#)
- [68] F. Zenke, B. Poole, and S. Ganguli. Continual learning through synaptic intelligence. In D. Precup and Y. W. Teh, editors, *Proceedings of the 34th International Conference on Machine Learning*, volume 70 of *Proceedings of Machine Learning Research*, pages 3987–3995, International Convention Centre, Sydney, Australia, 06–11 Aug 2017. PMLR. [1](#)
- [69] A. Zhang, Z. C. Lipton, M. Li, and A. J. Smola. *Dive into Deep Learning*. 2020. <https://d21.ai>. [2](#)
- [70] C. Zhao, T. M. Hospedales, F. Stulp, and O. Sigaud. Tensor based knowledge transfer across skill categories for robot control. In *Proceedings of the 26th International Joint Conference on Artificial Intelligence*, pages 3462–3468. AAAI Press, 2017. [2](#)