

Optimal Transport-based Adaptation in Dysarthric Speech Tasks

Rosanna Turrisi^{1,2,3}, Leonardo Badino⁴

¹Italian Institute of Technology, ²University of Ferrara, ³DIBRIS, University of Genoa, ⁴PerVoice

trrrnn@unife.it, leonardo.badino@pervoice.it

Abstract

In many real-world applications, the mismatch between distributions of training data (*source*) and test data (*target*) significantly degrades the performance of machine learning algorithms. In speech data, causes of this mismatch include different acoustic environments or speaker characteristics. In this paper, we address this issue in the challenging context of dysarthric speech, by multi-source domain/speaker adaptation (MSDA/MSSA). Specifically, we propose the use of an optimal-transport based approach, called MSDA via Weighted Joint Optimal Transport (MSDA-WDJOT). We confront the mismatch problem in dysarthria detection for which the proposed approach outperforms both the Baseline and the state-of-the-art MSDA models, improving the detection accuracy of 0.9 % over the best competitor method. We then employ MSDA-WJDOT for dysarthric speaker adaptation in command speech recognition. This provides a Command Error Rate relative reduction of 16% and 7% over the baseline and the best competitor model, respectively. Interestingly, MSDA-WJDOT provides a similarity score between the source and the target, i.e. between speakers in this case. We leverage this similarity measure to define a Dysarthric and Healthy score of the target speaker and diagnose the dysarthria with an accuracy of 95%.

In many real-world applications, the mismatch between training data (*source*) distribution and test data (*target*) distribution significantly degrades the performance of machine learning algorithms. In this paper, we address this problem in the context of assessment and recognition of dysarthric speech, in a multi-source domain/speaker adaptation (MSDA/MSSA) setting. Specifically, we propose the use of an optimal-transport based approach, called MSDA via Weighted Joint Optimal Transport (MSDA-WDJOT). We confront the mismatch problem in dysarthria detection for which the proposed approach outperforms both the [baseline non va con b maiuscola e devi spiegare in 2 parole cosa e' la baseline] Baseline and the state-of-the-art MSDA models, increasing detection accuracy by 0.9 % over the best competitor method. We then employ MSDA-WJDOT for dysarthric speaker adaptation in a command speech recognition task. Our approach reduces the command error rate by 16% and 7% over the baseline and the best competitor model, respectively. Interestingly, MSDA-WJDOT provides a similarity score between the source and the target, i.e. between speakers in this case. We leverage this similarity measure to define a Dysarthric and Healthy score of the target speaker and diagnose the dysarthria with an accuracy of 95%.

Index Terms: dysarthric speech, speaker adaptation, multi-source domain adaptation, dysarthria detection

1. Introduction

Many machine learning algorithms assume that the test and training datasets are sampled from the same distribution. However, in many real-world applications, new data can exhibit a

distribution change (*domain shift*) that degrades the algorithm performance. In speech tasks, such as speech recognition, this shift can be observed when the recording conditions are varying (e.g., different noisy/clean environments). This problem can be solved through Domain Adaptation (DA) [1, 2], that is a particular case of transfer learning [3]. DA methods consist in leveraging a labelled dataset, called *source* domain, to build a model that well performs on the dataset of interest, called *target* domain. The source and target domains are supposed to be similar and, typically, the labels for the target domain are not available (unsupervised DA).

Beside the recording conditions mismatching, speech tasks suffer of differences between speakers (e.g., different accents, different speaking style). This mismatch is even more evident in speech-impaired people as the speech characteristics also depend on the type and the severity of the disorder. We refer to this problem as *speaker adaptation*.

In this work, we focus on unsupervised domain adaptation and unsupervised speaker adaptation in pathological speech, when multiple sources are available. Therefore, in this framework, we assume to have access to multiple labelled training data sets (e.g., multiple speakers data) that are different, but related, to the dataset of interest (e.g., the speaker of interest) for which labels are not available. We consider as pathological speech the one recorded from people affected by dysarthria. This is a motor speech disorder consisting in the disruption of the normal control of the vocal tract musculature that is common in elderly people and in conditions such as Parkinson Disease, Amyotrophic Lateral Sclerosis and post-stroke motor impairments [4, 5].

We consider speech recorded from people with affected by dysarthria, that is a motor disorder consisting in the disruption of the normal control of the vocal tract musculature [5]. Dysarthria can express different speech characteristics based on the location of the neurological damage. However, it is possible to individuate common tendencies in dysarthric patients, such as mumbled speech, an acceleration or deceleration in the speaking rate, abnormal pitch and rhythm. Further, dysarthric individuals are more subject to a fatigue factor that affects the voice. We here investigate two case studies, that are domain adaptation in dysarthria detection and dysarthric speaker adaptation for command speech recognition.

Dysarthria detection is currently evaluated by neurology experts through the use of clinical assessment tools that attribute a score to the capacity of the subject to perform perceptual and/or acoustic tasks. This procedure can be laborious and time consuming. Therefore, a rapid and objective dysarthria detection procedure could help the therapist in the diagnosis.

In the last years, the research community started to look at dysarthria detection by learning a mapping from the acoustic features to the text label [6, 7]. In [8], the authors proposed an interpretable DNN model in which they added an interme-

diate layer that acts as a bottle-neck feature extractor providing nasality, vocal quality, articulatory precision and prosody features. They showed that these interpretable features are highly correlated with the evaluation of speech-language pathologists. In [9] the authors propose a deep learning approach to compute phonological posteriors from the speech signal and model the voice quality spectrum in patient affected by Parkinson’s Disease (PD). In [10], articulation impairments of PD patients are analyzed by time–frequency representations (TFRs), used to feed a convolutional neural network (CNN) and discriminate between patients and healthy speakers.

However, none of the previous studies considered the mismatch between training and testing data. Towards this direction, few studies [11, 12] looked for an invariant-feature space to improve dysarthria detection. Nonetheless, these only consider the mismatch case within the same dataset, in which recording conditions and environment characteristics can be considered invariant. Instead, we here tackle the more real and common scenario in which audio are recorded in different noisy conditions. To the best of our knowledge, this is the first work in which unsupervised domain adaptation is applied to dysarthria detection. While the domain adaptation problem for dysarthric speech has not been addressed yet, the adaptation of a model to a new unseen speech dataset with a different noise type is an old problem that always attracted the attention of the research community [13, 14, 15]. Due to the fact that both dysarthria detection and noise robustness are challenging tasks, they tend to be treated separately. However, it is worthwhile to consider them as a unique problem. Indeed, dysarthric speech corpora are usually collected at the hospitals that are not equipped to record speech in absence of noise.

Speaker Adaptation (SA) techniques have been widely investigated by the automatic speech recognition (ASR) community [16, 17, 18, 19, 20, 21]. However, conventional SA algorithms perform poorly in dysarthric speech when they present a low intelligibility. As reported in [22, 23, 24], even though commercial ASR systems can achieve up to 90% for some dysarthric speakers with high intelligibility, the recognition performance still remains inadequate with the decreasing of the speech intelligibility. These commercial systems usually incorporate SA techniques to adapt the model to the voice of that speaker that require some audio samples from the speaker of interest. It follows that traditional adaptation techniques are not sufficient to deal with gross abnormalities [25]. Further, they results to be inefficient even for speakers with mild to moderate dysarthria when the vocabulary size is larger than 30 words [26].

In the last decades, some attempts to move forward and solve the training-testing mismatch for pathological speech have been done. [27] adapts the ASR system trained on large datasets to a dysarthric dataset. In [28], the authors leverage articulatory features, as well as the acoustic ones, achieving a 4-8% of World Error Rate (WER) relative reduction. However, these techniques require a large amount of data for fine-tuning, that is usually not available. To overcome this problem, [29] proposes to fine-tune only a subset of the network layers to better adapt an ASR model to the dysarthric speech. [30], rather than adapting the acoustic models, models the errors at phonetic level made by the speaker and attempts to correct them by two possible strategies, that incorporate the language model and find the best estimate of the correct word sequence.

However, all the aforementioned studies are limited to the supervised framework, whereas the unsupervised speaker adaptation is the most common real scenario.

We propose to solve both adaptation problems by adopting an Optimal Transport (OT) [31, 32] based approach, named Multi-Source Domain Adaptation Weighted Joint Distribution Optimal Transport (MSDA-WJDOT), firstly introduced in [33]. This method looks for a convex combination of the joint source distributions with minimal Wasserstein distance to the proxy target distribution, in which the labels are replaced by the prediction of a classifier. The source weights and the target classifier are simultaneously learned. The advantage of MSDA-WJDOT over the other MSDA approaches is that the source weights provide a similarity measure between each source and the target domain. This can be leveraged to select only the relevant sources and it also offers an interpretable model. For instance, in the case of speaker adaptation, these weights reflect the similarity between speakers.

2. MSDA-WJDOT

In this section, we recall MSDA-WJDOT firstly proposed in [33]. This method approaches to the MSDA problem by estimating the similarity between the source and target domains, in the Wasserstein sense, and learning a target classifier using only the most similar source datasets.

Let us suppose to have J sources (X_j, Y_j) with N_j samples. MSDA-WJDOT assumes to have access to a differentiable embedding function g from the input space to an embedding space \mathcal{G} . If the embedding is not available MSDA-WJDOT becomes a two-step procedure where g is learned in the first step. This can be done by

$$\min_{g, f_S} \sum_{j=1}^J \frac{1}{N_j} \sum_{i=1}^{N_j} \mathcal{L}(f_S \circ g(x_j^i), y_j^i), \quad (1)$$

where f_S is a global classifier common to all sources. Alternatively, the authors in [33] suggests to estimate g with the Multi-Task Learning (MTL) framework [34], i.e. by

$$\min_{g, \{f_j\}_{j=1}^J} \sum_{j=1}^J \frac{1}{N_j} \sum_{i=1}^{N_j} \mathcal{L}(f_j \circ g(x_j^i), y_j^i), \quad (2)$$

where f_j represents the classification function of the j -th source. Note that Eq. 1 and 2 provide two different ways to estimate g , while the source classifiers f_S and f_j are not further used in MSDA-WJDOT.

Once g is given, we can define the source joint distributions $p_{S,j}$, for $1 \leq j \leq J$, with support on the product space $\mathcal{G} \times \mathcal{Y}$, where \mathcal{Y} is the label space. We define a convex combination of the source distributions

$$p_S^\alpha = \sum_{j=1}^J \alpha_j p_{S,j}$$

with $\alpha \in \Delta^J$. MSDA-WJDOT aims at finding a classification function f that aligns the target distribution p_T^f with a convex combination $\sum_{j=1}^J \alpha_j p_{S,j}$ of the source distributions with convex weights α on the simplex Δ^J . This can be expressed as

$$\min_{\alpha, f} W_D \left(\hat{p}_T^f, \sum_{j=1}^J \alpha_j \hat{p}_{S,j} \right), \quad (3)$$

where W_D is the Wasserstein distance. A remarkable advantage of this approach is that the weights α are learned simultaneously with the classifier f , which allows to distribute

the mass based on the similarity between the source and the target domains, both in the feature and in the output spaces. Consequently, misleading and unrelated source domains are in practice not used and this allows to learn a more accurate classifier.

In the following we refer to MSDA-WJDOT as MSDA-WJDOT or MSDA-WJDOT_{MTL} to specify if the embedding is learned by Eq. 1 or 2, respectively.

3. Experimental setup

3.1. Dysarthria detection

3.1.1. Dataset

TORGO is one of the most popular dysarthric speech corpora [37]. It consists of aligned acoustic and articulatory recordings from 15 speakers. Seven of these speakers are control speakers without any speech disorders, while the remaining eight speakers present different levels of dysarthria. We used the TORGO dataset to generate multiple-sources and target domain. In particular, we generated 15 noisy datasets by combining the raw signals with different types of noises from a noise dataset (available *here*). Each noisy dataset has been synthesized by PyDub python library [38] summing the same type of noise signal to the raw data. We then used the libROSA Python library [39] to extract 13 MFCCs plus deltas and delta-deltas, computed every 10ms from 25ms Hamming windows followed by a z-normalization per track. We fixed the number of sources equal to 14 and we tested 4 noisy domains as target: F16, Buccaneer2 (B2), Factory2 (F2), Destroyerengine (D).

3.1.2. MSDA-WJDOT model details

The feature extraction g is performed by a Bidirectional Long Short-Term Memory (BLSTM) recurrent network with two hidden layers, each containing 50 memory blocks. We train the BLSTM as sequence-to-vector model, by taking the final hidden state at the last time step as a fixed-length utterance representation to generate the command probability given the whole sequence. The source and target classifier functions $\{f_j\}, f_S, f$ are learned as one feed-forward layer taking the last hidden state as input. The weights were initialized with Xavier initialization. Training is performed with Adam optimizer with 0.9 momentum and $\epsilon = e^{-8}$. The learning rate exponentially decays at every epoch. We grid-research the initial learning rate value and the decay rate.

3.2. Command speech recognition

3.2.1. Dataset

To investigate the Dysarthric Speaker Adaptation we employ the AllSpeak dataset [40], that consists of speech recordings from 29 Italian native speakers. Seventeen of these (thirteen males, four females) are affected by Amyotrophic Lateral Sclerosis, while the remaining twelve (six males, six females) are healthy control speakers. The dataset contains 25 commands in Italian, relative to basic needs such as ‘‘I am thirsty’’. This dataset is very challenging due to the small amount of recordings. Indeed, only 2387 and 1857 examples have been recorded from control and dysarthric speakers, respectively.

We perform speaker adaptation of each dysarthric speaker by using all the remaining speakers as training dataset. The unlabelled target speaker data is split into adaptation set (80%) and testing (20%) set, which contains one example of each com-

mand. To train MSDA-WJDOT, we simultaneously employ the source training dataset and the adaptation target speaker dataset.

3.2.2. MSDA-WJDOT model details

The embedding function g is represented by a BLSTM with five hidden layers, each containing 250 memory blocks. Finally, a softmax layer performs the classification task. Here, we do not consider the MTL variant as the dataset size is limited and learning a source-classifier f_j with a very small amount of data may result hard. All weights are initialized with Xavier initialization. Training is performed with Adam optimizer with 0.9 momentum and $\epsilon = e^{-8}$. Learning rate is fixed to 0.001.

4. Results

4.1. Competitor models

We compare the proposed approach with well-established MSDA approaches: Importance Weighted Empirical Risk Minimization (IWERM) [35] and two extensions of JDOT [36] to the MSDA case (see [33] for more details). To better measure the adaptation contribution, we also report the performance of a *Baseline* model in which the global classifier f_S , learned on the source domains, is used as target classifier. In addition, in Sec. 4.3, we provide the performance of a supervised speaker adaptation (*SSA*) model, in which we add a feed-forward linear layer atop the input to the *Baseline* model and train it on the target dataset [41]. We consider this approach as the lower bound of the SA performance error.

4.2. Dysarthria detection

In all experiments, we observed that learning g by the Multi-Task Learning approach always provides a better performance. Hence, for an easier reading of Table 1, we only report the performances in which the extractor g is given by the MTL.

For all the target domains, IWERM performs poorly, even underperforming the *Baseline*. This is probably due to the difficulties in computing the probability density function of the acoustic input, that presents a high complexity. Indeed, to make the computation feasible, we firstly extracted a lower-dimensional vector from the audio signal by PCA. All the remaining MSDA methods outperform the *Baseline*. Among them our MSDA-WJDOT provides the best accuracy for all target domains. More precisely, MSDA-WJDOT provides a relative error reduction of 56.7% and 32.69% over the error of the *Baseline* and the best competitor model, respectively.

4.3. Command speech recognition

Table 2 reports the results in terms of Command Error Rate (CER). A first remark is that, although the *Baseline* always achieved a CER between 15% and 20% on the validation set, it often had low accuracy on the target speaker. Once again, this emphasizes the difficulty of an ASR system to generalize to a new dysarthric speaker and the importance of the speaker adaptation in this context.

The unsupervised speaker adaptation carried out by MSDA-WJDOT outperforms all the methods by providing the best Average CER. Indeed, it reduces the CER of 16% and 7% over the *Baseline* and the MSDA competitors, respectively. Surprisingly, MSDA-WJDOT achieves an Average CER similar to the *SSA* approach, in which the labels are used.

It is crucial to recall that MSDA-WJDOT provides a measure of similarity between the target and the sources and, hence,

Table 1: Dysarthria detection accuracy on four target datasets: F16, Buccaneer2 (B2), Factory2 (F2), Destroyerengine (D). The mean and standard deviation of the accuracy are reported for the Baseline, IWERM, two extensions of JDOT and the proposed MSDA-WJDOT approach.

Target domain	F16	B2	F2	D	Average
Baseline	93.59 ± 0.38	93.76 ± 0.22	93.23 ± 0.66	92.46 ± 0.82	93.26
IWERM [35]	66.22 ± 0.01	66.38 ± 0.01	66.25 ± 0.05	66.30 ± 0.09	66.29
CJDOT _{MTL} [36]	95.35 ± 0.55	97.39 ± 0.09	96.71 ± 0.07	92.98 ± 0.75	95.61
MJDOT _{MTL} [36]	95.81 ± 0.42	97.22 ± 0.09	96.53 ± 0.12	93.12 ± 0.67	95.67
MSDA-WJDOT _{MTL}	97.32 ± 0.36	97.82 ± 0.13	97.76 ± 0.10	95.42 ± 0.24	97.08

Table 2: Command Error Rate (CER) for each dysarthric target speaker provided by the Baseline, SSA, MSDA-WJDOT and the competitor models.

Speaker	Baseline	CJDOT [36]	MJDOT [36]	MSDA-WJDOT	SSA
M01	35.79	32.77	31.93	31.93	25.00
M02	34.26	36.75	36.75	37.71	54.17
F01	63.16	52.63	49.12	49.12	60.00
F02	48.50	40.00	40.00	40.00	36.00
M03	64.44	68.89	71.11	57.78	55.56
M04	30.00	31.20	32.00	30.40	24.00
M05	18.62	17.46	15.08	14.29	17.39
F03	68.33	61.74	70.43	62.61	56.52
M06	48.67	34.78	33.91	35.65	26.09
M07	11.00	7.20	8.00	8.80	20.00
M08	39.50	36.00	41.60	33.60	32.00
M09	24.79	16.81	18.49	19.33	13.04
F04	48.07	38.60	38.60	38.60	40.91
M10	18.00	12.80	12.00	12.80	16.00
M11	56.50	47.20	48.80	45.60	40.00
M12	7.50	5.60	7.20	4.80	4.00
M13	30.91	45.45	43.64	21.82	9.09
A. CER	38.11	34.46	34.37	32.05	31.16

between speakers. We found that the recovered α always attributes highest similarity scores to dysarthric speakers rather than healthy ones, when the target speaker is dysarthric, and vice versa for healthy target speakers. This suggests that this approach can realistically estimate speaker closeness. Fig. 1 shows the recovered weights for a dysarthric target speaker. The mass is spread along dysarthric speakers while the α_j values are close to zero for healthy speakers.

4.4. The α weight and the dysarthria detection

As we showed in Fig. 1, MSDA-WJDOT associates speakers with similar voice characteristics. As additional analysis, we investigated the possibility of leveraging the α weights of the command classifier to detect dysarthria. Specifically, we attempt to classify a speaker as healthy or dysarthric based on his/her similarity with the other subjects.

Let define I_c as the set indexing the control speakers and I_d as the set of indices related to dysarthric speakers. We then define the Healthy Score (HS) and the Dysarthric Score (DS) as follow

$$HS = \sum_{j \in I_c} \alpha_j, \quad DS = \sum_{j \in I_d} \alpha_j. \quad (4)$$

We can use these scores to perform dysarthria detection by stating that

A speaker is affected by dysarthria if $DS > HS$.

Fig. 2 reports the computed scores for all dysarthric speakers

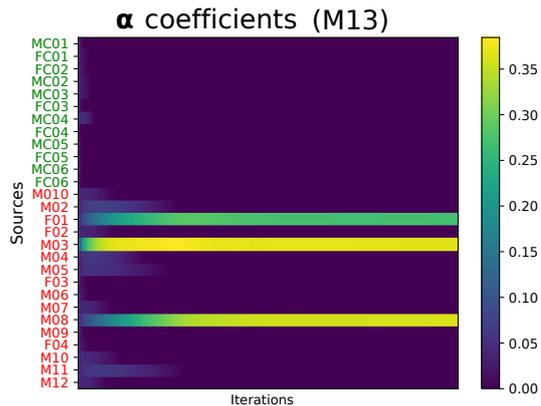


Figure 1: α coefficients recovered during MSDA-WJDOT training for dysarthric target speaker M13. The α_j coefficients are close to zero for healthy speakers (in green), while the highest weights are attributed to dysarthric speakers (in red)

and for 5 control speakers. As we can see the controls subjects are always classified as healthy while for the patients, except for F02, we have $DS > HS$. This results in a final accuracy of 95%.

5. Conclusions

In this work, we addressed unsupervised domain and speaker adaptation in the challenging context of pathological speech by employing MSDA-WJDOT [33]. We have shown the effectiveness of our proposed method on dysarthria detection and spoken command recognition, by comparing it with well-established MSDA approaches and a Baseline model, in which a global classifier is learned on the source datasets and directly tested on the target data, without adaptation. Our method provides the best performance on both applications. Interestingly, MSDA-WJDOT also provides source-target similarity coefficients α that, in speaker adaptation, result in a measure of speaker relatedness. From this, we derived the Healthy (HI) and Dysarthric (DI) Index of a target speaker and diagnosed the dysarthria, achieving an accuracy of 95%.

Future directions could delve into the dysarthria assessment by individuating intervals of values in which the DI corresponds to dysarthria severity levels (e.g., mild, moderate, severe). This may bring to very efficient ASR systems that simultaneously improve their performance via SA, and compute the DI warning the subject when the index is close to the right endpoint of its interval. Such a device could predict the disease degeneration

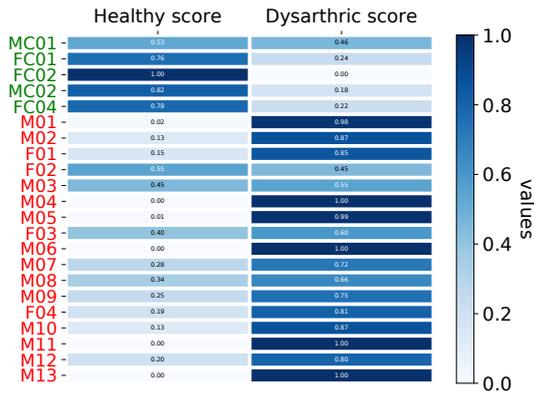


Figure 2: *HS and DS computed for healthy (in green) and dysarthric (in red) speakers.*

and allow the patient to act in time in order to prevent it.

6. References

- [1] J. J. Jiang, "A literature survey on domain adaptation of statistical classifiers," 2007.
- [2] W. M. Kouw and M. Loog, "A review of single-source unsupervised domain adaptation," *CoRR*, vol. abs/1901.05335, 2019. [Online]. Available: <http://arxiv.org/abs/1901.05335>
- [3] S. J. Pan and Q. Yang, "A survey on transfer learning," *IEEE Transactions on knowledge and data engineering*, vol. 22, no. 10, pp. 1345–1359, 2009.
- [4] M. R. McNeil, *Clinical management of sensorimotor speech disorders*. Thieme, 2009.
- [5] F. L. Darley, A. E. Aronson, and J. R. Brown, "Differential diagnostic patterns of dysarthria," *Journal of speech and hearing research*, vol. 12, no. 2, pp. 246–269, 1969.
- [6] J. R. Williamson, T. F. Quatieri, B. S. Helfer, J. Perricone, S. S. Ghosh, G. Ciccarelli, and D. D. Mehta, "Segment-dependent dynamics in predicting parkinson's disease," in *Sixteenth annual conference of the international speech communication association*, 2015.
- [7] G. An, D. G. Brizan, M. Ma, M. Morales, A. R. Syed, and A. Rosenberg, "Automatic recognition of unified parkinson's disease rating from speech with acoustic, i-vector and phonotactic features," in *Sixteenth Annual Conference of the International Speech Communication Association*, 2015.
- [8] M. Tu, V. Berisha, and J. Liss, "Interpretable objective assessment of dysarthric speech based on deep neural networks," in *INTERSPEECH*, 2017, pp. 1849–1853.
- [9] M. Cernak, J. R. Orozco-Arroyave, F. Rudzicz, H. Christensen, J. C. Vásquez-Correa, and E. Nöth, "Characterisation of voice quality of parkinson's disease using differential phonological posterior features," *Computer Speech & Language*, vol. 46, pp. 196–208, 2017.
- [10] J. C. Vásquez-Correa, J. R. Orozco-Arroyave, and E. Nöth, "Convolutional neural network to model articulation impairments in patients with parkinson's disease," in *INTERSPEECH*, 2017, pp. 314–318.
- [11] A. Wisler, V. Berisha, J. Liss, and A. Spanias, "Domain invariant speech features using a new divergence measure," in *2014 IEEE Spoken Language Technology Workshop (SLT)*. IEEE, 2014, pp. 77–82.
- [12] V. Berisha, A. Wisler, A. O. Hero, and A. Spanias, "Empirically estimable classification bounds based on a nonparametric divergence measure," *IEEE Transactions on Signal Processing*, vol. 64, no. 3, pp. 580–591, 2016.
- [13] D. Van Compernelle, "Noise adaptation in a hidden markov model speech recognition system," *Computer Speech & Language*, vol. 3, no. 2, pp. 151–167, 1989.
- [14] H. Cung and Y. Normandin, "Noise adaptation algorithms for robust speech recognition," *Speech Communication*, vol. 12, no. 3, pp. 267–276, 1993.
- [15] S. Furui, Z. Zhang, T. Horikoshi, and T. Sugimura, "Noise adaptation system of speech model, noise adaptation method, and noise adaptation program for speech recognition," 2008, uS Patent 7,424,426.
- [16] R. Gemello, F. Mana, S. Scanzio, P. Laface, and R. De Mori, "Linear hidden transformations for adaptation of hybrid ann/hmm models," *Speech Communication*, vol. 49, no. 10-11, pp. 827–835, 2007.
- [17] Z. Huang, S. M. Siniscalchi, I.-F. Chen, J. Wu, and C.-H. Lee, "Maximum a posteriori adaptation of network parameters in deep models," *arXiv preprint arXiv:1503.02108*, 2015.
- [18] Y. Zhao, J. Li, and Y. Gong, "Low-rank plus diagonal adaptation for deep neural networks," in *2016 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2016, pp. 5005–5009.
- [19] S. Sun, B. Zhang, L. Xie, and Y. Zhang, "An unsupervised deep domain adaptation approach for robust speech recognition," *Neurocomputing*, vol. 257, pp. 79–87, 2017.
- [20] Z. Meng, J. Li, Y. Gong, and B. Juang, "Adversarial teacher-student learning for unsupervised domain adaptation," in *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2018, pp. 5949–5953.
- [21] Z. Meng, J. Li, and Y. Gong, "Adversarial speaker adaptation," in *ICASSP 2019-2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2019, pp. 5721–5725.
- [22] A.-L. Kotler and N. Thomas-Stonell, "Effects of speech training on the accuracy of speech recognition for an individual with a speech impairment," *Augmentative and Alternative Communication*, vol. 13, no. 2, pp. 71–80, 1997.
- [23] N. J. Manasse, K. Hux, and J. L. Rankin-Erickson, "Speech recognition training for enhancing written language generation by a traumatic brain injury survivor," *Brain Injury*, vol. 14, no. 11, pp. 1015–1034, 2000.
- [24] P. Raghavendra, E. Rosengren, and S. Hunnicutt, "An investigation of different degrees of dysarthric speech as input to speaker-adaptive and speaker-dependent recognition systems," *Augmentative and Alternative Communication*, vol. 17, no. 4, pp. 265–275, 2001.
- [25] P. Green, J. Carmichael, A. Hatzis, P. Enderby, M. Hawley, and M. Parker, "Automatic speech recognition with sparse training data for dysarthric speakers," in *Eighth European Conference on Speech Communication and Technology*, 2003.
- [26] C. Goodenough-Trepagnier and M. I. Rosen, "Towards a method for computer interface design using speech recognition," *REPORT NO PUB DATE NOTE AVAILABLE FROM*, p. 341, 1991.
- [27] M. B. Mustafa, S. S. Salim, N. Mohamed, B. Al-Qatab, and C. E. Siong, "Severity-based adaptation with limited data for asr to aid dysarthric speakers," *PLoS one*, vol. 9, no. 1, p. e86285, 2014.
- [28] Y. E., M. V., B. C., and F. H., "Articulatory features for asr of pathological speech," *arXiv preprint arXiv:1807.10948*, 2018.
- [29] J. Shor, D. Emanuel, O. Lang, O. Tuval, M. Brenner, J. Cattiau, F. Vieira, M. McNally, T. Charbonneau, M. Nollstadt *et al.*, "Personalizing asr for dysarthric and accented speech with limited data," *arXiv preprint arXiv:1907.13511*, 2019.
- [30] S. O. C. Morales and S. J. Cox, "Modelling errors in automatic speech recognition for dysarthric speakers," *EURASIP Journal on Advances in Signal Processing*, vol. 2009, no. 1, p. 308340, 2009.
- [31] G. Monge, "Mémoire sur la théorie des déblais et de remblais," in *Histoire de l'Académie Royale des Sciences de Paris, avec les Mémoires de Mathématique et de Physique pour la même année*, 1781.

- [32] L. V. Kantorovich, "On the translocation of masses," in *Journal of Mathematical Sciences*, 2006.
- [33] R. Turrisi, R. Flamary, A. Rakotomamonjy, and M. Pontil, "Multi-source domain adaptation via weighted joint distributions optimal transport," *arXiv preprint arXiv:2006.12938*, 2020.
- [34] R. Caruana, "Multitask Learning," *Machine Learning*, vol. 28, no. 1, pp. 41–75, 1997. [Online]. Available: <https://doi.org/10.1023/A:1007379606734>
- [35] M. Sugiyama, M. Krauledat, and K.-R. Müller, "Covariate shift adaptation my importance weighted cross validation," *J. Mach. Learn. Res.*, vol. 8, pp. 985–1005, Dec. 2007.
- [36] N. Courty, R. Flamary, A. Habrard, and A. Rakotomamonjy, "Joint distribution optimal transportation for domain adaptation," in *Advances in Neural Information Processing Systems 30*, I. Guyon, U. V. Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett, Eds. Curran Associates, Inc., 2017, pp. 3730–3739. [Online]. Available: <http://papers.nips.cc/paper/6963-joint-distribution-optimal-transportation-for-domain-adaptation.pdf>
- [37] R. F., N. A.K., and T. Wolff, "The torgo database of acoustic and articulatory speech from speakers with dysarthria," *Lang Resources & Evaluation*, vol. 46, pp. 523–541, 2012.
- [38] J. Robert, M. Webbie *et al.*, "Pydub," 2018. [Online]. Available: <http://pydub.com/>
- [39] Brian McFee, Colin Raffel, Dawen Liang, Daniel P.W. Ellis, Matt McVicar, Eric Battenberg, and Oriol Nieto, "librosa: Audio and Music Signal Analysis in Python," in *Proceedings of the 14th Python in Science Conference*, Kathryn Huff and James Bergstra, Eds., 2015, pp. 18 – 24.
- [40] C. Di Nardi, R. Turrisi, A. Inuggi, N. Riva, I. Mauri, and L. Badino, "An automatic speech recognition android app for als patients."
- [41] J. Neto, L. Almeida, M. Hochberg, C. Martins, L. Nunes, S. Renals, and T. Robinson, "Speaker-adaptation for hybrid hmm-ann continuous speech recognition system," 1995.