

# Unsuitability of NOTEARS for Causal Graph Discovery

Marcus Kaiser · Maksim Sipos

Received: date / Accepted: date

**Abstract** Causal Discovery methods aim to identify a DAG structure that represents causal relationships from observational data. In this article, we stress that it is important to test such methods for robustness in practical settings. As our main example, we analyze the NOTEARS method, for which we demonstrate a lack of scale-invariance. We show that NOTEARS is a method that aims to identify a parsimonious DAG from the data that explains the residual variance. We conclude that NOTEARS is not suitable for identifying truly causal relationships from the data.

**Keywords** Causal Discovery · Bayesian Networks · Structure Learning · DAGs

## 1 Introduction

Establishing the relationship between cause and effect normally requires a randomized controlled trial (RCT), or an ability to perform an intervention [9]. However, this is not always possible or ethical in practical settings. The field of Causal Discovery aims to identify causal relationships from purely observational data. For tabular data with independently and identically distributed (IID) samples, causal relationships can conveniently be represented by a Directed Acyclic Graph (DAG) [3, 9]. Thus the aim of many Causal Discovery methods is to generate a DAG that resembles the true causal relationships in the data. For most real world use cases, there typically is no ground truth one can compare results to and it is only partially possible to verify the iden-

tified cause and effect relationships. Therefore, it is important that methods deployed on such data are robust with respect to changes in hyperparameters [5], and invariant with respect to reparameterization of the data. When it comes to applicability of newly developed methods to real data, there are the following pitfalls:

- Evaluation on examples for which the method has been developed (and is expected to perform well). It is important to also test how the method behaves when some of the assumptions (such as linearity, additivity, homoscedasticity and causal sufficiency [9]) are not satisfied.
- No checks for robustness to changes in hyperparameters. In order to be able to trust the results, it is important that the results either are only mildly affected by changes of hyperparameters, or there are reasonable heuristics for how to choose these hyperparameters.
- No checks for invariance with respect to the parameterization of the data. For example, how does the method behave when the scale of some of the variables is altered (such as a change of units, for example from meters to centimeters).

For the rest of the paper, we focus on the third point. We analyze the recent NOTEARS [14] method and show how a simple rescaling of the variables can lead to a large alteration of the derived graph.

## 2 The NOTEARS method

One popular method (with 100+ citations) for extracting a DAG structure from observational data published recently is NOTEARS (with open source code available on GitHub). Given a loss function  $\ell(W; X)$ , the core idea of this method is to optimize the objective function

$$F(W) := \ell(W; X) + \lambda \|W\|_1, \quad (1)$$

---

M. Kaiser  
causalens  
E-mail: marcus@causalens.com

M. Sipos  
causalens  
E-mail: max@causalens.com

with the additional constraint that the weight matrix  $W$  has to represent a DAG.  $\|\cdot\|_1$  is the  $L_1$  matrix norm and  $\lambda \geq 0$  is a regularization parameter that controls the sparsity of the identified weights. Following the suggestion in [14], we concentrate on the least-squares loss, given by

$$\ell(W; X) := \frac{1}{2n} \|X - XW\|_F^2, \quad (2)$$

where  $\|\cdot\|_F$  is the Frobenius norm or  $L_2$  matrix norm and  $n$  is the total number of samples. Theorem 1 in [14] states that  $W \in \mathbb{R}^{d \times d}$  is a DAG if and only if

$$h(W) := \text{trace}(e^{W \circ W}) - d = 0, \quad (3)$$

where  $A \circ B$  is the Hadamard product (entry-wise product of matrix entries). Based on this insight, the authors of NOTEARS define the following constrained non-linear problem

$$\min_{W \in \mathbb{R}^{d \times d}} F(W) \quad \text{subject to} \quad h(W) = 0. \quad (4)$$

Problems of the form (4) can be solved using an Augmented Lagrangian [2] approach, which replaces the constrained problem with a sequence of unconstrained problems. It is given by


$$\min_{W \in \mathbb{R}^{d \times d}} F(W) + \frac{\rho}{2} |h(W)|^2 + \alpha h(W), \quad (5)$$

where  $\alpha > 0$  and  $\rho > 0$  are iteratively increased, in order to find solutions that minimize  $h(W)$  (see [14] for the full details). Asymptotically, this leads to an (approximate) DAG structure for  $W$ . The whole algorithm can then be seen as an outer update step, where  $\alpha$  and  $\rho$  are increased, as well as an inner update step, which can e.g. be solved with a second order Newton method, such as L-BFGS-B [16]. There are a few points worth noting here:

- The overall algorithm is non-convex, which implies that the method can have multiple minima (and potentially can get stuck in such a local minimum).
- The method tries to find a trade-off between three objectives, which are an optimal fit of the linear model  $X = XW$ , whilst  $W$  should both resemble a DAG and be sparse.

Note that the first objective is opposed to the second and third objective, which both are aligned to one another as it is easier for a graph to not violate the DAG constraints when it has fewer edges that could violate these assumptions.

- The (approximate) DAG structure returned by the algorithm does not necessarily represent any causal relationships between the variables, but rather is the estimated result of a parsimonious model of the form of a structural equation model (SEM) [3].

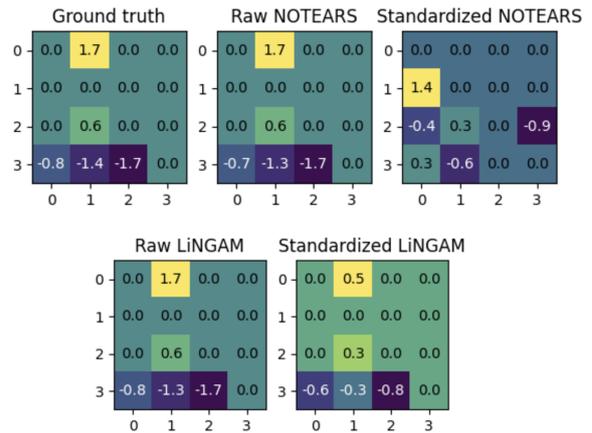

**Fig. 1** The weights of the simulated process. The entries in the  $i$ -th column represent how much variable  $i$  is affected by all other variables. Top row: We show the ground truth, results for the original generated data, as well as results for standardized data. Bottom row: Results for the LiNGAM algorithm (for comparison).

Although the authors in [14] do not claim that the estimated SEM represents causal relationships, one can find many references in the literature, which equate the structure learning approach from NOTEARS with learning causal graphs or Bayesian networks, cf. [6, 13, 15, 7, 12, 1, 4]. This however is not appropriate because identifying parsimonious structures that explain the data is not equivalent to making statements about causality in the data generating process. Causal graphs in particular imply conditional statistical independences between the variables (d-separation) which are entirely ignored by methods such as NOTEARS, cf. [3]. Causal graphs also imply more information than that which is present within a statistical model such as a Bayesian Network, most notably the ability to model interventions upon the data using do-calculus [8, 10].

### 3 Illustrative example

We consider a simple example consisting of a linear SEM with four variables  $X = (X_0, X_1, X_2, X_3)$ , uniform noise and  $n = 1000$ . Each variable is centered to be mean zero. This setup satisfies the assumptions of NOTEARS and therefore the method is expected to perform well. We want to understand how this method is affected by rescaling the data. We stress that the below described issues do not depend on this particular setup, but are general.

Figure 1 presents five plots. The first row shows the underlying ground truth  $W$  used to generate the data, followed by two iterations of NOTEARS. It is applied to the raw data (with standard deviations  $\sigma(X) = (0.86, 1.56, 1.07, 0.76)$ ), as well as normalized (unit standard deviation for all variables). The bottom row shows the corresponding results for the LiNGAM [11] algorithm (based on the DirectLiNGAM

implementation available on GitHub). We can observe that the result from NOTEARS on the original scale (second plot on the top) is close to the ground truth, but the identified variables for normalized data are not correct (top right). One can see that the weights for  $X_0$  and  $X_1$  are “flipped”, resulting in the method identifying that  $X_1 \rightarrow X_0$ , as opposed to  $X_0 \rightarrow X_1$  (cf. the description of Figure 1 for how to interpret the coefficients). In comparison, LiNGAM is able to correctly identify the variables. (For the scaled variables, the resulting weights differ due to the scaling, but the identified DAGs coincide.)

Note that for  $\lambda > 0$ , one would expect the scaling to affect the results, since the addition of an  $L_1$  penalty leads to a biased estimate of the true coefficients. To isolate the influence of the  $L_1$  penalty, the results we present here (and in all the following sections) are for  $\lambda = 0$ . We again stress that the qualitatively same behavior can be observed for  $\lambda > 0$ .

#### 4 Further observations and remarks

Next, we analyze the dynamics of this iterative method, in order to get a better understanding of where things go wrong. It is convenient to visualize the results after each iteration of the inner update step. Figure 2 shows the total loss (from Eq. (5)) after each iteration, together with  $\ell(W; X)$  and  $h(W)$ . After the first inner step (displayed at index 0), there is a small penalization for the lack of a DAG structure. In this case, the method “overfits” the data, leading to a fairly small loss  $\ell(W; X)$ , and hence a small overall loss in Eq. (5). As the loss contribution of  $h(W)$  is increased with each step, the loss  $\ell(W; X)$  tends to increase as well. This represents the tradeoff between fitting the data well and satisfying a DAG structure. Interestingly, also  $h(W)$  has the tendency to increase initially. Once the multiplicative factors applied to  $h(W)$  in Eq. (5) increase,  $h(W)$  becomes the predominant contributor to the loss at later iteration of the outer loop. This ensures that  $h(W)$  eventually approaches 0.

In Figure 3, we visualize the dynamics of  $W$  for different rescaling factors of the data. Each row represents the evolution of one set of weights. From top to bottom, the variables are incrementally rescaled - for the first row, we used the original data and in the last row we used the “fully rescaled” data, where each variable is normalized to unit variance.

We observe that the first inner update step largely determines the final structure, with mainly smaller adjustment in the later steps. The first two rows lead to the correct result, but as we increase the rescaling factors for the variables, the method converges to a different (wrong) solution. Again, we can observe that for larger rescaling factors (close to unit variance for all variables), the results are flipped for certain variables.

In summary, we observed the following points: The first inner update step largely determines the final structure. More-

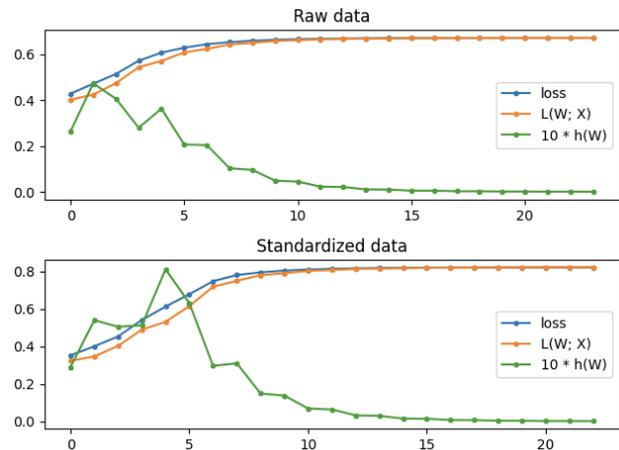


Fig. 2 Plots of the loss terms.

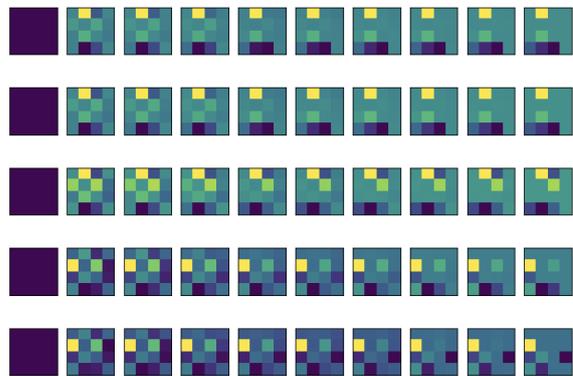


Fig. 3 Each row represents the evolution of the weights with each inner update step, for different scaling factors (cf. main text).

over, this first update step seems to overfit the data and the result thereof is sensitive to the scaling of the variables.

#### 5 Explanation

In order to obtain a better understanding of how the results depend on the scale, we consider the following toy example with two variables, where  $X_0 = \gamma X_1$  for some  $\gamma > 0$ . Note that this is clearly a pathological example with no “correct” solution, since we can equivalently write  $X_1 = \gamma^{-1} X_0$ . Nonetheless, the example is useful for understanding the internal workings of the algorithm.

In order to minimize  $\ell(W; X)$ , the method initially chooses positive weights for both off-diagonal entries of  $W$  (in violation of the acyclicity constraint!). The strength of the violation of this constraint depends on the size of the penalty  $h(W)$  compared to the remaining error in  $\ell(W; X)$ .

Then, with each iteration, the weight of one of the two off-diagonal entries is pushed to zero, in order to compen-

sate for the increasing penalty of  $h(W)$  until one of the two terms is equal (or at least close) to 0. The crux here is that we aim to achieve the overall smallest loss of  $F(W)$ , which in this case is obtained by minimizing the sum of residual variances, which is the minimum of

$$\|X_0\|^2 + \|X_1 - w_{01}X_0\|^2 \quad \text{and} \quad \|X_1\|^2 + \|X_0 - w_{10}X_1\|^2, \quad (6)$$


where  $w_{01}$  and  $w_{10}$  are the respective regression coefficients. For this example, the second term in both equations is zero, due to the perfect linear relationship  $X_0 = \gamma X_1$ . Therefore, the chosen direction solely depends on the variances of  $X_0$  and  $X_1$ . When  $\gamma > 1$ , then  $X_1$  has the larger variance, and thus the lower residual error is obtained for the choice  $X_0 \rightarrow X_1$  and  $X_1 \rightarrow X_0$  for  $\gamma < 1$  (for  $\gamma \approx 1$  the direction is subject to randomness). In other words, the variable with lower variance is identified as the driver of the variable with higher variance.

For a general example, the weight matrix will typically satisfy  $|W_{ij}| > 0 \Leftrightarrow |W_{ji}| > 0$ , with equal signs, whenever the variables are nonzero. This explains the initial ‘‘overfitting’’: The outcome of the first inner update returns a matrix that explains variables ‘‘both ways’’. In later iterations, once the penalty for  $h(W)$  is increased, the method will force a selection of the weights to zero in order to obtain a valid DAG structure.

Moreover, it is easy to show that increasing the variance for a single variable will lead to many edges pointing to this variable. This is because the  $\|X - XW\|_F^2$  term in the loss function cannot be reduced to zero due to the acyclicity constraint. Some of the feature vectors  $X_j$  will always be ‘‘source variables’’ for which all  $XW$  terms are identically 0, whereas others will be ‘‘sink variables’’ for which the  $XW$  terms are nonzero. When a feature vector  $X_j$  has a significantly higher variance than other vectors, the NOTEARS method will prefer entries that reduce this variance as much as possible, thereby prioritizing inbound edges into the  $j$ -th node. This intuitively explains why the method lacks scale invariance, it is because nodes with high variance are preferred to be sinks as opposed to sources. As one performs a sweeping increase of the variance of a variable by changing its units, the resulting DAGs will change from having this variable act as a source to having this variable act as a sink. This is exemplified in Figure 4, where the method is applied to the same data, with the exception that the variance for the fourth variable  $X_3$  is doubled in each iteration. Iterating this argument, by rescaling all variables accordingly, one can then generate an arbitrary topological order (cf. Appendix B in [9]) for the identified DAG.

## 6 Conclusion

We have seen that we can interpret NOTEARS as a method for finding parsimonious linear SEMs that best explain the



**Fig. 4** Multiple runs of the same example, where from left to right, the fourth variable is rescaled by the factors [1, 2, 4, 8, 16, 32], respectively.

data (as measured via a quadratic error term). We showed that the results of the method heavily depend on the scale of the data. It therefore is very important to carefully choose the scale of the data when one considers to use NOTEARS (or any method with similar loss function, cf. [1, 12]) for real world applications. Moreover, one should be careful about using methods such as NOTEARS for implying causality from observational data.

**Acknowledgements** We thank Hana Chockler and Andrew Lawrence for providing helpful comments on an early draft.

## Conflict of interest

The authors declare that they have no conflict of interest.

## References

- Bhattacharya, R., Nagarajan, T., Malinsky, D., Shpitser, I.: Differentiable causal discovery under unmeasured confounding. In: International Conference on Artificial Intelligence and Statistics, pp. 2314–2322. PMLR (2021)
- Fortin, M., Glowinski, R.: Augmented Lagrangian methods: applications to the numerical solution of boundary-value problems. Elsevier (2000)
- Glymour, C., Zhang, K., Spirtes, P.: Review of causal discovery methods based on graphical models. *Frontiers in genetics* **10**, 524 (2019)
- Kyono, T., Zhang, Y., van der Schaar, M.: Castle: Regularization via auxiliary causal graph discovery. In: H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, H. Lin (eds.) *Advances in Neural Information Processing Systems*, vol. 33, pp. 1501–1512. Curran Associates, Inc. (2020)
- Lawrence, A.R., Kaiser, M., Sampaio, R., Sipos, M.: Data generating process to evaluate causal discovery techniques for time series data. *Causal Discovery & Causality-Inspired Machine Learning Workshop at Neural Information Processing Systems* (2020)
- Ng, I., Fang, Z., Zhu, S., Chen, Z., Wang, J.: Masked gradient-based causal structure learning. *arXiv preprint arXiv:1910.08527* (2019)
- Pamfil, R., Sriwattanaworachai, N., Desai, S., Pilgerstorfer, P., Georgatzis, K., Beaumont, P., Aragam, B.: Dynotears: Structure learning from time-series data. In: International Conference on Artificial Intelligence and Statistics, pp. 1595–1605. PMLR (2020)
- Pearl, J.: The do-calculus revisited. *arXiv preprint arXiv:1210.4852* (2012)
- Peters, J., Janzing, D., Schölkopf, B.: *Elements of causal inference: foundations and learning algorithms*. The MIT Press (2017)

10. Schölkopf, B.: Causality for machine learning. arXiv preprint arXiv:1911.10500 (2019)
11. Shimizu, S., Inazumi, T., Sogawa, Y., Hyvärinen, A., Kawahara, Y., Washio, T., Hoyer, P.O., Bollen, K.: Directlingam: A direct method for learning a linear non-gaussian structural equation model. *The Journal of Machine Learning Research* **12**, 1225–1248 (2011)
12. Vowels, M.J., Camgoz, N.C., Bowden, R.: D’ya like dags? a survey on structure learning and causal discovery. arXiv preprint arXiv:2103.02582 (2021)
13. Yu, Y., Chen, J., Gao, T., Yu, M.: Dag-gnn: Dag structure learning with graph neural networks. In: *International Conference on Machine Learning*, pp. 7154–7163. PMLR (2019)
14. Zheng, X., Aragam, B., Ravikumar, P., Xing, E.P.: Dags with no tears: Continuous optimization for structure learning. *Advances in Neural Information Processing Systems (NeurIPS 2018)* (2018)
15. Zheng, X., Dan, C., Aragam, B., Ravikumar, P., Xing, E.: Learning sparse nonparametric dags. In: *International Conference on Artificial Intelligence and Statistics*, pp. 3414–3425. PMLR (2020)
16. Zhu, C., Byrd, R.H., Lu, P., Nocedal, J.: Algorithm 778: L-bfgs-b: Fortran subroutines for large-scale bound-constrained optimization. *ACM Transactions on Mathematical Software (TOMS)* **23**(4), 550–560 (1997)