

PAC Bayesian Performance Guarantees for Deep (Stochastic) Networks in Medical Imaging

Anthony Sicilia¹ Xingchen Zhao²
Anastasia Sosnovskikh² Seong Jae Hwang^{1,2}

¹Intelligent Systems Program, University of Pittsburgh

²Department of Computer Science, University of Pittsburgh

anthonysicilia@pitt.edu xiz168@pitt.edu
anastasia@pitt.edu sjh95@pitt.edu

Abstract. Application of deep neural networks to medical imaging tasks has in some sense become commonplace. Still, a “thorn in the side” of the deep learning movement is the argument that deep networks are somehow prone to overfitting and are thus unable to generalize well when datasets are small. The claim is not baseless and likely stems from the observation that PAC bounds on generalization error are usually so large for deep networks that they are vacuous (i.e., logically meaningless). Contrary to this, recent advances using the PAC-Bayesian framework have instead shown non-vacuous bounds on generalization error for large (stochastic) networks and standard datasets (e.g., MNIST and CIFAR-10). We apply these techniques to a much smaller medical imaging dataset (the ISIC 2018 challenge set). Further, we consider generalization of deep networks on segmentation tasks which has not commonly been done using the PAC-Bayesian framework. Importantly, we observe that the resultant bounds are also non-vacuous despite the sharp reduction in sample size. In total, our results demonstrate the applicability of PAC-Bayesian bounds for deep stochastic networks in the medical imaging domain.

1 Introduction

Understanding the generalization of learning algorithms is a classical problem. In medical imaging, in particular, where sample sizes are small and stakes may be high, guarantees on the performance of our algorithms are of paramount importance. Practically speaking, verifying whether a fixed method of inference will generalize is not a challenging task. Holdout sets are the tool of choice for most practitioners – when sample sizes are large,¹ we can be confident the measured performance is representative. For example, in classification tasks, Langford provides a useful tutorial [33]. Still, the study of generalization requires another distinct realm of reasoning about our model performance. In particular, generalization theory asks questions surrounding *why* a model generalizes.

¹ Application of Hoeffding’s Inequality can give us bounds on performance. For large sample sizes, the interval around our holdout estimate grows small.

To answer these, one appeals to the Probability Approximately Correct (PAC) learning framework. By definition, learnability in this context specifies how many samples should be required for a learning algorithm to confidently ensure an arbitrarily small difference between the observed training performance of the model, and the expected testing performance (e.g., see Haussler [22] or Shalev-Shwartz and Ben-David [49]). A perhaps traditional approach shows this property through *uniform* convergence bounds; i.e., by identifying a sample size which is large enough for any model in our search space (such as neural networks of a fixed architecture). Typically, these analyses depend on a complexity measure of the space from which we pick our model. Interpretation of these analyses gives us greater confidence when deploying our models in, say, a clinical setting. If the complexity of our model is low, we can be more confident we have not simply “overfit” to the training set. The model *should* generalize well when deployed.

Where these bounds appear to fall short is in the case of deep neural networks. Here, to make uniform guarantees with typical measures such as the Vapnik-Chervonenkis (VC) dimension [51,52], one may require as many samples as parameters in our network to expect good generalization.² When our networks are large (e.g., consider a U-Net [48] with 15M parameters) our datasets are thus required to be (perhaps) unreasonably sized to ensure generalization; especially in the context of medical imaging. Empirically, Zhang et al. [53] highlight this by demonstrating deep networks which nearly perfectly fit a *random* labeling of their training set, and of course, generalize poorly on any distinct set. As suggested by the authors, the result questions the usefulness of uniform convergence bounds. But still, we do often observe that networks generalize in practice. Hence, the community response has been to try and explain this phenomenon.

One recent line of research which we find particularly appealing is the demonstration of *non-vacuous* bounds for practical networks on standard datasets. Here, *vacuous* describes a bound on an error which is larger than 1. Thus, it gives us no new insight into a model’s generalization performance.³ This line of work was perhaps initiated by Dziugaite and Roy [15] who observed that most bounds on error for deep networks were, in fact, vacuous (when computed). Borrowing ideas from Langford and Caruana [32], the authors further demonstrate a technique to compute non-vacuous bounds for some deep stochastic networks trained on standard datasets (e.g., MNIST). Tying their work back to the results of Zhang et al., the authors also empirically demonstrate that those networks, which *do* fit random labels, have vacuous bounds on the true error. The key tool employed by Dziugaite and Roy is the *PAC-Bayesian* framework.⁴ As discussed later, the motivation for using PAC-Bayesian bounds is the hypothesis that stochastic gradient descent (SGD) trained networks generalize well when

² Bartlett et al. [7] provide tight bounds on VC dimension. Shalev-Shwartz and Ben-David [49] show an upper bound as low as the number of weights when parameters are discretized (as in computing representations). We are unaware of better bounds.

³ Error rates, by definition, are confined to the interval [0,1].

⁴ PAC-Bayes is attributed to McAllester [38]; also, Shawe-Taylor and Williamson [50].

their solutions lie in large, flat minima (e.g., see an early formulation of this hypothesis by Hochreiter and Schmidhuber [25]). Thus, these PAC-Bayes bounds give us exactly what we desire. They provide empirically realizable guarantees on the performance of deep networks, while also giving us insight into what properties of the optimization space allow networks to generalize well in practice. To borrow an analogy from Arora [2], these bounds are “prescriptive.” They are similar to a doctor’s orders to resolve high blood pressure. Cut the salt, or in our case, look for flat minima.

In this context, the end goal of this paper is to validate whether the “flat minima prescription” – with observed evidence in traditional computer vision – may find similar success in explaining generalization for the small-data, non-traditional tasks that are common to medical imaging. Our contributions, in this sense, are primarily experimental. We demonstrate non-vacuous PAC-Bayesian performance guarantees for deep stochastic networks applied to the classification and segmentation tasks within the ISIC 2018 Challenge [12]. We employ much the same strategies used by Dziugaite et al. [14, 15] as well those used by Perez-Ortiz et al. [44]. With that said, our different setting yields novel experimental results. Specifically, in segmentation, we compute non-vacuous bounds for a fully-sized U-Net using a medical imaging dataset with about 2.3K training samples. To our knowledge, for deep stochastic networks, no other paper has explored non-vacuous bounds in segmentation, and no other paper has computed non-vacuous bounds on such small datasets.

The ramifications of these results are continued evidence supporting the “flat minima prescription” for generalization, specifically, in medical imaging. Besides this, for the medical imaging practitioner who seeks to benefit from using deep learning, we attempt to outline how knowledge of such bounds may provide practical benefit. We show that PAC-Bayesian bounds yield promising results in a self-bounded learning context (e.g., see Freund [17] or Langford and Blum [31]) as was demonstrated by Perez-Ortiz et al. [44] on natural image datasets. Further, we show how one might use these bounds to “probe” the loss-landscape to learn about the generalization properties of a particular model and dataset.

2 PAC-Bayesian Theory and Generalization

We proceed by outlining the PAC-Bayesian bounds which we intend to compute. We present only a minimum of the possible results, focusing on those required to parse the employed technique. We also discuss the relation between the PAC-Bayesian framework and the flat minima hypothesis, along with other arguments for generalization in the literature.

2.1 Formal Setup

In the PAC-Bayes setting, we consider a hypothesis space \mathcal{H} and a distribution Q over this space. Specific to our context, $\mathcal{H} = \mathbb{R}^d$ will represent the space of deep networks with some fixed architecture, and Q will be a distribution over \mathcal{H} .

Typically, we will set $Q = \mathcal{N}(\mu, \Sigma)$, a multivariate normal. For some fixed space $\mathcal{Z} = \mathcal{X} \times \mathcal{Y}$, the hypothesis $h \in \mathcal{H}$ defines a mapping $x \mapsto h(x)$ with $x \in \mathcal{X}$, and $h(x) \in \mathcal{Y}$. Given a $[0, 1]$ -bounded loss function $\ell : \mathcal{H} \times \mathcal{Z} \rightarrow [0, 1]$ and a distribution D over \mathcal{Z} , the risk of h is defined $\mathcal{R}_\ell(h, D) = \mathbf{E}_{(x,y) \sim D} \ell(h, (x, y))$. Given instead a sample $S \sim D^m$ over \mathcal{Z} , the empirical risk is denoted $\hat{\mathcal{R}}_\ell(h, S)$ and is computed as usual by averaging. In all of our discussions, the data distribution D or sample S is usually easily inferred from context. Therefore, we typically write $\mathcal{R}_\ell(h) = \mathcal{R}_\ell(h, D)$ and $\hat{\mathcal{R}}_\ell(h) = \hat{\mathcal{R}}_\ell(h, S)$. With these definitions, we are interested in quantifying the risk of a stochastic model.⁵ In the context of neural networks, one can imagine sampling the distribution Q over \mathbb{R}^d and setting the weights before performing inference on some data-point x . Often, we will refer to Q itself as the stochastic predictor. The associated risk for such a model is defined as $\mathcal{R}_\ell(Q) = \mathbf{E}_{h \sim Q} \mathcal{R}_\ell(h)$ with $\hat{\mathcal{R}}_\ell(Q)$ similarly defined. Typically, we cannot exactly compute expectations over Q . For this reason, we also define $\hat{\mathcal{R}}_\ell(\hat{Q})$ for a sample $\hat{Q} \sim Q^n$ as an empirical variant, computed by averaging. The last components for any PAC-Bayesian bound come from two notions of the Kullback-Leibler (KL) divergence between two distributions Q and P written $\text{KL}(Q||P)$ and defined as usual. For numbers $q, p \in [0, 1]$, we write $\text{kl}(q||p)$ as shorthand for the KL divergence between Bernoulli distributions parameterized by q, p . This is typically used to quantify the difference between the risk on a sample and the true risk. In the next section, we put the discussed pieces in play.

2.2 The PAC-Bayesian Theorem

The PAC-Bayesian theory begins primarily with the work of McAllester [38] with similar conceptualizations given by Shawe-Taylor and Williamson [50]. Besides what is discussed in this section, for completeness, readers are also directed to the work of Catoni [10], McAllester [37], Germain et al. [18, 19], and the primer by Guedj [20]. We start by stating the main PAC-Bayesian Theorem as given by Mauer [36]. See also Langford and Seeger [34] for the case where ℓ is a 01 loss.

Theorem 1. (Mauer [36]) *Let ℓ be a $[0, 1]$ -bounded loss function, D be a distribution over \mathcal{Z} , and P be a probability distribution over \mathcal{H} . Then, for $\delta \in (0, 1)$*

$$\Pr_{S \sim D^m} \left(\forall Q : \text{kl}(\hat{\mathcal{R}}_\ell(Q)||\mathcal{R}_\ell(Q)) \leq \frac{\text{KL}(Q||P) + \ln \frac{1}{\delta} + \ln \sqrt{4m}}{m} \right) \geq 1 - \delta. \quad (1)$$

By way of Pinsker’s inequality, the above may be loosened for the purpose of interpretation

$$\mathcal{R}_\ell(Q) \leq \hat{\mathcal{R}}_\ell(Q) + \sqrt{\frac{\text{KL}(Q||P) + \ln \frac{1}{\delta} + \ln \sqrt{4m}}{2m}}. \quad (2)$$

⁵ Sometimes, in classification, this may be called the Gibbs classifier. Not to be confused with the “deterministic,” majority vote classifier. An insightful discussion on the relationship between risk in these distinct cases is provided by Germain et al. [19].

Often P is referred to as the prior and Q as the posterior. Still, it is important to note that no restriction on the form of P and Q is required by the above bound (e.g., as in Bayesian parameter estimation). As we have alluded to before, we will focus on the case where both P and Q are multivariate normal distributions. What is required is that P be fixed before observing the sample S that is used to compute the bound. Albeit, P can depend on D and samples independent of S as we discuss later. Intuitively, by examining the upper bound, one realizes we quantify the complexity of the stochastic predictor Q in so much as it deviates from some prior knowledge we have on the solution space. That is, by growth in the term $\text{KL}(Q||P)$.

In Section 3, we compute a much tighter formulation of the bound in Eqn. (2) which handles the KL divergence more directly. We provide the derivation of this bound in the Appendix. Various insights (and results) used to build the final bound are of course due to Langford and Caruana [32]; Dziugaite et al. [14, 15]; and Perez-Ortiz et al. [44] who have all computed similar (or identical) bounds on stochastic neural networks before us. In Section 3, we compute this bound for classification and segmentation tasks. For classification, we take ℓ to be the 01-loss defined $\ell_{01}(h, (x, y)) = \mathbf{1}[h(x) \neq y]$ where $\mathbf{1}$ is the indicator function. Precisely, $\mathcal{R}_{\ell_{01}}(h)$ is equal to 1 minus the accuracy. For segmentation, we pick ℓ to be $\ell_{\text{DSC}}(h, (x, y)) = 1 - \text{DSC}(h, (x, y))$ where DSC is the Dice similarity coefficient. These upper bounds trivially yield corresponding lower bounds for both the accuracy and the Dice similarity coefficient, respectively.

2.3 Relation to Neural Network Generalization

Flat Minima. There is a considerable history for the idea that neural network solutions lying in large flat minima generalize well. Some of the earliest conceptualizations of this idea are due to Hochreiter and Schmidhuber [25] who suggest that complexity may, in fact, be viewed as low in networks which lie in flat minima because specifying the weights of these networks requires low precision. Earlier still, the same ideas of low-precision descriptions are found in Hinton and Van Camp [24]. In more recent years, the flat minima hypothesis has been supported by observations in discretely parameterized neural networks (see Balasi et al. [3, 4] and a continuous extension by Chaudhari et al. [11]) as well as in empirical studies linking flat minima to training heuristics that typically yield good generalization (see Keskar et al. [27]). In the context of the PAC-Bayesian Theorem presented above, a key takeaway from our limited discussion is that low risk for a stochastic predictor Q often necessitates a sizable region of “good” predictors in \mathcal{H} . This is precisely the insight of Dziugaite and Roy [15] whose application of the PAC-Bayesian framework seeks such regions near the SGD neural network solution. This idea is perhaps a bit more obvious when we take Q to be a multivariate normal $\mathcal{N}(\mu, \sigma^2 I)$ with σ a constant and I the identity matrix. In this case, the size of the region of “good” predictors is dictated directly by σ . Without a region of appropriate size, the expected risk over samples from Q cannot be small. Concretely, this idea is validated by the large-scale empirical studies conducted by Jiang et al. [26]. Upon training

more than 10K networks of various architectures and sizes, the authors indicate PAC-Bayesian measures of complexity, along with other notions of “sharpness” of the minima, were most promising. See also Dziugaite, Druin, et al. [13] for an empirical analysis of similar size which considers the worst-case performance of different generalization measures.

Weight Norms. Besides flat minima, considering the KL divergence in the upper bound of Eqn. (2) leads to additional interpretations of its relation to generalization. Neyshabur et al. [41] identify terms in PAC-Bayesian upper bounds which not only measure the sharpness of the minima, but also measure the magnitude of the network weights. This idea that the norm of the network weights may control generalization error, of course, has its own history of conceptualization. For example, see works of Bartlett [5, 6] and Neyshabur et al. [42].

Stability. When one further considers the role of the prior P , the KL divergence gains some new interpretation. Using the notion of uniform stability (see Bousquet and Elisseeff [9]), Hardt et al. [21] give bounds on the expected generalization gap with terms proportional to the number of steps taken during SGD. See also Mou et al. [40]; Kuzborskij and Lampert [29]. In the case of neural networks, the prior P is often selected as the random initialization at which SGD starts. Thus, we may expect $\text{KL}(Q||P)$ to increase as training progresses and the solution moves away from its initialization, suggesting a connection to the stability-based bounds of Hardt et al. Following a different line of thought, Rivasplata et al. [46] do make such a connection between stability and PAC-Bayes bounds more formal in the case of Hilbert space valued algorithms. On the other hand, it is not uncommon for P to instead be data-dependent. In these cases, the prior may be trained on a sample independent of that which is used to train the posterior and compute the bound.⁶ Informally, the KL divergence may then be seen to measure some notion of the stability of SGD as a training algorithm under *large* data perturbations. We are not aware of rigorous arguments along these lines, although, similar ideas are conjectured in Dziugaite et al. [14].

3 Experiments

In this section, the primary goal is to show the utility of PAC-Bayesian Bounds in understanding neural network generalization as well as display that PAC-Bayesian Bounds may be promising in the context of self-bounded learning. The former has been shown in a number of existing papers (e.g., see [15, 26, 41]), and the latter was suggested by Perez-Ortiz et al. [44]. As mentioned, the primary contribution of this paper is to explore these goals in the context of medical imaging where the datasets are smaller and the tasks (i.e., segmentation with deep networks) are not as frequently studied as, say, classification. To this end,

⁶ For example, see Ambroladze et al. [1], Parrado-Hernandez et al. [43], Ortiz-Perez et al. [44], and Dziugaite et al. [14]. See also Dziugaite and Roy [16] for a case where data used to learn the prior is not independent of that used to compute the bound, and instead, the bound is made to account for this.

we apply PAC-Bayesian Bounds to the **Lesion Segmentation** and the **Lesion Classification Tasks** in the ISIC 2018 Skin Lesion Challenge Dataset [12]. The data in these sets used for training (and bound computation) totals 2.3K and 9K labeled examples, respectively. In contrast, previous computation of PAC-Bayesian bounds (e.g., see [14, 15, 44]) is usually done using MNIST [35] or CIFAR-10 [28] which, respectively, have 60K and 50K labeled examples for training/bound computation and are limited to classification tasks. Code will be made available at [this repository](#).

3.1 Setup

Models. For segmentation, we use U-Net [48] and a light-weight version of U-Net (LW) which has 3% of the parameters and no skip-connections. For classification, we use ResNet-18 [23]. Probabilistic models use the same architecture but define a multivariate normal distribution over the network weights $\mathcal{N}(\mu, \Sigma)$ with a diagonal covariance matrix Σ . The distribution is sampled to do inference.

Losses. For segmentation, we train using the common Dice Loss [39] which is a smooth surrogate for $1 - DSC$. For classification, we use the negative log-likelihood. Probabilistic models used modified losses we describe next.

Training Probabilistic Models. Recall, in the PAC-Bayes setting we define both the prior P and the posterior Q as both are needed to compute bounds and Q is needed for inference. The prior P is a probabilistic network defined by $\mathcal{N}(\mu_p, \sigma_p^2 I)$ where I is the identity matrix and σ_p is a constant. In this text, we use a data-dependent prior unless otherwise noted. Data-dependent priors are commonly used to produce empirically tighter bounds [1, 14, 43, 44]. To pick the prior, μ_p is learned by performing traditional optimization on a dataset *independent* from that which is used to compute the bound (see **Data Splits**). The parameter $\sigma_p = 0.01$ unless otherwise noted. The posterior Q is initialized identically to P before it is trained using PAC-Bayes with Backprop (PBB) as proposed by Rivasplata et al. [44, 47]. This training technique may be viewed as similar to Bayes-by-Backprop (BBB) [8] for the familiar reader. In particular, it uses a re-parameterization trick to optimize probabilistic neural networks through gradient descent. Where PBB primarily differs from BBB is the use of PAC-Bayesian upper bounds as the objective to optimize. Since PAC-Bayesian upper bounds are valid for all $[0, 1]$ -bounded loss functions, we may apply them to the Dice Loss or the negative log-likelihood, so long as we take care to normalize these to the interval $[0, 1]$. The upper bound we use to define our PBB objective is the Variational PAC-Bayes bound given by Dziugaite et al. [14].

Probabilistic Batch Norm Layers. While generally each weight in the probabilistic networks we consider is sampled independently according to a normal distribution, batch norm layers⁷ must be handled with special care. We treat the parameters of batch norm layers as point mass distributions. Specifically,

⁷ We refer here to both the running statistics and the weights used in any learned affine transformation within the layer.

the parameter value has probability 1 and 0 is assigned to all other values. The posterior distribution for these parameters is made identical to the prior by “freezing” the posterior batch norm layers during training and inference. In effect, we avoid sampling the means and variances in our batch norm layers, and importantly, the batch norm layers do not contribute to the KL divergence computation. Notice, this trick requires that parameters are sampled independently.

Optimization Parameters. Optimization is done using SGD with momentum set to 0.95. For classification, the batch size is 64, and the initial learning rate is 0.5. For segmentation, the batch size is 8, and the initial learning rate is 0.1 for LW and 0.01 for U-Net. All models are initialized at the same random location and are trained for 120 epochs with the learning rate decayed by a factor of 10 every 30 epochs. In the PAC-Bayesian setting, the data-dependent prior mean μ_p is randomly initialized (as other models) and trained for 30 epochs. The posterior Q is initialized at the prior P and trained for the remaining 90 epochs. The learning rate decay schedule is not reset for posterior training.

Bound Details. Note, in all cases, PAC-Bayes bounds are computed using a data-dependent prior. Bounds are computed with 95% confidence with details on the data sample size given in the next section. For PAC-Bayes bounds, the number of models sampled is either 1000 (in Fig. 1a) or 100 (in Fig. 1b,c).

Data Splits. In this work, we consider a self-bounded learning setting [17,31,44]. Each method is given access to a base training set (90% of the data) and is expected to both learn a model and provide a performance guarantee for this model when applied to unseen data. To evaluate both the model and performance guarantee in a more traditional fashion, each method is also tested on a final holdout set (10% of the data). Splits are random but identically fixed for all models. In a real-world context, this simulates a reasonable requirement on performance guarantees before deployment of a model in a clinical setting. The final holdout set exists experimentally to gauge model performance independent of the guarantee that was provided by the model. For probabilistic networks trained using PBB, we split the base training data into a 50%-prefix set⁸ used to train the prior and an independent 50%-bound set. Both the prefix-set and bound-set are used to train the posterior, but the final PAC-Bayes bound can only be computed on the bound-set. For the baseline non-probabilistic networks, we instead train the model using a traditional training set (composed of 90% of the base training set) and then compute a guarantee on the model performance (i.e., a Hoeffding bound) using an independent holdout set (the remaining 10% of the base training set). In this sense, all models are on an equal footing with respect to the task of a self-bounded learner. All models have access *only* to the base training set for both training and computation of valid performance guarantees. In relation to Fig. 1, performance metrics such as DSC are computed using the final holdout set. Lower bound computation (and training) is done using the base training set.

⁸ See Dziugaite et al. [14] who coin the term “prefix.”

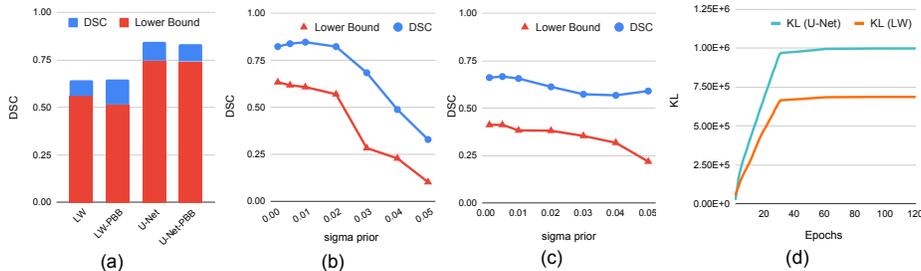


Fig. 1: (a) DSC (blue) and lower bounds (red). (b,c) Modulation of prior variance for U-Net (b) and LW (c). (d) Average KL divergence per epoch for U-Net (teal) and LW (orange) when removing KL-constraint during training.

3.2 Results

Fig. 1 shows segmentation results. We comment on these below. Classification results are given in the Appendix and have a largely similar interpretation.

Non-vacuous Bounds. We discuss here the lower bounds (corresponding to the PAC-Bayes upper bounds discussed in Section 2) computed on our training set and shown in Fig. 1a. The main takeaway from the fact that these bounds are non-vacuous is the simple insight that PAC-Bayesian bounds may explain generalization (in practice) where other measures of complexity tend to fail. As noted, this is not a new insight. Yet, in the novel settings we consider, these results add considerably to a growing body of evidence.

Practicality Through Self-Bounded Learning. One additional takeaway from Fig. 1a is the possible effectiveness of PBB for self-bounded learning. While this is suggested by the original authors of PBB [44], our results provide additional evidence in the context of segmentation and medical imaging. As discussed, the self-bounded learning setting used to produce the results in Fig. 1a ensures both the non-probabilistic networks and the probabilistic networks (trained using PBB) have access to the same data to train and produce their bound. Interestingly, when comparing networks, we observe that performance as guaranteed by the bounds is comparable, and further, performance on the final holdout set is comparable. So, PBB may be practical in medical imaging when datasets are small, and we want to maximize the utility of the training data.

Flat Minima and Their Size. As discussed, the argument that PAC-Bayesian bounds may explain deep network generalization usually stems from the idea that SGD solutions that lie in flat minima tend to generalize (see Section 2). We explore this idea in Fig. 1b,c by modulating the prior variance σ_p across runs. Informally, these plots can give us insight into our loss landscape. As the KL divergence between the posterior and the prior is generally small,⁹ it is safe

⁹ This is evidenced by the lower bounds which are slightly looser here only due to the reduction in sample size.

to assume the prior and posterior variances are of a similar magnitude. Small KL divergence also implies the difference between the prior and posterior means should not be too large, relative to the variance. A fixed random-seed ensures priors are identical, so each data-point within a plot should correspond to roughly the same location in parameter space; i.e., we will assume we are analyzing the location of a single minimum.¹⁰ For U-Net, we see stable performance and a gradual drop as the prior variance grows. As the predictors are sampled from multivariate normal distributions, such behavior indicates a flat minimum in our loss landscape with size proportional to $\sigma_p = 0.02$. The gradual drop in performance may indicate a grade at the boundary of the minimum. For LW, we see a largely stable performance with an increase in KL divergence to maintain this when the prior variance is largest. Likely, the size of the flat-minimum is larger in the case of LW which makes some intuitive sense from a more traditional viewpoint since LW has a much lower capacity. The behavior is characteristic of the classic bias-variance tradeoff. Informally, such sensitivity analysis can tell us “how flat” the minima are for a particular network and dataset as well as “how large.” As seen, we can also reason about the geometry of such minima by using these plots. Practically, information like this can be useful to practitioners interested in understanding the generalization capabilities of their models.

Some Relation to Stability Arguments. As mentioned, PAC-Bayesian bounds can also be seen to relate to arguments which use the stability of SGD to dataset perturbations to explain generalization. Such bounds relate the number of steps we take in SGD to the expected generalization gap (e.g., see Hardt et al. [21]). In Fig. 1d, we train a probabilistic network without using a PAC-Bayesian objective or a data-dependent prior. That is, we use a standard loss function (the DSC Loss) and set the prior to be a random initialization. Note, the effect of the former is that the model may move freely about the parameter space without the constraint that it stays close to its prior. Thus, the training dynamics of this probabilistic network behave much more closely to that of a traditionally optimized network. We report in Fig. 1d a proxy¹¹ for the KL divergence. Notably, the proxy continues to increase throughout training (until the learning rate decays at epoch 30). In the PAC-Bayesian setting, since the KL divergence acts as a measure of complexity, this indicates looser and looser guarantees on performance of the predictor. Simultaneously, the stability arguments of Hardt et al. suggest the same thing: the longer we train, the looser our bounds on the expected generalization gap become. Thus, Fig. 1d provides an informal

¹⁰ Notice, another way to conduct this experiment might be to fix the posterior mean at the result of, say, the run with $\sigma_p = 0.01$ and then modulate the variance from this fixed location. The logic is more straightforward, but we are not guaranteed that this run will be near the center of a minimum. We could grossly underestimate the minimum’s size by this procedure whereas the approach we have taken allows the center of the posterior to change (slightly) when the variance grows.

¹¹ In this experiment, we do not freeze the batchnorm layers and do not consider their contribution to the KL divergence.

empirical connection between two (naïvely) disparate ways of reasoning about generalization.

4 Conclusion

As a whole, our results lend credence to a growing argument in the literature that explains the generalization of SGD-trained networks via the PAC-Bayesian framework. In particular, we believe they form a convincing argument for the use of PAC-Bayes bounds in medical imaging – where theoretical guarantees (for deep networks) would appear useful but not commonly discussed.

With this said, we hope for this paper to act primarily as a conversation starter. At 2.3K examples, the segmentation dataset we consider is still larger than available in some application domains. For example, in neuroimaging applications, the number of subjects (i.e., *independent* data-points) is often closer to 100 than 1000. It remains to be considered how effective PAC-Bayes bounds can be in these ultra-low resource settings.

References

1. Ambroladze, A., Parrado-Hernández, E., Shawe-Taylor, J.: Tighter pac-bayes bounds (2007)
2. Arora, S.: Generalization theory and deep nets, an introduction (2017), <https://www.offconvex.org/2017/12/08/generalization1/>
3. Baldassi, C., Borgs, C., Chayes, J.T., Ingrosso, A., Lucibello, C., Saglietti, L., Zecchina, R.: Unreasonable effectiveness of learning neural networks: From accessible states and robust ensembles to basic algorithmic schemes. PNAS (2016)
4. Baldassi, C., Ingrosso, A., Lucibello, C., Saglietti, L., Zecchina, R.: Subdominant dense clusters allow for simple learning and high computational performance in neural networks with discrete synapses. Physical review letters **115**(12) (2015)
5. Bartlett, P.L.: For valid generalization, the size of the weights is more important than the size of the network (1997)
6. Bartlett, P.L.: The sample complexity of pattern classification with neural networks: the size of the weights is more important than the size of the network. IEEE transactions on Information Theory **44**(2), 525–536 (1998)
7. Bartlett, P.L., Harvey, N., Liaw, C., Mehrabian, A.: Nearly-tight vc-dimension and pseudodimension bounds for piecewise linear neural networks. JMLR (2019)
8. Blundell, C., Cornebise, J., Kavukcuoglu, K., Wierstra, D.: Weight uncertainty in neural network. In: ICML (2015)
9. Bousquet, O., Elisseeff, A.: Stability and generalization. JMLR (2002)
10. Catoni, O.: Pac-bayesian supervised classification: the thermodynamics of statistical learning. arXiv:0712.0248 (2007)
11. Chaudhari, P., Choromanska, A., Soatto, S., LeCun, Y., Baldassi, C., Borgs, C., Chayes, J., Sagun, L., Zecchina, R.: Entropy-sgd: Biasing gradient descent into wide valleys. arXiv:1611.01838 (2016)
12. Codella, N., Rotemberg, V., Tschandl, P., Celebi, M.E., Dusza, S., Gutman, D., Helba, B., Kalloo, A., Liopyris, K., Marchetti, M., et al.: Skin lesion analysis toward melanoma detection 2018: A challenge hosted by the international skin imaging collaboration (ISIC). arXiv preprint arXiv:1902.03368 (2019)

13. Dziugaite, G.K., Drouin, A., Neal, B., Rajkumar, N., Caballero, E., Wang, L., Mitliagkas, I., Roy, D.M.: In search of robust measures of generalization. arXiv preprint arXiv:2010.11924 (2020)
14. Dziugaite, G.K., Hsu, K., Gharbieh, W., Roy, D.M.: On the role of data in pac-bayes bounds. arXiv:2006.10929 (2020)
15. Dziugaite, G.K., Roy, D.M.: Computing nonvacuous generalization bounds for deep (stochastic) neural networks with many more parameters than training data. arXiv:1703.11008 (2017)
16. Dziugaite, G.K., Roy, D.M.: Data-dependent pac-bayes priors via differential privacy. In: NeurIPS (2018)
17. Freund, Y.: Self bounding learning algorithms. In: COLT (1998)
18. Germain, P., Lacasse, A., Laviolette, F., Marchand, M.: Pac-bayesian learning of linear classifiers. In: ICML (2009)
19. Germain, P., Lacasse, A., Laviolette, F., Marchand, M., Roy, J.F.: Risk bounds for the majority vote: From a pac-bayesian analysis to a learning algorithm. arXiv:1503.08329 (2015)
20. Guedj, B.: A primer on pac-bayesian learning. arXiv:1901.05353 (2019)
21. Hardt, M., Recht, B., Singer, Y.: Train faster, generalize better: Stability of stochastic gradient descent. In: ICML (2016)
22. Haussler, D.: Decision theoretic generalizations of the pac model for neural net and other learning applications. Information and computation (1992)
23. He, K., Zhang, X., Ren, S., Sun, J.: Deep residual learning for image recognition. In: CVPR (2016)
24. Hinton, G.E., Van Camp, D.: Keeping the neural networks simple by minimizing the description length of the weights. In: COLT (1993)
25. Hochreiter, S., Schmidhuber, J.: Flat minima. Neural computation (1997)
26. Jiang, Y., Neyshabur, B., Mobahi, H., Krishnan, D., Bengio, S.: Fantastic generalization measures and where to find them. arXiv:1912.02178 (2019)
27. Keskar, N.S., Mudigere, D., Nocedal, J., Smelyanskiy, M., Tang, P.T.P.: On large-batch training for deep learning: Generalization gap and sharp minima. arXiv:1609.04836 (2016)
28. Krizhevsky, A., Hinton, G., et al.: Learning multiple layers of features from tiny images (2009)
29. Kuzborskij, I., Lampert, C.: Data-dependent stability of stochastic gradient descent. In: International Conference on Machine Learning. pp. 2815–2824. PMLR (2018)
30. Langford, J.: Quantitatively tight sample complexity bounds (2002)
31. Langford, J., Blum, A.: Microchoice bounds and self bounding learning algorithms. Machine Learning (2003)
32. Langford, J., Caruana, R.: (not) bounding the true error. NeurIPS (2002)
33. Langford, J., Schapire, R.: Tutorial on practical prediction theory for classification. JMLR (2005)
34. Langford, J., Seeger, M.: Bounds for averaging classifiers (2001)
35. LeCun, Y., Cortes, C.: MNIST handwritten digit database (2010), <http://yann.lecun.com/exdb/mnist/>
36. Maurer, A.: A note on the pac bayesian theorem. cs/0411099 (2004)
37. McAllester, D.: A pac-bayesian tutorial with a dropout bound. arXiv:1307.2118 (2013)
38. McAllester, D.A.: Some pac-bayesian theorems. Machine Learning (1999)

39. Milletari, F., Navab, N., Ahmadi, S.A.: V-net: Fully convolutional neural networks for volumetric medical image segmentation. In: 2016 fourth international conference on 3D vision (3DV). pp. 565–571. IEEE (2016)
40. Mou, W., Wang, L., Zhai, X., Zheng, K.: Generalization bounds of sgld for non-convex learning: Two theoretical viewpoints. In: Conference on Learning Theory. pp. 605–638. PMLR (2018)
41. Neyshabur, B., Bhojanapalli, S., McAllester, D., Srebro, N.: Exploring generalization in deep learning. arXiv:1706.08947 (2017)
42. Neyshabur, B., Tomioka, R., Srebro, N.: In search of the real inductive bias: On the role of implicit regularization in deep learning. arXiv:1412.6614 (2014)
43. Parrado-Hernández, E., Ambroladze, A., Shawe-Taylor, J., Sun, S.: Pac-bayes bounds with data dependent priors. JMLR (2012)
44. Pérez-Ortiz, M., Rivasplata, O., Shawe-Taylor, J., Szepesvári, C.: Tighter risk certificates for neural networks. arXiv:2007.12911 (2020)
45. Reeb, D., Doerr, A., Gerwinn, S., Rakitsch, B.: Learning gaussian processes by minimizing pac-bayesian generalization bounds. arXiv:1810.12263 (2018)
46. Rivasplata, O., Parrado-Hernández, E., Shawe-Taylor, J., Sun, S., Szepesvári, C.: Pac-bayes bounds for stable algorithms with instance-dependent priors. arXiv:1806.06827 (2018)
47. Rivasplata, O., Tankasali, V.M., Szepesvari, C.: Pac-bayes with backprop. arXiv:1908.07380 (2019)
48. Ronneberger, O., Fischer, P., Brox, T.: U-net: Convolutional networks for biomedical image segmentation. In: International Conference on Medical image computing and computer-assisted intervention. pp. 234–241. Springer (2015)
49. Shalev-Shwartz, S., Ben-David, S.: Understanding machine learning: From theory to algorithms. Cambridge university press (2014)
50. Shawe-Taylor, J., Williamson, R.C.: A pac analysis of a bayesian estimator. In: COLT (1997)
51. Vapnik, V.: The nature of statistical learning theory (2000)
52. Vapnik, V.N., Chervonenkis, A.Y.: On uniform convergence of the frequencies of events to their probabilities. *Teoriya Veroyatnostei i ee Primeneniya* **16** (1971)
53. Zhang, C., Bengio, S., Hardt, M., Recht, B., Vinyals, O.: Understanding deep learning requires rethinking generalization. arXiv:1611.03530 (2016)

A Bound Computation

We present here derivation of the bound we compute in Section 3. To arrive at this, we point out some unhandled issues if we wish to compute the bound in Thm. 1 directly. First, our quantity of interest is shrouded by the binary KL divergence, and second, the quantity $\hat{\mathcal{R}}_\ell(Q)$ is itself not observed if we cannot directly compute an expectation over Q . We handle these in order. As already seen, some possible resolutions to our first problem include a simple application of Pinsker's inequality or slightly more complicated manipulations which produce tighter results when the KL divergence is small (e.g., see the Variational bound proposed by Dziugaite et al. [14] and the Quadratic bound proposed by Rivasplata et al. [44, 47]). Unfortunately, these solutions tend to yield bounds which are too loose. As is common, we instead take the route which uses an inversion of the binary KL divergence, given below

$$\text{kl}^{-1}(q|\varepsilon) = \max\{p \in [0, 1] \mid \text{kl}(q||p) \leq \varepsilon\}. \quad (3)$$

There are a few important properties to note about kl^{-1} . First, by its design, it has the property that p which satisfies $\text{kl}(q||p) \leq \varepsilon$ is bounded above by $\text{kl}^{-1}(q|\varepsilon)$. So, taking $p = \mathcal{R}_\ell(Q)$ will give us a satisfactory bound on our quantity of interest. Second, although in practice kl^{-1} cannot be computed exactly, it can be approximated to arbitrary precision using the bisection method because the function $f(p) = \varepsilon - \text{kl}(q||p)$ has a single root¹² in the interval $[q, 1]$.

Next, we recall the remaining issue in computing the PAC-Bayes bound: we must empirically estimate $\hat{\mathcal{R}}_\ell(Q)$, and, account for this estimate in our bound. This much can be accomplished by the sample convergence bound given by Langford and Caruana [32]. See also other works of Langford for more detailed exposition [30, 33].

Theorem 2. *For all distributions Q , for any $\delta \in (0, 1)$*

$$\Pr_{\hat{Q} \sim Q^n} \left(\text{kl} \left(\hat{\mathcal{R}}_\ell(\hat{Q}) || \hat{\mathcal{R}}_\ell(Q) \right) \leq \frac{\ln \frac{2}{\delta}}{n} \right) \geq 1 - \delta. \quad (4)$$

Using iterated application of the function kl^{-1} , it is straightforward to combine Thm. 1 (in main text) with Thm. 2 to arrive at a computable bound on $\mathcal{R}_\ell(Q)$ as given below

$$\begin{aligned} \mathcal{R}_\ell(Q) &\leq \text{kl}^{-1} \left(q \mid m^{-1} \left(\text{KL}(Q||P) + \ln \frac{1}{\delta} + \ln \sqrt{4m} \right) \right) \\ &\text{where } q = \text{kl}^{-1} \left(\hat{\mathcal{R}}_\ell(\hat{Q}) \mid n^{-1} \ln \frac{2}{\delta} \right). \end{aligned} \quad (5)$$

¹² For more on this fact, we like the discussion on kl^{-1} in the work of Reeb et al. [45]

B Classification Results

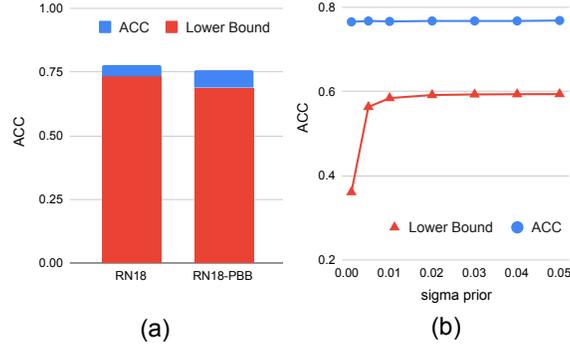


Fig. 2: **(a)** Resnet-18 (RN18) Accuracy and accuracy lower bound. Confidence is 95%. For PAC-Bayes bounds, number of model samples is 1000. **(b)** Modulation of prior variance. For small variance, posterior does not match prior well, leading to looser bounds. Otherwise, performance is stable for variance up to 0.05 indicating a larger flat-minimum than U-Net in the case of segmentation. Confidence is 95%. Number of model samples is 100.