

# ZMCintegral-v5.1: Support for Multi-function Integrations on GPUs

Xiao-Yan Cao<sup>a</sup>, Jun-Jie Zhang<sup>b,\*</sup>

<sup>a</sup>*Xi'an Research Institute of High-Tech*  
<sup>b</sup>*Northwest Institute of Nuclear Technology*

---

## Abstract

In this new version of ZMCintegral, we have added the functionality of multi-function integrations, i.e. the ability to integrate more than  $10^3$  different functions on GPUs. The Python API remains the similar as the previous versions. For integrands less than 5 dimensions, it usually takes less than 10 minutes to finish the evaluation of  $10^3$  integrations on one Tesla v100 card. The performance scales linearly with the increasing of the GPUs.

*Keywords:* Monte Carlo integration, multi-function integrations, Numba, Ray.

---

## NEW VERSION PROGRAM SUMMARY

*Program Title:* ZMCintegral

*Licensing provisions:* Apache-2.0

*Programming language:* Python

*Journal reference of previous version:* Hong-Zhong Wu, Jun-Jie Zhang, Long-Gang Pang, Qun Wang, Comput. Phys. Commun. 248(2020):106962 and Jun-Jie Zhang, Hong-Zhong Wu, Comput. Phys. Commun. 251(2020):107240

*Does the new version supersede the previous version?:* Yes

*Reasons for the new version:* When solving the Boltzmann equation with radiations[1], one encounters different collision integrals for different energy beams. In the relativistic QED plasma, the collision terms involve various Feynman graphs[2] and usually the contribution from each graph is of great interest. In these circumstances one needs to integrate many functions of different forms simultaneously. In our previous versions[3, 4], we focused on single integration of high dimensions

---

\*Corresponding author.

*E-mail address:* zjacob@mail.ustc.edu.cn(Jun-Jie Zhang)

and functions with parameters. Therefore, it is necessary to include the functionality for integrating many functions which have different dimensions, forms and integration domains.

*Summary of revisions:*

- Multi-function Integrations

Suppose we have a series of integrations defined as

$$f_n(\mathbf{x}) = a_n \cos(\mathbf{k}_n \cdot \mathbf{x}) + b_n \sin(\mathbf{k}_n \cdot \mathbf{x}), \quad (1)$$

where  $n = 1, 2, 3, \dots, 100$ . The above integration series can be treated as a set of Harmonic bases if one wishes to evaluate the contribution of each Harmonic mode. In our previous versions, these series cannot be manipulated in a convenient and efficient way. It is worth noting that the integration domains or dimensions can be different, for example

$$\begin{aligned} g_n(x_1, x_2) &= a_n |x_1 + x_2| \text{ for } 0 < n < 50 \\ g_n(x_1, x_2, x_3) &= b_n |x_1 + x_2 - x_3| \text{ for } 50 \leq n \leq 100. \end{aligned} \quad (2)$$

The support of multi-functions gives the users full flexibility to integrate as many different functions as possible.

- Test on GPUs

As an illustrative example, we report the solution of Eq. (1) with  $\mathbf{x} = (x_1, x_2, x_3, x_4)$ ,  $a_n = b_n = 1$ . The ranges for all components are taken to be  $[0, 1]$  and  $\mathbf{k}_n = (\frac{n+50}{2\pi}, \frac{n+50}{2\pi}, \frac{n+50}{2\pi}, \frac{n+50}{2\pi})$  such that the integration is highly fluctuating around the zero line. The hardware condition in this case is taken to be: Intel(R) Xeon(R) Silver 4110 CPU@2.10GHz CPU with 10 processors + one Nvidia Tesla V100 GPU. The results are shown in Fig. 1.

*Nature of problem:* ZMCintegral is an easy to use Python package for doing high dimensional integrations on distributed GPU clusters. Using the Python libraries Numba[5] and Ray[6], as well as the NVIDIA CUDA[7] capability, ZMCintegral offers a succinct Python interface to evaluate numerical integrations for physical problems. In this updated version, we mainly focus on the problems where the users have various functions to integrate. These integrations can take different forms and domains.

*Solution method:* This new version contains three Python classes. ZMCintegral\_normal utilizes the stratified-sampling and heuristic-tree-search techniques,

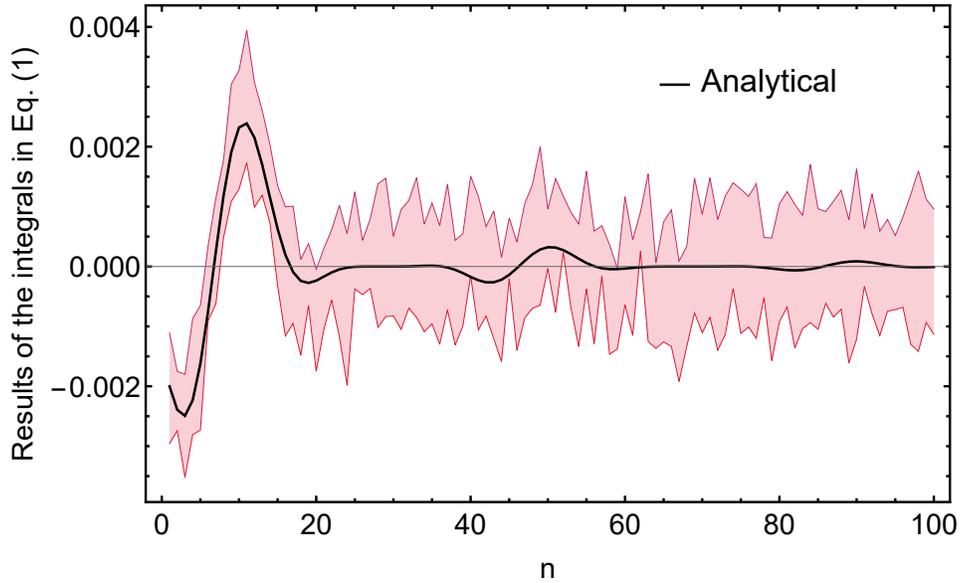


Figure 1: Integration results of Eq. (1) at various  $n$ . The red shaded area, drawn from  $[\overline{F}_n - \Delta F_n, \overline{F}_n + \Delta F_n]$  with  $F_n$  denoting the result of the  $n$ -th integral, is obtained via ZMCintegral (analytical results in solid black line). Here,  $\overline{F}_n$  and  $\Delta F_n$  are the average value and standard deviation of 10 independent evaluations. It takes about one minute for each independent calculation (of all series in Eq. (1)) on one Tesla V100 card. For each  $n$  we have taken  $10^6$  samples.

while `ZMCintegral_functional` and `ZMCintegral_multifunctions` use the direct-Monte Carlo method for each integrand which benefits mainly from the heavily distributed GPU clusters.

*Additional comments:* If the integrations are high-dimensional (e.g. dimensionality of 8-12), users are encouraged to use `ZMCintegral_normal`. If the integrations are middle-dimensional (e.g. dimensionality of 1-7) but with a large parameter space, we suggest users to try `ZMCintegral_functional`. If the integrations contains many different integrands and domains (e.g.  $10^4$  different integrations), then `ZMCintegral_multifunctions` is suggested. The detailed instructions can be found here: [8].

### ***Acknowledgment***

The authors are supported in part by the Major State Basic Research Development Program (973 Program) in China under Grant No. 2015CB856902 and by the National Natural Science Foundation of China (NSFC) under Grant No. 11535012. The Computations are performed at the GPU servers of department of modern physics at USTC. We are thankful for the valuable help from Prof. Qun Wang of department of modern physics at USTC.

### **References**

- [1] J. Oxenius, Kinetic Theory of Particles and Photons, Springer Berlin Heidelberg, 1986. doi:10.1007/978-3-642-70728-5.
- [2] V. Morozov, G. Röpke, Kinetic theory of radiation in non-equilibrium relativistic plasmas, Annals of Physics 324 (6) (2009) 1261–1302. doi:10.1016/j.aop.2009.02.001.
- [3] H.-Z. Wu, J.-J. Zhang, L.-G. Pang, Q. Wang, ZMCintegral: A package for multi-dimensional monte carlo integration on multi-GPUs, Computer Physics Communications (2019) 106962doi:10.1016/j.cpc.2019.106962.
- [4] J.-J. Zhang, H.-Z. Wu, ZMCintegral-v5: Support for integrations with the scanning of large parameter space on multi-GPUs, Computer Physics Communications 251 (2020) 107240. doi:10.1016/j.cpc.2020.107240.
- [5] S. Kwan Lam, A. Pitrou, S. Seibert, Numba: a llvm-based python jit compiler, 2015, pp. 1–6. doi:10.1145/2833157.2833162.

- [6] P. Moritz, R. Nishihara, S. Wang, A. Tumanov, R. Liaw, E. Liang, M. Elibol, Z. Yang, W. Paul, M. I. Jordan, I. Stoica, Ray: A distributed framework for emerging AI applications, in: 13th USENIX Symposium on Operating Systems Design and Implementation (OSDI 18), USENIX Association, Carlsbad, CA, 2018, pp. 561–577.  
URL <https://www.usenix.org/conference/osdi18/presentation/moritz>
- [7] I. Buck, T. Purcell, A Toolkit for Computation on GPUs, 2004.
- [8] <https://github.com/Letianwu/ZMCintegral.git>.