

A Scalable and Reproducible System-on-Chip Simulation for Reinforcement Learning

1st Tegg Taekyong Sung
EpiSys Science, Inc.
Poway, CA
tegg@episcience.com

2nd Bo Ryu
EpiSys Science, Inc.
Poway, CA
boryu@episcience.com

Abstract—Deep Reinforcement Learning (DRL) underlies in a simulated environment and optimizes objective goals. By extending the conventional interaction scheme, this paper proffers gym-ds3, a scalable and reproducible open environment tailored for a high-fidelity Domain-Specific System-on-Chip (DSSoC) application. The simulation corroborates to schedule hierarchical jobs onto heterogeneous System-on-Chip (SoC) processors and bridges the system to reinforcement learning research. We systematically analyze the representative SoC simulator and discuss the primary challenging aspects that the system (1) continuously generates indefinite jobs at a rapid injection rate, (2) optimizes complex objectives, and (3) operates in steady-state scheduling. We provide exemplary snippets and experimentally demonstrate the run-time performances on different schedulers that successfully mimic results achieved from the standard DS3 framework and real-world embedded systems.

Index Terms—resource allocation, system-on-chip simulation, heterogeneous resource, real-world simulation

I. INTRODUCTION

Deep reinforcement learning (deep RL or DRL) has breakthrough performances in tactical games [24], [27], [34] and robotics [2], [15], [21]. To these successes, a systematized RL-perspective environment is essential to proceed with sequential interactions. The prior works in environment developments for various domains are robotic manipulation [13], [29] and vehicle maneuver [25], [35]. The critical mechanism underlying systems is that the agent must continuously interact with the simulation and receive the necessary information straightforwardly [12].

As a universal problem, resource allocation is associated with various problems, including clustering and wireless communication [20], [22], [32], [33]. Despite the successes in various scheduling applications, previous research has overlooked heterogeneous many-core systems. As a representative, Domain-Specific System-on-chip Simulation (DS3) is a high-fidelity discrete-event simulator targetted to the Domain-Specific System-on-Chip (DSSoC) application and faithfully mimics the real-world hardware performance. [4].

To facile RL agents' design tailored to real-world systems, this paper introduces a gym-ds3 environment built upon the DS3 framework accessible to the RL research community. We systematically analyze the standard DS3 framework and elaborate fundamental challenging standpoints in designing RL agents to the DS3 framework. Contrast to available scheduling

applications, the agent in the DS3 system requires to tackle various joint action sets in complex dynamics due to the hierarchical task dependency and fast job injection rate. Furthermore, we experimentally demonstrate that the scheduling performances operated in the proposed gym-ds3 framework equivalent to the performances in the standard DS3 framework. We publicly release code at <https://github.com/EpiSci/gym-ds3>.

II. RELATED WORK

The most relevant approach with this paper is the Park platform, which is a unified open Gym framework [12] for ten types of real-world simulators, including cluster scheduling, video streaming, network congestion, memory caching, and circuit design [16]. Park categorizes environments into different challenging problems in systems and provides exemplary RL algorithms.

Concerning scheduling applications, various existing simulations are developed by real-time execution. Formerly, Sparrow builds on a decentralized design that concurrently operates scheduler decisions for cluster jobs [20]. Borg manages large-scale clusters and aims to minimize the fault-recovery time in run-time failures for scheduling decisions [33]. Bose et al. summarize a secure and resilient embedded SoCs applicable in the power-efficient autonomous vehicles domain [10].

As a representative simulator in the SoC application, the DS3 framework positions a *de facto* benchmarking simulator in active research. DeepSoCS is the first deep RL hybrid scheduler that outperforms run-time performances over standard schedulers provided in the DS3 framework [28]. Krishnakumar et al. apply imitation learning technique to maintain competitive run-time performances and optimize power dissipation and energy efficiency [14]. HiLITE is dynamic power management incorporated into the DS3 framework that utilizes imitation learning to optimize energy efficiency [23].

III. BACKGROUND

The presented gym-ds3 is built on the Gym framework, which is an open interface connecting from the simulation and reinforcement learning algorithms [12]. The system is mainly comprised of `reset` function to warm up the environment to initialize relevant components and `step` function to receive an agent action and respond by immediate reward and the next state acquired by the system dynamics. Thereby, the

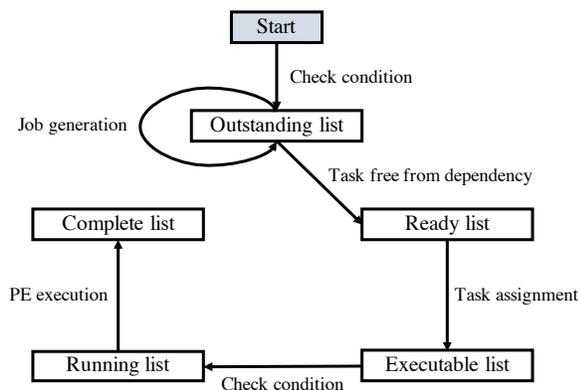


Fig. 1. A DS3 framework workflow. Here, the system operates with a single processing element.

provided action-and-response methodology is suitable for RL agent workflow.

We begin by elaborating the standard DS3 framework specialized in scheduling hierarchical jobs to heterogeneous resources for an SoC application. The system processes in a real-time operation running by flops (floating-point operations per second) and designed with non-preemptive execution. An overall workflow is illustrated in Figure 1. The simulation comprises a job generator, distributed processing elements (PEs), scheduling policy, and simulation kernel governing task statuses.

A. Jobs and resources

The DS3 framework proceeds the kernel using a job (workload application) and resource (processing element) profiles originally targeted to wireless communication and the radar processing domain. As shown in Figure 2, a job is depicted by a *Directed Acyclic Graph* (DAG) $G = (V, E)$, where vertices correspond to tasks and edges to communication cost. The node values denote the task number, and the edge values entail data transmission delay accrued to the resource switching. The graph topology represents the dependencies between the tasks. Unlike numerous studies designed for cluster applications that specifying the job duration in the profiles, the SoC workload spanning time is defined by the assigned processing elements' functionalities from the scheduling policy. The resources or processing elements (PEs)¹ are structured with different functionalities in task run-time and energy consumption. Each PE also contains a list of Operating Performance Points (OPP), which characterize the supported frequency and voltage points. Thereby, the scheduling policy directly reflects the overall performance.

B. Job generator

One key property in DS3 is that the job generator continuously generates an indefinite number of jobs based on the input profile. The job queue holds C jobs, where $C \leq T$. Here,

¹Resources represent the raw profile information, and processing elements represent essential operating components execute tasks.

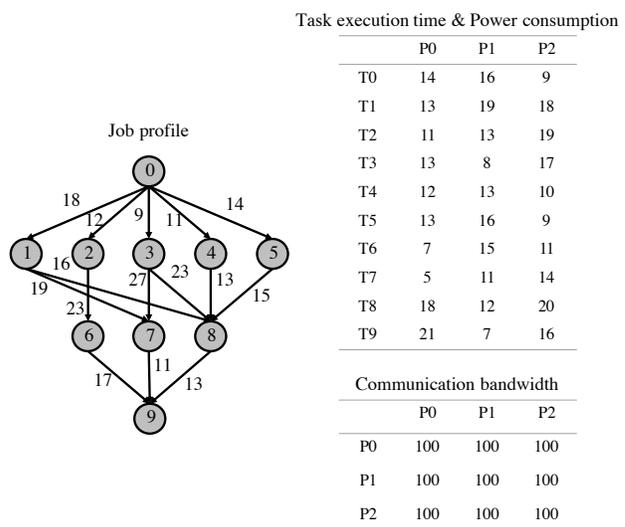


Fig. 2. A canonical job and a chart of resource profile [30].

C denotes the number of jobs and T the length of the job queue. A scale value denotes the frequency of job generation. The smaller scale entails high frequency and reflects the faster injection rate.

Once the job is generated, the system identifies job topology and distributes tasks into separate lists of statuses. As shown in Figure 1, the tasks free from dependency load to the 'ready list' and those having child dependencies remain in the 'outstanding list'. As of multiple jobs awaited in the job queue, tasks with different job instances are arbitrarily overlapped. The more overlapping workloads derive the system more dynamic and stochastic.

C. Scheduling policy

The scheduler executes in run-time and essentially allocates each task in the ready list to available PE. The scheduling policy irregularly interacted with the constant clock signal (flops) due to the task dependency and overlapped task traces. After all assignments, the tasks move to the 'executable list' and await the PE execution. If the designated PE is idle, the distributed PEs concurrently run the assigned tasks in parallel, and the task transits to the 'running list'. After execution, the task finally moves to the 'complete list'.

Assume that the job is composed of N tasks. The individual task run-time is the cumulative sum of PE run-time and data transmission delay, which is calculated with the job edge and PE performance as depicted in Figure 2. The task has waiting time when remaining time in the executable list and response time to the cumulative waiting time. The average response time (ART) denotes the rate between task execution time and task waiting time for all tasks. The scheduler operating in small ART generally indicates adequate performances. The scheduling objective is varied by the designing goals, for

instance, minimizing average latency², power dissipation, or energy consumption.

IV. PROPOSED APPROACH

The prototypical DS3 framework is developed by SimPy [18] that is a process-based discrete-event simulation framework. SimPy built-in simulation can be operated in real-time, and the simulation kernel with multiple instances can be executed in parallel. This notion, however, is difficult to directly match the interaction time step in the reinforcement learning perspective. We thereby derive a representative environment that supports the standard Gym scheme upon the DS3 framework.

The scheduling agent can be designed as a global control or distributed control, depending on the design perspective. For the latter case, independent PE can be referred to multiple agents collaborating to complete tasks quickly. Moreover, gym-ds3 supports Ray, a distributed operating framework manageable to scalable training [19]. For the current version of gym-ds3, the state indicates the simulation information (i.e., task/job/PE statuses, relevant task time), the action space, a joint set on which task allocates to which PEs. The reward function is stated with the average job duration. Users can modify state, action, and reward statements afterward. For the following sections, we pose the challenging critical standpoints for RL agents in DS3 simulation.

A. Challenges

We highlight the main challenging standpoints arising from designing RL agents in the gym-ds3 environment. First, the agent must tackle a varying number of actions. The action of a scheduling agent is a set of tuples composed of two primitive actions, task and PE selections. Systematically, DS3 fetches more than one specifically designed graph-structured job profile. One straightforwardly considers selecting actions for the tasks in the ready list. In that sense, for various task dependencies on different job profiles, the number of remaining tasks is constantly changing. Furthermore, the ready tasks are arbitrarily overlapped by the multiple injecting jobs. Hence, the action associates with a variable joint action problem. Second, the complexity in action spaces exponentially increases to the number of jobs and heterogeneous resources. The disparate functionalities from the distributed PEs and the combination of tasks in the mixed job topology increase complexity in sequential action selection. Third, the indefinite jobs generated at a fast injection rate cause the system dynamics more complex. One of the main differences between SoC and the clustering domain is that the SoC workloads essentially run in a short duration but much faster workload injection.

Figure 3 depicts the analysis of job rates for DS3 and Spark simulations [17]. Here, we modify simulations with the same range of running flops and the number of injected jobs. We evaluate scheduling performance with heuristic schedulers. Due to innate development, DS3 completes jobs faster than Spark by a factor of 10.

²The latency is proportional to the number of completed jobs and inversely proportional to the cumulative execution time.

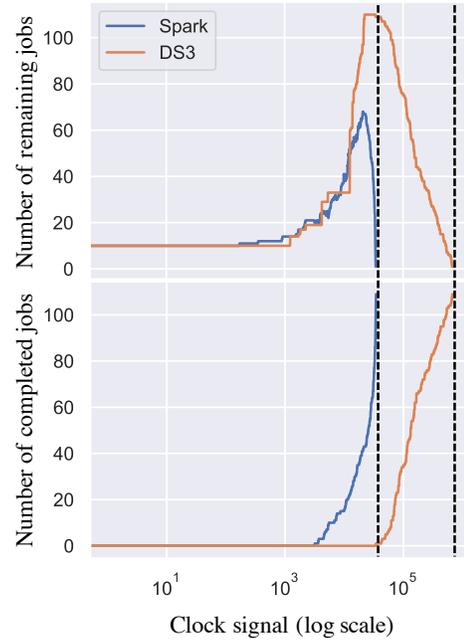


Fig. 3. An evaluation of the number of remaining and completed jobs for DS3 and Spark simulations.

B. Steady-state scheduling

Absolute makespan minimization of scheduling heterogeneous resource is NP-hard in most practical situations [5], [26]. The steady-state scheduling circumvents this difficulty by considering asymptotic optimality [6], [7]. In DS3 simulation, jobs are indefinitely generated, and the scheduling performance is evaluated starting from the steady-state that the jobs are fully stacked to the job queue.

Figure 4 illustrates the timeline that jobs arbitrarily injected into the system based on the scale values. The jobs after the last clock signal are discarded.

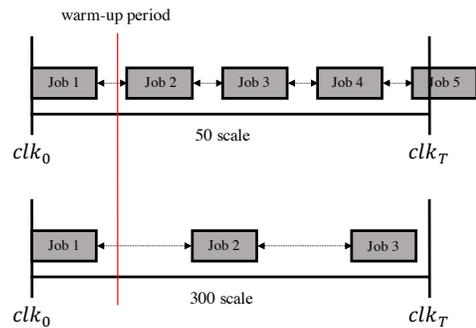


Fig. 4. A timeline of multiple jobs injected into the job queue at different scales.

DS3 accounts warm-up period to attain a steady-state. The traces before the warm-up period referring to the initializing phase is neglected. The warm-up period essentially denotes additional duration to reach jobs fully stacked to the job queue. Designing a warm-up period requires domain-expert knowledge.

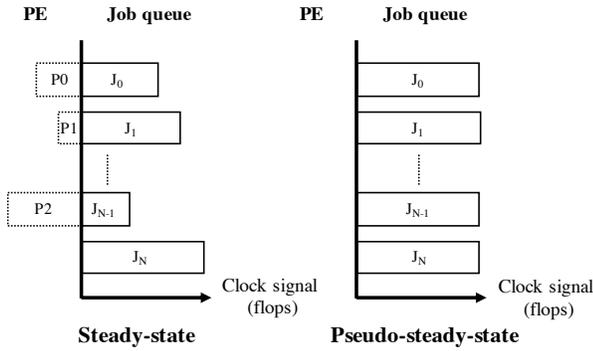


Fig. 5. A demonstration for steady-state and pseudo-steady-state.

Essentially, the better scheduling policy takes a more extended warm-up period.

In practice, reaching to initializing phase wastes time to run an episode, particularly in RL training. Sung et al. introduce ‘pseudo-steady-state’ (PSS) that approximates steady-state to reduce the waiting time. As denoted in Figure 5, in PSS mode, the episode starts running from the complete jobs stacked in the job queue. Assume that the system holds up to N jobs, then the PSS starts simulation after generating N jobs in the job queue. In this paper, we evaluate scheduling algorithms with the PSS option.

C. Implementation

This section derives the code snippets of the proposed environment framework. First, we provide the `GymDS3` class built upon the `Gym` framework [12].

```

1 class GymDS3(gym.Env):
2     def __init__(self):
3         ...
4
5     def reset(self):
6         # reset environment
7
8     def step(self, action):
9         if ready task list is not empty:
10            # select action
11        else:
12            # select no-action and run simulator
13            # update immediate reward
14
15        obs = self._get_observation()
16        return obs, reward, done, {}
17
18    def _get_observation(self):
19        ...
20        return (job_dags, action_map, env_storage,
                PEs)

```

In the `step` function, the action can be valid action sets (i.e., task-to-PE mappings) or ‘no-action’ in that the task not in the ready list. For the latter case, the immediate reward is updated. The `_get_observation` function returns environment instances. `job_dags` denotes the injected job data, `action_map` the take-to-PE mappings, `env_storage` the task statuses and performance statistics, `PEs` the PE

information. Next, we demonstrate the actual simulation processing code snippets.

```

1 # Create a new environment and reset it.
2 env = GymDS3(simulation_length, scale)
3 state = env.reset()
4
5 # Create a scheduler
6 scheduler = get_scheduler(env, scheduler_name)
7 # If using 'DeepSoCS' as scheduler
8 if scheduler_name == 'DeepSoCS':
9     sess = tf.Session()
10    actor_agent = ActorAgent(sess, **kwargs)
11    scheduler.set_actor_agent(actor_agent)
12
13 done = False
14
15 while not done:
16     action = scheduler.schedule(state)
17     state, reward, done, info = env.step(action)

```

The environment is generated with total simulation length and scale value. In particularly using neural scheduler (i.e., DeepSoCS [28]), TensorFlow session [1] and corresponding agent are initialized.

V. EXPERIMENTS

This section demonstrates the feasibility of `gym-ds3` to standard DS3 framework by conducting experiments and two orthogonal directions. (a) We compare average response time for `gym-ds3` and DS3 in different job frequencies and provided schedulers. (b) We verify the latency performances in different schedulers with `gym-ds3` and DS3 simulations.

A. Experimental Setup

Throughout the experiments, we use five different types of jobs that modified topology based on the Simple profile from Figure 2. The jobs are continuously generated to the exponential distribution controlled by the scale factor. To diminish time for initializing phase, we start evaluation on pseudo-steady-state condition. We set the job queue length to three and simulate for 5,000 clock time (flops). We conduct five trials using different random seeds to produce result data.

The `gym-ds3` environment provides heuristic schedulers: Shortest Job First (SJF) [31], Minimum Execution Time (MET) [11], Earliest Task First (ETF) [9], and Heterogeneous Earliest Finish Time (HEFT) [3], [8], [30]. Also, we include DeepSoCS [28], which is a hybrid scheduler on Deep RL and heuristic approaches.

B. Average response time

We extrapolate average response time (ART) using the `gym-ds3` environment and standard DS3 framework with different job generation frequencies and schedulers. Figure 6 highlights the task waiting time and task running time using MET scheduler. Considering that the DS3 successfully mimics customer hardware performance, we discover that `gym-ds3` simulation demonstrates almost equivalent performance to the DS3 framework. The minor differences can be neglected due to the simulation variances. Next, we evaluate ART on different schedulers and job frequencies using `gym-ds3` environment, as illustrated in Figure 7. The variances are marked with the

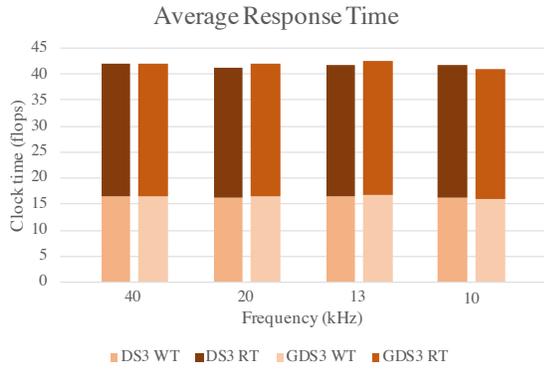


Fig. 6. Average response time for DS3 and gym-DS3 on different job generating frequencies. Minimum Execution Time scheduler is conducted.

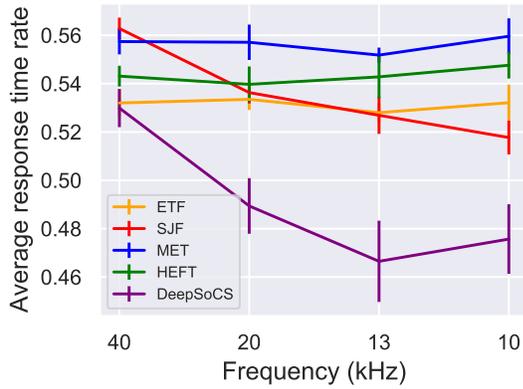


Fig. 7. A demonstration of average response time on provided heuristic schedulers using gym-ds3 environment.

error bar. Comparing to heuristic schedulers where demonstrate similar ranged performances, DeepSoCS outperforms but has high variances.

C. Performance evaluation

Subsequently, we compare average latency for different schedulers using DS3 and gym-ds3 environments. Figure 8 demonstrates the run-time performances conducted using varied job frequencies.

The run-time performances evaluated on the gym-ds3 environment successfully mimic those on the DS3 framework. Note that both have neglectable differences arisen from the system variances. Upon the experimental results, we can conclude that gym-ds3 validates indistinguishable performances with the standard DS3 framework.

VI. CONCLUSION

This paper presents the gym-ds3 environment that provides equivalent functionalities to the DS3 framework. The proposed system operates upon the Gym mechanism, which is comprehensible to RL interaction. We systematically analyze the DS3 simulation and pose challenging standpoints from designing RL agents in DS3 simulation. Furthermore, we experimentally

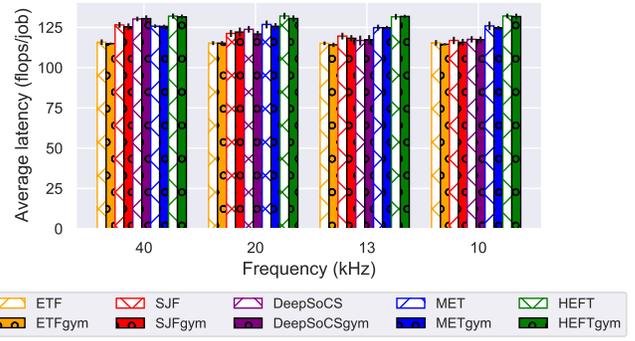


Fig. 8. A performance evaluation with different schedulers using standard DS3 and gym-ds3.

validate run-time performances using various schedulers and job frequencies in gym-ds3 and DS3 and extrapolate almost identical performances.

ACKNOWLEDGMENT

The authors would like to thank Hanbum Ko for experiment setup and Jeewoo Kim for valuable discussions.

REFERENCES

- [1] Martín Abadi, Paul Barham, Jianmin Chen, Zhifeng Chen, Andy Davis, Jeffrey Dean, Matthieu Devin, Sanjay Ghemawat, Geoffrey Irving, Michael Isard, et al. Tensorflow: A system for large-scale machine learning. In *12th {USENIX} symposium on operating systems design and implementation ({OSDI} 16)*, pages 265–283, 2016.
- [2] OpenAI: Marcin Andrychowicz, Bowen Baker, Maciek Chociej, Rafal Jozefowicz, Bob McGrew, Jakub Pachocki, Arthur Petron, Matthias Plappert, Glenn Powell, Alex Ray, et al. Learning dexterous in-hand manipulation. *The International Journal of Robotics Research*, 39(1):3–20, 2020.
- [3] Hamid Arabnejad and Jorge G Barbosa. List scheduling algorithm for heterogeneous systems by an optimistic cost table. *IEEE Transactions on Parallel and Distributed Systems*, 25(3):682–694, 2013.
- [4] Samet E. Arda, Anish NK, A. Alper Goksoy, Nirmal Kumbhare, Joshua Mack, Anderson L. Sartor, Ali Akoglu, Radu Marculescu, and Umit Y. Ogras. Ds3: A system-level domain-specific system-on-chip simulation framework, 2020.
- [5] Giorgio Ausiello, Pierluigi Crescenzi, Giorgio Gambosi, Viggo Kann, Alberto Marchetti-Spaccamela, and Marco Protasi. *Complexity and approximation: Combinatorial optimization problems and their approximability properties*. Springer Science & Business Media, 2012.
- [6] Olivier Beaumont, Arnaud Legrand, Loris Marchal, and Yves Robert. Steady-state scheduling on heterogeneous clusters. *International Journal of Foundations of Computer Science*, 16(02):163–194, 2005.
- [7] Dimitris Bertsimas and David Gamarnik. Asymptotically optimal algorithms for job shop scheduling and packet routing. *Journal of Algorithms*, 33(2):296–318, 1999.
- [8] Luiz F Bittencourt, Rizos Sakellariou, and Edmundo RM Madeira. Dag scheduling using a lookahead variant of the heterogeneous earliest finish time algorithm. In *2010 18th Euromicro Conference on Parallel, Distributed and Network-based Processing*, pages 27–34. IEEE, 2010.
- [9] James Blythe, Sonal Jain, Ewa Deelman, Yolanda Gil, Karan Vahi, Anirban Mandal, and Ken Kennedy. Task scheduling strategies for workflow-based applications in grids. In *CCGrid 2005. IEEE International Symposium on Cluster Computing and the Grid, 2005.*, volume 2, pages 759–767. IEEE, 2005.
- [10] Pradip Bose, Augusto Vega, Sarita Adve, Vikram Adve, Sasa Misailovic, Luca Carloni, Ken Shepard, David Brooks, Vijay Janapa Reddi, and Gu-Yeon Wei. Secure and resilient socs for autonomous vehicles.

- [11] Tracy D Braun, Howard Jay Siegel, Noah Beck, Ladislau L Bölöni, Muthucumar Maheswaran, Albert I Reuther, James P Robertson, Mitchell D Theys, Bin Yao, Debra Hensgen, et al. A comparison of eleven static heuristics for mapping a class of independent tasks onto heterogeneous distributed computing systems. *Journal of Parallel and Distributed computing*, 61(6):810–837, 2001.
- [12] Greg Brockman, Vicki Cheung, Ludwig Pettersson, Jonas Schneider, John Schulman, Jie Tang, and Wojciech Zaremba. Openai gym, 2016.
- [13] Erwin Coumans and Yunfei Bai. Pybullet, a python module for physics simulation for games, robotics and machine learning. 2016.
- [14] Anish Krishnakumar, Samet E Arda, A Alper Goksoy, Sumit K Mandal, Umit Y Ogras, Anderson L Sartor, and Radu Marculescu. Runtime task scheduling using imitation learning for heterogeneous many-core systems. *arXiv preprint arXiv:2007.09361*, 2020.
- [15] Sergey Levine, Chelsea Finn, Trevor Darrell, and Pieter Abbeel. End-to-end training of deep visuomotor policies. *The Journal of Machine Learning Research*, 17(1):1334–1373, 2016.
- [16] Hongzi Mao, Parimarjan Negi, Akshay Narayan, Hanrui Wang, Jiacheng Yang, Haonan Wang, Ryan Marcus, Ravichandra Addanki, Mehrdad Khani Shirkoohi, Songtao He, et al. Park: An open platform for learning-augmented computer systems. *Advances in Neural Information Processing Systems 32 (NIPS 2019)*, 2019.
- [17] Hongzi Mao, Malte Schwarzkopf, Shaileshh Bojja Venkatakrishnan, Zili Meng, and Mohammad Alizadeh. Learning scheduling algorithms for data processing clusters. In *Proceedings of the ACM Special Interest Group on Data Communication*, pages 270–288. 2019.
- [18] Norm Matloff. Introduction to discrete-event simulation and the simpy language. *Davis, CA. Dept of Computer Science. University of California at Davis. Retrieved on August, 2(2009):1–33*, 2008.
- [19] Philipp Moritz, Robert Nishihara, Stephanie Wang, Alexey Tumanov, Richard Liaw, Eric Liang, Melih Elibol, Zongheng Yang, William Paul, Michael I Jordan, et al. Ray: A distributed framework for emerging {AI} applications. In *13th {USENIX} Symposium on Operating Systems Design and Implementation ({OSDI} 18)*, pages 561–577, 2018.
- [20] Kay Ousterhout, Patrick Wendell, Matei Zaharia, and Ion Stoica. Sparrow: distributed, low latency scheduling. In *Proceedings of the Twenty-Fourth ACM Symposium on Operating Systems Principles*, pages 69–84, 2013.
- [21] Xue Bin Peng, Marcin Andrychowicz, Wojciech Zaremba, and Pieter Abbeel. Sim-to-real transfer of robotic control with dynamics randomization. In *2018 IEEE international conference on robotics and automation (ICRA)*, pages 3803–3810. IEEE, 2018.
- [22] Alejandro Rico, Felipe Cabarcas, Antonio Quesada, Milan Pavlovic, Augusto Javier Vega, Carlos Villavieja, Yoav Etsion, and Alex Ramirez. Scalable simulation of decoupled accelerator architectures. *Universitat Politècnica de Catalunya, Tech. Rep. UPCDAC-RR-2010-14*, 2010.
- [23] Anderson L Sartor, Anish Krishnakumar, Samet E Arda, Umit Y Ogras, and Radu Marculescu. Hilitte: Hierarchical and lightweight imitation learning for power management of embedded socs. *IEEE Computer Architecture Letters*, 19(1):63–67, 2020.
- [24] Julian Schrittwieser, Ioannis Antonoglou, Thomas Hubert, Karen Simonyan, Laurent Sifre, Simon Schmitt, Arthur Guez, Edward Lockhart, Demis Hassabis, Thore Graepel, et al. Mastering atari, go, chess and shogi by planning with a learned model. *Nature*, 588(7839):604–609, 2020.
- [25] Shital Shah, Debadepta Dey, Chris Lovett, and Ashish Kapoor. Airsim: High-fidelity visual and physical simulation for autonomous vehicles. In *Field and service robotics*, pages 621–635. Springer, 2018.
- [26] Behrooz A Shirazi, Krishna M Kavi, and Ali R Hurson. *Scheduling and load balancing in parallel and distributed systems*. IEEE Computer Society Press, 1995.
- [27] David Silver, Aja Huang, Chris J Maddison, Arthur Guez, Laurent Sifre, George Van Den Driessche, Julian Schrittwieser, Ioannis Antonoglou, Veda Panneershelvam, Marc Lanctot, et al. Mastering the game of go with deep neural networks and tree search. *nature*, 529(7587):484–489, 2016.
- [28] Tegg Taekyong Sung, Jeongsoo Ha, Jeewoo Kim, Alex Yahja, Chae-Bong Sohn, and Bo Ryu. Deepsocks: A neural scheduler for heterogeneous system-on-chip (soc) resource scheduling. *Electronics*, 9(6):936, 2020.
- [29] Emanuel Todorov, Tom Erez, and Yuval Tassa. Mujoco: A physics engine for model-based control. In *2012 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 5026–5033. IEEE, 2012.
- [30] Haluk Topcuoglu, Salim Hariri, and Min-you Wu. Performance-effective and low-complexity task scheduling for heterogeneous computing. *IEEE transactions on parallel and distributed systems*, 13(3):260–274, 2002.
- [31] Mihaela-Andreea Vasile, Florin Pop, Radu-Ioan Tutueanu, Valentin Cristea, and Joanna Kolodziej. Resource-aware hybrid scheduling algorithm in heterogeneous distributed computing. *Future Generation Computer Systems*, 51:61–71, 2015.
- [32] Augusto Vega, Aporva Amarnath, John-David Wellman, Hiwot Kassa, Subhankar Pal, Hubertus Franke, Alper Buyuktosunoglu, Ronald Dreslinski, and Pradip Bose. Stomp: A tool for evaluation of scheduling policies in heterogeneous multi-processors. *arXiv preprint arXiv:2007.14371*, 2020.
- [33] Abhishek Verma, Luis Pedrosa, Madhukar Korupolu, David Oppenheimer, Eric Tune, and John Wilkes. Large-scale cluster management at google with borg. In *Proceedings of the Tenth European Conference on Computer Systems*, pages 1–17, 2015.
- [34] Oriol Vinyals, Igor Babuschkin, Wojciech M Czarnecki, Michaël Mathieu, Andrew Dudzik, Junyoung Chung, David H Choi, Richard Powell, Timo Ewalds, Petko Georgiev, et al. Grandmaster level in starcraft ii using multi-agent reinforcement learning. *Nature*, 575(7782):350–354, 2019.
- [35] Iker Zamora, Nestor Gonzalez Lopez, Victor Mayoral Vilches, and Alejandro Hernandez Cordero. Extending the openai gym for robotics: a toolkit for reinforcement learning using ros and gazebo. *arXiv preprint arXiv:1608.05742*, 2016.