

# Weighed $\ell_1$ on the simplex: Compressive sensing meets locality

Abiy Tasissa<sup>1</sup>, Pranay Tankala<sup>2</sup>, and Demba Ba<sup>2</sup>

<sup>1</sup>Department of Mathematics, Tufts University, Medford, MA

<sup>2</sup>School of Engineering and Applied Sciences, Harvard University, Cambridge, MA

## Abstract

Sparse manifold learning algorithms combine techniques in manifold learning and sparse optimization to learn features that could be utilized for downstream tasks. The standard setting of compressive sensing can not be immediately applied to this setup. Due to the intrinsic geometric structure of data, dictionary atoms might be redundant and do not satisfy the restricted isometry property or coherence condition. In addition, manifold learning emphasizes learning local geometry which is not reflected in a standard  $\ell_1$  minimization problem. We propose weighted  $\ell_0$  and weighted  $\ell_1$  metrics that encourage representation via neighborhood atoms suited for dictionary based manifold learning. Assuming that the data is generated from Delaunay triangulation, we show the equivalence of weighted  $\ell_1$  and weighted  $\ell_0$ . We discuss an optimization program that learns the dictionaries and sparse coefficients and demonstrate the utility of our regularization on synthetic and real datasets.

## 1 Introduction

The compressive sensing (CS) problem considers the recovery of a sparse vector  $\mathbf{x} \in \mathcal{R}^m$  given  $d$  undetermined measurements  $\mathbf{y} = \mathbf{Ax}$ . The optimization problem is given by

$$\min_{\mathbf{x} \in \mathcal{R}^m} \|\mathbf{x}\|_0 \quad \text{s.t.} \quad \mathbf{y} = \mathbf{Ax}, \quad (1)$$

where  $\|\cdot\|_0$  denotes the  $\ell_0$  norm. However, the  $\ell_0$  minimization is known to be intractable and a common approach is a convex relaxation based on  $\ell_1$  minimization.

$$\min_{\mathbf{x} \in \mathcal{R}^m} \|\mathbf{x}\|_1 \quad \text{s.t.} \quad \mathbf{y} = \mathbf{Ax}. \quad (2)$$

CS theory shows that the  $\ell_1$  relaxation exactly recovers the underlying sparse solution assuming certain conditions on  $\mathbf{A}$  such as the restricted isometry property (RIP) or the coherence condition (Candes et al., 2006). RIP is known to hold with high probability for random matrices and the mutual coherence can be employed for deterministic matrices (Donoho and Elad, 2003; Gribonval and Nielsen, 2003).

We highlight two limitations of the standard CS. The first is the assumption of a fixed measurement matrix which is constraining in cases where an optimal predefined measurement matrix is a priori unavailable. The more general sparse coding framework learns suitable dictionaries from data adapted to the task at hand (Engan et al., 2000; Aharon et al., 2006; Elad and Aharon, 2006; Jiang et al., 2013). Second, measurement matrices do not always satisfy RIP or coherence condition which are properties leveraged to guarantee the recovery of sparse solutions. In this paper, we illustrate these limitations in the context of the manifold learning problem.

Sparse subspace clustering (Elhamifar and Vidal, 2013) is a method to cluster data that lie on the union of manifolds. It relies on the principle of self-representation, which expresses a given example as a sparse combination of its neighbors. A recent work (Tankala et al., 2020) utilizes dictionary learning and substitutes self representation with sparse convex combinations of dictionary columns. In this scalable approach, the size of the dictionary depends on intrinsic dimensions of data. In both frameworks, the dictionary atoms are in fact correlated and standard CS theory assuming RIP or coherence is not applicable. In addition, the  $\ell_1$  regularization to promote sparsity can be geometrically oblivious. For instance, a common step in manifold learning is estimate of local geometry by reconstructing a point from nearby points Roweis and Saul (2000). With that, a sparse reconstruction of a point that uses far away dictionary atoms is sub-optimal.

**Related work:** Given the mentioned limitations of standard CS, the works in (Elhamifar and Vidal, 2011; Tankala et al., 2020) use a weighted  $\ell_1$  penalty which take into account the proximity of dictionary atoms. Our work is in the spirit of weighted  $\ell_1$  minimizations and structured compressive sensing (Khajehnejad et al., 2009; Vaswani and Lu, 2010; Friedlander et al., 2011; Pilanci et al., 2012). We note that the weighted  $\ell_1$  regularization employed in this paper resembles a Laplacian smoothness term (Dornaika and Weng, 2019; Cai et al., 2010). The proposed weighted  $\ell_1$  regularization in its exact form has also been used in (Zhong and Pun, 2020).

**Contributions:** We propose weighted  $\ell_0$  and  $\ell_1$  metrics that account for locality and allow a representation of a point using neighborhood points. Under a certain generative model of the points, we show that the  $\ell_0$  and  $\ell_1$  problem are equivalent. To our knowledge, the analysis of the weighted  $\ell_0$  and weighted  $\ell_1$  metrics and applications to manifold learning is a novelty of this work.

## 2 Proposed Method

We consider  $m$  landmark points  $\mathbf{a}_1, \mathbf{a}_2, \dots, \mathbf{a}_m$  with a unique Delaunay triangulation (Lee and Schachter, 1980). In this setting, each point in the set  $\{\mathbf{y}_i\}_{i=1}^n \in \mathcal{R}^d$  is generated from a convex combination of at most

$d + 1$  atoms. Figure 1 shows an example with  $d = 2$  i.e. data points in  $\mathcal{R}^2$ . Compactly, we have  $\mathbf{y}_i = \mathbf{A}\mathbf{x}_i$  where the  $d \times m$  matrix  $\mathbf{A}$  is the dictionary defined as  $\mathbf{A} = [\mathbf{a}_1, \mathbf{a}_2, \dots, \mathbf{a}_m]$  and  $\mathbf{x}_i \in \mathcal{R}^m$  is the coefficient vector  $\mathbf{x}_i^T = [x_{i1} \ x_{i2} \ \dots \ x_{im}]$  such that  $x_{ij} \geq 0$  for all  $j$  and  $\sum_{j=1}^m x_{ij} = 1$  i.e. the coefficient vector  $\mathbf{x}_i$  is supported on the probability simplex in  $\mathcal{R}^m$ .

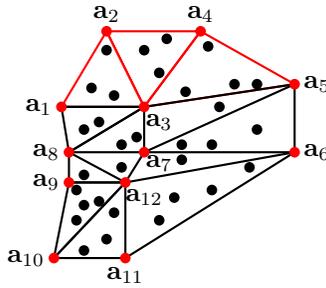


Figure 1: The red dots indicate the atoms which generate the data points. Each black dot, denoting a data point, is a convex combination of three atoms which are vertices of the triangle the point belongs to. We show that the optimal weighted  $\ell_0$  and  $\ell_1$  metric is based on a point representing itself using the vertices of the triangle it belongs to.

Our aforementioned goal of representing by local dictionaries motivates the following definition of a weighted  $\ell_0$  metric.

**Definition 1.** Assume  $m$  landmark points  $\mathbf{a}_1, \mathbf{a}_2, \dots, \mathbf{a}_m$  in  $\mathcal{R}^d$  with a unique Delaunay triangulation. Let the point  $\mathbf{z} \in \mathcal{R}^d$  have the following representation,  $\mathbf{z} = \sum_{i=1}^m x_i \mathbf{a}_i$  with the coefficient vector  $\mathbf{x}$  supported on the probability simplex in  $\mathcal{R}^m$ . The weighted  $\ell_0$  metric is defined as

$$\ell_{W,0}(\mathbf{x}) = \sum_{i=1}^m \mathbf{1}_{x_i \neq 0} \|\mathbf{z} - \mathbf{a}_i\|^2, \quad (3)$$

where  $\mathbf{1}_{x_i \neq 0}$  denotes the indicator function.  $\mathbf{1}_{x_i \neq 0}$  takes a value of 1 if  $x_i > 0$  and is 0 otherwise.

Given the above definition of a weighted  $\ell_0$  metric and the fact that a given point  $\mathbf{z}$  admits different representations as a convex combination of the dictionary atoms, the natural question is the sense in which this metric is minimal i.e. among the different representations, which ones admit minimal values in this metric? The following theorem shows that the local reconstruction is minimal in the weighted  $\ell_0$  metric.

**Theorem 1.** Let  $\mathbf{y} \in \mathcal{R}^d$  lie in the convex hull of the points  $\mathbf{a}_1, \dots, \mathbf{a}_m \in \mathcal{R}^d$  with a unique a unique Delaunay triangulation. Consider the following  $\ell_{W,0}$  minimization problem.

$$\min_{\mathbf{x} \in \mathcal{R}^m} \ell_{W,0}(\mathbf{x}) \quad \text{s.t.} \quad \mathbf{y} = \mathbf{A}\mathbf{x}. \quad (4)$$

The optimal solution  $\mathbf{x}^*$  to the above program is such that  $\mathbf{x}_j^* \neq 0$  comprise the vertices of some face of this triangulation that contains  $\mathbf{y}$ .

*Proof.* Consider an arbitrary Delaunay cell containing  $\mathbf{y}$  defined by the vertices  $\{\mathbf{a}_j : j \in S, |S| = k\}$  with  $S \subseteq [m]$  denoting a set of at most  $d + 1$  indices. Let  $\mathbf{x}$  be a  $k$ -sparse feasible solution of the program with support  $S'$ . It follows that

$$\sum_{i \in S'} \mathbf{1}_{x_i \neq 0} \|\mathbf{y} - \mathbf{a}_i\|^2 > \sum_{i \in S} \mathbf{1}_{x_i \neq 0} \|\mathbf{y} - \mathbf{a}_i\|^2. \quad (5)$$

Above, the inequality follows from the fact that atoms within  $S$  are the closest to the point  $\mathbf{y}$ . Therefore, the  $k$ -sparse representation using the vertices in  $S$  is the optimal solution to the  $\ell_{W,0}$  minimization problem.  $\square$

Motivated by the fact that the weighted  $\ell_0$  metric enforces local reconstructions and with the goal of obtaining a regularization amenable to optimization, we define a convex relaxation of the weighted  $\ell_0$  problem.

**Definition 2.** Assume  $m$  landmark points  $\mathbf{a}_1, \mathbf{a}_2, \dots, \mathbf{a}_m$  in  $\mathcal{R}^d$  with a unique Delaunay triangulation. Let the point  $\mathbf{z} \in \mathcal{R}^d$  have the following representation,  $\mathbf{z} = \sum_{i=1}^m x_i \mathbf{a}_i$  with the coefficient vector  $\mathbf{x}$  supported on the probability simplex in  $\mathcal{R}^m$ . The weighted  $\ell_1$  metric is defined as

$$\ell_{W,1}(\mathbf{x}) = \sum_{i=1}^m x_i \|\mathbf{z} - \mathbf{a}_i\|^2, \quad (6)$$

Analogous to CS theory, the next question is the sense in which a weighted  $\ell_1$  minimization is equivalent to a weighted  $\ell_0$  minimization problem. This equivalency is summarized in the theorem below.

**Theorem 2.** Let  $\mathbf{y} \in \mathcal{R}^d$  lie in the convex hull of the points  $\mathbf{a}_1, \dots, \mathbf{a}_m \in \mathcal{R}^d$ , and let  $\mathbf{x} \in \mathcal{R}^m$  be a solution to the following optimization problem.

$$\begin{aligned}
& \underset{\mathbf{x} \in \mathcal{R}^m}{\text{minimize}} && \sum_j x_j \|\mathbf{y} - \mathbf{a}_j\|^2 \\
& \text{subject to} && \mathbf{y} = \sum_j x_j \mathbf{a}_j \\
& && \sum_j x_j = 1 \\
& && x_j \geq 0, \text{ for all } j.
\end{aligned} \tag{7}$$

If the points  $\mathbf{a}_1, \dots, \mathbf{a}_m$  have a unique Delaunay triangulation, then the set of points  $\mathbf{a}_j$  such that  $x_j \neq 0$  comprise the vertices of some face of this triangulation that contains  $\mathbf{y}$ .

*Proof.* It suffices to show that if a Delaunay cell of  $\mathbf{a}_1, \dots, \mathbf{a}_m$  contains  $\mathbf{y}$ , then each point  $\mathbf{a}_j$  such that  $x_j \neq 0$  is a vertex of this cell. To this end, consider an arbitrary Delaunay cell containing  $\mathbf{y}$  defined by the vertices  $\{\mathbf{a}_j : j \in S\}$ . Here,  $S \subseteq [m]$  denotes a set of  $d+1$  indices. We will prove that  $x_j \neq 0$  only if  $j \in S$ .

Since  $\mathbf{y}$  lies in the Delaunay cell, we may write it as a convex combination of only the vertices  $\{\mathbf{a}_j : j \in S\}$  using a coefficient vector  $\mathbf{x}' \in \mathcal{R}^m$ , which may differ from the solution  $\mathbf{x}$  to the optimization problem.

Observe that for any vector  $\mathbf{c} \in \mathcal{R}^d$ , the identities  $\mathbf{y} = \sum_j x_j \mathbf{a}_j$  and  $\sum_j x_j = 1$  imply

$$\begin{aligned}
& \sum_j x_j \|\mathbf{y} - \mathbf{a}_j\|^2 \\
&= \sum_j x_j (\|\mathbf{a}_j - \mathbf{c}\|^2 - 2\langle \mathbf{y} - \mathbf{c}, \mathbf{a}_j - \mathbf{c} \rangle + \|\mathbf{y} - \mathbf{c}\|^2) \\
&= \sum_j x_j \|\mathbf{a}_j - \mathbf{c}\|^2 - \|\mathbf{y} - \mathbf{c}\|^2.
\end{aligned}$$

The above identity also holds if we replace  $x_j$  with  $x'_j$ .

By the definition of a Delaunay cell, there is a sphere with center  $\mathbf{c}$  and radius  $r$  such that  $\|\mathbf{a}_j - \mathbf{c}\| = r$  for each  $j \in S$  and  $\|\mathbf{a}_j - \mathbf{c}\| > r$  for each  $j \notin S$  (this is where we use the assumption that the triangulation is unique). Since the support of  $\mathbf{x}'$  is contained in  $S$  and the support of  $\mathbf{x}$  is not, we have

$$\begin{aligned}
\sum_j x'_j \|\mathbf{y} - \mathbf{a}_j\|^2 &= \sum_j x'_j \|\mathbf{a}_j - \mathbf{c}\|^2 - \|\mathbf{y} - \mathbf{c}\|^2 \\
&< \sum_j x_j \|\mathbf{a}_j - \mathbf{c}\|^2 - \|\mathbf{y} - \mathbf{c}\|^2 \\
&= \sum_j x_j \|\mathbf{y} - \mathbf{a}_j\|^2,
\end{aligned}$$

which contradicts the optimality of  $\mathbf{x}$ . Thus, each point  $\mathbf{a}_j$  such that  $x_j \neq 0$  is a vertex of the cell. We conclude that  $\{\mathbf{a}_j : x_j \neq 0\}$  are the vertices of some face of the triangulation containing  $\mathbf{y}$ .  $\square$

### 3 Dictionary Learning Algorithm

The utility of the proposed model employing weighted  $\ell_1$  regularization discussed in the previous section depends on the generative dictionary. In practice, the dictionary  $\mathbf{A}$  is not available and needs to be estimated from the input data points. Let  $\mathbf{Y} = [\mathbf{y}_1, \dots, \mathbf{y}_n] \in \mathcal{R}^{d \times n}$  be a set of  $n$  data points in  $\mathcal{R}^d$ . For a data point  $\mathbf{y} \in \mathcal{R}^d$ , we consider the following minimization problem.

$$\min_{\mathbf{A} \in \mathcal{R}^{m \times d}, \mathbf{x} \in \mathcal{R}^m} \frac{1}{2} \|\mathbf{y} - \mathbf{A}\mathbf{x}\|^2 + \lambda \sum_{j=1}^m x_j \|\mathbf{y} - \mathbf{a}_j\|^2. \tag{8}$$

Let  $L(\mathbf{A}, \mathbf{y}, \mathbf{x}) = \frac{1}{2} \|\mathbf{y} - \mathbf{A}\mathbf{x}\|^2 + \lambda \sum_{j=1}^m x_j \|\mathbf{y} - \mathbf{a}_j\|^2$  if  $\mathbf{x} \in S$  and  $\infty$  otherwise with  $S = \{\mathbf{x} \in \mathcal{R}^m : x_1, \dots, x_m \geq 0 \text{ and } \sum_{j=1}^m x_j = 1\}$  denoting the probability simplex in  $\mathcal{R}^m$ . We note that the parameter  $\lambda$  balances the reconstruction loss with the weighted  $\ell_1$  regularization and determines the sparsity of  $\mathbf{x}$ .

If the dictionary is fixed, the resulting problem is a weighted  $\ell_1$  minimization problem and can be efficiently solved (Salman Asif and Romberg, 2012). However, given a fixed coefficient, learning the dictionary is a nontrivial task. We have proposed the K-Deep Simplex (KDS) algorithm for this purpose in an earlier work (Tankala et al., 2020). Given data, a classical method to learn the dictionary alternates between sparse approximation and dictionary update step (Agarwal et al., 2016). KDS utilizes this along with algorithm unrolling (Monga et al., 2019; Gregor and LeCun, 2010; Hershey et al., 2014), a framework to recast a structured optimization framework into a neural network, to solve the optimization problem in (8). We develop an autoencoder architecture to solve the optimization problem. We summarize the main steps of the KDS algorithm below and refer the interested reader to (Tankala et al., 2020) for details.

**Encoder:** We employ the accelerated projected gradient descent (Bubeck, 2015) to compute the optimal coefficient for

$$\mathbf{x}^*(\mathbf{A}, \mathbf{y}) \in \underset{\mathbf{x}}{\operatorname{argmin}} L(\mathbf{A}, \mathbf{y}, \mathbf{x}). \tag{9}$$

Starting with initialization  $\mathbf{x}^{(0)} = \tilde{\mathbf{x}}^{(0)} = \mathbf{0}$ , the algorithm updates can be written as follows

$$\mathbf{x}^{(t+1)} = \mathcal{P}_S \left( \tilde{\mathbf{x}}^{(t)} - \alpha \nabla_{\mathbf{x}} L(\mathbf{A}, \mathbf{y}, \tilde{\mathbf{x}}^{(t)}) \right) \tag{10}$$

$$\tilde{\mathbf{x}}^{(t+1)} = \mathbf{x}^{(t+1)} + \gamma^{(t)} (\mathbf{x}^{(t+1)} - \mathbf{x}^{(t)}), \tag{11}$$

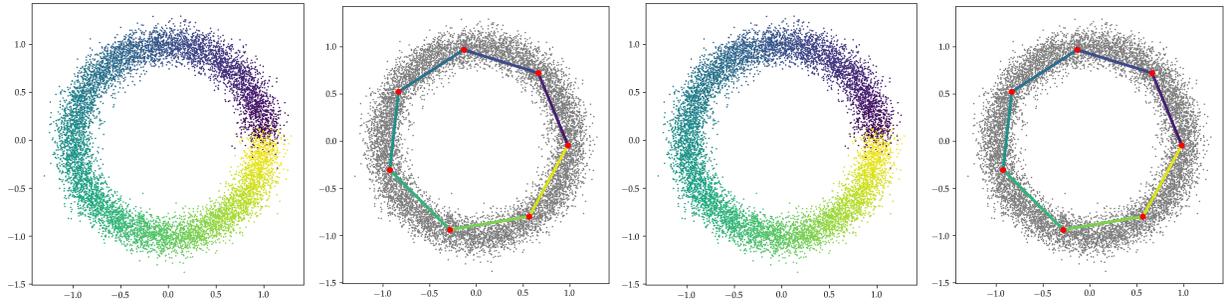


Figure 2: Circle and two moons. Autoencoder input (first and third) and output (second and fourth), with learned atoms marked in red.

for  $0 \leq t \leq T$ . The parameter  $\alpha$  is a step size, and the constants  $\gamma^{(t)}$  are given by the recurrence

$$\eta^{(0)} = 0, \quad \eta^{(t+1)} = \frac{1 + \sqrt{1 + 4\eta^{(t)}}}{2}, \quad \gamma^{(t)} = \frac{\eta^{(t)} - 1}{\eta^{(t+1)}}. \quad (12)$$

The gradient of the loss function  $L$  is given by

$$\nabla_{\mathbf{x}} L(\mathbf{A}, \mathbf{y}, \mathbf{x}) = \mathbf{A}^\top (\mathbf{A}\mathbf{x} - \mathbf{y}) + \lambda \sum_{j=1}^m \|\mathbf{y} - \mathbf{a}_j\|^2 \mathbf{e}_j. \quad (13)$$

The operator  $\mathcal{P}_S$  projects onto  $S$ , the probability simplex and has the following form (Wang and Carreira-Perpinán, 2013)

$$\mathcal{P}_S(\mathbf{x}) = \text{ReLU}(\mathbf{x} + b(\mathbf{x}) \cdot \mathbf{1}), \quad (14)$$

with  $b : \mathcal{R}^m \rightarrow \mathcal{R}$  denoting a piecewise-linear bias function. In summary, the approximate optimal code  $\mathbf{x}^{(T)}(\mathbf{A}, \mathbf{y}) \approx \mathbf{x}^*(\mathbf{A}, \mathbf{y})$  is an output of a recurrent encoder with input  $\mathbf{y}$ , weights  $\mathbf{A}$ , and activation function  $\mathcal{P}_S$ .

**Decoder and Backward Pass :** Given  $\mathbf{A}$  and  $\mathbf{x}$ , the decoder approximately reconstructs the input  $\mathbf{y}$  by computing  $\hat{\mathbf{y}} = \mathbf{A}\mathbf{x}^{(T)}$ . The final step is to find the optimal network weights by solving  $\mathbf{A}^* \in \underset{\mathbf{A}}{\text{argmin}} \frac{1}{n} \sum_{i=1}^n L(\mathbf{A}, \mathbf{y}_i, \mathbf{x}^*(\mathbf{A}, \mathbf{y}_i))$ . We minimize  $\frac{1}{n} \sum_{i=1}^n L(\mathbf{A}, \mathbf{y}_i, \mathbf{x}^{(T)}(\mathbf{A}, \mathbf{y}_i))$  by backpropagation through the autoencoder. An advantage of this optimization framework is that the encoding and decoding steps are amenable to GPU parallelizations across the data points.

## 4 Numerical Experiments

In this section, we show that the proposed regularization is useful for the manifold learning task. We first consider one-dimensional manifolds in  $\mathcal{R}^2$ . Figure 2 shows two such data sets. The first data is a unit circle in  $\mathcal{R}^2$ . The second data we consider is the classic two moon data set (Ng et al., 2001). The latter dataset consists of two disjoint semicircular arcs. To test the robustness of the proposed regularization and the KDS algorithm, a small Gaussian white noise is added to each data point. Figure 2 shows the results of training the autoencoder on these data sets. Using the weighted  $\ell_1$  metric and employing the KDS algorithm, each data point is accurately represented as sparse convex combinations of neighborhood atoms. In addition, the learned atoms are geometrically significant and can be interpreted as the dictionary that generate the points up to additive noise.

### 4.1 Application: Clustering

The learned sparse coefficients can be used for downstream tasks. Here, we illustrate their use for the clustering task and compare our results to competitive clustering methods. The first is the  $k$ -means (KM) algorithm (Lloyd, 1982) which is a centroid based clustering algorithm. The second is the sparse manifold clustering and embedding (SMCE) algorithm proposed in (Elhamifar and Vidal, 2011). Therein, the authors also consider a proximity regularization. However, the dictionary is constituted from all data points. In contrast, our method learns few atoms from the input data. We evaluate the algorithms on two datasets. The first is a noisy two moon dataset. The second is the MNIST dataset (LeCun et al., 1998) which is a database of 10 different digits each represented as a  $28 \times 28$  grayscale image. We consider a subset of the data by considering 5 digits, 0, 3, 4, 6 and 7. For KDS and SMCE, we run spectral clustering (Ng et al., 2001) on a similarity graph derived from the coefficients. Table 1 summarizes the results. We note that the proposed algorithm achieves the best accuracy over the baselines. As important as the accuracy is the fact that the clustering is performed on a sparse similarity graph. This ensures that KDS is fast and makes it an efficient scalable algorithm for large datasets.

## 5 Conclusion

In this work, we propose weighted  $\ell_0$  and weighted  $\ell_1$  regularizations that promote the representation of a data point using nearby dictionary atoms. Assuming that data points are generated from a convex combination of atoms, represented as vertices of a unique Delaunay triangulation, we prove that the weighted  $\ell_1$

Method	Moons	MNIST-5
KM	0.75	0.91
SMCE	0.88	0.94
KDS	<b>1.0</b>	<b>0.99</b>

Table 1: Clustering accuracy for various data sets. Accuracy is defined the percentage of correct matches with respect to the ground truth labels of the data.

regularization recovers the underlying sparse solution. In the general setting, we discuss an efficient algorithm to learn the sparse coefficients and dictionary atoms. In the context of the manifold learning problem, our experiments show that the proposed regularization obtains a geometrically meaningful estimate of local geometry. We test the algorithm on the clustering problem and show that the proposed framework is efficient and yields accurate results.

## References

- E. J. Candes, J. K. Romberg, and T. Tao, “Stable signal recovery from incomplete and inaccurate measurements,” *Communications on Pure and Applied Mathematics: A Journal Issued by the Courant Institute of Mathematical Sciences*, vol. 59, no. 8, pp. 1207–1223, 2006.
- D. L. Donoho and M. Elad, “Optimally sparse representation in general (nonorthogonal) dictionaries via  $\ell_1$  minimization,” *Proceedings of the National Academy of Sciences*, vol. 100, no. 5, pp. 2197–2202, 2003.
- R. Gribonval and M. Nielsen, “Sparse representations in unions of bases,” *IEEE transactions on Information theory*, vol. 49, no. 12, pp. 3320–3325, 2003.
- K. Engan, S. O. Aase, and J. H. Husøy, “Multi-frame compression: Theory and design,” *Signal Processing*, vol. 80, no. 10, pp. 2121–2140, 2000.
- M. Aharon, M. Elad, and A. Bruckstein, “K-svd: An algorithm for designing overcomplete dictionaries for sparse representation,” *IEEE Transactions on signal processing*, vol. 54, no. 11, pp. 4311–4322, 2006.
- M. Elad and M. Aharon, “Image denoising via sparse and redundant representations over learned dictionaries,” *IEEE Transactions on Image processing*, vol. 15, no. 12, pp. 3736–3745, 2006.
- Z. Jiang, Z. Lin, and L. S. Davis, “Label consistent k-svd: Learning a discriminative dictionary for recognition,” *IEEE transactions on pattern analysis and machine intelligence*, vol. 35, no. 11, pp. 2651–2664, 2013.
- E. Elhamifar and R. Vidal, “Sparse subspace clustering: Algorithm, theory, and applications,” *IEEE transactions on pattern analysis and machine intelligence*, vol. 35, no. 11, pp. 2765–2781, 2013.
- P. Tankala, A. Tasissa, J. M. Murphy, and D. Ba, “Manifold learning and deep clustering with local dictionaries,” *arXiv preprint arXiv:2012.02134*, 2020.
- S. T. Roweis and L. K. Saul, “Nonlinear dimensionality reduction by locally linear embedding,” *science*, vol. 290, no. 5500, pp. 2323–2326, 2000.
- E. Elhamifar and R. Vidal, “Sparse manifold clustering and embedding,” *Advances in neural information processing systems*, vol. 24, pp. 55–63, 2011.
- M. A. Khajehnejad, W. Xu, A. S. Avestimehr, and B. Hassibi, “Weighted  $\ell_1$  minimization for sparse recovery with prior information,” in *2009 IEEE international symposium on information theory*. IEEE, 2009, pp. 483–487.
- N. Vaswani and W. Lu, “Modified-cs: Modifying compressive sensing for problems with partially known support,” *IEEE Transactions on Signal Processing*, vol. 58, no. 9, pp. 4595–4607, 2010.
- M. P. Friedlander, H. Mansour, R. Saab, and Ö. Yilmaz, “Recovering compressively sampled signals using partial support information,” *IEEE Transactions on Information Theory*, vol. 58, no. 2, pp. 1122–1134, 2011.
- M. Pilanci, L. El Ghaoui, and V. Chandrasekaran, “Recovery of sparse probability measures via convex programming,” in *NIPS*, 2012.
- F. Dornaika and L. Weng, “Sparse graphs with smoothness constraints: Application to dimensionality reduction and semi-supervised classification,” *Pattern Recognition*, vol. 95, pp. 285–295, 2019.
- D. Cai, X. He, J. Han, and T. S. Huang, “Graph regularized nonnegative matrix factorization for data representation,” *IEEE transactions on pattern analysis and machine intelligence*, vol. 33, no. 8, pp. 1548–1560, 2010.
- G. Zhong and C.-M. Pun, “Subspace clustering by simultaneously feature selection and similarity learning,” *Knowledge-Based Systems*, vol. 193, p. 105512, 2020.
- D.-T. Lee and B. J. Schachter, “Two algorithms for constructing a delaunay triangulation,” *International Journal of Computer & Information Sciences*, vol. 9, no. 3, pp. 219–242, 1980.

- M. Salman Asif and J. Romberg, “Fast and Accurate Algorithms for Re-Weighted L1-Norm Minimization,” *arXiv e-prints*, 2012.
- A. Agarwal, A. Anandkumar, P. Jain, and P. Netrapalli, “Learning sparsely used overcomplete dictionaries via alternating minimization,” *SIAM Journal on Optimization*, vol. 26, no. 4, pp. 2775–2799, 2016.
- V. Monga, Y. Li, and Y. C. Eldar, “Algorithm Unrolling: Interpretable, Efficient Deep Learning for Signal and Image Processing,” *arXiv e-prints*, 2019.
- K. Gregor and Y. LeCun, “Learning fast approximations of sparse coding,” in *Proceedings of the 27th international conference on international conference on machine learning*, 2010, pp. 399–406.
- J. R. Hershey, J. Le Roux, and F. Weninger, “Deep Unfolding: Model-Based Inspiration of Novel Deep Architectures,” *arXiv e-prints*, 2014.
- S. Bubeck, “Convex optimization: Algorithms and complexity,” *Foundations and Trends® in Machine Learning*, vol. 8, no. 3-4, pp. 231–357, 2015.
- W. Wang and M. A. Carreira-Perpinán, “Projection onto the probability simplex: An efficient algorithm with a simple proof, and an application,” *arXiv preprint arXiv:1309.1541*, 2013.
- A. Ng, M. Jordan, and Y. Weiss, “On spectral clustering: Analysis and an algorithm,” *Advances in neural information processing systems*, vol. 14, pp. 849–856, 2001.
- S. Lloyd, “Least squares quantization in pcm,” *IEEE transactions on information theory*, vol. 28, no. 2, pp. 129–137, 1982.
- Y. LeCun, L. Bottou, Y. Bengio, and P. Haffner, “Gradient-based learning applied to document recognition,” *Proceedings of the IEEE*, vol. 86, no. 11, pp. 2278–2324, 1998.