

Traceability Technology Adoption in Supply Chain Networks

Philippe Blaettchen

Technology and Operations Management, INSEAD, Fontainebleau, France, 77305, philippe.blaettchen@insead.edu

Andre P. Calmon

Scheller College of Business, Georgia Institute of Technology, Atlanta, GA, 30308, andre.calmon@gatech.edu
Technology and Operations Management, INSEAD, Fontainebleau, France, 77305

Georgina Hall

Decision Sciences, INSEAD, Fontainebleau, France, 77305, georgina.hall@insead.edu

Modern traceability technologies promise to improve supply chain management by simplifying recalls, increasing demand visibility, or ascertaining sustainable supplier practices. Managers in the traceability initiatives developing such technologies face a difficult question: which companies should they target as early adopters to ensure that their technology is broadly employed? To answer this question, managers must consider that supply chains are interlinked in complex networks and that a *supply chain effect* is inherent to traceability technologies. More specifically, the benefits obtained from traceability are conditional on technology adoption throughout a product's supply chain.

We introduce a model of the dynamics of traceability technology adoption in supply chain networks to tackle the problem of selecting the smallest set of early adopters guaranteeing broad dissemination. Our model builds on extant diffusion models while incorporating that a firm's adoption decision depends on previous adoption decisions throughout its supply chains. We show that the problem is NP-hard and that no approximation within a polylogarithmic factor can be guaranteed for any polynomial-time algorithm. Nevertheless, we introduce an algorithm that identifies an exact solution in polynomial time under certain assumptions on the network structure and provide evidence that it is tractable for real-world supply chain networks. We further propose a random generative model that outputs networks consistent with real-world supply chain networks. The networks obtained display, whp, structures that allow us to find the optimal seed set in subexponential time using our algorithm. Our generative model also provides approximate seed sets when information on the network is limited.

Key words: supply chain traceability; technology adoption; network diffusion; computational complexity

1. Introduction

The supply chains of modern consumer goods are complex, spanning multiple countries and dozens of firms. As a result, most companies are largely unable to trace the products that they produce and source beyond one or two upstream and downstream tiers of their supply chain. This limited traceability—or ability to trace the processing history, origin of materials and parts, as well as

distribution and location of products (ISO 2005)—has numerous negative consequences. For example, firms lacking traceability have restricted visibility of end-customer demand, are incapable of detecting supplier-related issues and disruptions, face coordination and agency problems, and find it difficult to address quality and contamination concerns appropriately.

Many initiatives seek to deploy new traceability technologies and standards (henceforth technology) in response to this ubiquitous lack of traceability.¹ However, the dissemination of traceability technology faces unique barriers. Consider, for example, a coffee producer deciding whether or not to adopt a traceability technology to track the origins of beans it uses to produce roasted coffee products and the final destination of the beans (in the form of coffee products). On the supply side, tracing the beans' origins might help the coffee producer improve production planning and mitigate supplier-related issues such as social or environmental malpractice. On the demand side, tracing the beans' destination can increase demand visibility, mitigate counterfeits, generate value from sustainability certifications, and facilitate recalls and quality control. However, the producer only fully realizes traceability benefits if it can source and sell enough beans that are traceable beyond its direct suppliers and customers. In turn, supply and demand depend on upstream and downstream firms' ability to generate, process, transmit and use traceability information. If even a single firm does not adopt the technology, individual products may no longer be linked with certainty to the available traceability information and the traceability benefits are drastically diminished. Thus, the success of a traceability technology for a product depends on the technology's adoption by all the firms along the "flow" of the product's supply chain. We call this specific type of network effect the *supply chain effect*.

Companies and initiatives that develop and promote traceability technologies follow a typical scaling strategy where they offer their technology at a discount to a set of early adopters. The hope is that this "seed set" of companies will promote the diffusion of the technology. However, due to the supply chain effect, nearly everyone in a supply chain would require such discounts for successful technology adoption within that supply chain. As a result, the initiative must consider economies of scale enabled by highly interlinked supply chains forming a "supply chain network" to deploy its technology efficiently. While supply chain networks make traceability technology dissemination profitable in the first place, they complicate the selection of a seed set. In fact, selection strategies vary significantly across different initiatives. Some initiatives, such as IBM's food traceability initiative, encourage large companies at the center of many supply chains to be

¹ Initiatives stem from supply chain participants (Morris 2018), third-party providers (Peters 2016), or industry consortia (Haig 2020). We identify 41 new initiatives in the food industry in the last decade, where the global value of traceability was nearly US\$11 bn. in 2017 and is estimated to grow to US\$23 bn. by 2025 (Bhandalkar and Das 2019). Appendix A contains a detailed discussion and examples.

early adopters (Naidu and Irrera 2017). Others, such as the startup bext360, focus on companies at the edges of supply chains (Youngdahl and Hunsaker 2018) hoping to create supply and demand of traceable goods. Again other initiatives, such as one by supermarket chain Albert Heijn, are product-focused and promote the early adoption of traceability technology by all the companies in a specific set of supply chains (Morris 2018). In the absence of a formal model, it is unclear which of these approaches should be taken and which lead to too large and ineffective a seed set, wasted time, money, and ultimately, a failure to achieve widespread adoption.

In light of these issues, we propose a principled approach to seed set selection that considers supply chain effects and the complex nature of modern highly interlinked supply chains. Our approach involves developing a new technology adoption model, the Supply Chain Traceability Model (SCTM), which accounts for supply chain effects. The SCTM incorporates that a company will only benefit from adopting traceability technology for a product if there is enough traceable supply and demand available for it. For this purpose, it builds on an existing technology adoption model, the Linear Threshold Model (LTM), wherein a firm or individual adopts a technology if enough of its direct neighbors adopt it (Kempe et al. 2003). In contrast, firms in the SCTM adopt a traceability technology when there is sufficient demand for traceable products from its customers and sufficient supply from its direct suppliers. In particular, the SCTM assumes a network of firms wherein each path corresponds to the supply chain of a product or a component. Then, in each discrete-time period, a firm decides whether to adopt a technology or not, based on the immediate benefits ultimately implied by the adoption decisions of other firms in its supply chains. In a nutshell, if the firm has enough supply and demand for a traceable product such that the benefit of adopting the technology exceeds the adoption cost, the firm adopts.

With this new model in hand, we formalize the *minimum seed set problem*: What is the smallest size of any seed set such that, if the firms within the seed set adopt the technology, all firms within the supply chain network eventually adopt it? We prove that the problem is hard not just to solve, but also to approximate. This is the case even when supply chains consist of few tiers and traceability benefits largely outweigh adoption costs. As a result, an approach that does not exploit the supply chain network's structure is bound to be unusable if the network consists of hundreds or even just dozens of firms. Consider the aforementioned coffee producer as an example. An average producer is part of hundreds of end-product supply chains and deals directly or indirectly with thousands of farmers and intermediaries. It has dozens of competitors whose supply chains likely overlap both upstream and downstream with its own. As a result, coffee traceability initiatives such as bext360 might have thousands of potential candidate companies for their seed set.

Thus, our next contribution is to show that, indeed, the minimum seed set problem can be solved effectively under certain conditions on the supply chain network structure. To do so, we

generalize optimization methods for other diffusion models (see Ben-Zwi et al. 2011) to the SCTM. Specifically, we first build an auxiliary graph that is derived from the supply chain network. Then, we show that if the treewidth of this auxiliary graph is bounded, the problem can be solved in polynomial time.² We provide evidence that such an algorithm could work well in practice. In particular, we find that the treewidths derived from a data set of 38 real supply chain networks by Willems (2008), some with multiple thousand nodes, are relatively small.

Our final contribution is a new random generative model of supply chain networks. The random model’s dynamics assume that a tiered supply chain network outputs horizontally differentiated types of products (or components). Each firm in the network specializes in processing a certain type of product. A randomly sampled product’s supply chain consists of the firms in each of the network’s tiers whose specialization is closest to the product. The networks generated by this model are particularly realistic and exhibit several characteristics commonly observed in real-world supply chains, such as v-shaped and diamond-shaped sub-tier networks, high modularity, and disassortativity (Ang et al. 2017, Perera et al. 2017, Wang et al. 2020). This random model, which may be of independent interest, serves two purposes for the minimum seed set problem. First, it allows us to explicitly prove an upper bound on the auxiliary graph’s treewidth for arbitrary network sizes. For the vast majority of supply chain networks generated via this procedure, the treewidth of the auxiliary graphs grows sublinearly in the network’s size, which implies subexponentiality of our algorithm. This is the case also when the random model is tuned to output networks similar to the ones in Willems (2008). Second, the random model enables us to obtain approximate seed sets in the setting where information relating to the supply chain network is limited by providing a “worst-case” supply chain network structure, which can be used as a replacement of the unknown supply chain network.

The rest of the paper is structured as follows. We review extant literature on traceability and technology adoption in Section 2. We then formally introduce the SCTM and the minimum seed set problem in Section 3. In Section 4, we show the computational complexity of the minimum seed set problem, before introducing an algorithm in Section 5 that allows us to solve the problem under certain structural conditions. While data from real supply chain networks seems to indicate that these structural conditions hold in practice, it is difficult to generalize such claims, especially with regards to arbitrary network sizes. Hence, in Section 6, we introduce a random generative model for supply chain networks and prove that our algorithm scales well for supply chain networks generated by this model. We conclude in Section 7.

² The existence of polynomial-time algorithms for NP-hard problems given that some graph related to the problem has bounded treewidth is common in the combinatorial optimization community (e.g., Ben-Zwi et al. 2011, Jagabathula and Rusmevichientong 2019, Faenza et al. 2020).

2. Literature Review

Our work relates to two different research streams: the literature on traceability and the technology adoption literature. We review both in this section.

2.1. Traceability and Supply Chain Effects

In our model, we presume quantifiable traceability benefits. We thus abstract away from the mechanisms underlying these benefits, some of which have been studied extensively in the operations literature (e.g., Lee et al. 2000, Sodhi and Tang 2019). In comparison, we focus on the dissemination of technologies used to capture, share, and process traceability information. Recent studies linking supply chain traceability with enabling technologies have focused on the underlying IT infrastructure, particularly blockchain technology (Babich and Hilary 2020, Chod et al. 2020, Cui et al. 2020). Previous work has also considered tracking tools like RFID that are required to gather traceability information (Dutta et al. 2007, Heese 2007, Whang 2010). Our paper studies the adoption of traceability technology broadly, which includes IT infrastructures and tracking tools, as well as standards. We add a new perspective by taking the point of view of the traceability technology provider seeking to achieve widespread use. Moreover, we consider complex supply chain coordination issues in the multi-tiered and highly interconnected supply chains observed in practice.³ To do so, we adapt tools from the study of diffusion in networks to the context of supply chains.

The supply chain effect complicates the diffusion of traceability technology. The literature on traceability applications identifies this effect as a key barrier for broad adoption (e.g., Galliano and Orozco 2011, Hackius and Petersen 2017, Behnke and Janssen 2020, Sternberg et al. 2021). We contribute to this line of research, based on case studies and surveys, by formalizing the supply chain effect and proposing an optimization approach to promoting traceability technology adoption.

2.2. Adoption of Technologies with Network Effects

Traceability technology exhibits externalities because the benefit a firm obtains from technology adoption depends directly on technology adoption by other firms in its supply chains. By taking the perspective of a traceability initiative, our work adds to a growing body of literature that studies firms' strategic interactions when customers experience network externalities based on local interactions with other customers (e.g., Candogan et al. 2012, Cohen and Harsha 2020). Such interactions play an important role, for example, when the perceived benefits of an innovation are influenced by contacts that have experienced the innovation (Domingos and Richardson 2001, Kempe et al. 2003) or when the benefits themselves are generated by interactions (Goldberg and Liu 2013, Goyal et al. 2019). In fact, Beaman et al. (2018) show empirically that companies promoting new technologies

³Recent work by Osadchiy et al. (2021) on the bullwhip effect also highlights the importance of considering the non-linear supply chain network structures observed in practice.

can profit from considering local interactions when targeting early technology adopters. Unlike in the existing literature, it is not final consumers who experience network externalities in our case, but rather firms whose local interactions emerge from their supply chain relationships.

Local interaction effects are captured by modeling customers as nodes in a network with a state (adopted/not adopted). The nodes are linked to each other with edges representing the mutual impacts that customers have on each other (Jackson 2010).⁴ When an actor chooses to adopt an innovation, they are likely to weigh the (static) costs of adoption against the perceived benefits derived from the adoption by actors with whom they are connected. It is reasonable to assume in such a case that actors have a threshold. If the innovation is adopted by a number of connections exceeding this threshold, an actor decides to adopt it, as well. This model is called the Linear Threshold Model (LTM) and was first proposed in the context of collective behaviors by Granovetter (1978). The model we provide is not an LTM because benefits to actors do not stem only from direct neighbors' states. Instead, it reflects the linkages between firms in supply chain networks where technology adoption may be subject to supply chain effects. As such, the model allows us to relate observable supply chain structures to the diffusion process.⁵

Nonetheless, the SCTM builds on the LTM, and it can be shown that the LTM's adoption process can be replicated within the SCTM. As our objective is to identify a small seed set in the network leading to broad adoption, we take algorithmic work on the LTM with similar objectives as a starting point. In a seminal paper, Kempe et al. (2003) study the *influence maximization* problem, which is the problem of choosing the set of early adopters of a fixed size leading to the broadest diffusion. While NP-hard, a solution can be approximated greedily to within a constant factor when thresholds are randomly distributed. Kempe et al. (2003) further show that any approximation to within a non-trivial factor is NP-hard when thresholds are deterministic. Chen (2009) shows a similarly strong inapproximability result for the *minimum seed set* problem—the problem of selecting the smallest seed set that leads to adoption by the whole network. In particular, they show that it is hard to approximate a solution to within a polylogarithmic factor, even if each actor requires exactly two neighbors to adopt. Nevertheless, much progress has been made in understanding the drivers of this complexity and relating structural parameters to the minimum seed set problem's tractability. Ben-Zwi et al. (2011), in particular, identify the treewidth of the graph as a key parameter, showing that the problem is solvable in polynomial time when this is bounded. Nichterlein et al. (2013), Chopin et al. (2014), and Hartmann (2018) identify a range of

⁴ We note that in the economics literature, such models are usually described as local interaction games (Morris 2000).

⁵ Goldberg and Liu (2013) also propose a model with underlying dynamics similar to the LTM but differently computed benefits. The model is specific to communication network technologies, and an actor's benefits are based on the largest size of an adjacent connected component. It assumes an undirected graph and paths of arbitrary length, unnatural assumptions in a supply chain setting.

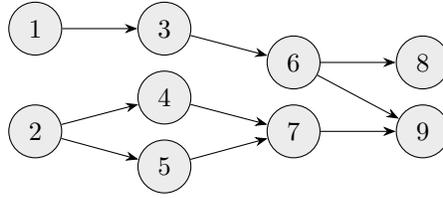


Figure 1 Example of a supply chain network with $k = 4$.

other parameters that, when bounded, indicate high tractability. Chiang et al. (2013) and Cicalese et al. (2014), in turn, identify types of graphs for which the problem is easily solvable. We extend key results regarding the tractability of the minimum seed set problem to the SCTM while using supply-chain specific structures to simplify the search for a minimal seed set. Finally, we extend our results to the case where supply chains are randomly generated. Namely, we propose a random generative model that produces realistic supply chain networks of arbitrary sizes. We then prove that our algorithm is subexponential on networks output by this model.

3. The Supply Chain Traceability Model (SCTM)

We describe the SCTM in Section 3.1 before briefly discussing some of the assumptions we make in Section 3.2.

3.1. Model Description

We consider a graph G with nodes $N = \{1, \dots, n\}$ and directed edges E over infinitely many discrete time periods $t \in \{0, 1, \dots\}$. Nodes represent independent *firms* in a *supply chain network* that process different products or product components (henceforth, we use the term *products*). Each node belongs to exactly one of a fixed number of *tiers* k , representing the firm's role in the processing of the products (e.g., supplier, processor, retailer). Edges are only present between firms of adjacent tiers and correspond to a possible flow of products between two firms. A *supply chain* is represented by a path, that is, a vector of nodes $p_r = (i_1, i_2, \dots, i_k)$, where each i_l , $l \in \{1, \dots, k\}$, is a node at a distinct tier, and $(i_l, i_{l+1}) \in E$, for all $l \in \{1, \dots, k-1\}$. We denote by $P = \{p_1, p_2, \dots, p_m\}$ the set of paths in the graph. Each path $p_r \in P$ is associated with a *product flow* $w_r \geq 0$, corresponding to the standardized rate at which the supply chain processes a product. Formally, we denote with Γ the set of graphs with the aforementioned specifications. An example of a graph in Γ with four tiers is given in Figure 1. In this example, $(1, 3, 6, 8)$ may be a path in the graph representing a product's supply chain, as may be $(1, 3, 6, 9)$.

State of the Network. Each node $i \in N$ has a state $x_{i,t} \in \{0, 1\}$ in any period $t \in \{0, 1, \dots\}$. A node in state 1 is said to have *activated* or *adopted the technology*. Once activated, a node remains in state 1 for all future periods. The *state of the network* is defined as the set of nodes that have activated by the start of period t , that is $S_t \stackrel{\text{Def.}}{=} \{i \in N : x_{i,t} = 1\}$.

Adoption Process and State Equation. In all periods $t \in \{0, 1, 2, \dots\}$, a firm $i \in N$ in state 0 decides whether to adopt the technology and switch to state 1. The firm switches states if the benefits of technology adoption outweigh the cost. The cost of technology adoption is fixed and firm-specific, and denoted with $c_i \geq 0$.

The benefits are linked to the spread of the technology within a firm's supply chains. In particular, we assume that a firm obtains traceability benefits from one of its supply chains whenever all firms in the supply chain have adopted the technology. When this happens, we say that a supply chain has *activated*. Thus, the benefit that a firm i in state 0 obtains from activating is the sum of the benefits associated with each supply chain that i is a part of that is activated if i adopts the technology. Formally, for a given non-activated node i at time t and state of the network S_t , let $\mathcal{B}_i(S_t)$ be the set of indices of paths (i.e., supply chains) that become activated if i adopts the technology. Specifically,

$$\mathcal{B}_i(S_t) \stackrel{\text{Def.}}{=} \{r : i \in p_r, |S_t \cap p_r| = k - 1\}.$$

We further assume that supply chain r generates benefit w_r to all its members if it is activated, i.e., the benefit depends on the product flow through that supply chain. Thus, we define the benefit that firm i obtains from adopting the technology as

$$b_i(S_t) \stackrel{\text{Def.}}{=} \sum_{r \in \mathcal{B}_i(S_t)} w_r.$$

Then, given an initial seed set S_0 , the adoption decision results in the state equation

$$S_{t+1} = S_t \cup \{i \in N \setminus S_t : b_i(S_t) \geq c_i\}, \quad \forall t = 0, 1, \dots$$

This process is well-defined, in the sense that the final set of adopters exists, can be attained in a finite number of steps, and is unique for a given graph $G \in \Gamma$ and an initial set of adopters S_0 . To illustrate, we provide an example of the adoption process in Figure 2: there, Node 9 is able to complete both paths $p_1 = (1, 3, 6, 9)$ and $p_2 = (2, 4, 7, 9)$ if it activates, thus receiving a benefit of $w_1 + w_2$, and activating if $w_1 + w_2 \geq c_9$.

Decision. At time 0, the decision-maker, a *traceability initiative*, chooses the initial set of adopters, or *seed set*, $S_0 \subseteq N$. All other nodes are in state 0 at the start of period 0.

Problem Formulation. The decision-maker chooses the smallest seed set S_0 such that all nodes $i \in N$ eventually adopt:

$$\begin{aligned} OPT &= \min_{S_0 \subseteq N} |S_0| \\ \text{s.t.} \quad & S_\infty = N \\ & S_{t+1} = S_t \cup \{i \in N \setminus S_t : b_i(S_t) \geq c_i\}, \quad \forall t = 0, 1, \dots \end{aligned} \tag{1}$$

We denote by *MIN-SCTM* the problem of identifying the size of the smallest seed set.

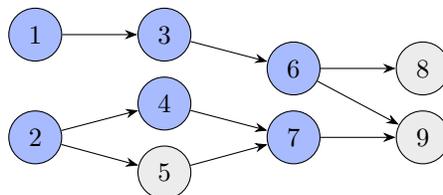


Figure 2 Example of the adoption process on the supply chain network given in Figure 1 for some seed set. The blue nodes are active. Node 9 adopts the technology if c_9 is less than or equal to the combined flows of paths (1, 3, 6, 9) and (2, 4, 7, 9).

3.2. Model Discussion

We now discuss our modeling assumptions, starting with the underlying supply chain network. Our model assumes that all paths are of the same length, which may seem restrictive. This assumption can easily be circumvented, however, by introducing dummy nodes as necessary (see Section 5.3 for an example). This can be done without changing the nature of the problem we would like to solve as adding the dummy nodes to the seed set at time 0 makes the *MIN-SCTM* problem on the initial graph and on the transformed graph equivalent. Our model further assumes that the product flow w_r is identical for all firms processing the product. Our procedure can be easily modified to take into account settings where we would want to allow for heterogeneity in product benefits for each firm, though it may come at some complexity cost.

Regarding the nature of the costs of technology adoption, we make no specific assumptions. We do, however, assume that $c_i \geq 0$ includes all (discounted) costs firm $i \in N$ faces by operating the traceability technology, net of any benefits the firm obtains from the technology independent of other firms' adoption decision. As path flows and resulting traceability benefits are standardized, individual values of c_i allow for adjustments due to differences in firm sizes or margins.

We make a few key assumptions related to the benefit computation. The first assumption we make here is that benefits are path-specific (or supply chain-specific) and proportional to the product flow. This assumption implies certain characteristics of the products produced within the supply chain networks; we discuss this in more detail and give concrete examples of applications where such an assumption would be satisfied in Appendix A.1. A second assumption we make is that $b_i(S_t)$ includes all (discounted) future benefits to firm i of operating in a traceable manner, provided that all firms $j \in N$ with $x_{j,t-1} = 1$ continue to do so. Thus, no firm that adopts the technology has an incentive to divest from it as benefits (net of variable costs) are always non-negative. This is coherent with our observations from practice, which suggest that initial adoption is the foremost hurdle to technology dissemination. A final assumption we make, which differentiates our model from extant models, is that a firm obtains benefits from traceability of a certain product flow if and only if the firms at all tiers of the product's supply chain have adopted the traceability technology.

This is in line with, e.g., Hardt et al. (2017), who state that sustainable supplier practices can only be assured when traceability information is shared along the supply chain. Similarly, to quickly react to contaminations and issue recalls, firms require traceability information from other supply chain parties (Pearson et al. 2019). Our solution procedure can nevertheless easily be adapted to the case in which traceability benefits are linked to adoption within *parts* of a supply chain. As we discuss in Appendix A.1, this reduces the clarity of exposition, but it may also reduce the procedure’s complexity.

Our model also entails a certain number of assumptions regarding the amount of information available to both (i) firms when deciding to adopt and (ii) traceability initiatives when deciding who to seed. We assume that firms have limited information regarding the supply chain network or the future potential of the traceability technology. This leads them to behave in a myopic fashion (which in turn leads to a conservative assumption on the adoptive process), where they do not consider future adoption decisions but only the traceability benefits obtained based on the current states. Note that this assumption does not impact the ability of an individual firm to decide whether to adopt traceability technology. Indeed, it is enough for the firm to know whether its direct upstream supplier can supply the product in a traceable manner and whether its direct downstream customer has demand for a traceable version of the product to determine the benefit associated with any of its products (i.e., supply chains). We assume, however, that traceability initiatives possess complete knowledge of the supply chain network. This can be justified in practice through the efforts made by the initiatives to map out their target industries. In the case where this assumption fails to hold, we provide an approach to identify an approximate seed set in Section 6.3, based on a random generative model of supply chain networks.

Finally, we make three remarks regarding our definition of the *MIN-SCTM* problem. First, we decide to focus in this paper on the minimum seed set problem⁶ as opposed to the influence maximization problem, an equally prevalent problem in the literature, which involves finding a seed set of a given size that leads to the broadest activation (Kempe et al. 2003). This is because the former is more appealing in practice: network effects and economies of scale inherent to traceability technology are likely to eventually lead to a single industry-wide traceability standard. For an initiative to reap benefits in the long term, broad adoption is needed, even if this comes at high current costs. Hence, it is more natural to define the required level of adoption rather than a seeding budget. Second, we constrain ourselves to solutions that give rise to full adoption of the technology, which leads to an upper bound on the seed set required for partial adoption. In Appendix A.2, we discuss how our results can be extended directly to the case where the decision-maker aims to

⁶ The problem is also termed *target set selection* in the diffusion model literature.

achieve adoption by a certain number of supply chains within the network. Third, as formulated, the *MIN-SCTM* problem involves finding the *size* of the smallest seed set S_0 , rather than finding the seed set *itself*. Though it may seem that the former is easier to solve than the latter, they are in fact equivalent. If the size OPT of the smallest seed set that fully activates the network is known, then a corresponding seed set can be obtained in polynomial time by simply enumerating all sets of size OPT , of which there are a polynomial number in n when OPT is fixed.⁷ Our preference for stating the problem in this fashion is due to two reasons: (i) inapproximability results such as Proposition 1 are easier to write; and (ii) it enables us to bypass any wording difficulties linked to non-uniqueness of the seed set of minimum size.

4. Computational Complexity Results

In this section, we turn our attention to the computational complexity of the *MIN-SCTM* problem introduced in Section 3.1. A useful first step in understanding how hard the problem can be involves the introduction of a subset Γ_ϵ of the set Γ of graphs on which the adoption process unfolds. For graphs within this subset, the costs of adoption are negligible compared to the product flows in the graph. Formally, G belongs to Γ_ϵ if $G \in \Gamma$ and $c_i = \epsilon$ for all $i \in N$, with $\epsilon > 0$ satisfying $w_r \geq \epsilon$ for all $r = 1, \dots, m$. We also assume, w.l.o.g. and for exposition purposes, that for any edge $(i, j) \in E$, there exists a path $p_r \in P$ with $w_r > 0$ such that nodes i and j are on p_r . We refer to the case where the underlying graph is in Γ_ϵ as the *ϵ -thresholds case*. The reason the ϵ -thresholds case plays an important role in the rest of the paper is because it leads to a much simplified adoption process, as compared to the general case. Indeed, as $w_r \geq c_i$ for all $i = 1, \dots, n$ and $r = 1, \dots, m$, a node will automatically adopt if it is the only node on a path not yet to have adopted (see Figure 3 for an example). Thus, only the *network structure* influences adoption, not the path flows or adoption costs. This is useful for many reasons. First, it enables us to tease apart the effect of the network structure on the adoption dynamics from the effects of prohibitive costs or insufficient benefits. Secondly, the ϵ -thresholds case provides a more didactic setting in which to introduce the tools and analysis for the general case. It also serves to produce a lower bound on the minimum seed set, which can be useful in settings where the benefits, for example, are unknown. Finally, the ϵ -threshold case can be a setting of interest in its own right, as it reflects scenarios where traceability benefits are relatively large compared to adoption costs, and adoption is limited only by supply chain coordination issues. For example, this may be an appropriate assumption for traceability systems that aim to restrict counterfeit drugs (see, e.g., Lock 2019). With this in mind, we denote with $MIN-SCTM(\epsilon)$ the *MIN-SCTM* problem in the ϵ -thresholds case.

⁷ We remark that brute-force enumeration, which can be quite costly nevertheless, is not necessary here as our solution algorithm provides us with a minimal seed set.

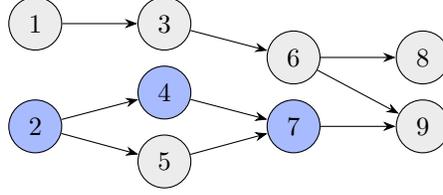


Figure 3 Technology adoption in the ϵ -thresholds case. Assume that all connected sequences of nodes from Tier 1 to Tier k form paths, and that $S_0 = \{2, 4, 7\}$. Then, $S_1 = \{2, 4, 7, 9\}$ and $S_2 = \{2, 4, 5, 7, 9\}$. Nodes 1, 3, 6, and 8 never adopt as no node is active on Path $(1, 3, 6, 8)$ and only one (Node 9) on Path $(1, 3, 6, 9)$.

Our first computational complexity result, the proof of which can be found in Appendix B.2, centers on $MIN-SCTM(\epsilon)$ rather than $MIN-SCTM$ in its full generality.

THEOREM 1. $MIN-SCTM(\epsilon)$ is NP-hard to solve, even when the number of tiers $k = 3$.

Theorem 1 thus states that $MIN-SCTM$ remains hard even when two simplifying assumptions are made on the underlying supply chain network; namely (i) the number k of tiers is small and (ii) the costs are negligible compared to the benefits. Condition (i) implies that the number k of tiers need not grow with n for $MIN-SCTM$ to be hard: in fact, it is hard already when $k = 3$, which is also the smallest number of tiers for which the problem can be hard (when $k = 1$ or $k = 2$, the problem can be solved in polynomial time; see Appendix B.3). Condition (ii) indicates that the network structure plays a key role in making the problem difficult, as when one removes all difficulties arising from cost and benefit comparisons, the problem remains hard. This is in contrast to the Linear Threshold Model (LTM), which becomes trivial to solve if (ii) is assumed to hold. This contrast accentuates the role that the supply chain effects play in differentiating the SCTM from extant diffusion models. It also points to the necessity of restricting ourselves to supply chain networks of a specific structure to hope to obtain polynomial-time algorithms for $MIN-SCTM$: this is what we do in Section 5.

One can in fact show a stronger result relating to the complexity of solving $MIN-SCTM(\epsilon)$ under slightly stronger assumptions.

PROPOSITION 1. *There exists an $\alpha > 1$ such that, unless $NP \subseteq DTIME(n^{\text{polylog}(n)})$, the solution OPT to the $MIN-SCTM(\epsilon)$ problem cannot be approximated within the ratio of $O(\alpha^{\log^{1-\xi} n})$ for any fixed constant $\xi > 0$. This is the case also when the number of tiers $k = 3$.*

Thus, $MIN-SCTM(\epsilon)$ is not only hard to solve, it is also hard to approximate to any reasonable degree. NP-hardness and inapproximability of $MIN-SCTM$ immediately follow as a corollary to the ϵ -thresholds case.

COROLLARY 1. $MIN-SCTM$ is NP-hard to solve, even when the number of tiers $k = 3$. Furthermore, there exists an $\alpha > 1$ such that, unless $NP \subseteq DTIME(n^{\text{polylog}(n)})$, the solution OPT

to *MIN-SCTM* cannot be approximated within the ratio of $O\left(\alpha^{\log^{1-\xi} n}\right)$ for any fixed constant $\xi > 0$. This is the case also when the number of tiers $k = 3$.

5. A Treewidth-Dependent Tractable Algorithm for *MIN-SCTM*

The previous computational complexity results indicate that one cannot hope to obtain a polynomial-time algorithm that provides an exact solution (or a good-quality approximation of one) for *all* supply chain networks. However, it could be the case that *MIN-SCTM*(ϵ) (or indeed *MIN-SCTM*) is solvable in polynomial time when restricting ourselves to supply chain networks of a particular structure.


In this section, we leverage results from the network diffusion literature to construct a procedure to exactly solve *MIN-SCTM*. This procedure runs in polynomial-time provided that the treewidth of a certain graph, constructed from the original graph $G \in \Gamma$, is bounded. For ease of exposition and discussion, we first derive this procedure for the ϵ -thresholds case in Section 5.1. We then extend it to the general case in Section 5.2. We show in Section 5.3 how the algorithm performs on the real-world supply chain networks contained in Willems (2008).

5.1. An Algorithm for Solving *MIN-SCTM*(ϵ)

We introduce a framework for solving the *MIN-SCTM*(ϵ) problem exactly in polynomial time, provided that the network adheres to certain structural conditions. Within this framework, we construct an auxiliary graph that captures the interactions between paths and nodes. The auxiliary graph, when activated using the dynamics of the LTM, can mimic the activation process of the original (SCTM) graph. We can then adapt results from the LTM literature to derive an optimal solution from the auxiliary graph. Using this framework, we show that *MIN-SCTM*(ϵ) can be solved exactly in time polynomial in n if the treewidth of the auxiliary graph is bounded.

5.1.1. Construction of the Auxiliary Graph and Activation via a Modified LTM. Let $G \in \Gamma_\epsilon$. We start by describing the construction of the (undirected) auxiliary graph G' associated to G and exemplified in Figure 4. The formal procedure is defined in Algorithm 1. First, for each path $p_r \in P$, the procedure creates a node in the auxiliary graph, termed “path-node” (Lines 2–3). For example, the auxiliary graph in Figure 4b contains a path-node (in green), for each of the four paths in the original graph in Figure 4a. The algorithm then assigns a set that contains all of a path’s (original) nodes to the corresponding path-node. For example, for the path $p_1 = (1, 3, 6, 8)$, a path-node with index i' is generated and assigned the set $cont_{i'} = \{1, 3, 6, 8\}$. The procedure also assigns a threshold $c'_{i'} = k - 1$ to each path-node i' .

Next, the procedure partitions the nodes in N into sets $B \in \mathcal{B}$ based on the paths they belong to: If two nodes share the same paths, they belong to the same set. Consequently, we can associate

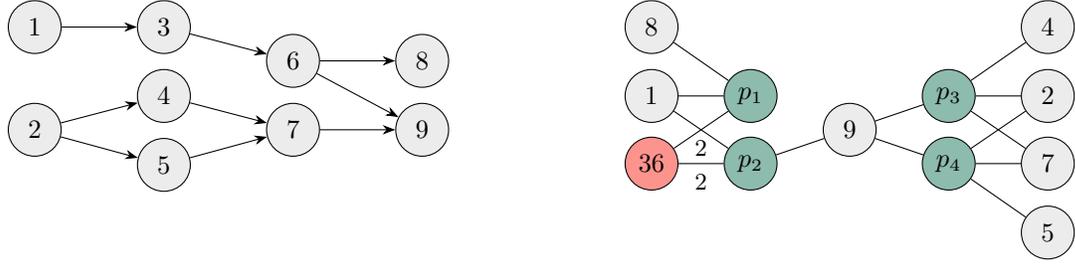

(a) Original graph.

(b) Auxiliary graph. Path-nodes in green have threshold 3, node-nodes in grey (red) have threshold 1 (2). Edge weights are 1 unless indicated. $p_1 = (1, 3, 6, 8)$, $p_2 = (1, 3, 6, 9)$, $p_3 = (2, 4, 7, 9)$, $p_4 = (2, 5, 7, 9)$.**Figure 4** Constructing an auxiliary graph.

any set B with a set of paths p_B (Lines 4–8). For example, the nodes 1, 3, and 6 all belong to the same paths, p_1 and p_2 . Hence, there is a set $B \in \mathcal{B}$ with $B = \{1, 3, 6\}$ associated to paths p_1 and p_2 . For each set B , if its size is one, then one node is added to the auxiliary graph. If its size is two or more, then two nodes are added (Lines 9–18). The added nodes are termed “node-nodes”. Each node-node i' created is once again associated to a set of original nodes, which we also denote by $cont_{i'}$, with a slight abuse of notation. If B only contains one node, e.g., node i , then $cont_{i'} = i$. If B contains two nodes or more, then the first node-node created by the procedure, say i' , is associated arbitrarily with the first of these nodes and the second node-node created, say $i' + 1$, is associated with the remaining nodes. Thus, in our previous example, $cont_{i'} = \{1\}$ and $cont_{i'+1} = \{3, 6\}$. As a result, some node-nodes may be associated with more than one of the original nodes, marked in red in Figure 4b, allowing to simplify the auxiliary graph. Each node-node i' is then assigned a threshold $c'_{i'} = |cont_{i'}|$. In the case of $B = \{1, 3, 6\}$, the first node-node (with $cont_{i'} = \{1\}$) is assigned $c'_{i'} = 1$ and the second node-node (with $cont_{i'+1} = \{3, 6\}$) is assigned $c'_{i'+1} = 2$.

When a node-node corresponding to a set B is generated, it is linked to all path-nodes corresponding to the paths in p_B (Lines 14 & 16). For example, the path-node corresponding to $p_1 = (1, 3, 6, 8)$ is linked to the node-nodes 1, 36, and 8, associated with $\{1\}$, $\{3, 6\}$, and $\{8\}$, respectively. Edges only appear between path-nodes and node-nodes, and so the graph is bipartite. Moreover, each edge has a weight of w' , which is identical to the threshold of c' of the associated node-node.

The LTM supposes that nodes activate when the number of their active neighbors exceeds their threshold (see, e.g., Kempe et al. 2003). We assume that G' activates following another version of the LTM with weighted edges: in this setting, a node adopts if the sum of weights of the edges it shares with active neighbors exceeds its threshold. Under this assumption, G' can mimic the activation process of G . Indeed, if $k - 1$ nodes in a path in G are active, the remaining node necessarily activates. In G' , this is reflected in the path-node, which activates when neighboring

Algorithm 1: Construction of an auxiliary graph for the ϵ -thresholds case.

Data: A graph $G \in \Gamma$ with paths P .

Result: An undirected graph $G' = (N', E')$ with weights $w'_{i',j'}$ for each edge $(i', j') \in E'$ and thresholds $c'_{i'}$ for each $i' \in N'$.

```

1 Initialization:  $i' \leftarrow 0; N' \leftarrow \emptyset; E' \leftarrow \emptyset; \mathcal{B} \leftarrow \emptyset; c'(\cdot) \leftarrow k - 1; w'(\cdot) \leftarrow k - 1; cont(\cdot) \leftarrow \emptyset; p(\cdot) \leftarrow \emptyset;$ 
2 for  $p_r \in P$  do
3    $i' \leftarrow i' + 1; N' \leftarrow N' \cup \{i'\}; cont(i') \leftarrow \{i : i \in p_r\};$ 
4 for  $i \in N$  do
5   if  $\exists B \in \mathcal{B}$  with  $p(B) = \{p_r : i \in p_r\}$  then
6      $B \leftarrow B \cup \{i\};$ 
7   else
8      $B \leftarrow \{i\}; \mathcal{B} \leftarrow \mathcal{B} \cup \{B\}; p(B) \leftarrow \{p_r : i \in p_r\};$ 
9 for  $B \in \mathcal{B}$  do
10   $i' \leftarrow i' + 1; N' \leftarrow N' \cup \{i'\}; c'(i') \leftarrow 1; cont(i') \leftarrow B\{1\};$ 
11  if  $|B| > 1$  then
12     $N' \leftarrow N' \cup \{i' + 1\}; c'(i' + 1) \leftarrow |B| - 1; cont(i' + 1) \leftarrow B\{2\};$ 
13  for  $p_r \in path(B)$  do
14     $j' \leftarrow \{j'' \in N' : cont(j'') = \{i : i \in p_r\}\}\{1\}; E' \leftarrow E' \cup \{(i', j')\}; w'(i', j') \leftarrow 1;$ 
15    if  $|B| > 1$  then
16       $E' \leftarrow E' \cup \{(i' + 1, j')\}; w'(i' + 1, j') \leftarrow |B| - 1;$ 
17  if  $|B| > 1$  then
18     $i' \leftarrow i' + 1;$ 

```

node-nodes with a total weight of $k - 1$ are active, as its threshold is $k - 1$. Once the path-node is active, any non-active neighboring node-node activates, as its threshold is equal to the weight of the edge linking it to the path-node. Say, for example, that nodes 3, 6, and 8 in Figure 4a are active. Then, node 1 necessarily activates next. Similarly, if the node-nodes $\{3, 6\}$ and 8 are active in Figure 4b, then the total weight of edges $(\{3, 6\}, p_1)$ and $(8, p_1)$ is $k - 1 = 3$. Hence, path-node p_1 activates. Next, because c'_1 equals the weight of the edge $(1, p_1)$, node-node 1 activates. The existence of an equivalent activation process allows us to show (in the proof of Theorem 2) that the minimal seed set of G can be recovered from G' .

5.1.2. Description of the Algorithm. As a result of the above, if we can obtain a minimal seed set for G' in polynomial time (following the LTM activation process), we can solve $MIN-SCTM(\epsilon)$ in polynomial time as well. The algorithm introduced by Ben-Zwi et al. (2011) allows deriving a minimal seed set for the LTM in polynomial time under broad conditions. We generalize this algorithm based on three characteristics of our auxiliary graph: (i) edges are weighted, (ii) only certain types of nodes (the node-nodes) can be part of the seed set, and (iii) the size of the minimum seed set is based on the total number of associated original nodes, rather than the number of node-nodes.

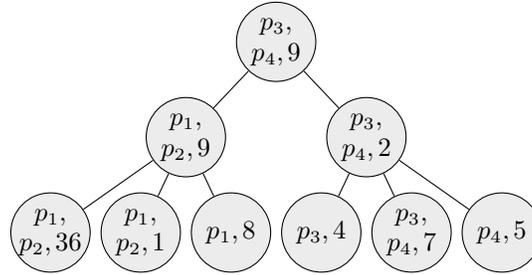


Figure 5 Tree decomposition of the auxiliary graph in Figure 4b. Each node in the tree corresponds to a set of nodes from the auxiliary graph.

The generalized algorithm relies on a *tree decomposition* of G' . A tree decomposition is a tree graph T with nodes Z . Each node $z \in Z$ is associated with a set X_z of nodes from the auxiliary graph. In particular, whenever two nodes i and j have an edge between them in the auxiliary graph, there must be a set X_z with $i, j \in X_z$. Moreover, suppose a node i from the auxiliary graph appears in two distinct sets, X_x and X_y . Let (x, \dots, y) be the (unique) path between x and y in the tree T . Then, i must appear in X_z for $z \in \{x, \dots, y\}$. Formally, a tree decomposition is defined as follows:

DEFINITION 1 (TREE DECOMPOSITION AND TREewidth BASED ON BODLAENDER (1994)).

Let $G = (N, E)$ be a graph. A tree decomposition T of G is any tree graph with nodes Z and a mapping from each node $z \in Z$ to a set $X_z \subseteq N$ that satisfies the following properties:

- (a) $\bigcup_{z \in Z} X_z = N$,
- (b) for all edges $(i, j) \in E$, there exists $z \in Z$ with $i, j \in X_z$,
- (c) for all $x, y, z \in Z$, if z is on the unique path from x to y in T , then $X_x \cap X_y \subseteq X_z$.

For any tree decomposition T , $\max_{z \in Z} |X_z| - 1$ is its treewidth. For a given G , there can be many different tree decompositions: let $\mathcal{T}(G)$ be the set of all such decompositions. The treewidth of G is then simply $tw(G) = \min_{T \in \mathcal{T}(G)} \max_{z \in Z} |X_z| - 1$.

A tree decomposition always exists trivially by taking $Z = \{z\}$ and letting $X_z = N$. It follows that $tw(G) \leq |N| - 1$. In Figure 5, we present a tree decomposition for the auxiliary graph G' from Figure 4b. For example, the uppermost node is associated with a set containing the node-node 9 and the path-nodes p_3 and p_4 . Other sets contain these elements as well. Importantly, the sets are linked such that no element appears twice without appearing in the in-between sets. For example, path-node p_4 also appears in the set on the bottom right. It thus, necessarily, appears in the set at the intermediate level on the right-hand side. The treewidth of this decomposition (and of the auxiliary graph G') is 2.

In Appendix C, we explain our extension to Ben-Zwi et al.'s (2011) algorithm in detail. We give a high-level explanation of it here, assuming that we have a tree decomposition T of G' with treewidth

ω . First, the leaves of T are used to create (possibly overlapping) subgraphs of G' containing at most ω nodes. Moving up one level in the tree corresponds to growing the subgraphs constructed at the previous level, either by adding nodes or merging two subgraphs. When we get to the root node, the subgraph considered is the full graph G' . The key property of the subgraphs constructed via this process is that each one only interacts with its complement in G' via a set of *boundary nodes*, which is of size at most ω . In other words, if there exists an edge between node i in the subgraph and a node outside of the subgraph, then it must be that i belongs to the boundary nodes, and there cannot be more than ω such nodes. The minimum seed set for G' is then obtained recursively using these subgraphs. First, the minimum seed sets for the subgraphs corresponding to the leaves are found through enumeration (this is exponential in ω but not necessarily in n , based on how ω depends on n). Then, as we go up the tree, the algorithm uses the previously established minimum seed set for smaller subgraphs to obtain that of the larger subgraph. The computational effort is limited because nodes in the smaller subgraph that are not part of the boundary are not affected by any nodes that may enter the subgraph. Thus, we can focus on nodes in the boundary. As we reach the root node, the relevant subgraph is all of G' , allowing us to derive a minimum seed set for the full auxiliary graph, and, thus, the original graph G . This process gives us the following result:

THEOREM 2. *Let $G \in \Gamma_\epsilon$ and let G' be its auxiliary graph created via Algorithm 1. Assume that $tw(G') = \omega - 1$. Then, $MIN\text{-}SCTM(\epsilon)$ can be solved exactly in $n^{k+1} \cdot [(k-1) \cdot \omega]^{O(\omega)}$ time.*

In other words, the algorithm we give returns the minimum seed set in the ϵ -thresholds case in polynomial time if the treewidth of the auxiliary graph is bounded in n . We now show how to adapt this algorithm to the general case.

5.2. An Algorithm for Solving $MIN\text{-}SCTM$

As explained in Section 4, the additional difficulty of contending with thresholds and path flows is introduced when we move from the ϵ -thresholds case to the general case. Thankfully, we can extend our framework to the general case with small adaptations to the auxiliary graph and solution algorithm. To make things more straightforward, we add two additional assumptions here:

ASSUMPTION 1. *In the general thresholds case, we assume:*

- (a) *For all $i \in N$, $\sum_{r:i \in p_r} w_r \geq c_i$.*
- (b) *For all $i \in N$, and all $p_r \in P$, $c_i, w_r \in \mathbb{N}_0$.*

These assumptions are both without loss of generality. The first assumption implies that all nodes have the *potential* to adopt. If a node i does not satisfy this assumption, it would never adopt the traceability technology. Thus, the node must be part of the initial seed set S_0 to achieve full

activation of the graph.⁸ The second assumption is required for the solution algorithm, but it is not restrictive because both thresholds and flows can be scaled appropriately to obtain integer values.

We explain here the modifications to the auxiliary graph, but describe the modifications to the solution algorithm in Appendix C.3. Recall that the auxiliary graph G' in Section 5.1 is an undirected bipartite graph where each node in N' corresponds either to a path $p_r \in P$ (path-nodes) or to nodes $i \in N$ (node-nodes). In the previous case, nodes in N which belonged to the same set of paths were divided into a set of size one and a set with the remaining nodes, creating two node-nodes. This division was done in an arbitrary fashion. Now, the node that is chosen to belong to the set of size one is determined by the lowest threshold. We then replace each of the previously undirected edges with two directed edges: we weight the edge pointing from the path-node corresponding to p_r to the node-node corresponding to $i \in N$ with the flow w_r of the path; we weight the edge pointing from the node-node to the path-node with 1. We finally change the thresholds of the nodes in N' : the threshold of the path-nodes remains the same ($k - 1$) whereas the threshold of the node-nodes is changed to their threshold in G , i.e., c_i if the node-node corresponds to $i \in N$ and $\max_{i \in \text{cont}_{i'}} c_i$ if multiple nodes are contained in the node-node i' . It is easy to see that the path-nodes activate if at least $k - 1$ node-node neighbors activate. Likewise, node-node i' activates if the sum of the flows from its active path-node neighbors exceeds its threshold $c'_{i'}$.

Though not strictly necessary, we make further changes to the auxiliary graph to reduce the solving time of *MIN-SCTM*. In the ϵ -thresholds case, the solving time scales in $k - 1$, while it scales in $\max\{c_1, \dots, c_n, k - 1\}$ with the auxiliary graph defined above. Thus, it is generally of interest to reduce c_1, \dots, c_n . This is done via a rescaling based on the greatest common denominator of the thresholds and flows. Let $i' \in N'$ be a node-node in G' and let $g_{i'} = \gcd(c'_{i'}, w_r \ \forall r : i \in p_r \text{ for some } i \in \text{cont}_{i'})$. We redefine the threshold of node i' to be $c'_{i'}/g_{i'}$ and the incoming edge weights to i' to be $w_{j',i'}/g_{i'}$ where j' is a neighboring path-node. In this way, all edge weights and thresholds in G' remain integers and the activation condition for node-nodes remains the same, while possibly reducing $c_{\max} = \max_{i' \in N'} \{c'_{i'}\}$ considerably.

We give the rigorous procedure to construct G' in Appendix C.3. under Algorithm 3. We also describe there the minor modifications required to solve *MIN-SCTM* based on this modified auxiliary graph. This allows us to show that the time it takes to solve *MIN-SCTM* depends directly on the treewidth of the auxiliary graph as well, though the parameter c_{\max} defined above also intervenes. We formalize this in Theorem 3:

⁸ One can encode this in the original graph by simply setting the threshold of the nodes that do not have the potential to adopt to 0, which will lead to their immediate activation, and add one to the size of the minimum seed set.

THEOREM 3. *Let $G \in \Gamma$ and let G' be its auxiliary graph created via Algorithm 3, with $c_{\max} = \max_{i' \in N'} \{c'_{i'}\}$. Assume that $tw(G') = \omega - 1$. Then, MIN-SCTM can be solved exactly in $n^{k+1}[\max\{c_{\max}, k - 1\} \cdot \omega]^{O(\omega)}$ time.*

The problem is fixed-parameter tractable with respect to the treewidth⁹ if c_{\max} is bounded. Importantly, the treewidth remains the main driver of complexity.

We now investigate whether supply chain networks typically give rise to auxiliary graphs with small treewidth ω , as compared to the number of nodes n in the graph. If this is the case, our algorithm, which is exponential in ω , becomes quite valuable because the only alternative approach to solving the minimum seed set problem that we know of is a brute-force enumeration approach, which is exponential in n . If the treewidth is much smaller than n , then the computation time of the minimum seed set will be much improved by using our algorithm. We present evidence that this is the case through two different approaches: our first approach, given in Section 5.3, involves studying the supply chain networks presented in Willems (2008). We show that the treewidth of the auxiliary graphs of these networks is order of magnitudes smaller than the number of nodes in the graph. Our second approach involves a random generative model of supply chain networks, which we detail in Section 6.

5.3. Numerical Examples

In this section, we consider a data set provided by Willems (2008). The data represent 38 acyclic supply chain models gathered from companies in 22 industries and provided to test analytical methods. We interpret any continuous sequence of directed edges as an individual supply chain and assume that each of the 38 models represents a supply chain network. Because the supply chains in the dataset are not always of equal length, we add “dummy” nodes to ensure consistency with Γ , as mentioned in Section 3.2.

The procedure for adding dummy nodes has multiple steps. We first define the number of tiers k as the length of the longest path in the graph. We then place all existing nodes in the supply chain network along the k tiers in a recursive manner. To do this, we initialize $l = k$ and place all nodes without successors in Tier k . Then, in each iteration, any node that has all of its successors in a tier greater or equal to l is placed in Tier $l - 1$. We lower l by one and repeat the process until no nodes are left. The introduction of dummy nodes comes next: Whenever an edge spans more than one tier in the graph, we add a dummy node and replace the edge, connecting the source to the dummy and the dummy to the target. Similarly, if there is a path commencing at a tier greater than 1, dummy nodes are added beforehand. For example, assume Node 1 supplies Node 2 and

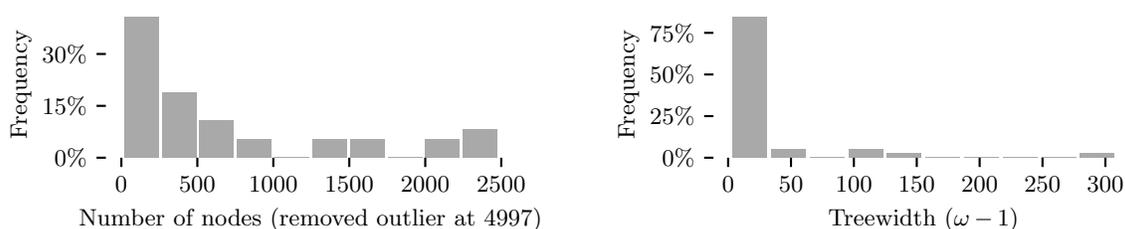
⁹ A problem parameterized by some parameter θ is fixed-parameter tractable with respect to θ if it can be solved in $f(\theta)n^{O(1)}$ time, where f is a function that does not depend on n (Nichterlein et al. 2013).

Table 1 Summary statistics (rounded) of the 38 supply chain networks adapted from Willems (2008).

	mean	std	min	q _{0.25}	median	q _{0.75}	max
number of tiers	5	2	2	4	5	6	10
number of nodes	803	1036	8	70	390	1348	4997

both supply Node 3. Node 3 is placed in Tier 3, as the longest path is of length three. Because Node 2 only has Node 3 as a successor, the node is placed in Tier 2. Finally, Node 1, which also has Node 2 as a successor, cannot be placed in Tier 2, but in Tier 1. Then, a dummy node, $3'$, is added in Tier 2, as are the edges $(1, 3')$ and $(3', 3)$. Because the supply chains are acyclic, this is always possible. Moreover, the original nodes in the minimal seed set remain unchanged if the dummy nodes are assumed to be part of S_0 . Note that the addition of a dummy node may lead to a nominal increase in the treewidth. However, because it is assumed part of S_0 , the Algorithm from Section 5 can be adapted slightly such that the overall complexity remains unchanged. Table 1 presents summary statistics of the supply chain networks used and adapted to fit the k -tier structure.

We display the number of nodes of the different supply chain networks in Figure 6 and contrast this with upper bounds on the treewidths of the auxiliary graphs.¹⁰ As no corresponding information is available, we assume that all possible paths in the network reflect supply chains. That is, if there is a simple path from a node at Tier 1 to a node at Tier k in the network, we assume a supply chain exists with this path’s nodes. In practice, it is unlikely that a supply chain exists for all possible path, as firms may be specialized or limited in their capacities. Nevertheless, we proceed with this assumption as it corresponds to a worst-case scenario for our method—the higher the number of paths, the higher the treewidth. Even in this adversarial set-up, our solution algorithm provides a tractable approach in practically all cases, whereas the brute-force approach is infeasible in most.

**Figure 6** Statistics of the supply chain networks in Willems (2008).

¹⁰ To compute a minimal tree decomposition, we use the heuristic developed by Ben Strasser and available at <https://github.com/ben-strasser/flow-cutter-pace16>, which showed the best performance in the *First Parameterized Algorithms and Computational Experiments Challenge* (Dell et al. 2017).

6. Treewidth in a Random Model for Supply Chain Networks

The analysis conducted in Section 5.3 indicates that the treewidth of the auxiliary graph of some real-world supply chain networks is small compared to the number n of firms in the network. While this is an encouraging observation in view of our algorithm, it is difficult to draw stronger conclusions from an analysis that bases itself on a finite number of examples. One of the conclusions that we are unable to obtain, for example, due to the size of the networks in the dataset being capped, relates to how the treewidth scales with respect to n . This is limiting in our setting, as we can only claim to outperform enumeration from a theoretical perspective if the treewidth is sublinear in n .

This drawback, among others, motivates us to consider supply chain networks obtained through a random generation process. As we were unable to identify a generative process of this type in the existing operations management literature, we propose a new one here that could be of independent interest. We give its description in Section 6.1, as well as providing evidence that it produces supply chain networks in line with real-world supply chains, i.e., that the supply chains generated are reflective of “average” supply chains. In Section 6.2, we prove that the treewidth of the auxiliary graph of a randomly generated supply chain network is sublinear in the network’s size, provided that the number of paths remains below a certain level, a criterion that is easily met in practice. This implies, among other things, the competitiveness of our method compared to brute-force enumeration as mentioned previously. Section 6.3 shows that the random model can be useful beyond treewidth computations: it can be leveraged to tackle the important question of how to solve the minimum seed set problem when knowledge of the supply chains (or associated benefits) is incomplete. This involves the introduction of a “worst-case” graph, from which one can obtain an approximate seed set.

6.1. Description of the Random Model

Intuitively, our random model behaves as follows. Assume a supply chain network that outputs m horizontally differentiated products. There are n companies distributed across k supply chain tiers that produce these products. For simplicity, we assume each tier has exactly n/k companies (we can also assume a constant fraction of companies in each tier and our results remain the same). We further assume that the m products have different types. These types are drawn from a probability distribution that has the unit interval as support (this is a common assumption in the marketing and operations literature, see Lancaster 1990). The closer two products’ types are on the unit line, the more similar they are.

Companies specialize in producing a certain type of product. Each company’s specialization is drawn from a probability distribution over the type support, possibly with a unique distribution

per tier. In the following, we assume that nodes at all tiers and the types of products follow a uniform distribution for simplicity. However, our results can be extended to distributions that are absolutely continuous with respect to the uniform distribution. In that case, the upper bound in Theorem 4 remains asymptotically of the same order. In a given tier, we assume that the company best at producing a product of a given type is the one whose specialization realization is closest to that type.

Supply chain links are then formed in a “greedy” fashion: a product is produced in a supply chain of k companies (one in each tier) and the company in each tier whose specialization is closest to the product’s type produces it. Two companies in consecutive tiers that produce the same product are linked by an edge representing a supplier-buyer relationship.

This simple procedure creates supply chain networks that bear an uncanny resemblance and have similar characteristics to those in Willems (2008) and Perera et al. (2017). At the same time, we show in Section 6.2 that the treewidth of the auxiliary graphs of these supply chain networks is sublinear in n with high probability (whp),¹¹ as long as the number of paths is small with respect to n^2 . This result provides a theoretical guarantee that our algorithm is subexponential in n , thereby implying that it is the dominant approach in solving the minimum seed-set problem on “average” supply chain networks, as the brute-force approach is exponential in n .

We can incorporate the simple logic of how supply chain networks form based on firms’ *specializations* and products’ *types* by directly generating *auxiliary* graphs instead of the original supply chain networks. Recall that the auxiliary graph G' is a graph on $m + n$ nodes, where m nodes are *path-nodes* representing paths in the original graph G , and n nodes are *node-nodes* representing nodes in G . A necessary condition for all nodes in G to be on at least one path is that m should be greater or equal to the maximum number of nodes on each tier. The n node-nodes in G' are split into k tiers, where k is fixed. As mentioned before, we assume for simplicity that each tier contains $n' \stackrel{\text{Def.}}{=} n/k$ nodes. Each path-node connects to exactly one node-node in each tier. Thus, the degree of any path-node in G' is exactly k . Node-nodes do not have constraints on their degree. Furthermore, node-nodes exclusively connect to path-nodes and vice-versa (in other words, G' is bipartite). Our random model builds graphs with this structure via the following steps:

- (1) Sample m independent uniform random variables on the interval $[0, 1]$. This gives m points, z_1, \dots, z_m , which correspond to our path-nodes.
- (2) Sample an additional $n' \times k$ independent uniform random variables on the interval $[0, 1]$, independently of the previous step. This gives $y_1^l, y_2^l, \dots, y_{n'}^l$ points for $l = 1, \dots, k$. These correspond to the $n = n' \times k$ node-nodes in G' . More specifically, the points $y_1^l, y_2^l, \dots, y_{n'}^l$ can be viewed as the nodes in G present at Tier l .

¹¹ We remind the reader that an event E_n is true *with high probability* if $P(E_n) \rightarrow 1$ when $n \rightarrow \infty$.

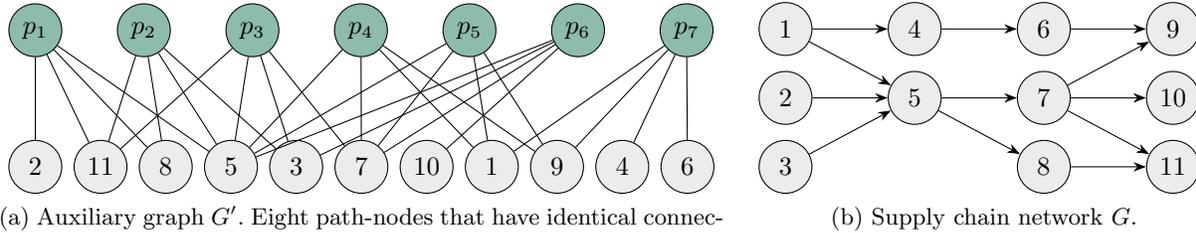


Figure 7 Example of a randomly generated supply chain network. Parameters $n = 12$, $k = 4$, and $\alpha = 1.2$; nodes equally spread amongst tiers. One node without any paths attached has been dropped for clarity.

- (3) Now consider point z_1 . Connect this point to exactly one point $y_{i_1}^1$ in $(y_1^1, \dots, y_{n'}^1)$ at Tier 1. In particular, choose the one that is closest to z_1 , i.e.,

$$i_1 \in \arg \min_{i=1, \dots, n'} |z_1 - y_i^1|.$$

Then, repeat this process for Tier 2, all the way up to Tier k .

- (4) Proceed similarly with z_2 up to z_m .

An auxiliary graph G' thus generated has exactly the structure described above. It is straightforward to construct a graph G from G' and Figure 7 provides an example.

Interestingly, we note that the networks output by the random model have characteristics that are commonly observed in real-world supply chains. First, as the above example shows, the network generation dynamics naturally create v-shaped and diamond-shaped connections between buyers, first-tier suppliers, and second-tier suppliers that have been extensively examined both empirically and theoretically (see, e.g., Ang et al. 2017, Wang et al. 2020). Simulating 88 different combinations of supply chain network structures and values of m , 100 times each,¹² we analyze the “diamond scale”, which measures the degree to which a focal firm’s tier two suppliers (its direct suppliers’ suppliers) are shared among its direct suppliers. The mean value is slightly higher than what is reported in Wang et al. (2020) for a sample of 2,258 focal firms (1.32 vs. 1.12), while the standard deviation is nearly identical (0.19 vs. 0.18). We note that the diamond scale shows a clear increasing and concave relationship with α , and the statistics in our simulation are nearly identical to those reported in Wang et al. (2020) for low values of α around 1. Moreover, the diamond scale tends to be lower and less variable for firms at the penultimate or third-to-last tier.

Second, the output networks exhibit significant modularity and disassortativity, two characteristics found in real supply chain networks according to a recent survey by Perera et al. (2017). Modularity describes the degree to which nodes in a graph can be subdivided into communities

¹² We let $m = n^\alpha$ with $\alpha \in \{0.8, 1.2, 1.6, 2\}$ and define a number of nodes $n \in \{50, 150, 500\}$ and tiers $k = \{3, 6\}$. To build different structures, for each tier, with a probability in $\{0, 1/4\}$, we remove either 50% or 90% of the nodes from the tier. All nodes removed are then reassigned randomly and uniformly to the different tiers.

with dense connections within but sparse connections in-between. Given a proposed subdivision into communities, modularity is measured as the number of edges within each community, minus the number of edges that should be expected under a configuration model in which nodes are randomly connected. Adapting the approach for identifying the optimal subdivision of a directed graph from Leicht and Newman (2008) to our tiered graph structure, we find a high degree of modularity, with 7.37[5.41;10.45] nodes per group at the median[IQR]. The number of nodes per group seems to be increasing and concave as a function of the total number of nodes. Finally, assortativity describes nodes’ tendency to connect to “similar” nodes and is quantified with the correlation coefficient between the degrees of connected nodes. Networks with a negative assortativity coefficient are termed disassortative. Following, Foster et al. (2010), there are four measures of assortativity to consider when studying directed networks, based on whether we compare the in-degree or out-degree of the outgoing neighbor and the in-degree or out-degree of the incoming neighbor. They all indicate varying degrees of disassortativity.¹³ We also define a new measure of assortativity, based on similarity in the number of paths, that is the correlation coefficient between the number of paths the incoming node connects to and the number of paths the outgoing node connects to. Again, we find a tendency of mixing between dissimilar nodes, with disassortativity of $-0.18[-0.29; -0.10]$ at the median[IQR].

6.2. Treewidth Bounds

With the random model in hand, we now upper-bound the treewidth of the auxiliary graphs produced by it. A crucial observation is that our model has commonalities with *random geometric graphs*, more specifically *random interval graphs*. Random interval graphs are chordal, which implies that their treewidth is easier to compute as it is equal to their clique number. These observations, combined with existing results in the literature, enable us to show the theorem below. Recall that, for two functions $f(n)$ and $g(n)$, we say that $f(n) = \omega(g(n))$ if $\lim_{n \rightarrow \infty} \frac{|f(n)|}{|g(n)|} = \infty$ and that $f(n) = o(g(n))$ if $\lim_{n \rightarrow \infty} \frac{|f(n)|}{|g(n)|} = 0$.

THEOREM 4. *Let G' be the auxiliary graph constructed via the random process described in Section 6.2 with $m = \omega(n)$. We have*

$$tw(G') \leq k \cdot \frac{m}{n} \log(n) \cdot (1 + o(1)) \text{ whp.}$$

In particular, if $m = o(n^2)$, then the Algorithm described in Section 5 can be solved in sub-exponential time. If $m = o(n^{1+\epsilon})$ for any $\epsilon > 0$ (e.g., $m = n \log(n)$) then it can be solved in quasi-polynomial time.

¹³ in/in: median[IQR] = $-0.07[-0.14; 0.06]$, in/out: median[IQR] = $-0.42[-0.68; -0.10]$, out/in: median[IQR] = $-0.51[-0.57; -0.42]$, out/out: median[IQR] = $-0.06[-0.14; 0.03]$

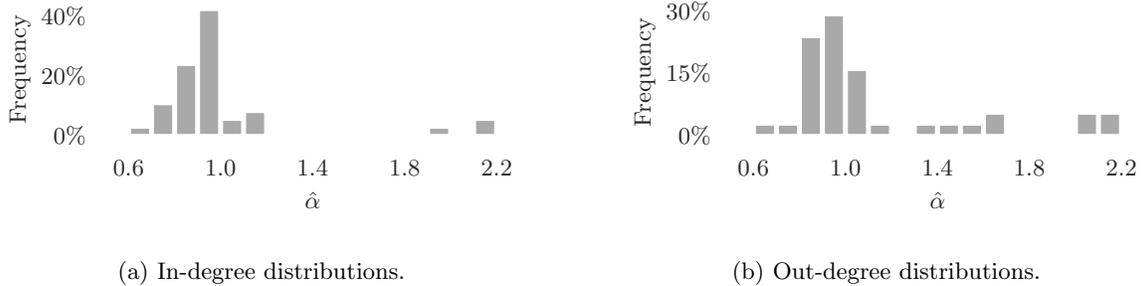


Figure 8 Histogram of $\hat{\alpha}$ leading to the best fit between in-degree distributions (resp. out-degree distributions) in our simulations and in Willems (2008).

The proof of this result is given in Appendix D.1. We can assume w.l.o.g. that m is at most of order $n^2 \log n$ as it can be shown that graphs generated with $m = \omega(n^2 \log n)$ are equal with high probability to those generated with m of order $n^2 \log n$ (the proof of this statement involves the notion of a worst-case graph introduced in Section 6.3). Hence, as a brute-force algorithm is exponential in n , our algorithm outperforms it for nearly all values of m . Experimentally, we observe that m is typically closer in orders of magnitude to n than it is to n^2 when fitting our random model to real-world supply chain networks. This suggests that $m = o(n^2)$ (which is the regime in which our algorithm outperforms a brute-force algorithm) is not a restrictive assumption in practice. We next detail the experimental set-up that enables us to reach this conclusion.

We consider the dataset from Willems (2008) and assume that the supply chains networks are realizations of our random model. In particular, we let $m = n^\alpha$, where α is a parameter, which we pick to fit the model. As we only have information on the individual links between nodes, but not the actual paths (i.e., supply chains), we select the α which best recreates the degree distribution of a network. In particular, for each network in the dataset and each of a set of values of α , we create 30 instances of our random model with the same nodes at each tier. We then compare the empirical in- and out-degree distributions of our randomly generated supply chain networks with the original networks' empirical degree distributions. For comparisons between distributions, we use the Wasserstein distance. Figure 8a (resp. 8b) displays a histogram of the values of α for which the distance for the in-degree (resp. out-degree) distributions is minimized. The Wasserstein distances are $0.38[0.20; 1.03]$ (resp. $0.40[0.22; 0.69]$) at the median[IQR].

As the figures show, and assuming the correct specification of our generative model, supply chain networks in practice seem to consist of relatively low numbers of paths, i.e., α is close to 1.¹⁴ As mentioned above, this is a positive result for us as the algorithm is increasingly competitive as m approaches n .

¹⁴ Notice the frequent occurrence of $\hat{\alpha} < 1$. As $n \rightarrow \infty$, this would imply that an arbitrary node, with high probability, is not connected to any path. However, for finite n , most nodes are connected because paths contain multiple nodes.

6.3. The Role of the Random Model in the Absence of Structural Supply Chain Information

The random generative model plays another very important role: it allows us to deal with settings where the firms' positions in each tier are known, but the existing paths and benefits are not. The key observation to handle such settings is that if both nodes and types are fixed in our random model, one can produce a deterministic worst-case graph with a *finite* number of paths. Any other random graph $G \in \Gamma$ generated via our model (with the same nodes and types) is a subgraph of this worst-case graph.

DEFINITION 2. Fix nodes and types y_1^1, \dots, y_n^k on the $[0, 1]$ segments corresponding to each of the k tiers. Assume a continuum of path-nodes on the $[0, 1]$ interval and let G'_{wc} denote the auxiliary graph thus obtained. We refer to the graph G_{wc} associated with G'_{wc} as the worst-case graph.

Any random graph G' generated via our model is a subgraph of G'_{wc} . It then follows that the corresponding original graph G is a subgraph of G_{wc} . As it turns out, despite G'_{wc} having a continuum of path nodes, G_{wc} has a finite number of distinct paths.

PROPOSITION 2. *The graph G_{wc} has exactly $n - k + 1$ distinct paths.*

The proof of Proposition 2 gives an explicit construction of G_{wc} . Thus, if nodes and types are known, but paths and benefits are not, one can work with G_{wc} instead of the unknown underlying graph G , leveraging the fact that G would be a subgraph of G_{wc} to obtain approximate seed sets. In practice, instead of working with G'_{wc} as an auxiliary graph, we work with the graph H'_{wc} , constructed from G_{wc} where each path only gives rise to one path-node (unlike G'_{wc} which has infinitely many copies of each path-node). The advantage of proceeding this way is that H'_{wc} has a finite number of path-nodes, namely $m = n - k + 1$, making computations easier, while not changing the seed set obtained.¹⁵

This graph can be used in multiple ways to compute an approximate seed set for G when information about paths and benefits is unavailable. First, as the tree decomposition of H'_{wc} is also a (not necessarily minimal) tree decomposition of the auxiliary graph with known path-nodes, it allows performing the tree decomposition offline. Once supply chains (and the associated benefits) become known, the optimal seed set can be computed from this decomposition. Moreover, this approach can be refined when information about supply chains is partially available. In particular, the largest computational burden of the procedure occurs in the leaves of the tree decomposition. By rearranging the tree such that path-nodes with known benefits are towards the bottom, the seed

¹⁵ The small number of path-nodes in H'_{wc} does not enable us to conclude, following Theorem 4, that its treewidth is small. Indeed, the m path-nodes are chosen *deterministically* here. To use Theorem 4, one would have to generate m path-nodes uniformly at random on the $[0, 1]$ segment: a graph generated thus, with $m = n - k + 1$ random path-nodes, would most likely not be H'_{wc} .

set can be partially computed. As additional information about paths is acquired, the procedure can be performed with a warm-start from that partial seed set, leading to reduced complexity.

Second, suppose it is reasonable to assume that traceability benefits are the same in all paths. Moreover, suppose individual node thresholds express the number of fully traceable supply chains required for a given node to adopt. In that case, the worst-case graph can be used directly to return an approximate seed set without information about any particular path. The minimum seed set size is a lower bound for the seed set size of any realization of the random generative model. A possible approach in this scenario is to generate a seed set based on the worst-case graph and then add additional seed nodes greedily to keep the activation process going.

7. Conclusion

Modern traceability technologies can alleviate a range of supply chain risks and enhance demand in expansive and complex supply chain networks. However, to profit fully from traceability, all firms along a product’s supply chain need to adopt compatible technology. This supply chain effect has profound implications for traceability initiatives that seek to solve a difficult problem: What companies should they target as early adopters to guarantee the adoption of their technology throughout a supply chain network?

We introduce the Supply Chain Traceability Model (SCTM) as a new framework to tackle this problem. To the best of our knowledge, ours is the first model that highlights the network externalities imposed by overlapping supply chain structures in the broader context of firm-level innovation diffusion. It builds on the Linear Threshold Model (LTM), widely employed in the network diffusion literature. Based on the SCTM, we define *MIN-SCTM*, the problem of finding the minimum size of a seed set of nodes that guarantees technology diffusion throughout the network. We prove that the problem is not just NP-hard; it is impossible to compute an approximation in polynomial time with a reasonable performance guarantee.

Fortunately, we show that *MIN-SCTM* can be solved exactly in polynomial time if the supply chain network follows certain conditions that seem prevalent in practice. Our proof involves introducing a procedure that leverages and extends optimization methods for the LTM. In one step of the procedure, an auxiliary graph is constructed. As we show, *MIN-SCTM* is polynomial-time solvable if this auxiliary graph’s treewidth is bounded. We observe empirically from 38 publicly available networks that the treewidth is, in fact, small in practical cases.

To generalize our findings to networks of arbitrary scale, we propose a new random generative model of supply chain networks. The generation process is intuitive and leads to the output of realistic supply chain networks. Moreover, we prove that the treewidth of these randomly generated networks grows sublinearly in the number of nodes as long as the (relative) number of paths is

not too large. When we fit our model to the networks in Willems (2008) we find that, indeed, the number of paths is not too large relative to the number of nodes. In summary, we show that our approach scales better in practically relevant cases than an approach based on enumeration. Our random generative model further allows us to define a worst-case supply chain network. An initiative may use this network to derive an approximate seed set in the absence of complete information about paths and their traceability benefits. This seed set can be complemented as more information becomes available.

Relaxing some of our assumptions opens promising new research directions. For example, there may be multiple competing traceability technologies that a firm might choose. Examining how supply chain effects influence the diffusion of competing technologies is an interesting research question. More broadly, the tool-set and analysis we develop might be useful for other problems that require the coordination of multiple players in supply chains. For example, many critical sustainability issues (such as building a circular business model) can only be solved by aligning all the companies in a supply chain. Similarly, the introduction of shared communication or automated logistics systems necessitates alignment. We speculate that considering supply chain effects in such cases might lead to new and interesting strategies for tackling these issues.

References

- Ang E, Iancu DA, Swinney R (2017) Disruption risk and optimal sourcing in multitier supply networks. *Management Science* 63(8):2397–2419.
- Babich V, Hilary G (2020) OM Forum—Distributed ledgers and operations: What operations management researchers should know about blockchain technology. *Manufacturing & Service Operations Management* 22(2):223–240.
- Beaman L, BenYishay A, Magruder J, Mobarak AM (2018) Can network theory-based targeting increase technology adoption? Accessed March 31, 2021, <https://tinyurl.com/y4xb3myv>.
- Behnke K, Janssen M (2020) Boundary conditions for traceability in food supply chains using blockchain technology. *International Journal of Information Management* 52:101969.
- Ben-Zwi O, Hermelin D, Lokshtanov D, Newman I (2011) Treewidth governs the complexity of target set selection. *Discrete Optimization* 8(1):87–96.
- Bhandalkar S, Das D (2019) Food traceability market outlook—2025. Accessed March 31, 2021, <https://tinyurl.com/yyqrobql>.
- Bodlaender HL (1994) A tourist guide through treewidth. *Acta Cybernetica* 11(1-2):1.
- Candogan O, Bimpikis K, Ozdaglar A (2012) Optimal pricing in networks with externalities. *Operations Research* 60(4):883–905.

- Chen N (2009) On the approximability of influence in social networks. *SIAM Journal on Discrete Mathematics* 23(3):1400–1415.
- Chiang CY, Huang LH, Li BJ, Wu J, Yeh HG (2013) Some results on the target set selection problem. *Journal of Combinatorial Optimization* 25(4):702–715.
- Chod J, Trichakis N, Tsoukalas G, Aspegren H, Weber M (2020) On the financing benefits of supply chain transparency and blockchain adoption. *Management Science* 66(10):4378–4396.
- Chopin M, Nichterlein A, Niedermeier R, Weller M (2014) Constant thresholds can make target set selection tractable. *Theory of Computing Systems* 55(1):61–83.
- Cicalese F, Cordasco G, Gargano L, Milanič M, Vaccaro U (2014) Latency-bounded target set selection in social networks. *Theoretical Computer Science* 535:1–15.
- Cohen MC, Harsha P (2020) Designing price incentives in a network with social interactions. *Manufacturing & Service Operations Management* 22(2):292–309.
- Cui Y, Hu M, Liu J (2020) Values of traceability in supply chains. Accessed March 31, 2021, <https://tinyurl.com/yy9edmrz>.
- Dell H, Husfeldt T, Jansen BM, Kaski P, Komusiewicz C, Rosamond FA (2017) The first parameterized algorithms and computational experiments challenge. *11th International Symposium on Parameterized and Exact Computation (IPEC 2016)* (Schloss Dagstuhl-Leibniz-Zentrum für Informatik).
- Domingos P, Richardson M (2001) Mining the network value of customers. *Proceedings of the Seventh ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 57–66.
- Dutta A, Lee HL, Whang S (2007) RFID and operations management: Technology, value, and incentives. *Production and Operations Management* 16(5):646–655.
- Faenza Y, Muñoz G, Pokutta S (2020) New limits of treewidth-based tractability in optimization. *Mathematical Programming* 1–36.
- Foster JG, Foster DV, Grassberger P, Paczuski M (2010) Edge direction and the structure of networks. *Proceedings of the National Academy of Sciences* 107(24):10815–10820.
- Galliano D, Orozco L (2011) The determinants of electronic traceability adoption: A firm-level analysis of French agribusiness. *Agribusiness* 27(3):379–397.
- Goldberg S, Liu Z (2013) Technology diffusion in communication networks. *Proceedings of ACM-SIAM Symposium on Discrete Algorithms (SODA)*, 233–240.
- Goyal S, Heidari H, Kearns M (2019) Competitive contagion in networks. *Games and Economic Behavior* 113:58–79.
- Granovetter M (1978) Threshold models of collective behavior. *American Journal of Sociology* 83(6):1420–1443.

- Hackius N, Petersen M (2017) Blockchain in logistics and supply chain: Trick or treat? *Digitalization in Supply Chain Management and Logistics: Smart and Digital Solutions for an Industry 4.0 Environment. Proceedings of the Hamburg International Conference of Logistics (HICL), Vol. 23*, 3–18 (Berlin: epubli GmbH).
- Haig S (2020) Walmart joins Hyperledger alongside 7 other companies. Accessed March 31, 2021, <https://tinyurl.com/s79613k>.
- Hardt MJ, Flett K, Howell CJ (2017) Current barriers to large-scale interoperability of traceability technology in the seafood sector. *Journal of Food Science* 82(S1):A3–A12.
- Hartmann TA (2018) Target set selection parameterized by clique-width and maximum threshold. *International Conference on Current Trends in Theory and Practice of Informatics*, 137–149 (Springer).
- Heese HS (2007) Inventory record inaccuracy, double marginalization, and RFID adoption. *Production and Operations Management* 16(5):542–553.
- ISO (2005) ISO 9000:2005 Quality management systems—Fundamentals and vocabulary. Accessed March 31, 2021, <https://tinyurl.com/y6dudvml>.
- Jackson MO (2010) *Social and economic networks* (Princeton University Press).
- Jagabathula S, Rusmevichientong P (2019) The limit of rationality in choice modeling: Formulation, computation, and implications. *Management Science* 65(5):2196–2215.
- Kempe D, Kleinberg J, Tardos É (2003) Maximizing the spread of influence through a social network. *Proceedings of the Ninth ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 137–146.
- Lancaster K (1990) The economics of product variety: A survey. *Marketing science* 9(3):189–206.
- Lee HL, So KC, Tang CS (2000) The value of information sharing in a two-level supply chain. *Management Science* 46(5):626–643.
- Leicht EA, Newman ME (2008) Community structure in directed networks. *Physical Review Letters* 100(11):118703.
- Lock H (2019) Fight the fakes: How to beat the \$200bn medicine counterfeiters. Accessed March 31, 2021, <https://tinyurl.com/y4ukkpeo>.
- Morris N (2018) Dutch supermarket Albert Heijn’s blockchain food traceability. Accessed March 31, 2021, <https://tinyurl.com/y2w8fs8b>.
- Morris S (2000) Contagion. *The Review of Economic Studies* 67(1):57–78.
- Naidu R, Irrera A (2017) Nestle, Unilever, Tyson and others team with IBM on blockchain. Accessed March 31, 2021, <https://tinyurl.com/y4pxw2w9>.
- Nichterlein A, Niedermeier R, Uhlmann J, Weller M (2013) On tractable cases of target set selection. *Social Network Analysis and Mining* 3(2):233–256.

- Osadchiy N, Schmidt W, Wu J (2021) The bullwhip effect in supply networks. *Management Science*. Articles in Advance.
- Pearson S, May D, Leontidis G, Swainson M, Brewer S, Bidaut L, Frey JG, Parr G, Maull R, Zisman A (2019) Are distributed ledger technologies the panacea for food traceability? *Global Food Security* 20:145–149.
- Perera S, Bell MG, Bliemer MC (2017) Network science approach to modelling the topology and robustness of supply chain networks: A review and perspective. *Applied Network Science* 2(1):1–25.
- Peters A (2016) Tracking tuna on the blockchain to prevent slavery and overfishing. Accessed March 31, 2021, <https://tinyurl.com/y8uhlo7l>.
- Sodhi MS, Tang CS (2019) Research opportunities in supply chain transparency. *Production and Operations Management* 28(12):2946–2959.
- Sternberg HS, Hofmann E, Roeck D (2021) The struggle is real: Insights from a supply chain blockchain case. *Journal of Business Logistics* 42(1):71–87.
- Wang Y, Li J, Wu D, Anupindi R (2020) When ignorance is not bliss: An empirical analysis of subtier supply network structure on firm risk. *Management Science*, Articles in Advance.
- Whang S (2010) Timing of RFID adoption in a supply chain. *Management Science* 56(2):343–355.
- Willems SP (2008) Real-world multiechelon supply chains used for inventory optimization. *Manufacturing & Service Operations Management* 10(1):19–23.
- Youngdahl WE, Hunsaker BT (2018) Coda coffee and bext360 supply chain: Machine vision, AI, IoT, and blockchain. Accessed March 31, 2021, <https://tinyurl.com/ygs5bo88>.

Appendix A: Formalizing Traceability Adoption

While a lack of traceability affects many industries (e.g., Lenzing 2019, Lock 2019), nowhere is it more readily apparent than in the food industry, which we use as a leading example throughout. Many companies have experienced recalls following contamination events with significant costs from recall operations and demand losses (Grocery Manufacturers Associations et al. 2011). A lack of effective traceability systems and protocols makes it difficult to locate contamination sources and exclude cross-contamination, thus amplifying the costs (Wowak et al. 2016). Traceability initiatives specifically include recall management solutions, for example, Safefood 360 (2020) and FoodLogiQ (2020).

At the other side of the supply chain, food companies struggle with verifying stated origins (Wilson 2014) and adherence to processing standards (Baggini 2015). An inability to verify origins and standards may reduce consumer demand (Retail Leader 2016) and put firms at large legal and reputational risks. Traceability initiatives like Provenance (2020) focus on verifying origins and histories of raw materials and intermediate inputs. Some, like Wholechain, directly work with standard-setting bodies in this quest (Orlowski 2019).

We next review some key modeling assumptions in light of practical applications of traceability, as well as the possibility of removing them.

A.1. Traceability Benefits

Path-Specific Benefits of Traceability. Benefits are assumed to be specific to supply chains and proportional to the (standardized) flow of products. This predicates that product flows cannot be redirected along other supply chains after traceability adoption. Such redirection may not be possible in the short term because adjustments to product flows take time. Even in the long-term, the cost of adjusting product flows may exceed the benefits. Moreover, product flow adjustments may be impossible in several cases. First, when each supply chain carries differentiated products, as when a packaging firm processes both premium and non-premium meats from the same slaughterhouse but sells them to different supermarkets. Second, when supply chains are specific to components that realize traceability benefits by themselves, as in the cases of “Made with Organic” labeling and “Specific Ingredient Listings”. Third, when benefits are linked to specific firms processing the traceable product. This is the case, for example, when large chocolate producers guarantee that products stem from farms adhering to worker rights and sustainable deforestation practices (Thorlakson 2018). When producers are concerned with validating good supplier practices, they do not merely exchange their suppliers but rather work with their suppliers such that they achieve the standards (e.g., Unilever 2020). Finally, when benefits are linked to general firm interactions rather than individual products, for example, when traceability systems are used for digitized document management or to make existing supply chain interactions more efficient (e.g., IBM 2020).

When products are thoroughly commoditized and indistinguishable, the assumption may not apply. A firm may then maximize the use of traceability, reallocating flows whenever there is an imbalance in adoption between buyers and suppliers. We exclude this because many current traceability initiatives specifically target more complex products or highly differentiated high-price product segments (e.g., of coffee, cocoa, meat, fish, or wine). One way to, nevertheless, address this case is to assume that the traceable product flows are maximized in each period. This raises two issues, however. First, it is unclear how to decide between different

suppliers or buyers who may be willing to adopt traceability technology, but only if they receive most of the product flow. Second, this can cause non-monotonicities, wherein a higher degree of adoption in the supply chain network leads to a lower benefit of adoption for an individual company.

We further assume that firms can simultaneously process traceable and non-traceable products. This may be difficult to uphold in continuous processes. In fact, most traceability initiatives we identify focus on solids, which are easier to differentiate. Alternatively, when differentiation between traceable and non-traceable products is impossible, one may assume that a firm can only benefit from traceability when all its supply chains are traceable and adapt the solution procedure accordingly.

Equivalence of Benefits Along Supply Chains. The benefits obtained from a traceable supply chain are assumed equivalent for all firms of that supply chain. This assumption simplifies notation, and the solution procedure can be adapted easily to accommodate benefits specific to firm-path combinations. However, nodes may no longer be pooled together in node-nodes, potentially leading to a small increase of the treewidth.

Benefits from Partial Adoption. We assume that entire supply chains need to be traceable for firms to obtain traceability benefits. However, a subset of firms may be able to obtain traceability benefits already, for example, when benefits stem from tracing (and recalling) products from a certain tier downwards. Our method can easily be extended to alternative assumptions by adapting the concept of path-nodes and integrating “partial-path-nodes” into the auxiliary graph. Naturally, the treewidth may be affected by this—in a way that depends on the exact assumptions. For example, paths may be subdivided into mutually exclusive benefit groups. All nodes in a path obtain traceability benefits when the nodes in their group have adopted traceability technology. By replacing the original path-nodes with the corresponding partial-path-nodes in the auxiliary graph, one can show that the treewidth decreases, at least weakly. This is, again, barring any reductions from pooling nodes into node-nodes.

A.2. Objective of the Traceability Initiative

Finally, we assume that a traceability initiative’s ultimate objective is adoption by all firms in the network. If the initiative desires a certain fraction of supply chains to adopt the technology instead, we can add $k - 1$ nodes to the graph that form a path together with each existing node at tier k . The benefits and thresholds can be chosen such that the so-created paths activate only if enough of the original nodes at tier k have activated to account for the desired fraction of paths. We proceed identically for all tiers. When all supporting structures are active, additional paths are activated, leading to the whole network’s activation. The solution algorithm only needs to be adjusted such that the new nodes cannot be added to the seed set. Alternatively, if the initiative desires a certain fraction of nodes to adopt the technology, we can create a similar structure within the auxiliary graph. For this purpose, we add a node, and each existing node corresponding to a node from the SCTM is connected to the new node. Thresholds are again such that the new node activates when the desired fraction is reached and, upon activation, leads to all other nodes activating. This approach comes with a slight loss of generality, as nodes cannot be summarized within the auxiliary graph construction.

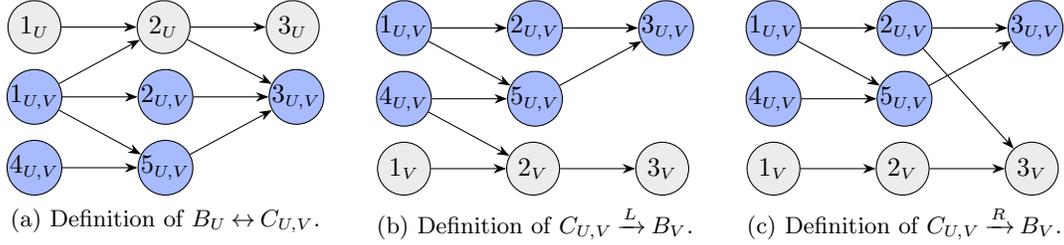


Figure 9 Construction of building blocks.

Appendix B: Computational Complexity Results

B.1. Definition of Some Concepts Used in the Proofs

The proofs in Sections B.2 and B.3 require similar graph structures on 3 tiers, which we refer to as “building blocks”. Before tackling the proofs, we first describe these building blocks:

- (i) Let B_U be a “line” block of three nodes $\{1_U, 2_U, 3_U\}$ and two edges $\{(1_U, 2_U), (2_U, 3_U)\}$.
- (ii) Let $C_{U,V}$ be a block of five nodes $\{1_{U,V}, 2_{U,V}, 3_{U,V}, 4_{U,V}, 5_{U,V}\}$ and five edges $\{(1_{U,V}, 2_{U,V}), (1_{U,V}, 5_{U,V}), (2_{U,V}, 3_{U,V}), (4_{U,V}, 5_{U,V}), (5_{U,V}, 3_{U,V})\}$.

These blocks are given in Figure 9 in gray, respectively blue. We assume that any path within the blocks has positive flow. Moreover, we denote connections between the blocks as follows:

- (i) Let $B_U \leftrightarrow C_{U,V}$ if complete activation of B_U leads to complete activation of $C_{U,V}$ (in the ϵ -thresholds case) and vice versa. This is achieved by introducing edges $(1_{U,V}, 2_U)$ and $(2_U, 3_{U,V})$, see Figure 9a.
- (ii) Let $C_{U,V} \xrightarrow{L} B_V$ if the complete activation of $C_{U,V}$ leads to the activation of exactly node 2_V within B_V , and the activation of B_V does not lead to the complete activation of $C_{U,V}$. This is achieved by introducing the edge $(4_{U,V}, 2_V)$, see Figure 9b.
- (iii) Let $C_{U,V} \xrightarrow{R} B_V$ if the complete activation of $C_{U,V}$ leads to the activation of exactly node 3_V within B_V , and the activation of B_V does not lead to the complete activation of $C_{U,V}$. This is achieved by introducing the edge $(2_{U,V}, 3_V)$, see Figure 9c.
- (iv) Let $C_{U,V} \xrightarrow{L,R} B_V$ if both the links $C_{U,V} \xrightarrow{L} B_V$ and $C_{U,V} \xrightarrow{R} B_V$ exist. We observe that $C_{U,V} \xrightarrow{L,R} B_V$ implies that, if $C_{U,V}$ is fully activated, then B_V is. However, if B_V is fully activated, $C_{U,V}$ is not: only nodes $2_{U,V}$ and $4_{U,V}$ in $C_{U,V}$ activate and as these are not on a path together, no other node activates. If $C_{U,V} \xrightarrow{L} B_V$ and $C_{T,V} \xrightarrow{R} B_V$, activating $C_{U,V}$ and $C_{T,V}$ leads to the activation of B_V . However, activating $C_{U,V}$ (resp. $C_{T,V}$) and B_V does not lead to the activation of $C_{T,V}$ (resp. $C_{U,V}$).

B.2. NP-Hardness of $MIN-SCTM(\epsilon)$ (Theorem 1)

Proof of Theorem 1. Let $DEC-LTM$ be the following decision problem: given a weighted directed graph $G = (N, E)$ with weights $w_{i,j}$ for $(i, j) \in E$, and thresholds c_i for node $i \in N$, as well as an integer h , decide whether there is an initial active set of nodes of size less than or equal to h that leads to complete activation (in the Linear Threshold Model sense) of the graph. Recall that a node activates in the LTM if the sum of the weights of the edges it shares with active incoming neighbors exceeds its threshold.

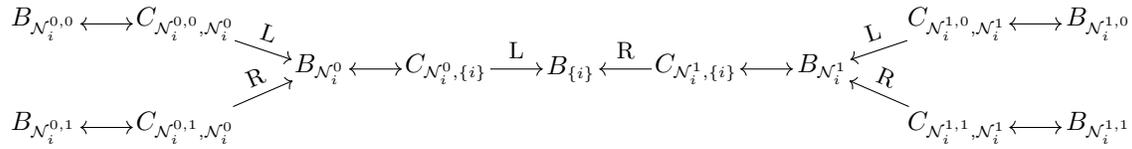


Figure 10 Linkage of building blocks for incoming edges.

It is known that *DEC-LTM* is NP-hard, even in the case where $w_{i,j} = 1 \forall (i,j) \in E$ and a node i requires all its incoming neighbors \mathcal{N}_i to be active in order to activate, that is $c_i = |\mathcal{N}_i|$ for $i \in N$ (see Kempe et al. 2003, Proof of Theorem 2.7). Further note that, w.l.o.g., we can assume that all nodes in N have incoming edges (i.e., $|\mathcal{N}_i| > 0$ for $i \in N$). Indeed, if a node does not, its benefit is equal to 0, as is its threshold. It will thus always activate by itself and would never be part of a minimal seed set. Moving forward, our inputs to *DEC-LTM* will thus be a graph G with $c_i = 1$ for all $i \in N$, $|\mathcal{N}_i| > 0$ for all $i \in N$, and $w_{i,j} \forall (i,j) \in E$.

We now construct a reduction from *DEC-LTM* to the decision version of *MIN-SCTM*(ϵ), which is the problem of deciding, given a graph G' in Γ_ϵ and an integer h' , whether there exists an initial active set of nodes of size less than or equal to h' which lead to the complete activation (in the SCTM sense) of G' .

Construction of the reduction. Let $G = (N, E)$ and h be inputs to *DEC-LTM*. We construct G' and h' , inputs to the decision version of *MIN-SCTM*(ϵ) using the building blocks defined in Appendix B.1. For ease of notation, we index the blocks B_U and $C_{U,V}$ that we generate using sets of nodes in N , i.e., $U, V \subseteq N$. We take $h' = h + 1$ and we proceed thus to construct G' from G : For any node i in N , add a block B_i to G' . Next, for each node $i \in N$, recursively split its set of incoming neighbors \mathcal{N}_i into two sets of equal size (if $|\mathcal{N}_i|$ is even), or into two sets of size differing by one (if $|\mathcal{N}_i|$ is odd). In other words, generate the decomposition $\mathcal{N}_i = \mathcal{N}_i^0 \cup \mathcal{N}_i^1 = \{\mathcal{N}_i^{0,0} \cup \mathcal{N}_i^{0,1}\} \cup \{\mathcal{N}_i^{1,0} \cup \mathcal{N}_i^{1,1}\} = \dots$, stopping when the sets in the decomposition contain one element. Add the corresponding blocks $B_{N_i^0}, B_{N_i^1}, B_{N_i^{0,0}}, B_{N_i^{0,1}}, B_{N_i^{1,0}}, B_{N_i^{1,1}}, \dots$ to G' , except when $|\mathcal{N}_i^x| = 1$ (the corresponding block already exists as $\mathcal{N}_i^x = \{j\}$ with $j \in N$). Further add blocks $C_{N_i^0, \{i\}}, C_{N_i^1, \{i\}}, C_{N_i^{0,0}, N_i^0}, C_{N_i^{0,1}, N_i^0}, C_{N_i^{1,0}, N_i^1}, C_{N_i^{1,1}, N_i^1} \dots$ to G' and link the blocks as follows: $C_{N_i^0, \{i\}} \xrightarrow{L} B_{\{i\}}, C_{N_i^1, \{i\}} \xrightarrow{R} B_{\{i\}}, B_{N_i^0} \leftrightarrow C_{N_i^0, \{i\}}, B_{N_i^1} \leftrightarrow C_{N_i^1, \{i\}}, \dots$ This is illustrated in Figure 10. As we proceed through the nodes in N , it may be the case that we are called upon to generate blocks $B_{N_j^x}$ and $C_{N_j^x, N_j^y}$ which have already been constructed (e.g., if the incoming neighbors of two nodes overlap). In that case, we simply use the existing blocks without generating additional blocks. Finally, add a block B_0 , as well as the blocks $C_{\{i\}, 0}$ for all $i \in N$. We connect the blocks as follows: $B_{\{i\}} \leftrightarrow C_{\{i\}, 0}$ and $C_{\{i\}, 0} \xrightarrow{L,R} B_0$. Thus constructed, G' is a graph in Γ_ϵ on $k = 3$ tiers.

The construction described is polynomial in $n = |N|$. Indeed, each node $i \in N$ has at most $n - 1$ incoming edges and so the number of times the recursive splitting on \mathcal{N}_i has to occur is upper bounded by $\lceil \log_2(n - 1) \rceil$. It follows that the number of sets $\mathcal{N}_i^0, \mathcal{N}_i^1, \dots$ generated for node i is at most equal to $2^1 + 2^2 + \dots + 2^{\lceil \log_2(n - 1) \rceil} \leq 8(n - 1)$: from this, we deduce that at most $n + 4(n - 1) + 1$ blocks B (including the n blocks B_i and block B_0) and at most $4(n - 1) + n$ blocks C (including the n blocks $C_{\{i\}, 0}$ and noting that each block C can be associated to one block B , e.g., $C_{N_i^0, \{i\}}$ with $B_{N_i^0}$) are built per node i . As the number of

nodes in the B and C blocks is constant and there are n nodes i , we obtain that G' contains a polynomial number $p(n)$ of nodes and so the number of edges in G' must also be polynomial in n as it is upper bounded by $(p(n))^2$. Hence, the construction is polynomial in n .

An important feature of G' is that we are able to replicate any LTM-activation process in G in G' via the SCTM. This is done by equating active nodes i in G with corresponding active blocks $B_{\{i\}}$ in G' and assuming that no other nodes are initially active in G' . We can then show that a node i_a activates in G if and only if block $B_{\{i_a\}}$ activates in its entirety in G' . To see this latter point, note that by construction, each block $B_{\{i\}}$ only appears in two places in G' : exactly once at the root of a tree such as the one given in Figure 10 and possibly many times as a leaf of trees of this type, associated to other blocks $B_{\{j\}}$. When $B_{\{i\}}$ is at the root of a tree, it activates if all of the leaves of the tree (corresponding to blocks $B_{\{j\}}, j \in \mathcal{N}_i$) activate. If it is a leaf, it will not activate through this particular tree if the root of the tree activates, nor if any other leaves activate. From this, we prove the statement: if node i_a is active in G , then all incoming neighbors $j \in \mathcal{N}_{i_a}$ of i_a are active. This implies that blocks $B_{\{j\}}, j \in \mathcal{N}_{i_a}$ are fully active, which leads from our previous discussion, to activation of $B_{\{i_a\}}$. Conversely, if $B_{\{i_a\}}$ activates with only blocks $B_{\{i\}}, i \in N$ having initially been activated, then it must be the case that all blocks in the tree rooted at $B_{\{i_a\}}$ became active at some point, which can only happen if all of its leaves $B_{\{j\}}, j \in \mathcal{N}_{i_a}$ were fully activated. By equivalence, this means that in G , nodes $j \in \mathcal{N}_{i_a}$ are active, and so i_a would activate.

Equivalence of YES answers between DEC-LTM and DEC-SCTM(ϵ). We show that the answer to *DEC-LTM* on graph G with integer h is yes if and only if the answer to *DEC-SCTM*(ϵ) on graph G' with integer h' is yes, for $h' = h + 1$.

For the “only if” direction, take a seed set S_0 in the LTM of size h leading to full activation. For each $i \in S_0$, add the corresponding node $5_{\{i\},0}$ to the seed set S'_0 of the SCTM. Finally, take any one of the nodes in S_0 , say j , and add the node $1_{\{j\},0}$ to S'_0 , such that $|S'_0| = h + 1$. Clearly, the block $C_{\{j\},0}$ fully activates, as does, then, block B_0 . In consequence, each block $C_{\{i\},0}$ with $i \in S_0$ eventually activates. This is followed by the activation of $B_{\{i\}}$ for all $i \in S_0$. Each other block $B_{\{j\}}$ with $j \notin S_0$ only activates if all incoming nodes are fully activated. Hence, activation proceeds exactly as under the LTM. Because the seed set S_0 eventually leads to full activation under the LTM, full activation also occurs under the SCTM in the graph G' .

For the “if” direction, assume that there is no seed set S_0 of size h fully activating G , but that there is a seed set of size $h' = h + 1$ fully activating G' , say S'_0 . We show that, if such a seed set exists, there must be another fully activating seed set S''_0 with $|S''_0| \leq |S'_0|$ that contains only nodes of the type $5_{\{i\},0}, i \in N$ and a single node $1_{\{j\},0}$, with j such that $5_{\{j\},0} \in S''_0$. But we know from before that the seed set $S_0 = \{i | 5_{\{i\},0} \in S''_0\}$ in the LTM leads to the same activation (with size $\leq h' - 1 = h$). This implies a contradiction.

First, note that if there is any node $j \in S'_0 \cap \left(C_{\mathcal{N}_i^x, \mathcal{N}_i^y} \cup B_{\mathcal{N}_i^x} \right)$ for some block \mathcal{N}_i^x that is not a singleton, then there is another seed set S''_0 without this node, but instead with $2_{\{i\}}$ (or $3_{\{i\}}$, depending whether the incoming set ends on a \xrightarrow{L} or \xrightarrow{R} connection), that also leads to full activation. Second, consider any block associated with $i \in N$ (either of the B or the C type) that contains a node $j \in S''_0$ and assume that there are l such blocks. Once one of those blocks is active, the block B_0 fully activates, which in turn implies that any other of the block can be activated with only the node $5_{\{i\},0}$ in it. Finally, exactly one of the l block

needs to have two nodes for any activation to occur and for the seed set to be minimal. Assume this block is associated with node $j \in N$ (note that one node could be in a C block and another in a B block, but they would have to be associated to the same node in N). We can replace the seed nodes in this block with the nodes $4_{\{j\},0}$ and $5_{\{j\},0}$ without loss of generality, and the proof is complete.

Note on the number of tiers, k . We have proceeded by reducing the $DEC-LTM$ problem to the $DEC-SCTM(\epsilon)$ problem with a graph of three tiers. To show that the $DEC-SCTM(\epsilon)$ problem with $k > 3$ tiers is NP-hard as well, we reduce the problem of solving $DEC-SCTM(\epsilon)$ with parameter h and a graph $G = (N, E)$ with $k = 3$ to the problem of solving $DEC-SCTM(\epsilon)$ with parameter h' and a graph $G' = (N', E')$ with $k' \geq 4$. For this purpose, we simply add to G , for all $l = 4, \dots, k'$, a tier with a single node. Then, for all nodes i in Tier 3, we add an edge (i, j) , where j is the singular node at Tier 4. We further add an edge between the single nodes of adjacent tiers thus constructed. For the first node to activate, an additional $k' - 3$ nodes are required to be in the seed set. However, once the first path is fully activated, all the nodes at tiers $4, \dots, k'$ must be active. At that point, activation of other paths proceeds as in the graph G . Hence, all that is required is to adapt $h' = h + k' - 3$ in order to reduce the problem with k tiers to the one with k' tiers.

If $k = 1$, there are no edges, so each node is also a one-node path (thus, it necessarily adopts) or no path exists containing the node (thus, it requires seeding). If $k = 2$, it is easy to see that exactly one (arbitrary) seed node is needed within any connected sub-graph. It follows that the minimum number of nodes needed corresponds to the number of connected subgraphs, which can be found in polynomial time. \square

B.3. Hardness of Approximation of $MIN-SCTM(\epsilon)$ (Proposition 1)

Proof of Proposition 1. We prove by reduction from the linear threshold model, where all nodes have a threshold $c_i \leq 2$ and all edges have weight $w_{i,j} = 1$. The result then follows from Corollary 4.1 in Chen (2009).

Below, we will show that for any such instance of the LTM with n nodes, we can create an instance of the SCTM with ϵ -thresholds in polynomial time with the following properties: (i) the number of nodes is $n' \leq (n)^\beta$ for a constant $1 \leq \beta < \infty$; (ii) if OPT_{LTM} is the size of the minimum seed set for the linear threshold model, and S_0^* is a minimum size seed set of the SCTM with $OPT = |S_0^*|$, then $OPT = OPT_{LTM} + 1$.

Given this construction, assume that for all $\alpha > 1$ there is an algorithm approximating $MIN-SCTM(\epsilon)$ with result OPT' such that $OPT' = OPT \cdot O(\alpha^{\log^{1-\xi} n'})$ for some $\xi > 0$. Clearly, OPT' is an upper-bound on OPT_{LTM} . But we then have that $OPT' = (OPT_{LTM} + 1) \cdot O(\alpha^{\log^{1-\xi} n'}) < OPT_{LTM} \cdot O(\alpha^{\log^{1-\xi} n'}) < OPT_{LTM} \cdot O(\alpha^{\beta^{1-\xi} \log^{1-\xi} n}) = OPT_{LTM} \cdot O\left(\left(\alpha^{\beta^{1-\xi}}\right)^{\log^{1-\xi} n}\right)$. As α is arbitrary greater 1, simply let $\alpha = 2^{\frac{1}{\beta^{1-\xi}}}$. We then have a direct contradiction to the result that there is no polynomial-time approximation algorithm with output OPT' and $OPT' < OPT_{LTM} \cdot O(2^{\log^{1-\xi} n})$ for any $\xi > 0$.

A note on the complexity class. Assume instead that $OPT' = OPT \cdot O(2^{\log^{1-\xi} n'})$. Then, $OPT' < OPT_{LTM} \cdot O\left(2^{\beta^{1-\xi} \log^{1-\xi} n}\right)$. To establish a contradiction, we require that there is a constant $M > 0$ such that $M \cdot 2^{\beta^{1-\xi} \log^{1-\xi} n} \leq 2^{\log^{1-\xi} n}$. This is equivalent to $M \leq 2^{\log^{1-\xi} n(1-\beta^{1-\xi})}$. However, unless $\beta = 1$, $1 - \beta^{1-\xi} < 0$, and the right-hand side tends to zero as n goes to infinity. But because $M > 0$, this does not hold. The same

issue arises in the sequence of proofs leading up to Corollary 4.1 in Chen (2009), where a reduction is created to a graph with a higher number of nodes at each step (that is, $\beta > 1$). This is of no consequence for the complexity class that we apply here, however, as we can replace 2 by some $\alpha \in (1, 2)$ in each step.

Construction of the reduction. We assume a directed graph $G = (N, E)$ with $|N| = n$, weights $w_{i,j} = 1$ for each edge $(i, j) \in E$, and thresholds $c_i \in \{1, 2\}$ for all $i \in N$, to which the problem *MIN-LTM* is applied. We can ignore the case of $c_i = 0$ —any such node would adopt immediately and will thus never be part of the minimal seed set. We proceed with a similar construction of a three-tiered graph $G' = (N', E') \in \Gamma$ as in the proof of Theorem 1, using the building blocks defined in Appendix B.1, and let $|N'| = n'$.

For each element $i \in N$, define a block $B_{\{i\}}$. There are two cases: either (i) node i has a threshold of 1 (i.e. it activates when one of its neighbors is active), or (ii) it has a threshold of 2 (i.e. it activates when two of its neighbors are active). Take case (i). For each (directed) edge $(j, i) \in E$, construct a block $C_{\{j\},\{i\}}$, as well as the following linkages: $B_{\{j\}} \leftrightarrow C_{\{j\},\{i\}} \xrightarrow{L,R} B_{\{i\}}$. Now take case (ii). Say the set of incoming neighbors of i is \mathcal{N}_i . Then, construct a block $B_{\{j,j'\}}$ for any pair $(j, j') \in \mathcal{N}_i^2$. There are $\binom{|\mathcal{N}_i|}{2} \leq \binom{n-1}{2} \leq n^2$ such pairs. For each pair, construct blocks $C_{\{j\},\{j,j'\}}$, $C_{\{j'\},\{j,j'\}}$, and $C_{\{j,j'\},\{i\}}$, as well as the following linkages: $B_{\{j\}} \leftrightarrow C_{\{j\},\{j,j'\}} \xrightarrow{L} B_{\{j,j'\}}$, $B_{\{j'\}} \leftrightarrow C_{\{j'\},\{j,j'\}} \xrightarrow{R} B_{\{j,j'\}}$, and $B_{\{j,j'\}} \leftrightarrow C_{\{j,j'\},\{i\}} \xrightarrow{L,R} B_{\{i\}}$.

The construction so far is polynomial in n : For each node in N , a number of blocks polynomial in n is created and linked. Each block has a constant number of nodes, as does each linkage.

As in the previous case, we add a block B_0 , as well as (n) blocks $C_{\{i\},0}$ for all $i \in N$, with the connections $B_{\{i\}} \leftrightarrow C_{\{i\},0} \xrightarrow{L,R} B_0$. The construction is, again, polynomial in n and allows us to activate all but one block with only the node $5_{\{i\},0}$ in the seed set.

Equivalence of optimal values. The solution to *MIN-LTM* on graph G is OPT_{LTM} if and only if the solution to *MIN-SCTM*(ϵ) on graph G' is $OPT = OPT_{LTM} + 1$. This can be shown following the same steps as when showing the equivalence of YES answers in the proof of Theorem 1. \square

Appendix C: Algorithm for Solving *MIN-SCTM*

C.1. Description of the Algorithm for *MIN-SCTM*(ϵ)

Stricto sensu, the algorithm by Ben-Zwi et al. (2011) runs on a specific tree decomposition of G' , referred to as a *nice tree decomposition*. We define this now:


DEFINITION 3 (NICE TREE DECOMPOSITION BASED ON BEN-ZWI ET AL. (2011)). Let $G = (N, E)$ be a graph. A tree decomposition T of G with treewidth $\omega - 1$ and nodes Z , mapping to X_z , $z \in Z$, is nice if and only if T is rooted, $|X_z| = \omega \forall z \in Z$, and all nodes in Z are of exactly one of the following types: (a) leaf nodes, (b) replace nodes, and (c) join nodes, where z is a

(b) replace node if it has exactly one child, z_0 and there are two nodes $u, v \in N$, $u \neq v$, such that $X_z \setminus X_{z_0} = \{u\}$ and $X_{z_0} \setminus X_z = \{v\}$;

(c) join node if it has exactly two children, say z_0 and z_1 , and $X_z = X_{z_0} = X_{z_1}$.

Given an arbitrary tree decomposition, one can always construct a nice tree decomposition of the same width in linear time. An example of a nice tree decomposition is given in Figure 11.

Some concepts and notation relating to tree decompositions will come in useful in the description of the algorithm. The *boundary* of a node z is the associated set X_z . For example, the boundary of node $\{p_3, p_4, 7\}$

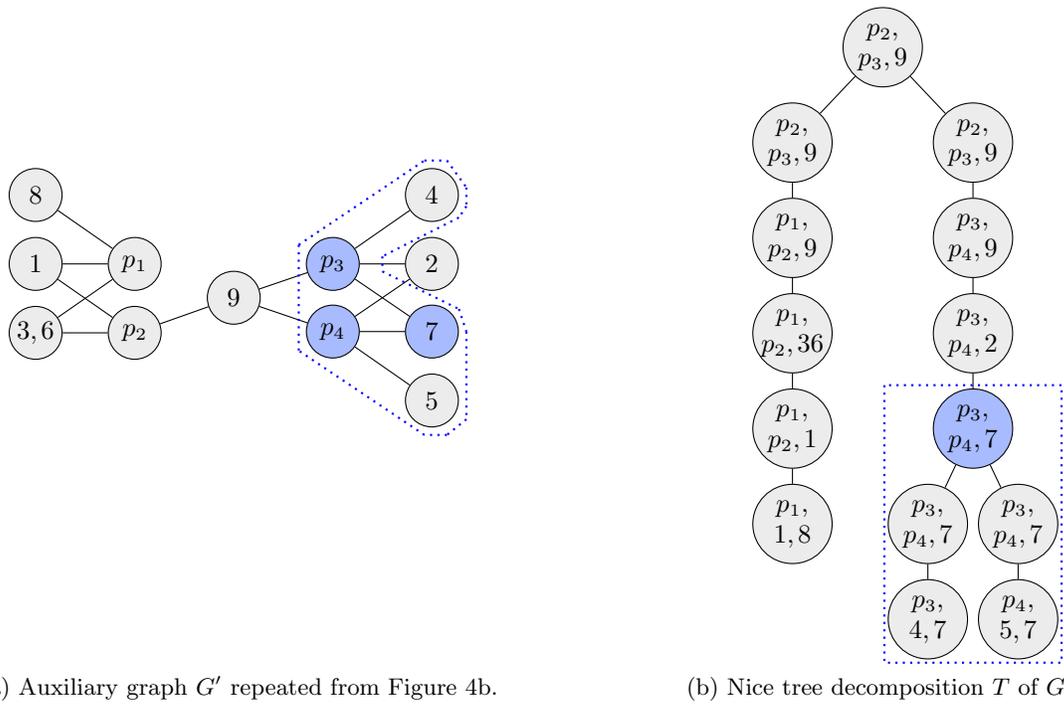
Figure 11 Example of a nice tree decomposition.

is exactly p_3 , p_4 , and 7. The name “boundary” is a consequence of the following: consider a subtree in T rooted at a node z_0 . We define with $G^{z_0} = (N^{z_0}, E^{z_0})$ the subgraph of G' induced by $\bigcup_{z \in \text{subtree}(z_0)} X_z$. For example, in Figures 11b (resp. 11a), the dashed line indicates the subtree rooted at $\{p_3, p_4, 7\}$ (resp. the associated subgraph). The nodes in X_{z_0} constitute the boundary because they may be connected to nodes in G' outside of this associated subgraph. Other nodes in the subgraph that are not in the boundary cannot be connected with nodes outside the subgraph. In Figure 11a, nodes p_3 and p_4 , which are in the boundary, connect to nodes 2 and 3 outside of the dashed line. The boundary may include additional nodes, due to the requirement $|X_z| = \omega$. In this example, 7 is such a node. Node 4, on the other hand, is not in the boundary and cannot connect to nodes outside of the dashed line. When we move upwards in the tree from a node z_0 to a replace node z_R , a node $v \in X_{z_0}$ is replaced by a node u to arrive at the new boundary X_{z_R} . A consequence of the definition of a tree decomposition is that the node leaving the boundary cannot share edges with any of the nodes that are not part of G^{z_R} . Say, we move from $\{p_3, p_4, 7\}$ to $\{p_3, p_4, 2\}$. In the boundary, Node 7 is replaced by Node 2, and Node 7 does indeed not share edges with nodes outside of the subgraph induced by p_3 , p_4 , 2, 4, and 5.

Next, let $\tilde{c} \in \{0, \dots, k-1\}^\omega$ and $\tilde{a} \in \{0, \dots, \omega\}^\omega$ be two vectors, referred to as threshold (resp. activation) vector. All boundaries are of size ω , so we can arbitrarily assign a one-to-one mapping from the boundary at the root node to these vectors. We denote with $\tilde{c}(i')$ (resp. $\tilde{a}(i')$) the mapping from node i' in the boundary to the threshold (resp. activation) vector. We define the mapping for any other boundary recursively: (i) if node v in the current boundary replaces node u in the previous one, v is mapped to the same index as u was and the mapping remains unchanged otherwise; and (ii) if a node has two children, the boundary remains unchanged, and so does the mapping.

Finally, for any $z \in Z$, we define a matrix S_0^z with rows indexed by the vectors \tilde{c} and columns indexed by the vectors \tilde{a} . The size of the matrix is therefore $[k \cdot (\omega + 1)]^\omega = [(k - 1) \cdot \omega]^{O(\omega)}$. Each entry of the matrix is a set of nodes in G' . If z is a leaf node, each entry is computed individually, as described below. For all other nodes z , the entries are defined recursively bottom up as outlined below. The last matrix to be computed (corresponding to the root node \tilde{z}) gives us the minimum seed set of G' , $(S'_0)^*$. To obtain $(S'_0)^*$, we restrict ourselves to the row \tilde{c} of $S_0^{\tilde{z}}$ such that $\tilde{c}(i') = c'_{i'} \forall i' \in X_{\tilde{z}}$. Among all entries of this row, we then select the one that corresponds to the smallest set. For any set $S_0^z[\tilde{c}, \tilde{a}]$, we define its size by $\sum_{i' \in S_0^z[\tilde{c}, \tilde{a}]} |cont_{i'}|$. For example, if $S_0^z[\tilde{c}, \tilde{a}] = \{1, 36, 9\}$, then its size is $|cont_1| + |cont_{36}| + |cont_9| = 1 + 2 + 1 = 4$.

We now define Algorithm 2 to solve *MIN-SCTM*(ϵ): this algorithm is based on Ben-Zwi et al. (2011) but it is adapted to reflect the specificities of the auxiliary graph G' , as mentioned in Section 5.1. We assume that a nice tree decomposition T of G' is available.

The first step in Algorithm 2 is the following: For each node $z \in Z$ which is a leaf, for each threshold vector \tilde{c} , and for each activation vector \tilde{a} , we compute a “minimum seed set” (Lines 2–5). To do this, we just consider the subgraph G^z and compute the minimum seed set for G^z assuming that a node $i' \in X_z$ (i) has the threshold $\tilde{c}(i')$; (ii) can activate only if all nodes $j' \in X_z$ with $\tilde{a}(j') < \tilde{a}(i')$ are already active and if all $j' \in X_z$ with $\tilde{a}(j') = \tilde{a}(i')$ activate at the same time; and (iii) can only be part of the seed set if it is a node-node. For example, let $z_0 = \{p_3, 4, 7\}$, $\tilde{c} = (1, 1, 0)$, and $\tilde{a} = (1, 2, 0)$. Node 7 has a threshold of 0. It also has the lowest value in the activation vector. Hence, Node 7 activates for any seed set. Node p_3 has a threshold of 1. However, there is an edge $(7, p_3)$ with $w_{7, p_3} = 1$ and Node p_3 has a lower value in the activation vector than Node 4. Once Node 7 is active, Node p_3 also activates. Thereafter, Node 4 can also activate. It follows that the minimum seed set is \emptyset . Assume, instead, that $\tilde{c} = (1, 1, 3)$, and $\tilde{a} = (1, 2, 0)$. Node 7 still has to activate first. However, its threshold is 4, so it must be part of the seed set. With Node 7 in the seed set, the remainder of the activation process is unchanged, so the minimum seed set is $\{7\}$. Finally, assume that $\tilde{c} = (1, 1, 3)$, and $\tilde{a} = (0, 2, 1)$. Node p_3 has to activate first, but path-nodes cannot be added to the seed set. Hence, no such minimum seed set exists, and we adopt the convention of equating the minimum seed set to the entire set of node-nodes. That is, $S_0^{z_0}[(1, 1, 4), (0, 2, 1)] = \{i' \in N' : |cont_{i'}| < k\}$.

Next, we generate S_0^z for all other nodes $z \in Z$, recursively from bottom to top. For this purpose, we consider two different cases corresponding to whether z is a replace node or a join node. If z is a replace node (Lines 7–19) with child z_0 , then the subgraph G^z of G' has exactly one more node than G^{z_0} , node u . Moreover, node u replaces a node v in the boundary, which is mapped to entry i_v in both the activation and threshold vectors. For each activation vector \tilde{a} , we then define a set $\tilde{A} = \{a \in \{0, \dots, \omega\}^\omega : a(i') = \tilde{a}(i') \forall i' \neq v\}$ which groups together all activation vectors that differ only in entry i_v . For example, if $z_0 = \{p_3, 4, 7\}$, $z = \{p_3, p_4, 7\}$, then $u = p_4$ and $v = 4$. Moreover, if $\tilde{a} = (1, 2, 0)$, then $\tilde{A} = \{(1, 0, 0), (1, 1, 0), (1, 2, 0), (1, 3, 0)\}$. Then, for each threshold vector \tilde{c} , we temporarily construct intermediary sets $S_0^z[\tilde{c}, \tilde{a}]$ which serve the purpose of removing dependencies on v and introducing the node u (Lines 9–13). We define them thus: (i) if $\tilde{c}(u) = 0$, then $S_0^z[\tilde{c}, \tilde{a}] = S_0^{z_0}[c, a]$ where $c(i') = \tilde{c}(i')$, $i' \neq v$, $c(v) = c'_v$, and $a = \arg \min_{a \in \tilde{A}} |S_0^{z_0}[c, a]|$, (ii) if $\tilde{c}(u) > 0$ and u is a node-node, then $S_0^z[\tilde{c}, \tilde{a}] = S_0^{z_0}[c, a] \cup \{u\}$ with a and c as before, (iii) if $\tilde{c}(u) > 0$ and u is a path-node, then $S_0^z = \{i' \in N' : |cont_{i'}| < k\}$. In the previous example, if $\tilde{a} = (1, 2, 0)$ and $\tilde{c} = (1, 0, 3)$, then $c = (1, 1, 3)$

and $S_0^z[(1, 2, 0), (1, 0, 3)]$ is the smallest of the following seed sets: $\{4, 7\}$ (corresponding to $a = (1, 0, 0)$), $\{4, 7\}$ (corresponding to $a = (1, 1, 0)$), $\{7\}$ (corresponding to $a = (1, 2, 0)$), $\{7\}$ (corresponding to $a = (1, 3, 0)$). As $\tilde{c}(p_4) = 0$, it follows that $S_0^z[(1, 2, 0), (1, 0, 3)] = \{7\}$.

Given a threshold vector \tilde{c} and an activation vector \tilde{a} , the intermediary set $S_0^z[\tilde{c}, \tilde{a}]$ reflects the minimum seed set needed to activate the subgraph G^z minus any edges between node u and the other nodes in the boundary. We iteratively refine the intermediary sets to reflect adding these edges to the subgraph (Lines 14–19). Arbitrarily choose one such edge, say (u, i') and copy the entries of matrix S_0^z to a new matrix $S_0^{z'}$. The matrix S_0^z will be the one we update using the copies in $S_0^{z'}$. Consider each value of \tilde{c} and \tilde{a} . For any \tilde{a} , there are three options: (i) if $\tilde{a}(u) < \tilde{a}(i')$, node u has to activate before node i' . Once node u is active, it contributes a benefit of $w'_{i',u}$ towards activation of i' . Hence, we update $S_0^z[\tilde{c}, \tilde{a}] = S_0^{z'}[\tilde{c}^{i'}, \tilde{a}]$, where $\tilde{c}^{i'}$ is identical to \tilde{c} , except that the entry of i' is adjusted accordingly: $\tilde{c}^{i'}(i') = \max\{\tilde{c}(i') - w'_{u,i'}, 0\}$. (ii) if $\tilde{a}(u) > \tilde{a}(i')$, node u has to activate after node i' . Once node i' is active, it contributes a benefit of $w'_{i',u}$ towards activation of u . Hence, we update $S_0^z[\tilde{c}, \tilde{a}] = S_0^{z'}[\tilde{c}^u, \tilde{a}]$, where \tilde{c}^u is identical to \tilde{c} , except that the entry of u is adjusted accordingly: $\tilde{c}^u(u) = \max\{\tilde{c}(u) - w'_{u,i'}, 0\}$. (iii) if $\tilde{a}(u) = \tilde{a}(i')$, the nodes have to activate simultaneously, so they cannot influence each other. In this case, $S_0^z[\tilde{c}, \tilde{a}] = S_0^{z'}[\tilde{c}, \tilde{a}]$. In the previous example, add the edge $(p_4, 7)$ with $w'_{p_4,7} = 1$, and assume again that $\tilde{a} = (1, 2, 0)$ and $\tilde{c} = (1, 0, 3)$. Then, $\tilde{a}(p_4) = 2 > 0 = \tilde{a}(7)$ and we consider $\tilde{c}^{p_4} = (1, 0, 3)$. The latter vector is unchanged because the threshold in the second entry is already 0, so $S_0^z[(1, 0, 3), (1, 2, 0)] = S_0^{z'}[(1, 0, 3), (1, 2, 0)]$. If, however, $\tilde{a} = (1, 0, 2)$, then we need to consider the threshold vector $\tilde{c}^7 = (1, 0, 2)$ to account for the fact that 7 always activates after p_4 . In this case, $S_0^z[(1, 0, 3), (1, 0, 2)] = S_0^{z'}[(1, 0, 2), (1, 0, 2)]$. We revise $S_0^{z'} = S_0^z$ and repeat the above process until no edges remain.

If z is instead a join node (Lines 20–26) with children z_0 and z_1 , then the subgraph G^z is exactly the union of the subgraphs G^{z_0} and G^{z_1} . In particular, there are no edges between nodes of the two subgraphs, unless they belong to the boundary. We again fix \tilde{a} and \tilde{c} . Note that the minimum seed set for G^z , $S_0^z[\tilde{c}, \tilde{a}]$, is not necessarily equal to the union of the minimum seed sets $S_0^{z_0}[\tilde{c}, \tilde{a}]$ and $S_0^{z_1}[\tilde{c}, \tilde{a}]$, though such a set is guaranteed to be a seed set for G^z . Indeed, it can be the case that a node $i' \in X_z$ benefits from activations in both subgraphs G^{z_0} and G^{z_1} . For example, consider the join node with $z = (p_2, p_3, 9)$ in Figure 11 and take $\tilde{a} = (0, 2, 1)$ (i.e., p_3 has to activate first, followed by 9, then p_2) and $\tilde{c} = (1, 0, 2)$ (i.e., $c_{p_2} = 1$, $c_{p_3} = 0$, $c_9 = 2$). In this case, the minimum seed set for the subgraph in G' associated with the left-hand subtree is $\{9\}$: p_3 activates due to its threshold, p_2 activates as 9 is active and then 36 and 1 activate, followed by p_1 and finally 8. Following a similar reasoning, the minimum seed set for the subgraph in G' associated to the right-hand subtree is $\{5\}$. However, while G' does activate if $\{9, 5\}$ is active, this is not the smallest seed set, which is given by $\{9\}$. This forces us to construct $S_0^z[\tilde{c}, \tilde{a}]$ in a different manner that accounts for synergies. To do this, for each $i' \in X_z$, we define the following weight reduction which avoids double-counting: $red(i') = \sum_{\{j' \in X_z : (j', i') \in E' \text{ and } \tilde{a}(j') < \tilde{a}(i')\}} w'_{i',j'}$. We then take $S_0^z[\tilde{c}, \tilde{a}] = S_0^{z_0}[\tilde{c}^{z_0}, \tilde{a}] \cup S_0^{z_1}[\tilde{c}^{z_1}, \tilde{a}]$, where

$$(\tilde{c}^{z_0}, \tilde{c}^{z_1}) = \arg \min_{f, g \in \{0, \dots, k-1\}^\omega} |S_0^{z_0}[f, \tilde{a}] \cup S_0^{z_1}[g, \tilde{a}]|$$

$$\text{s.t. } f(i') + g(i') = \tilde{c}(i') + red(i') \text{ for all } i' \in X_z.$$

For example, if $X_{z_0} = X_{z_1} = \{p_3, p_4, 7\}$, $\tilde{a} = (1, 2, 0)$, and $\tilde{c} = (1, 0, 3)$, then $\text{red}(p_3) = 1$, $\text{red}(p_4) = 1$, and $\text{red}(7) = 0$. It follows that $S_0^z[(1, 0, 3), (1, 2, 0)]$ is based on the union of seed sets corresponding to the threshold vectors $(\tilde{c}^{z_0}, \tilde{c}^{z_1}) = \arg \min_{\{f, g : f+g=(2,1,3)\}} |S_0^{z_0}[f, (1, 2, 0)] \cup S_0^{z_1}[g, (1, 2, 0)]|$.

We proceed in this way until we reach the root note \tilde{z} . To obtain $(S'_0)^*$, we consider the threshold vector that corresponds to the actual thresholds of the boundary nodes. Noting that the optimal seed set necessarily induces one of the activation sequences \tilde{a} , we have that $(S'_0)^* = S_0^z[c, a]$, with $c(i') = c'_i \forall i' \in X_{\tilde{z}}$ and $a = \arg \min_{\tilde{a}} S_0^z[\tilde{c}, \tilde{a}]$.

In total, the number of entries of any S_0^z is bounded by $[(k-1) \cdot \omega]^{O(\omega)}$. In the worst case, there are n^{k+1} nodes in the auxiliary graph (one for each path, as well as one per node). As a result, a nice tree decomposition exists with at most $\omega \cdot n^{k+1}$ nodes. The number of computations for each entry of a leaf node is 2^ω (Lines 2–5). The number of computations for each entry of a replace node is determined by comparing all $\omega + 1$ activation options of v (Lines 8–13) and iterating through each of at most $\omega - 1$ edges that u shares with other elements of the boundary (Lines 14–19). The number of computations for each entry of a join node is determined by comparing combinations of thresholds of the boundaries, which is upper-bounded by a constant factor of $(k-1)^\omega$. It follows that the maximum number of computations required for Algorithm 2 is in $n^{k+1} \cdot [(k-1) \cdot \omega]^{O(\omega)}$.

C.2. Using the Algorithm for *MIN-SCTM*(ϵ) (Theorem 2)

Proof of Theorem 2 Consider a graph G' output by Algorithm 1 applied to graph G , and assume the following activation process: Only nodes $i' \in N'$ with $|\text{cont}_{i'}| \leq k-1$ can be part of the seed set S'_0 . Then, for each node $i' \in N'$ and each time step $t \in \{0, 1, \dots\}$, we define the benefit to be the sum of edge weights of the edges between node i' and the activated neighbors (the graph is undirected, so that incoming and outgoing neighbors are identical). Formally, $b'_{i'}(S_t) = \sum_{j' \in \mathcal{N}_{i'} \cap S_t} w_{i', j'}$, where $\mathcal{N}_{i'} = \{j' \in N' : (i', j') \in E'\}$. Node i' is active at time $t \geq 1$ ($x_{i', t} = 1$) if and only if one of the following two hold: (i) node i' was active at time $t-1$ ($x_{i', t-1} = 1$), or (ii) node i' was not active at time $t-1$, but its benefit at time t exceeds its threshold $c'_{i'}$, i.e. $x_{i', t-1} = 0$ and $b'_{i'}(S_t) \geq c'_{i'}$. Hence, we are assuming an activation process on the auxiliary graph that is similar to the case of the linear threshold model. However, edges are undirected and weighted, and only certain types of nodes can be part of the seed set—in particular, the “node-nodes” representing individual nodes from the original graph G . Finally, the cardinality of S'_0 is defined as the number of original nodes in S'_0 , i.e. $|S'_0| = |\{i \in \text{cont}_{i'} : i' \in S'_0\}|$ (the definition of the cardinality of S_0 is unchanged).

We will show that any minimum seed set in graph G has a corresponding minimum seed set in graph G' of the same cardinality, and vice versa. We can then apply Algorithm 2, which finds a minimum seed set of graph G' in a maximum number of steps in $n^{k+1} \cdot [(k-1) \cdot \omega]^{O(\omega)}$, given a tree decomposition of G' with width $\omega - 1$. Because the construction of graph G' requires at most a constant factor of n^k operations, and the decomposition into a minimal tree requires linear time when ω is bounded and grows exponentially in ω otherwise (Bodlaender 1996), the result follows.

Algorithm 2: Algorithmic solution to minimum seed set problem.

Data: A nice tree decomposition T of graph G' , with nodes Z , subsets X_z , $z \in Z$, and width $\omega - 1$, rooted at \tilde{z} .

Result: A minimum seed set $(S'_0)^*$ of G' .

```

1 Initialization:  $red \leftarrow 0^\omega$ ;
2 for  $z \in Z$  where  $z$  is a leaf node do
3   for  $\tilde{c} \in \{0, \dots, k-1\}^\omega$  do
4     for  $\tilde{a} \in \{0, \dots, \omega\}^\omega$  do
5        $S_0^z[\tilde{c}, \tilde{a}] \leftarrow$  compute seed set through enumeration;
6 while  $z \in Z$  has not been traversed, but all its child nodes have do
7   if  $z$  is a replace node with child  $z_0$  then
8      $G_0^z = (G_0^z, E_0^z) \leftarrow G^z$ ;  $E_0^z \leftarrow E_0^z \setminus \{(u, i') : i' \in X_z\}$ ;
9     for  $\tilde{c} \in \{0, \dots, k-1\}^\omega$  do
10       $c \leftarrow \tilde{c}$ ;  $c(v) \leftarrow c'_v$ ;
11      for  $\tilde{a} \in \{0, \dots, \omega\}^\omega$  do
12         $\tilde{A} \leftarrow \{a \in \{0, \dots, \omega\}^\omega : a(i') = \tilde{a}(i') \ \forall i' \neq v\}$ ;  $a^* \leftarrow \arg \min_{a \in \tilde{A}} |S_0^{z_0}[c, a]|$ ;
13         $S_0^z[\tilde{c}, \tilde{a}] \leftarrow \begin{cases} S_0^{z_0}[c, a^*] & \text{if } \tilde{c}(u) = 0 \\ S_0^{z_0}[c, a^*] \cup \{u\} & \text{if } \tilde{c}(u) \neq 0, |cont(u)| < k; \\ \{i' \in N' : |cont(i')| < k\} & \text{otherwise.} \end{cases}$ 
14      for  $e = (u, i') \in \{(u, i') : i' \in X_z\}$  do
15         $E_0^z \leftarrow E_0^z \cup \{e\}$ ;  $S_0^{z'} \leftarrow S_0^z$ ;
16        for  $\tilde{c} \in \{0, \dots, k-1\}^\omega$  do
17           $\tilde{c}^u \leftarrow \tilde{c}$ ;  $\tilde{c}^{i'} \leftarrow \tilde{c}$ ;  $\tilde{c}^u(u) \leftarrow \max\{\tilde{c}(u) - w'_{i',u}, 0\}$ ;  $\tilde{c}^{i'}(i') \leftarrow \max\{\tilde{c}(i') - w'_{u,i'}, 0\}$ ;
18          for  $\tilde{a} \in \{0, \dots, \omega\}^\omega$  do
19             $S_0^z[\tilde{c}, \tilde{a}] \leftarrow \begin{cases} S_0^{z'}[\tilde{c}, \tilde{a}] & \text{if } \tilde{a}(i') = \tilde{a}(u) \\ S_0^{z'}[\tilde{c}^u, \tilde{a}] & \text{if } \tilde{a}(i') < \tilde{a}(u); \\ S_0^{z'}[\tilde{c}^{i'}, \tilde{a}] & \text{if } \tilde{a}(i') > \tilde{a}(u) \end{cases}$ 
20      if  $z$  is a join node with children  $z_0$  and  $z_1$  then
21        for  $\tilde{a} \in \{0, \dots, \omega\}^\omega$  do
22          for  $i' \in X_z$  do
23             $red(i') \leftarrow \sum_{\{j' \in X_z : (j', i') \in E' \text{ and } \tilde{a}(j') < \tilde{a}(i')\}} w'_{j', i'}$ ;
24          for  $\tilde{c} \in \{0, \dots, k-1\}^\omega$  do
25             $(\tilde{c}^{z_0}, \tilde{c}^{z_1}) \leftarrow \arg \min_{\{\tilde{c}^{z_0}, \tilde{c}^{z_1} : \tilde{c}^{z_0} + \tilde{c}^{z_1} = \tilde{c} + red\}} |S_0^{z_0}[\tilde{c}^{z_0}, \tilde{a}] \cup S_0^{z_1}[\tilde{c}^{z_1}, \tilde{a}]|$ ;
26             $S_0^z[\tilde{c}, \tilde{a}] \leftarrow S_0^{z_0}[\tilde{c}^{z_0}, \tilde{a}] \cup S_0^{z_1}[\tilde{c}^{z_1}, \tilde{a}]$ ;
27  $(S'_0)^* \leftarrow S_0^{\tilde{z}}[c, a]$ , with  $c(i') = c'_i \ \forall i' \in X_{\tilde{z}}$  and  $a = \arg \min_{\tilde{a}} S_0^{\tilde{z}}[\tilde{c}, \tilde{a}]$ ;

```

Equivalence of optimal seed sets. We start by showing that, for any minimal seed set that activates G , we can find a seed set of the same cardinality that activates G' .

Assume a minimal seed set \tilde{S}_0 of G . We show that there is a seed set of the same size S_0 where, for any node-node i' in G' with $|cont_{i'}| > 1$, all nodes in $cont_{i'}$ are part of S_0 . Take some path $p_r = (i_1, \dots, i_k)$ and, without loss of generality, assume that there is a $l \in \{1, \dots, k\}$, and nodes $i'_1, \dots, i'_{l-1}, i'_l \in N'$ with

$cont_{i'_1} = \{i_1\}, \dots, cont_{i'_{l-1}} = \{i_{l-1}\}$, and $cont_{i'_l} = \{i_l, \dots, i_k\}$. By definition, $\{i_l, \dots, i_k\}$ are part of the same paths. Call the set of paths P' and note that, by construction, i_{l-1} is also part of exactly these paths. The path $p_r \in P'$ and we assume, without loss of generality, that p_r is the path in P' that activates first. But this means that there is a time t at which all but one node of p_r are active (from being part of the seed set or because they are also part of previously activated paths). As none of the other paths in P' are active, none of the nodes i_{l-1}, \dots, i_k is active due to other paths' activation. Hence, of the nodes i_{l-1}, i_l, \dots, i_k , all but one are part of the seed set. Now assume that $i_{l-1}, i_l, \dots, i_{k-1} \in \tilde{S}_0$, but $i_k \notin \tilde{S}_0$. Clearly, the seed set $S_0 = \tilde{S}_0 \setminus \{i_{l-1}\} \cup \{i_k\}$ is of the same size and leads to the same activation process.

We now construct a seed set S'_0 based on S_0 with the same cardinality that fully activates G' . Let $S'_0 = \{i' \in N' : cont_{i'} = \{i_1, \dots, i_l\} \text{ with } i_1, \dots, i_l \in S_0 \text{ and } |cont_{i'}| \leq k-1\}$. To see that S'_0 fully activates G' , assume a node $i \in N$ that corresponds to some node $i' \in N'$ (i.e. $cont_{i'} = \{i\}$) activates at time t (i.e. $x_{i',t-1} = 0$, $x_{i',t} = 1$). Then, there must be a path p_r with $i \in p_r$ and $\sum_{j \in p_r, j \neq i} x_{j,t-1} = k-1$. The threshold of the corresponding path-node is $k-1$, while the total weight of the node-nodes must be at least $k-1$ (this clearly holds when $t=0$ by construction of the seed set, and it holds for $t > 0$ by induction). Hence, the path-node activates and, then, so do the connected node-nodes. The result follows by induction.

Next, we show that for any seed set that activates G' , there is a seed set of the same cardinality that activates G . Say S'_0 is the seed set of G' . It can contain only nodes $i' \in N'$ where $|cont_{i'}| \leq k-1$. We claim that $S_0 = \{i \in N : i \in cont_{i'} \text{ for some } i' \in S'_0\}$ fully activates G . To see this, consider the first node in G' to activate. As no node i' with $|cont_{i'}| = k$ is part of the seed set, this must be path-node. Say the node is j' and the corresponding path is p_r . We have that that $\sum_{\{i':(i',j') \in E' \text{ and } |cont_{i'}| \leq k-1\}} x_{i',0} \geq k-1$. But by definition of the seed set S_0 , we also have $x_{i,0} = x_{i',0}$ whenever $i \in cont_{i'}$. Hence, $\sum_{\{i:i \in p_r\}} x_{i,0} = \sum_{\{i':(i',j') \in E' \text{ and } |cont_{i'}| \leq k-1\}} x_{i',0} \geq k-1$. It follows that the path p_r activates in G . In G' after the corresponding node j' is active, all node-nodes corresponding to nodes on the path activate before some time $t' < \infty$. Similarly, in G , all nodes within the paths activate. By repeated application of the same argument, we see that all paths in G (and their nodes) must activate. \square

C.3. Extending the Algorithm to the General Thresholds Case (Theorem 3)

Generalizing the auxiliary graph. Algorithm 3 generates an auxiliary graph from $G \in \Gamma$ to solve the *MIN-SCTM* problem in the general case. With $gcd(x, y, \dots)$ we mean the greatest common divisor of all values x, y, \dots . Using this algorithm, we can prove Theorem 3.

Generalizing the solution algorithm. Note that a tree decomposition of G' is unaffected by the modifications introduced in the general case because for any edge (i', j') a corresponding edge (j', i') exists. Based on a tree decomposition, the minimum seed set problem on G' can again be solved using Algorithm 2. The only change we need to make to the solution algorithm is that in Lines 8 and 14, we consider pairs of edges (u, i') and (i', u) simultaneously. To define $\tilde{c}^u(u)$ and $\tilde{c}^{i'}(i')$, we use the edge that corresponds to the direction in which the indices have been defined already.

Proof of Theorem 3. The proof follows the same lines as the proof of Theorem 3. Regarding the equivalence of the auxiliary graph solution with the original solution, we note that a node-node $i' \in N'$ with $cont_{i'} = \{i\}$ that is not part of the seed set activates if and only if $\sum_{\{j' : cont_{j'} = \{j : j \in p_r\} \text{ and } i \in p_r\}} w'_{j',i'} \geq c'_{i'} \Leftrightarrow$

Algorithm 3: Construction of an auxiliary graph for the general case.**Data:** A graph $G \in \Gamma$ with paths P .**Result:** A directed graph $G' = (N', E')$ with weights $w'_{i',j'}$ for each edge $(i', j') \in E'$ and thresholds $c'_{i'}$ for each $i' \in N'$.

```

1 Initialization:  $i' \leftarrow 0; N' \leftarrow \emptyset; E' \leftarrow \emptyset; \mathcal{B} \leftarrow \emptyset; c'(\cdot) \leftarrow k - 1; w'(\cdot) \leftarrow k - 1; cont(\cdot) \leftarrow \emptyset; p(\cdot) \leftarrow \emptyset;$ 
2 Run Lines 2-8 of Algorithm 1;
3 for  $B \in \mathcal{B}$  do
4    $t \leftarrow \min_{j \in B} c_j; i \leftarrow \{j \in B : c_j = t\} \{1\}; g_1 \leftarrow gcd(t, w_r \forall r : p_r \in p(B));$ 
5    $i' \leftarrow i' + 1; N' \leftarrow N' \cup \{i'\}; cont(i') \leftarrow \{i\}; c'(i') \leftarrow \frac{t}{g_1};$ 
6   if  $|B| > 1$  then
7      $t' \leftarrow \max_{j \in B \setminus \{i\}} c_j; g_2 \leftarrow gcd(t', w_r \forall r : p_r \in p(B));$ 
8      $N' \leftarrow N' \cup \{i' + 1\}; cont(i' + 1) \leftarrow B \setminus \{i\}; c'(i' + 1) \leftarrow \frac{t'}{g_2};$ 
9   for  $p_r \in p(B)$  do
10     $j'' \leftarrow \{j'' \in N' : cont(j'') = \{i : i \in p_r\}\} \{1\};$ 
11     $E' \leftarrow E' \cup \{(i', j''), (j'', i')\}; w'(i', j'') \leftarrow 1; w'(j'', i') \leftarrow \frac{w_r}{g_1};$ 
12    if  $|B| > 1$  then
13       $E' \leftarrow E' \cup \{(i' + 1, j''), (j'', i' + 1)\}; w'(i' + 1, j'') \leftarrow |B| - 1; w'(j'', i' + 1) \leftarrow \frac{w_r}{g_2};$ 
14    if  $|B| > 1$  then
15       $i' \leftarrow i' + 1;$ 

```

$\sum_{\{p_r : i \in p_r\}} w_r \geq c'_i gcd_i \Leftrightarrow \sum_{\{p_r : i \in p_r\}} w_r \geq c_i$. Similarly, a path-node j' corresponding to path p_r activates if and only if $\sum_{\{i' : (i', j') \in E\}} x_{i',t} w_{i',j'} \geq c'_{j'} \Leftrightarrow \sum_{\{i' : (i', j') \in E'\}} x_{i',t} |cont_{i'}| \geq k - 1$. Because $i \in cont_{i'}$ for any such node i' implies that $i \in p_r$, this is the case whenever $k - 1$ of its nodes are active. This indicates that the remaining node has the potential to receive the path's benefit. \square

Appendix D: Results Relating to the Random Generative Model**D.1. Treewidth of Randomly Constructed Graphs (Theorem 4)**

Preliminaries. We use the following standard Landau notation. Let $f(n)$ and $g(n)$ be two functions. We say that f and g are equivalent and write $f(n) \sim g(n)$ if $\lim_{n \rightarrow \infty} \frac{f(n)}{g(n)} \rightarrow 1$. We say that $f(n)$ dominates $g(n)$ and write $f(n) \gg g(n)$ if $\lim_{n \rightarrow \infty} \frac{f(n)}{g(n)} = \infty$. On the contrary, we say that $f(n)$ is dominated by $g(n)$ and write $f(n) \ll g(n)$ if $\lim_{n \rightarrow \infty} \frac{f(n)}{g(n)} = 0$. We sometimes also write $f(n) = \omega(g(n))$ for $f(n) \gg g(n)$ and $f(n) = o(g(n))$ for $f(n) \ll g(n)$. Finally, we say that an event E_n occurs *with high probability (whp)* if $\lim_{n \rightarrow \infty} P(E_n) = 1$. The proof further necessitates the introduction of *random geometric graphs*:

DEFINITION 4. Let $d \geq 1$ and consider n points (y_1, \dots, y_n) sampled uniformly from $[0, 1]^d$. A random geometric graph G in dimension d and with radius $r := r(n)$ is a graph with (y_1, \dots, y_n) as vertices and edges between y_i and y_j if $\|y_i - y_j\| \leq r$, where $\|\cdot\|$ is some norm over \mathbb{R}^d .

Note that r conditions how connected the graph is: the higher r , the more connected, the lower, the less. When $d = 1$, we call random geometric graphs *random interval graphs*.

It is well-known that random interval graphs are chordal graphs. The following results on random interval graphs are also known (see, e.g., McDiarmid and Müller (2011, Theorem 1.2) for part (i) and Godehardt and Jaworski (1996, Theorem 12) for (ii)).

PROPOSITION 3. Let G be a random interval graph on n nodes and $\zeta(G)$ its clique number.

(i) If $r \geq \frac{\log(n) + \log(\log(n))}{n}$, then G is connected with high probability.

(ii) If $nr \gg \log(n)$ (but still $r \rightarrow 0$) then $\zeta(G_n) \sim nr$ whp.

In fact, a slightly stronger result holds for (i) under this condition, but (i) is sufficient for our purposes. We also use two results known in the treewidth literature (see, e.g., Eppstein 2002).

PROPOSITION 4. For a graph G , we let $tw(G)$ be its treewidth. The following properties hold:

(i) Let G and H be two graphs such that H is a subgraph of G . Then, $tw(H) \leq tw(G)$.

(ii) Let G be a chordal graph and let $\zeta(G)$ be its clique number, then $tw(G) = \zeta(G) + 1$.

With these results in hand, we can now prove Theorem 4.

Proof of Theorem 4. The main difficulty of the proof is showing that there exists a random interval graph I on $n + m$ nodes with radius

$$r = k \cdot \frac{\log(n) + \log(\log(n))}{n} \quad (2)$$

such that G' is a subgraph of I whp. If this is true, using Proposition 4 part (i), we obtain that $tw(G') \leq tw(I)$. As I is a random interval graph and so chordal, we deduce that $tw(I) = \zeta(I) + 1$ using Proposition 4 (ii), and, then, $tw(G') \leq \zeta(I) + 1$. As $m = \omega(n)$, we have

$$(n + m)r = k \cdot (n + m) \left(\frac{\log(n) + \log(\log(n))}{n} \right) \gg \log(n + m),$$

though $r \rightarrow 0$. This enables us to use Proposition 3 (ii) to conclude that

$$\begin{aligned} tw(G') &\leq (n + m)r = k \cdot (n + m) \left(\frac{\log(n) + \log(\log(n))}{n} \right) \\ &= k \cdot \left(1 + \frac{m}{n} \right) (\log(n) + \log(\log(n))) \\ &= k \cdot \frac{m}{n} \log(n) \cdot (1 + o(1)). \end{aligned}$$

It only remains to construct a random interval graph I with radius r as given in (2) that contains G' as a subgraph to be done. The construction of I is straightforward: its vertices are taken to be those of G' which are distributed uniformly at random on $[0, 1]$ and we connect two vertices of I if their distance is less than equal to r as given in (2). Thus defined, I is a random interval graph with $n + m$ vertices and radius r as given in (2). To ensure that G' is a subgraph of I , we need to take r large enough so that any point z_j is connected whp to at least one point out of (y_1^k, \dots, y_N^k) for $k = 1, \dots, K$, and this for any $j = 1, \dots, m$. Note that if this is true, then it will automatically follow that, whp, there is an edge between z_j and $y_{i_0}^k$ for all $k = 1, \dots, K$, as $y_{i_0}^k$ is situated at minimum distance, which will imply that G is a subgraph of I whp.

To see why r as defined in (2) is indeed large enough, fix j and k , and consider only the points z_j, y_1^k, \dots, y_N^k on the $[0, 1]$ interval. They are uniformly distributed: we can thus build a random interval graph by joining any two points out of the $N + 1$ distant by r . From Proposition 3(i), as r given in (2) satisfies the following inequality:

$$r \geq \frac{\log(n/k) + \log(\log(n/k))}{n/k},$$

the graph is connected whp. Thus, z_j has at least one neighbor in (y_1^k, \dots, y_N^k) and the result holds. \square

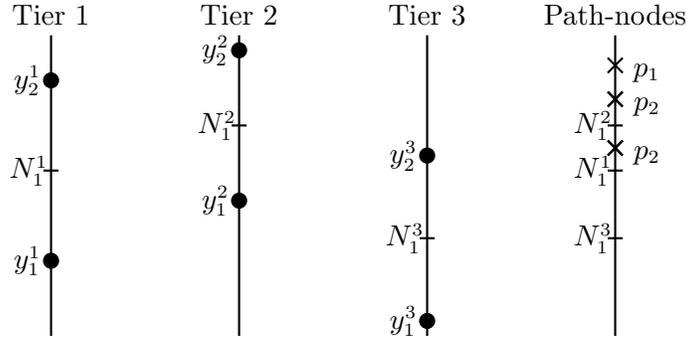


Figure 12 Illustration of the proof of Proposition 2

D.2. Worst-Case Graph (Proposition 2)

Proof of Proposition 2. Without loss of generality, we assume that for a given Tier l , $0 \leq y_1^l \leq \dots \leq y_n^l$. For any segment $[y_i^l, y_{i+1}^l]$ with $i = 1, \dots, n-1$, let N_i^l be its midpoint which we refer to as a *switch point* (see Figure 12 for an illustration). We also let $N_0^l = 0$ and $N_n^l = 1$. Create these switch points for all tiers. Per tier, there are $n-1$ switch points which are not simultaneously end points. Then consolidate the switch points of every tier on the path-node segment (again, see Figure 12 for an illustration). We claim the following: the number of distinct paths in G_{wc} correspond to the number of intervals thus created on the path-node segment by the switch points. As there are $n-1$ switch points (apart from the end points) per tier, there will be $k \cdot (n-1) = n-k$ switch points on the path-node segment. This will lead to a number $n-k+1$ of intervals, and our result follows.

We now show the claim. To do this, we argue that two path-nodes in G'_{wc} give rise to two distinct paths in G_{wc} if and only if the two path-nodes are in distinct intervals. First, assume that path-nodes p_1 and p_2 are in the same interval (as depicted in Figure 12). For each tier l , p_1 has a switch point N_i^l closest on its left, and a switch point N_{i+1}^l closest on its right. By assumption, p_2 shares these closest switch points on both the right-hand and left-hand side for all tiers. Thus, if we consider tier l , as both p_1 and p_2 are sandwiched between N_i^l and N_{i+1}^l , node-node y_{i+1}^l will be the closest node-node for both p_1 and p_2 on tier l , and p_1 and p_2 will connect to y_{i+1}^l on tier l . This will be the case for all tiers and so p_1 and p_2 describe the same path in G_{wc} . Now assume that path-nodes p_2 and p_3 are *not* in the same interval (as depicted in Figure 12). There is then a tier l such that the closest switch point either on the left-hand side or on the right-hand side differs between p_2 and p_3 : assume that $p_2 \in [N_i^l, N_{i+1}^l]$ whereas $p_3 \in [N_j^l, N_{j+1}^l]$ with $j \neq i$. Then when connecting p_2 to a node-node in tier l , we would pick y_{i+1}^l , whereas we would connect p_3 to y_{j+1}^l , a different node-node. Thus the corresponding paths in G_{wc} will differ on the nodes in tier l . \square

References for the Appendix

- Baggini J (2015) Why are foodies turning their backs on Fairtrade? Accessed March 31, 2021, <https://tinyurl.com/yxk3oyxo>.
- Ben-Zwi O, Hermelin D, Lokshtanov D, Newman I (2011) Treewidth governs the complexity of target set selection. *Discrete Optimization* 8(1):87–96.

- Bodlaender HL (1996) A linear-time algorithm for finding tree-decompositions of small treewidth. *SIAM Journal on Computing* 25(6):1305–1317.
- Chen N (2009) On the approximability of influence in social networks. *SIAM Journal on Discrete Mathematics* 23(3):1400–1415.
- Eppstein D (2002) Subgraph isomorphism in planar graphs and related problems. *Graph Algorithms and Applications I*, 283–309 (World Scientific).
- FoodLogiQ (2020) Recall + Response. Accessed March 31, 2021, <https://tinyurl.com/y6rcxysu>.
- Godehardt E, Jaworski J (1996) On the connectivity of a random interval graph. *Random Structures & Algorithms* 9(1-2):137–161.
- Grocery Manufactureres Associations, Covington & Burling, Ernst & Young (2011) Capturing recall costs: Measuring and recovering the losses. Accessed March 31, 2021, <https://tinyurl.com/y5lfx3hb>.
- IBM (2020) Customize ibm food trust for your business. Accessed March 31, 2021, <https://tinyurl.com/y585tyy7>.
- Kempe D, Kleinberg J, Tardos É (2003) Maximizing the spread of influence through a social network. *Proceedings of the Ninth ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 137–146.
- Lenzing (2019) Lenzing traces its fibers with blockchain technology. Accessed March 31, 2021, <https://tinyurl.com/yxc66772>.
- Lock H (2019) Fight the fakes: How to beat the \$200bn medicine counterfeiters. Accessed March 31, 2021, <https://tinyurl.com/y4ukkpeo>.
- McDiarmid C, Müller T (2011) On the chromatic number of random geometric graphs. *Combinatorica* 31(4):423–488.
- Orlowski A (2019) Building consumer trust: Wholechain pilots blockchain traceability tech. Accessed March 31, 2021, <https://tinyurl.com/yyevrofo>.
- Provenance (2020) Buy better, with confidence. Accessed March 31, 2021, <https://tinyurl.com/yxc66772>.
- Retail Leader (2016) Manufacturers accountable for supply chain transparency, consumer trust. Accessed March 31, 2021, <https://tinyurl.com/y3uz2kr4>.
- Safefood 360 (2020) Recall & Withdrawal. Accessed March 31, 2021, <https://tinyurl.com/yx8qzflg>.
- Thorlakson T (2018) A move beyond sustainability certification: The evolution of the chocolate industry’s sustainable sourcing practices. *Business Strategy and the Environment* 27(8):1653–1665.
- Unilever (2020) Our approach to sustainable sourcing. Accessed March 31, 2021, <https://tinyurl.com/y3rhola2>.
- Wilson T (2014) Understanding the origin of products is key to ending supply chain scandals. Accessed March 31, 2021, <https://tinyurl.com/yykeao9q>.

Wowak KD, Craighead CW, Ketchen Jr DJ (2016) Tracing bad products in supply chains: The roles of temporality, supply chain permeation, and product information ambiguity. *Journal of Business Logistics* 37(2):132–151.