

WhatTheWikiFact: Fact-Checking Claims Against Wikipedia

Anton Chernyavskiy, Dmitry Ilvovsky
HSE University
Moscow, Russia
aschernyavskiy_1@edu.hse.ru
dilvovsky@hse.ru

Preslav Nakov
Qatar Computing Research Institute
HBKU
Doha, Qatar
pnakov@hbku.edu.qa

Abstract

The rise of Internet has made it a major source of information. Unfortunately, not all information online is true, and thus a number of fact-checking initiatives have been launched, both manual and automatic. Here, we present our contribution in this regard: *WhatTheWikiFact*, a system for automatic claim verification using Wikipedia. The system predicts the veracity of an input claim, and it further shows the evidence it has retrieved as part of the verification process. It shows confidence scores and a list of relevant Wikipedia articles, together with detailed information about each article, including the phrase used to retrieve it, the most relevant sentences it contains, and their stances with respect to the input claim, with associated probabilities.

1 Introduction

The Internet is abundant in platforms that allow users to share information online such as social networks, blogs, and forums. Unfortunately, not all such information is true, and thus there is a need for tools that can help users check the veracity of questionable claims they come across online. As manual fact-checking is a complex and time-consuming task, it is important to develop tools that can help automate the process of fact-checking at all its stages.

Various task formulations have been proposed to automate fact-checking, e.g., RumourEval (Gorrell et al., 2019), the SemEval task on Fact Checking in Community Question Answering Forums (Mihaylova et al., 2019), the Fake News Challenge (Hanselowski et al., 2018a), and the FEVER task on Fact Extraction and VERification (Thorne et al., 2018b). Here, we focus on the FEVER task, as it offers a large-scale training dataset, and enables explainable systems.

Interestingly, despite the popularity of research using the FEVER task formulation and its dataset, to the best of our knowledge, there are no publicly available running systems based on it. Here we aim to bridge this gap with our *WhatTheWikiFact* system,¹ which we describe in detail below.

WhatTheWikiFact allows users to check a claim, or a set of claims, against Wikipedia. The system searches for potentially relevant information, by first identifying relevant documents, and then the relevant sentences within them. Then, it analyzes each statement submitted as an input against all extracted text fragments and reports its final decision: Truth, Lying, or Not Enough Info. *WhatTheWikiFact* further displays all the information it used to make its decision, together with intermediate results for each verified statement, which includes (i) a list of the titles of the most relevant documents with links to the corresponding Wikipedia pages, and (ii) detailed information about each document as a table of retrieved text fragments (position in the document | text fragment), and a bar chart showing the confidence of the classifier in each label (Supports, Refutes or Not Enough Info) for each text fragment. This allows the user to quickly analyze and to possibly correct the result.

The remainder of this paper is organized as follows: Section 2 discusses related work. Section 3 describes the dataset we used for training. Section 4 offers an overview of the system and its components. Section 5 discusses the core implementation details. Section 6 presents some evaluation results. Section 7 describes the system interface and its functionality, with some examples. Finally, Section 8 concludes and discusses future work.

¹The *WhatTheWikiFact* system is available online at <http://extmon.centralus.cloudapp.azure.com:8501/>

2 Related Work

Many task formulations have been proposed to address the spread of misinformation and disinformation online, and for each formulation, a number of approaches have been tried. Some good readings on the topic include surveys such as that by [Shu et al. \(2017\)](#), who adopted a data mining perspective on “fake news” and focused on social media. Another survey ([Zubiaga et al., 2018](#)) studied rumor detection in social media. The survey by [Thorne and Vlachos \(2018\)](#) took a fact-checking perspective on “fake news” and related problems. [Li et al. \(2016\)](#) covered truth discovery in general. [Lazer et al. \(2018\)](#) offered a general overview and discussion on the science of “fake news”, while [Vosoughi et al. \(2018\)](#) focused on the process of proliferation of true and false news online. Other recent surveys focused on stance detection ([Küçük and Can, 2020](#)), on propaganda ([Da San Martino et al., 2020](#)), on social bots ([Ferrara et al., 2016](#)), on false information ([Zannettou et al., 2019](#)) and on bias on the Web ([Baeza-Yates, 2018](#)). Some very recent surveys focused on stance for misinformation and disinformation detection ([Hardalov et al., 2021](#)), on automatic fact-checking to assist human fact-checkers ([Nakov et al., 2021a](#)), on predicting the factuality and the bias of entire news outlets ([Nakov et al., 2021c](#)), and on multimodal disinformation detection ([Alam et al., 2021](#)).

2.1 General Fact-checking

The primary focus of this paper is fact-checking of claims. Relevant research includes work on credibility assessment in Twitter, which has been addressed using user-based, message-based, topic-based, and propagation-based features ([Castillo et al., 2011](#)). [Rashkin et al. \(2017\)](#) studied veracity by analyzing the linguistic features used in the claims. [Wang \(2017\)](#) presented the LIAR dataset, which focuses on fact-checking using only the input claim (its text and metadata). [Lee et al. \(2020a\)](#) revealed that misinformation can be discovered using perplexity analysis of the input claim, as perplexity is higher for false statements (as scored by a language model trained on reliable information on the topic of the claim). A number of studies were also conducted on the feasibility of using language models for open-domain question answering and further as fact-checkers ([Petroni et al., 2019](#); [Roberts et al., 2020](#); [Lee et al., 2020b](#)). All this work was non-explainable.

An even more relevant research direction is on explainable, evidence-based fact-checking. [Shaar et al. \(2020\)](#) developed two datasets for detecting previously fact-checked claims, which were extended and used in CheckThat-2020 and CheckThat-2021 ([Barrón-Cedeño et al., 2020](#); [Nakov et al., 2021b](#)). [Chen et al. \(2020\)](#) proposed table-based fact verification, and [Gad-Elrab et al. \(2019\)](#) used knowledge graphs.

Yet another relevant research direction is on stance detection as an element of fact-checking. It was the objective of the Fake News Challenge shared task ([Hanselowski et al., 2018a](#); [Riedel et al., 2017](#)), as well as of the RumourEval shared tasks at SemEval in 2017 and 2019 ([Derczynski et al., 2017](#); [Gorrell et al., 2019](#)).

2.2 Fact-Checking Using Wikipedia

In our system, we use the FEVER dataset and task formulation, which enables Wikipedia-based explainable fact-checking [Thorne et al. \(2018a\)](#). The dataset was used in two shared tasks, FEVER and FEVER 2.0 ([Thorne et al., 2019](#)), where most participating systems had the following three components: (i) document retrieval, (ii) sentence retrieval, and (iii) natural language inference (NLI). [Otto \(2018\)](#); [Chakrabarty et al. \(2018\)](#); [Hanselowski et al. \(2018b\)](#); [Alonso-Reina et al. \(2019\)](#) used a search API to retrieve relevant documents, while [Yoneda et al. \(2018\)](#) used logistic regression. Word Mover’s Distance ([Chakrabarty et al., 2018](#)), TF.IDF ([Malon, 2018](#)), ESIM ([Hanselowski et al., 2018b](#)), logistic regression ([Yoneda et al., 2018](#)), BERT ([Stammbach and Neumann, 2019](#)) were used for sentence retrieval. DAM ([Otto, 2018](#)), ESIM ([Hidey and Diab, 2018](#)), Random Forest ([Reddy et al., 2018](#)), LSTM ([Nie et al., 2019](#)) and BERT ([Stammbach and Neumann, 2019](#)) were used for NLI. We use a similar overall architecture.

2.3 System Demonstrations

Several demos have addressed the task of fact-checking. This includes *Hoaxy* ([Shao et al., 2016](#)), for tracking misinformation from social networks and news sites, *CredEye*, ([Popat et al., 2018](#)) for credibility assessment, *Tracy* ([Gad-Elrab et al., 2019](#)), which uses rules and knowledge graphs, *STANCY* ([Popat et al., 2019](#)) for stance detection using BERT augmented with consistency constraints, and *FAKTA* ([Nadeem et al., 2019](#)), which was trained on the FEVER dataset, but focused on stance and on evidence extraction from the Web.

Claim	Jackie Chan has released an album.
Evidence	
Title	Jackie Chan
Sentence	He is an operatically trained vocalist and is also a Cantopop and Mandopop star, having released a number of albums and sung many of the theme songs for the films in which he has starred.
Label	
Supports	

Figure 1: Example of a manually labeled claim from the FEVER dataset.

Unlike these systems, we perform textual evidence-based fact-checking using Wikipedia, following the FEVER formulation of the task. While the FAKTA system is also trained on data from FEVER, it focuses on the stance of a document, e.g., retrieved from the Web, with respect to the input claim, while our system makes a prediction about a claim’s factuality and gives sentence-level evidence from Wikipedia to explain its decision.

3 Data

We train our system on the FEVER dataset (Thorne et al., 2018a), which includes a dump of 5.4M Wikipedia pages, and 220K statements labeled with one of the following three classes: `Supports`, `Refutes` or `Not Enough Info` (An example is shown in Figure 1). For the former two labels, there is also evidence, i.e., a sentence or a set of sentences that allow one to make a verdict about the veracity of the input claim, while the `Not Enough Info` label indicates that there is no enough evidence in Wikipedia to prove or to refute the claim. There can be different evidence sets for a claim, but all of them support the same label.

4 System Overview

Figure 2 illustrates our general architecture, which is similar to the one described in (Chernyavskiy and Ilvovsky, 2019). First, the Document Retrieval (DR) module finds potentially relevant documents from Wikipedia. Second, the Sentence Retrieval (SR) module extracts the top-20 most relevant sentences from these documents. Third, the Natural Language Inference (NLI) module classifies each claim–sentence pair as support/refute/NOI. Finally, the aggregation module makes a final prediction.

4.1 Document Retrieval

We use the Python MediaWiki API² to retrieve relevant documents from Wikipedia. We pass that API the results of our query generation module, which uses a pre-trained constituency parser based on ELMo (Joshi et al., 2018) to extract noun phrasism, and we then use all these noun phrases as separate queries. We further generate a query from the part of the claim up to the head word, which we extract using a pre-trained dependency parser (Dozat and Manning, 2017). For each query, we retain the top-3 returned documents. As there can be many queries for an input claim, we additionally filter the results to improve *WhatTheWikiFact*’s inference speed. To this end, we process the input claim and all retrieved titles shortened to the first bracket symbol using the Porter Stemmer (Porter, 1980), and we select them for the final set only if they are fully contained in the input claim.

4.2 Sentence Retrieval

This component selects the set of top-20 most relevant sentences from the documents retrieved by the DR component. The relevance is estimated using the cosine distance between Term Frequency Inverse Document Frequency (TF.IDF) representations of the claim and of the document titles. We apply a variant of TF.IDF that uses binarization of the non-zero term counts and considers words with the document fraction higher than 0.85 as stopwords. Note that there are no thresholds for the relevance score, and thus all retrieved sentences can have minimal zero scores if all documents are irrelevant.

4.3 Natural Language Inference

The NLI component takes as input the source claim, a separator, a sentence retrieved by the SR component, another separator, and the title of the document. Here, we use all retrieved sentences independently. For this component, we use BERT (Devlin et al., 2019), which we fine-tune using a balanced training dataset. In particular, we use instances of the classes `Supports` and `Refutes` from the training set, and the top-3 retrieved sentences for each claim, which we label as `Not Enough Info`.

²<http://wikipedia.readthedocs.io/en/latest/>

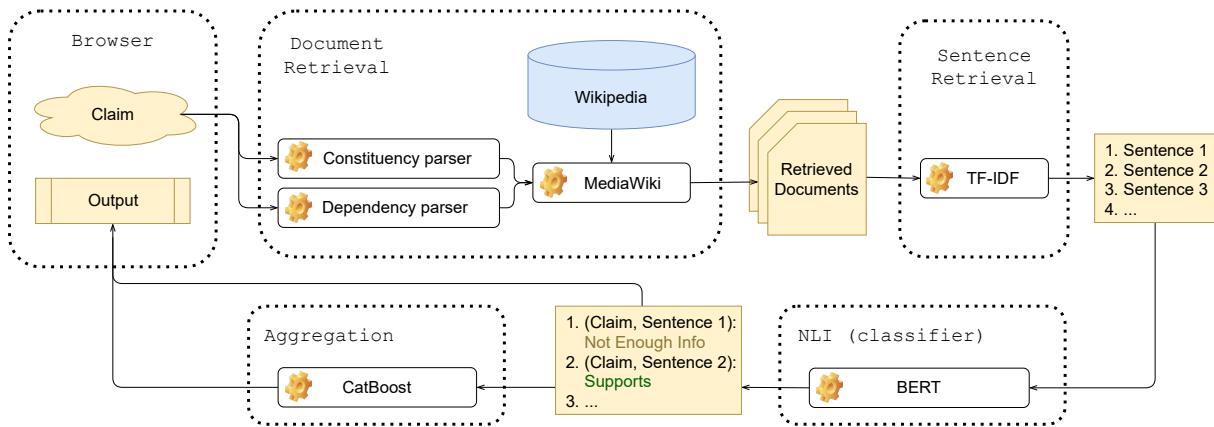


Figure 2: The pipeline of the *WhatTheWikiFact* system.

4.4 Aggregation

We use CatBoost gradient boosting (Prokhorenkova et al., 2018) to aggregate the sentence-level predictions of the NLI component. We train the model on part of the validation set using the stacked label probabilities predicted by the NLI model. Thus, we use 60-dimensional (3 scores for 20 sentences) feature vectors, potentially padded by zeros in case of lack of sentences in the retrieval phase.

We further report the maximal probability of the Supports (Refutes) class among all sentences scaled by the percentage of such sentences among the possibly relevant ones, i.e., excluding Not Enough Info, as the confidence score for Truth (Lying) predictions and the minimal probability of the Not Enough Info, otherwise.

5 System Architecture

The *WhatTheWikiFact* system has a server and a client parts, which are connected via a REST API. The client part is implemented using the Streamlit framework³—it is the GUI part, that is, the interface in the browser. The server part is implemented using the Fast API⁴. We use Allen NLP library (Gardner et al., 2018) for the constituency and the dependency parsers, and the official repository for BERT.⁵ We preload these models on the server and we serve them using POST requests made by the client part. The parsers receive a piece of text as input, which is further tokenized and stemmed using the NLTK library (Bird and Loper, 2004). BERT receives a list of sentence pairs, which are further processed using the BERT tokenizer.

³<http://streamlit.io/>

⁴<http://fastapi.tiangolo.com/>

⁵<http://github.com/google-research/bert>

6 Evaluation

The approach we use in our *WhatTheWikiFact* system achieves an accuracy of 73.22 and a FEVER score of 67.44 on the test part of the FEVER dataset. These scores are better than those for the best system at the FEVER shared task (Thorne et al., 2018b), which had an accuracy of 68.21, and a FEVER score of 64.21. They are also on par with the best system from the builder phase of the FEVER2.0 shared task (Thorne et al., 2019), which had a FEVER score of 68.46. Of course, there have been some better results reported in the literature since then, and we also had stronger results in our offline experiments. Yet, we use this particular system, as we need real-time execution, which requires certain compromise in terms of accuracy for the sake of speed of execution.

Our analysis shows that the biggest fraction of the system classification errors are in distinguishing Not Enough Info sentences from the rest. At the same time, the quality of the retriever part is almost 91%, which means that in 91% of the cases, we do retrieve correct evidence for the final set of potentially relevant sentences. Therefore, such cases can be easily analyzed by the user in our system’s output.

7 User Interface

The system allows the user to enter a list of up to 5 claims to verify, separated by line breaks.

Figure 3 shows a snapshot of *WhatTheWikiFact*’s output for an input claim. We can see that the system offers an overview of the verification results, which includes a verdict, the system’s confidence in that verdict, and a list of possibly relevant documents: title and a link to the Wikipedia page.

WhatTheWikiFact: Fact-Checking Claims Against Wikipedia

This tool performs fact checking by comparing information with Wikipedia data.

Enter claims here (one per row, max 5)

Napoleon Bonaparte declared Joan of Arc a national symbol

Verify

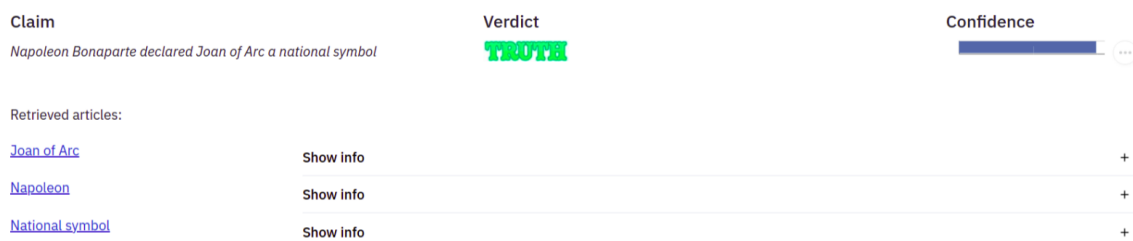


Figure 3: Screenshot of what our *WhatTheWikiFact* system outputs when verifying the claim: “*Napoleon Bonaparte declared Joan of Arc a national symbol.*”

Figure 3 shows that the system has retrieved three articles for the input claim “*Napoleon Bonaparte declared Joan of Arc a national symbol.*” However, this does not mean that the system considers all of these articles as relevant. It just means that they contain the top-20 most relevant sentences.

By clicking on the “show info” button, the user can expand the panel with details about each document. As a result, the following information will be shown (as illustrated in Figure 4):

- **The part of the input claim** that was used to retrieve the document.
- **A bar chart of the predicted stance labels for the input claim with respect to each retrieved sentence.** The stance is expressed as one of the classes *Supports* (SUP), *Refutes* (REF), or *Not Enough Info* (NEI). The chart further shows the class probability, which is also represented as the bar height, sentence number, and label, which is also indicated with the corresponding color. Note that there are three bars for each sentence, i.e., one for each label. Moreover, the bars are ordered (grouped) by labels.
- **A table of the most relevant sentences.** Each sentence in that table is supplemented with the position out of the length of the document, which is shown in lines for easy matching with the bar chart.

For example, Figure 4 shows that the article “Joan of Arc” is relevant for checking the input claim, as it includes a sentence that supports that claim. Other retrieved sentences in this document have almost 100% probability of a *Not Enough Info* label, and are thus irrelevant. The analysis of the remaining two documents—“Napoleon”, retrieved by the phrase “Napoleon Bonaparte”; “National symbol”, retrieved by the phrase “a national symbol”—will reveal that they are fully irrelevant. With these retrieval results, the user can manually investigate the boundary (doubtful) classification cases, especially for veracity prediction with low confidence or in case of *Not Enough Info*.

8 Conclusion and Future Work

We have presented *WhatTheWikiFact*, a system for automatic claim verification using Wikipedia. It reports the veracity for each input claim supplemented with evidence retrieved during the verification process. It also shows confidence scores and a set of relevant Wikipedia articles. Moreover, it allows users to get detailed information about each article, including the phrase used to retrieve it, a list of its most relevant sentences, and their stance probabilities regarding the input claim.

In future work, we plan to implement a more accurate model by distilling knowledge from a larger model. Another direction we want to explore is to add new languages for verification using local Wikipedias, which can be implemented without additional training, e.g., using multilingual BERT.

[Joan of Arc](#)



Figure 4: Screenshot showing details about “Joan of Arc”, a Wikipedia article retrieved when verifying the claim “Napoleon Bonaparte declared Joan of Arc a national symbol.”

Acknowledgments

This research was done within the framework of the HSE University Basic Research Program.

It is also part of the Tanbih mega-project,⁶ which is developed at the Qatar Computing Research Institute, HBKU, and aims to limit the impact of “fake news,” propaganda, and media bias by making users aware of what they are reading.

Ethics and Broader Impact

We would like to point out that our demo could potentially be misused by malicious actors, e.g., to restrict freedom of speech. Yet, our actual intent is to promote media literacy and critical thinking by letting people check and explore evidence about claims of their interest. We believe that the benefit of this kind of research outweighs the potential downsides.

⁶<http://tanbih.qcri.org/>

We would also like to warn that the use of large-scale Transformers requires a lot of computations and the use of GPUs/TPUs for training, which contributes to global warming. This is a bit less of an issue in our case, as we do not train such models from scratch; rather, we fine-tune them on relatively small datasets. Moreover, running on a CPU for inference, once the model has been fine-tuned (which is our case here), is perfectly feasible as CPUs contribute much less to global warming.

References

- Firoj Alam, Stefano Cresci, Tanmoy Chakraborty, Fabrizio Silvestri, Dimiter Dimitrov, Giovanni Da San Martino, Shaden Shaar, Hamed Firooz, and Preslav Nakov. 2021. A survey on multimodal disinformation detection. *arXiv/2103.12541*.
- Aimée Alonso-Reina, Robiert Sepúlveda-Torres, Estela Saquete, and Manuel Palomar. 2019. [Team GPLSI. approach for automated fact checking](#). In *Proceedings of the Second Workshop on Fact Ex-*

- traction and VERification (FEVER)*, pages 110–114, Hong Kong, China. Association for Computational Linguistics.
- Ricardo Baeza-Yates. 2018. Bias on the web. *Commun. ACM*, 61(6):54–61.
- A. Barrón-Cedeño, Tamer Elsayed, Preslav Nakov, Giovanni Da San Martino, Maram Hasanain, Reem Suwaileh, Fatima Haouari, Nikolay Babulkov, Bayan Hamdan, Alex Nikolov, Shaden Shaar, and Zien Sheikh Ali. 2020. Overview of checkthat 2020: Automatic identification and verification of claims in social media. In *CLEF*.
- Steven Bird and Edward Loper. 2004. *NLTK: The natural language toolkit*. In *Proceedings of the ACL Interactive Poster and Demonstration Sessions*, pages 214–217, Barcelona, Spain. Association for Computational Linguistics.
- Carlos Castillo, Marcelo Mendoza, and Barbara Poblete. 2011. *Information credibility on twitter*. In *Proceedings of the 20th International Conference on World Wide Web, WWW '11*, page 675–684, New York, NY, USA. Association for Computing Machinery.
- Tuhin Chakrabarty, Tariq Alhindi, and Smaranda Muresan. 2018. *Robust document retrieval and individual evidence modeling for fact extraction and verification*. In *Proceedings of the First Workshop on Fact Extraction and VERification (FEVER)*, pages 127–131, Brussels, Belgium. Association for Computational Linguistics.
- Wenhu Chen, Hongmin Wang, Jianshu Chen, Yunkai Zhang, Hong Wang, Shiyang Li, Xiyong Zhou, and William Yang Wang. 2020. *Tabfact: A large-scale dataset for table-based fact verification*. In *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net.
- Anton Chernyavskiy and Dmitry Ilvovsky. 2019. *Extract and aggregate: A novel domain-independent approach to factual data verification*. In *Proceedings of the Second Workshop on Fact Extraction and VERification (FEVER)*, pages 69–78, Hong Kong, China. Association for Computational Linguistics.
- Giovanni Da San Martino, Stefano Cresci, Alberto Barrón-Cedeño, Seunghak Yu, Roberto Di Pietro, and Preslav Nakov. 2020. A survey on computational propaganda detection. In *Proceedings of the Twenty-Ninth International Joint Conference on Artificial Intelligence, IJCAI-PRICAI '20*, pages 4826–4832.
- Leon Derczynski, Kalina Bontcheva, Maria Liakata, Rob Procter, Geraldine Wong Sak Hoi, and Arkaitz Zubiaga. 2017. *SemEval-2017 task 8: RumourEval: Determining rumour veracity and support for rumours*. In *Proceedings of the 11th International Workshop on Semantic Evaluation (SemEval-2017)*, pages 69–76, Vancouver, Canada. Association for Computational Linguistics.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. *BERT: Pre-training of deep bidirectional transformers for language understanding*. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Timothy Dozat and Christopher D. Manning. 2017. *Deep biaffine attention for neural dependency parsing*. In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings*. OpenReview.net.
- Emilio Ferrara, Onur Varol, Clayton Davis, Filippo Menczer, and Alessandro Flammini. 2016. The rise of social bots. *Commun. ACM*, 59(7):96–104.
- Mohamed H. Gad-Elrab, Daria Stepanova, Jacopo Urbani, and Gerhard Weikum. 2019. *Tracy: Tracing facts over knowledge graphs and text*. In *The World Wide Web Conference, WWW '19*, page 3516–3520, New York, NY, USA. Association for Computing Machinery.
- Matt Gardner, Joel Grus, Mark Neumann, Oyvind Tafjord, Pradeep Dasigi, Nelson F. Liu, Matthew Peters, Michael Schmitz, and Luke Zettlemoyer. 2018. *AllenNLP: A deep semantic natural language processing platform*. In *Proceedings of Workshop for NLP Open Source Software (NLP-OSS)*, pages 1–6, Melbourne, Australia. Association for Computational Linguistics.
- Genevieve Gorrell, Elena Kochkina, Maria Liakata, Ahmet Aker, Arkaitz Zubiaga, Kalina Bontcheva, and Leon Derczynski. 2019. *SemEval-2019 task 7: RumourEval, determining rumour veracity and support for rumours*. In *Proceedings of the 13th International Workshop on Semantic Evaluation*, pages 845–854, Minneapolis, Minnesota, USA. Association for Computational Linguistics.
- Andreas Hanselowski, Avinesh PVS, Benjamin Schiller, Felix Caspelherr, Debanjan Chaudhuri, Christian M. Meyer, and Iryna Gurevych. 2018a. *A retrospective analysis of the fake news challenge stance-detection task*. In *Proceedings of the 27th International Conference on Computational Linguistics*, pages 1859–1874, Santa Fe, New Mexico, USA. Association for Computational Linguistics.
- Andreas Hanselowski, Hao Zhang, Zile Li, Daniil Sorokin, Benjamin Schiller, Claudia Schulz, and Iryna Gurevych. 2018b. *UKP-athene: Multi-sentence textual entailment for claim verification*. In *Proceedings of the First Workshop on Fact Extraction and VERification (FEVER)*, pages 103–108, Brussels, Belgium. Association for Computational Linguistics.

- Momchil Hardalov, Arnav Arora, Preslav Nakov, and Isabelle Augenstein. 2021. A survey on stance detection for mis- and disinformation identification. *arXiv/2103.00242*.
- Christopher Hidey and Mona Diab. 2018. **Team SWEEPer: Joint sentence extraction and fact checking with pointer networks**. In *Proceedings of the First Workshop on Fact Extraction and VERification (FEVER)*, pages 150–155, Brussels, Belgium. Association for Computational Linguistics.
- Vidur Joshi, Matthew Peters, and Mark Hopkins. 2018. **Extending a parser to distant domains using a few dozen partially annotated examples**. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1190–1199, Melbourne, Australia. Association for Computational Linguistics.
- Dilek Küçük and Fazli Can. 2020. Stance detection: A survey. *ACM Comput. Surv.*, 53(1).
- David M.J. Lazer, Matthew A. Baum, Yochai Benkler, Adam J. Berinsky, Kelly M. Greenhill, Filippo Menczer, Miriam J. Metzger, Brendan Nyhan, Gordon Pennycook, David Rothschild, Michael Schudson, Steven A. Sloman, Cass R. Sunstein, Emily A. Thorson, Duncan J. Watts, and Jonathan L. Zittrain. 2018. The science of fake news. *Science*, 359(6380):1094–1096.
- Nayeon Lee, Yejin Bang, Andrea Madotto, and Pascale Fung. 2020a. **Misinformation has high perplexity**. *CoRR*, abs/2006.04666.
- Nayeon Lee, Belinda Li, Sinong Wang, Wen-tau Yih, Hao Ma, and Madian Khabsa. 2020b. **Language models as fact checkers?** In *Proceedings of the Third Workshop on Fact Extraction and VERification (FEVER)*, pages 36–41, Online. Association for Computational Linguistics.
- Yaliang Li, Jing Gao, Chuishi Meng, Qi Li, Lu Su, Bo Zhao, Wei Fan, and Jiawei Han. 2016. A survey on truth discovery. *SIGKDD Explor. Newsl.*, 17(2):1–16.
- Christopher Malon. 2018. **Team papelo: Transformer networks at FEVER**. In *Proceedings of the First Workshop on Fact Extraction and VERification (FEVER)*, pages 109–113, Brussels, Belgium. Association for Computational Linguistics.
- Tsvetomila Mihaylova, Georgi Karadzhov, Pepa Atanasova, Ramy Baly, Mitra Mohtarami, and Preslav Nakov. 2019. **SemEval-2019 task 8: Fact checking in community question answering forums**. In *Proceedings of the 13th International Workshop on Semantic Evaluation*, pages 860–869, Minneapolis, Minnesota, USA. Association for Computational Linguistics.
- Moin Nadeem, Wei Fang, Brian Xu, Mitra Mohtarami, and James Glass. 2019. **FAKTA: An automatic end-to-end fact checking system**. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics (Demonstrations)*, pages 78–83, Minneapolis, Minnesota. Association for Computational Linguistics.
- Preslav Nakov, David Corney, Maram Hasanain, Firoj Alam, Tamer Elsayed, Alberto Barrón-Cedeño, Paolo Papotti, Shaden Shaar, and Giovanni Da San Martino. 2021a. **Automated fact-checking for assisting human fact-checkers**. In *Proceedings of the 30th International Joint Conference on Artificial Intelligence, IJCAI '21*.
- Preslav Nakov, Giovanni Da San Martino, Tamer Elsayed, Alberto Barrón-Cedeño, Rubén Míguez, Shaden Shaar, Firoj Alam, Fatima Haouari, Maram Hasanain, Nikolay Babulkov, Alex Nikolov, Gautam Kishore Shahi, Julia Maria Struß, and Thomas Mandl. 2021b. **The CLEF-2021 CheckThat! lab on detecting check-worthy claims, previously fact-checked claims, and fake news**. In *Proceedings of the 43rd European Conference on Information Retrieval, ECIR '21*, pages 639–649, Lucca, Italy.
- Preslav Nakov, Husrev Taha Sencar, Jisun An, and Haewoon Kwak. 2021c. **A survey on predicting the factuality and the bias of news media**. *arXiv/2103.12506*.
- Yixin Nie, H. Chen, and Mohit Bansal. 2019. **Combining fact extraction and verification with neural semantic matching networks**. In *AAAI*.
- Wolfgang Otto. 2018. **Team GESIS cologne: An all in all sentence-based approach for FEVER**. In *Proceedings of the First Workshop on Fact Extraction and VERification (FEVER)*, pages 145–149, Brussels, Belgium. Association for Computational Linguistics.
- Fabio Petroni, Tim Rocktäschel, Sebastian Riedel, Patrick Lewis, Anton Bakhtin, Yuxiang Wu, and Alexander Miller. 2019. **Language models as knowledge bases?** In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 2463–2473, Hong Kong, China. Association for Computational Linguistics.
- Kashyap Popat, Subhabrata Mukherjee, Jannik Strötgen, and Gerhard Weikum. 2018. **Credeye: A credibility lens for analyzing and explaining misinformation**. In *Companion Proceedings of the The Web Conference 2018, WWW '18*, page 155–158, Republic and Canton of Geneva, CHE.
- Kashyap Popat, Subhabrata Mukherjee, Andrew Yates, and Gerhard Weikum. 2019. **STANCY: Stance classification based on consistency cues**. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 6413–6418, Hong Kong, China. Association for Computational Linguistics.

- M. Porter. 1980. An algorithm for suffix stripping. *Program*, 40:211–218.
- Liudmila Prokhorenkova, Gleb Gusev, Aleksandr Vorobev, Anna Veronika Dorogush, and Andrey Gulin. 2018. Catboost: Unbiased boosting with categorical features. In *Proceedings of the 32nd International Conference on Neural Information Processing Systems, NIPS’18*, page 6639–6649, Red Hook, NY, USA. Curran Associates Inc.
- Hannah Rashkin, Eunsol Choi, Jin Yea Jang, Svitlana Volkova, and Yejin Choi. 2017. Truth of varying shades: Analyzing language in fake news and political fact-checking. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 2931–2937, Copenhagen, Denmark. Association for Computational Linguistics.
- Aniketh Janardhan Reddy, Gil Rocha, and Diego Esteves. 2018. DeFactoNLP: Fact verification using entity recognition, TFIDF vector comparison and decomposable attention. In *Proceedings of the First Workshop on Fact Extraction and VERification (FEVER)*, pages 132–137, Brussels, Belgium. Association for Computational Linguistics.
- B. Riedel, Isabelle Augenstein, Georgios P. Spithourakis, and S. Riedel. 2017. A simple but tough-to-beat baseline for the fake news challenge stance detection task. *ArXiv*, abs/1707.03264.
- Adam Roberts, Colin Raffel, and Noam Shazeer. 2020. How much knowledge can you pack into the parameters of a language model? In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5418–5426, Online. Association for Computational Linguistics.
- Shaden Shaar, Nikolay Babulkov, Giovanni Da San Martino, and Preslav Nakov. 2020. That is a known lie: Detecting previously fact-checked claims. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 3607–3618, Online. Association for Computational Linguistics.
- Chengcheng Shao, Giovanni Luca Ciampaglia, Alessandro Flammini, and Filippo Menczer. 2016. Hoaxy: A platform for tracking online misinformation. In *Proceedings of the 25th International Conference Companion on World Wide Web, WWW ’16 Companion*, page 745–750, Republic and Canton of Geneva, CHE.
- Kai Shu, Amy Sliva, Suhang Wang, Jiliang Tang, and Huan Liu. 2017. Fake news detection on social media: A data mining perspective. *SIGKDD Explor. Newsl.*, 19(1):22–36.
- Dominik Stambach and Guenter Neumann. 2019. Team DOMLIN: Exploiting evidence enhancement for the FEVER shared task. In *Proceedings of the Second Workshop on Fact Extraction and VERification (FEVER)*, pages 105–109, Hong Kong, China. Association for Computational Linguistics.
- James Thorne and Andreas Vlachos. 2018. Automated fact checking: Task formulations, methods and future directions. In *Proceedings of the 27th International Conference on Computational Linguistics*, pages 3346–3359, Santa Fe, New Mexico, USA. Association for Computational Linguistics.
- James Thorne, Andreas Vlachos, Christos Christodoulopoulos, and Arpit Mittal. 2018a. FEVER: a large-scale dataset for fact extraction and VERification. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 809–819, New Orleans, Louisiana. Association for Computational Linguistics.
- James Thorne, Andreas Vlachos, Oana Cocarascu, Christos Christodoulopoulos, and Arpit Mittal. 2018b. The fact extraction and VERification (FEVER) shared task. In *Proceedings of the First Workshop on Fact Extraction and VERification (FEVER)*, pages 1–9, Brussels, Belgium. Association for Computational Linguistics.
- James Thorne, Andreas Vlachos, Oana Cocarascu, Christos Christodoulopoulos, and Arpit Mittal. 2019. The FEVER2.0 shared task. In *Proceedings of the Second Workshop on Fact Extraction and VERification (FEVER)*, pages 1–6, Hong Kong, China. Association for Computational Linguistics.
- Soroush Vosoughi, Deb Roy, and Sinan Aral. 2018. The spread of true and false news online. *Science*, 359(6380):1146–1151.
- William Yang Wang. 2017. “liar, liar pants on fire”: A new benchmark dataset for fake news detection. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 422–426, Vancouver, Canada. Association for Computational Linguistics.
- Takuma Yoneda, Jeff Mitchell, Johannes Welbl, Pontus Stenetorp, and Sebastian Riedel. 2018. UCL machine reading group: Four factor framework for fact finding (HexaF). In *Proceedings of the First Workshop on Fact Extraction and VERification (FEVER)*, pages 97–102, Brussels, Belgium. Association for Computational Linguistics.
- Savvas Zannettou, Michael Sirivianos, Jeremy Blackburn, and Nicolas Kourtellis. 2019. The web of false information: Rumors, fake news, hoaxes, clickbait, and various other shenanigans. *J. Data and Information Quality*, 11(3):10:1–10:37.
- Arkaitz Zubiaga, Ahmet Aker, Kalina Bontcheva, Maria Liakata, and Rob Procter. 2018. Detection and resolution of rumours in social media: A survey. *ACM Comput. Surv.*, 51(2).