

RESEARCH

Comparative Analysis of Box-Covering Algorithms for Fractal Networks

Péter Tamás Kovács^{1*}, Marcell Nagy¹ and Roland Molontay^{1,2}

*Correspondence:

petertamaskovacs@edu.bme.hu

¹Department of Stochastics,
Budapest University of Technology
and Economics, Budapest,
Hungary

Full list of author information is
available at the end of the article

Abstract

Research on fractal networks is a dynamically growing field of network science. A central issue is to analyze fractality with the so-called box-covering method. As this problem is known to be NP-hard, a plethora of approximating algorithms have been proposed throughout the years. This study aims to establish a unified framework for comparing approximating box-covering algorithms by collecting, implementing, and evaluating these methods in various aspects including running time and approximation ability. This work might also serve as a reference for both researchers and practitioners, allowing fast selection from a rich collection of box-covering algorithms with a publicly available codebase.

Keywords: fractality; box-covering; box-counting; approximating algorithms; comparative study; open source

1 Introduction

It is a challenging task to develop notions that can capture important features of a real-world network. Popular approaches often focus on the degree distribution of the nodes of a given network, on degree-degree correlations, on shortest path related measures, on the clustering of the network, and on other structural measures [1]. Various classes of networks, such as small-world networks, scale-free networks, and networks with a strong community structure have attracted a lot of research attention in the past two decades [2].

In recent years, there has been an increasing interest in the class of *fractal networks*, since fractality has been verified in several real-world networks (WWW, actor collaboration networks, protein interaction networks) [3, 4]. Moreover, fractality has been associated with many important properties of networks such as robustness, modularity, and information contagion [5]. For example, fractal networks are found to be relatively robust against targeted attacks, which may provide an explanation why numerous biological networks evolve towards fractal behavior [6]. For a wide range of applications of fractal property in networks see the work of Wen & Cheong [4].

Since the notion of fractal networks is motivated by the notions of fractals geometry, the method to identify fractal behavior of networks is similar to that of regular fractal objects: using the *box-covering method*, also called *box-counting method*. The method aims to determine the minimum number of boxes needed to cover the entire network. Although this problem belongs to the family of NP-hard problems [7], numerous algorithms have been proposed to obtain an approximate solution.

In this contribution, we provide a systematic review and comparative analysis on a large collection of algorithms that have been proposed throughout the years to perform the box-covering of the network. The high number of approximating algorithms introduced recently calls for an impartial, systematic comparison of the algorithms. There are a few recent works that describe the most important box-covering algorithms [4, 8, 9], however, to the best of our knowledge, this is the first comprehensive comparative study in this field. After collecting and implementing various methods, we compared their performance in terms of approximation ability and running time on a number of real-world networks. In addition, we made all our codes publicly available on GitHub (<https://github.com/PeterTKovacs/boxes>) together with detailed documentation and a tutorial Python notebook. It makes our results reproducible and every interested member of the community is cordially invited to contribute to the project.

1.1 Fractality in geometry

The term fractal was coined by Benoit B. Mandelbrot and the concept was originally developed for sets in a Euclidean space [10, 11]. In fractal geometry, the box-covering algorithm is one possible way to estimate the fractal dimension of a set S in a d -dimensional space (\mathbb{R}^d). The set is lying on an evenly spaced d -dimensional grid and the hypercubes of this grid are boxes of size l . We consider the $N(l)$ minimal number of boxes of size l that are needed to cover the set and see how it scales with the box size. The box-counting or Minkowski dimension is defined as


$$\dim_B(S) = \lim_{l \rightarrow 0} \frac{\log N(l)}{-\log l}$$

The exact mathematical definition of fractals goes beyond the scope of this paper. Roughly speaking, a set with a non-integer box-counting dimension is considered to have fractal geometry, since it suggests that the fractal scales differently from the space it resides in.

1.2 Fractality of networks

The notion of fractal networks is motivated by the concepts from fractal geometry and measuring the fractal dimension of a network is analogous to the geometric case [3]. The box-counting method can be easily generalized to networks since the vertex set of an undirected graph together with the graph distance function (geodesic distance) form a metric space, and the box-counting algorithm generalizes to any metric space. For networks, the *box-covering* also called *box-counting* method works as follows:

- We say that a group of nodes fit into a box of size l_B if, for any pair of these nodes, their shortest distance is less than l_B .
- A network is covered by boxes of size l_B if its nodes are partitioned such that every group fits into one box of size l_B .
- As the number of possible coverings is finite, there is a minimal number of boxes to cover the network with l_B sized boxes. This is what we denote by $N_B(l_B)$.

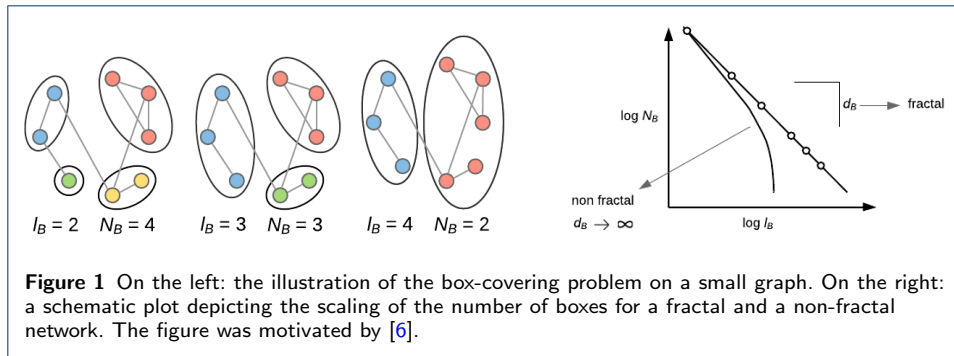

- If the minimal number of boxes scales as a power of the box size, i.e. $N_B(l_B) \propto l_B^{-d_B}$, the network is informally defined to be *fractal* with a finite *fractal dimension* or *box dimension* d_B .

Although the “ \propto ” scaling relation is not well-defined and cannot strictly hold for finite networks, the box-covering-based fractal dimension can be defined mathematically rigorously for infinite networks and graph sequences [12]. However, in practice, one usually verifies the fractality of real-world networks by approximating the $N_B(l_B)$ values on a feasible range of l_B box size values and then inspects them on a log-log plot to see if the relationship follows a power-law to a good approximation (see Figure 1). The left side of Figure 1 shows an optimal box-covering of a small graph with three different box sizes. The right side of the figure illustrates the scaling of the number of boxes N_B and the box size l_B for a fractal and a non-fractal network.

Although fractality is also defined for weighted networks [13], in this work we only focus on unweighted and undirected graphs. We also note that besides the box-covering-based fractal dimension, several other network dimension concepts have been proposed throughout the years, some of them are equivalent under some regularity conditions on the network [14]. For a survey on fractal dimensions of networks, we refer to Rosenberg [8, 15].

2 Algorithms

The box-covering of a network is known to be NP-hard [7]. Hence to have an algorithm of practically acceptable time complexity, one must use approximating methods. As it is usual for semi-empirical methods, there are a good number of different proposals for the task, see Table 1. To give some intuitive summary, we can say that most algorithms follow a greedy strategy where the distinction between algorithms is drawn by the actual greedy decision method. However, we present a number of approaches beyond the greedy paradigm.

It is also important to mention that there are algorithms that use diameter-based boxes, while other methods use radius-based boxes, also called balls of radius r_B around a center node c . The two approaches sometimes cause some ambiguity in the terminology.

Using radius-based boxes require the notion of “centers” or “seeds”, which means that each box is assigned to a special, central node. While this idea is natural in \mathbb{R}^n , it may be misleading for a graph since the edges between vertices generally

Table 1 The box-covering algorithms. The starred algorithms are not yet available in our repository.

Type	Algorithm	Abbr	Year	Ref
Classic	Random Sequential	RS	2007	[16, 17]
	Greedy Coloring	GC	2007	[7]
	Merge Algorithm	MA	2010	[18]
Burning	Compact-Box Burning	CBB	2007	[7]
	Modified Box Counting Method*	MBC	2007	[19, 20]
	Max-Excluded Mass Burning	MEMB	2007	[7]
	Ratio of Excluded Mass to Closeness Centrality	REMCC	2016	[21]
	MCWR algorithm	MCWR	2019	[22]
Meta-heuristic	Edge-Covering with Simulated Annealing*	ECSA	2007	[23]
	Simulated Annealing	SA	2010	[18]
	Differential Evolution	DE	2014	[24]
	Particle Swarm Optimization	PSO	2015	[25]
	Multi-Objective Particle Swarm Optimization*	MOPSO	2017	[26]
	Max-Min Ant Colony Optimization algorithm*	ACO	2017	[27]
Overlapping	Fuzzy box-covering	Fuzzy	2014	[28]
	Overlapping Box Covering Algorithm	OBCA	2014	[29]
	Improved Overlapping Box Covering*	IOB	2020	[30]
Sampling-based	Minimal-Value Burning*	MVB	2012	[31]
	Sampling-Based method	SM	2019	[32]
Weighted	Coulomb's Law Based Box-Covering*	CL	2016	[33]
	Deterministic Box-Covering Algorithm*	DBCA	2020	[34]
Other	Sketch-Based Box-Covering *	Sketch	2016	[35]
	Community-Structure-Based Method*	COM	2021	[36]

cannot be embedded into a Euclidean space. For example, in a box that contains a cyclic subgraph, there is no vertex that would be special by any means. The reason however why these nodes are called seeds or center nodes is that these nodes are the first elements of the boxes and the boxes are built around them.

2.1 General remarks

In the following part, we describe and evaluate the implemented algorithms in detail. Throughout this paper, we denote the box size by l_B , the box radius (if applies) by r_B , where $l_B = 2r_B + 1$. However, let us note that in the literature the definition of an l_B -sized box can be inconsistent. In the **implementation**, we define boxes such that for box-size \tilde{l}_B the distance between two nodes of the same box can be *less than or equal* to \tilde{l}_B .

In the **evaluation** part, we followed the widely used convention, which means that in an l_b -box the distance between any two nodes is *strictly less* than l_B . This means that the “equivalent box-size” is $l_B = \tilde{l}_B + 1 = 2r_B + 1$.


In this section, we use the *less than or equal* (“implementation”) convention for the algorithms. We will also provide a sketch of the pseudocode for the discussed algorithms. The aim is to foster understanding, there may be minor differences compared to the actual Python code.

As it is apparent from the definition, the box-covering process of a network requires the ability to determine the shortest path between two nodes to be able to decide if they can be in the same box. This could be done in multiple ways, for example by performing a breadth-first search on the fly. But for convenience and to avoid calculating the pairwise distances multiple times, we implemented the following approach: in the beginning, we calculate and store the pairwise shortest distances $d(v_i, v_j)$ for all $v_i, v_j \in V$, where V is the vertex set of the graph. This data is then used in the subsequent calculations. With this notion, we define the **ball of radius r_B around center c** , which is $B(c, r_B) = \{d(v_i, c) \leq r_B \mid v_i \in V\}$. This

term will be used extensively throughout this paper since many algorithms operate with these balls. Note that in this work, the terms graph and network are used interchangeably.

2.2 Greedy Coloring (GC)

The problem of box-covering can be mapped to the famous problem of graph coloring [7]. Therefore, a graph coloring algorithm can be utilized to solve the box-covering problem. The idea is the following: let us consider the *auxiliary graph* of our original network, which consists of the same vertices and “auxiliary edges”. This means that two vertices are connected by an edge in the auxiliary graph if and only if their distance in the original network is at least l_B , which means that they cannot be in the same box. The idea is illustrated in Figure 2, moreover, the pseudocode is detailed in Algorithm 1.

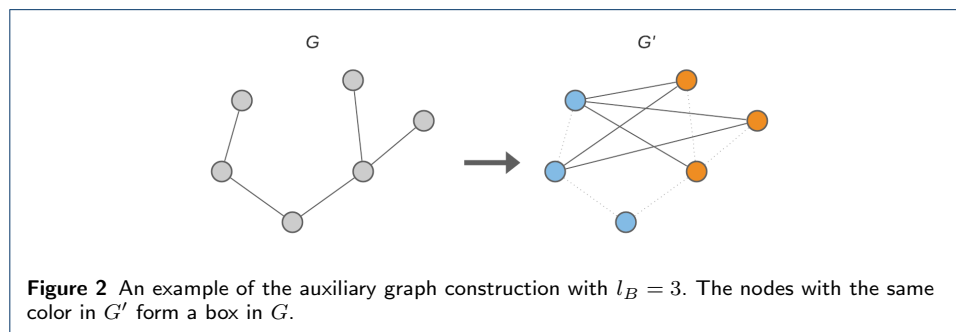

Once we constructed the auxiliary graph for a given l_B , we perform a graph (vertex) coloring on the auxiliary graph, i.e., we assign colors to the vertices of the auxiliary graph such that **i)** adjacent vertices cannot have the same color, **ii)** and we seek to use the least number of colors. This problem is equivalent to the box-covering of the original network since the assigned colors in the auxiliary graphs correspond to the assigned boxes in the original network. The vertices of the same color in the auxiliary graph are at most l_B far away from each other, hence they form a box in the original network. Moreover, the minimum number of colors required to color the vertices (the chromatic number) of the auxiliary graph equals the minimum number of boxes needed to cover the original graph.

Algorithm 1 Auxiliary graph

```

Require:  $G = (V, E)$ ,  $l_B$ ,
 $V' = V$  # the nodes of  $G'$  are the same
 $E' = []$  # initialize  $E'$  as an empty list
for  $v_1$  in  $V'$  do
  for  $v_2$  in  $V'$  do
    if  $d(v_1, v_2) \geq l_B$  in  $G$  then
      add the  $(v_1, v_2)$  edge to  $E'$ 
    end for
  end for
return  $G' = (V', E')$  auxiliary (simple) graph

```

Unfortunately, the complexity of the graph coloring problem is NP-hard. A well-known approximating algorithm is *greedy coloring*. This algorithm consists of two main steps [37]:

- 1 Order the nodes by some method
- 2 Iterate over the above sequence: assign the smallest possible color ID to every node

The schematic way the greedy coloring box-covering algorithm works is presented in Algorithm 2.

Algorithm 2 Greedy coloring

Require: $G = (V, E)$, l_B , and strategy s
 $G' = \text{auxiliary_graph}(G, l_B)$ # see Algorithm 1
 $V^{\text{sorted}} = \text{order}(V, s)$
for v in V^{sorted} **do**
 assign lowest allowed color ID to v in G'
end for
return (node, color) pairs

The algorithm is completely well-defined if the strategy, i.e., the ordering method is specified. In this work, we used a random sequence. Even though more advanced methods exist, we think that this *naive* approach serves as a great baseline for the other algorithms.

Our implementation relies on the greedy coloring implementation of the `networkx` package [38] and in our Python package, we made it possible to select any other built-in strategy.


Li *et al.* [27] introduced a related box-covering algorithm in 2017 which uses a so-called max-min ant colony heuristic optimization method to color the vertices of the auxiliary graph.

While in this work we focus on unweighted networks, to be comprehensive let us note that there are a few box-covering methods, that aim to solve the box-covering problem by assigning weights to the edges of an originally unweighted network. For example, Zhang *et al.* [33] proposed a greedy coloring method where the construction of the auxiliary graph is different. They adopted Coulomb's Law to assign *repulsive force*, i.e., weights to the edges, which was motivated by the observation that in real fractal networks hubs are less likely to be connected [39], however, there are some counterexamples as well [40, 41]. The construction of the auxiliary graph hence is based on the weighted shortest paths, called smallest repulsive force paths, and not on the original shortest paths. Recently, Gong *et al.* [34] introduced a deterministic box-covering algorithm, which is a modification of the algorithm of Zhang *et al.*, namely it starts the coloring with the high-degree nodes.

2.3 Random sequential

The random sequential algorithm was introduced by Kim *et al.* [16] as one of the first approximating box-covering algorithms and similarly to the algorithms that were proposed in 2007 [7], it also uses the idea of burning (breadth-first search). Burning means that the boxes are generated by growing them from one randomly selected center (or seed) vertex towards its neighborhood, see Figure 3. Moreover, once some nodes have been assigned to a box, they are “burned out”.

In every step, an unburned center node c is randomly chosen, and then the ball of radius r_B is formed around c , more precisely, the algorithm selects those unburned nodes that are at most r_B far from the center node c . These newly burned nodes

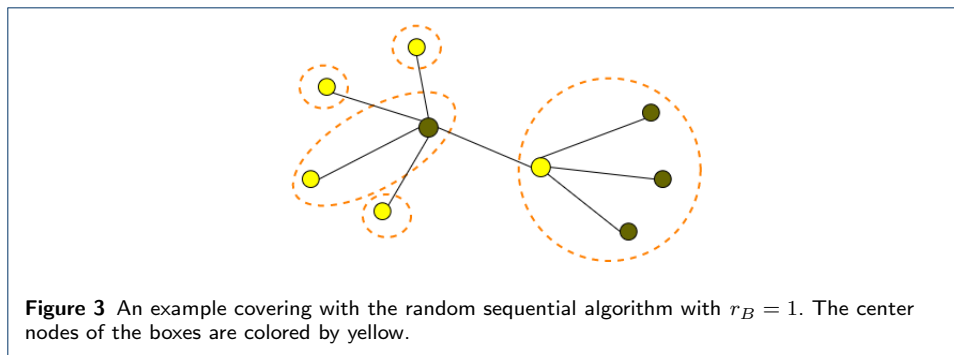

together form a new box. Note that in the original paper the center node is selected from the whole set of nodes V , yet we modified it to select it from the uncovered set of nodes. The authors argue that in some cases, that was necessary to obtain the desired behavior, namely, they stated that if they disallow *disconnected boxes*, they get different results for the scaling of N_B on the graph of WWW. In a disconnected box, the vertices are not connected, but they have a common neighbor, the center node, which is however not a member of the box because it has been burned already.

Algorithm 3 Random sequential (RS)

```

Require:  $G = (V, E)$ ,  $r_B$ 
 $U = V$  # uncovered nodes
 $boxes = []$  # list of the created boxes that will be returned
while  $U \neq \emptyset$  do
   $c = \text{random\_choice}(U)$  # randomly chosen uncovered center node
  append  $U \cap B(c, r_B)$  to boxes
   $U = U \setminus B(c, r_B)$ 
end while
return boxes

```

One year later, in 2008, Gao *et al.* [17] proposed a so-called rank-driven box-covering algorithm, which is a computationally more efficient version of the random sequential algorithm.

2.4 Compact Box Burning (CBB)

As the name suggests, similarly to the random sequential algorithm the compact box burning algorithm also uses the concept of burning. The algorithm was introduced by Song *et al.* in [7] together with the greedy and the MEMB algorithms. The main point is to grow boxes by picking new nodes randomly from a candidate set C that contains all nodes that are not farther away than l_B from any node that is already in the candidate set. In the end, this set C is going to form a box, and the process guarantees that the box is compact^[1].

^[1]Roughly speaking, we cannot add any more nodes.

Algorithm 4 Compact Box Burning (CBB)

```

Require:  $G = (V, E)$ ,  $l_B$ 
 $U = V$  # for uncovered nodes
 $boxes = []$  # list for assigned boxes
while  $U \neq \emptyset$  do
   $box = []$  # list for current box
   $C = U$  # candidates for box members
  while  $C \neq \emptyset$  do
     $p = \text{random}(C)$ 
    append  $p$  to  $box$ 
     $C = C \setminus \{d(p, v_i) > l_B \mid v_i \in V\}$  # remove  $p$  incompatible nodes from  $C$ 
  end while
  append  $box$  to  $boxes$ 
   $U = U \setminus box$ 
end while
return  $boxes$ 

```

Kitsak *et al.* introduced a simplified version of the CBB algorithm [19] which estimates the number of boxes rather fast and it has been also used and detailed in a more recent work [20]. The modified algorithm does not construct the actual boxes, it only approximates N_B for a given l_B as follows: first initializes N_B and sets its value to zero. Then it selects a random center node c , marks the nodes of the ball of radius l_B centered on c , and finally increases the value of N_B by one. Then randomly selects another unmarked center node and repeats this process until the whole network is covered. The authors stress that this estimation of N_B is always less than the actual minimum number of boxes needed to cover the network, hence to improve the estimation they suggest performing the computation many times and then taking the maximum of the estimations which is claimed to be a better approximation of N_B and that still has small time complexity.

Note that this algorithm could be also considered as a simplified *sampling-based* box-covering method (see Section 2.14), which is a more general framework that selects the “best” box-covering from many independent box covers generated by a simple covering algorithm.

2.5 Maximal Excluded Mass Burning (MEMB)

The Maximal Excluded Mass Burning algorithm is the third box-covering algorithm that was presented in the influential paper of Song *et al.* [7]. Instead of using l_B , this method also uses the notion of radius r_B and centered boxes: every box has a special node, a center. Boxes are constructed such that every member node of the box is not farther away than r_B from the center node. The algorithm guarantees that all the boxes are connected, i.e., two nodes of the same box can always be reached with a path that is inside of the box.

The algorithm could be interpreted as an improvement of the random sequential method in some aspects but the analogy fails because the way burning is implemented is different from random sequential. It works as follows:

- First, the next center is chosen on the basis of *maximal excluded mass*, that is the number of uncovered nodes not farther away than r_B from the center node.^[2]

^[2]Including the center node as well, if it is uncovered yet. It is also possible to have a covered node as the next center.

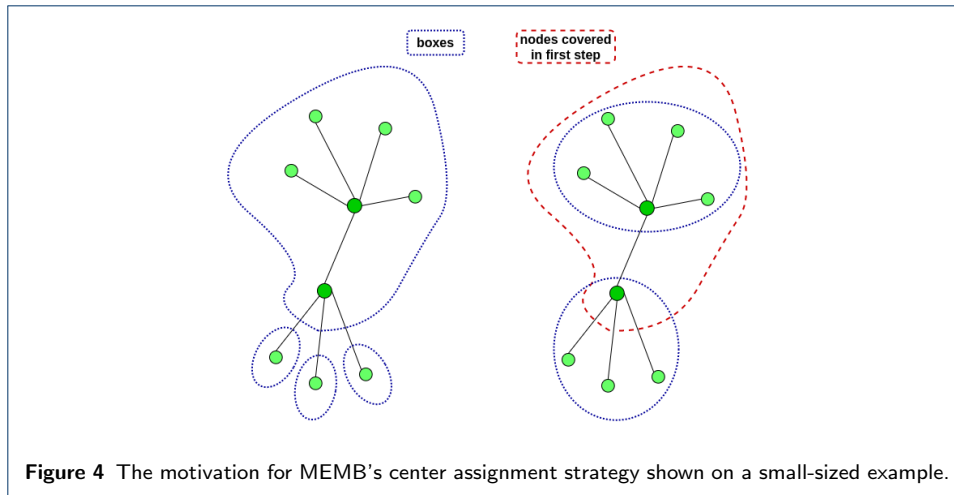


Figure 4 The motivation for MEMB's center assignment strategy shown on a small-sized example.

- Once the next center is chosen, all uncovered nodes within r_B are covered, but not yet assigned to boxes.
- Finally, after every node is covered, non-center nodes are assigned to centers in a way that the resulting boxes are connected.

The pseudocode of the MEMB algorithm is presented in Algorithm 5.

Algorithm 5 Maximal Excluded Mass Burning (MEMB)

Require: $G = (V, E)$, r_B
 $U = V$ # uncovered nodes
 $C = \{\}$ # center nodes
while $U \neq \emptyset$ **do**
 calculate m_i excluded mass for non-center nodes
 let p be the node for which m_p is maximal
 $C = C \cup \{p\}$
 $U = U \setminus B(p, r_B)$
end while
let c_{dist} contain the distance to the closest center for every node
let C' be the list of non-center nodes sorted by their c_{dist} value
for n in C' **do**
 $m =$ find a random neighbor of n whose c_{dist} is smaller
 allocate n to the center node which is the center of m
end for
return the formed boxes that are identified by their center nodes

Figure 4 helps to understand the reason why boxes are only formed in the end and not burned on the fly. The authors' motivation was that in scale-free networks, where there are a few hubs, the hubs should be selected as the center of the boxes, otherwise the tiling of the network is going to be far from the optimal case. That is why the algorithm first selects centers and then assigns the remaining nodes to them.

2.6 Ratio of Excluded Mass to Closeness Centrality (REMCC)

The REMCC box-covering algorithm has been introduced by Wei et al. [21] in 2016 and it can be regarded as a modification of the MEMB algorithm. Both algorithms rely on excluded mass but it also considers the ratio of excluded mass to closeness centrality (REMCC) to select the center nodes.

In every step, a new center is chosen from the uncovered set of nodes such that the chosen node has the maximal f score, which is a novel metric in the paper.

The f score is defined as the ratio of the excluded mass and closeness centrality or in other words, it is the product of the excluded mass and the average length of the shortest paths to all other nodes. The authors argue that the reason why they consider the closeness centrality in the selection of the center nodes is that if we chose a central node of the network as a center (seed) of a box, then eventually more boxes will be needed to cover the network. After the center node is selected, all nodes in the r_B ball of the center are covered. In this procedure – in contrast with the MEMB algorithm – centers are selected from the uncovered set of nodes.

The steps of the REMCC box-covering algorithm are detailed in Algorithm 6. Note that in the current implementation, the algorithm does not return the formed boxes, only the centers are determined, however after the center nodes are given, the box-building method of the MEMB algorithm can be applied.

Algorithm 6 Ratio of Excluded Mass to Closeness Centrality (REMCC)

Require: $G = (V, E)$, r_B
 $U = V$ # uncovered nodes
 $C = \{\}$ # centers
 calculate l_i : the average shortest path from i to other nodes
while $U \neq \emptyset$ **do**
 calculate m_i excluded mass for the uncovered nodes
 let p be the node for which $f_p = m_p \cdot l_p$ is maximal
 $C = C \cup \{p\}$
 $U = U \setminus B(p, r_B)$
end while
return C

2.7 MCWR

Recently, Liao *et al.* [22] proposed an algorithm, called MCWR, which is a combination of the MEMB and the random sequential (RS) algorithms. Their goal was to create an algorithm that has the accuracy of the MEMB and the fast speed of the random sequential algorithm. In addition, to reduce the time complexity of the MEMB algorithm, a new way of keeping track of the excluded mass is proposed.

The authors argue, that due to the excluded-mass-based selection of the central nodes, the MEMB algorithm has high accuracy but also high time complexity. Since the random sequential algorithm selects the center nodes randomly, it is one of the fastest algorithms but it gives a very rough approximation of the optimal number of boxes.

The main idea of the MCWR algorithm is that it mixes the two ways of center node selection. More specifically, the authors introduced a parameter $p \in [0, 1]$, which represents the mixing portion of the MEMB method in the approach of choosing a center node. Hence, before choosing a new center, a biased coin is tossed and with probability p the algorithm performs the usual MEMB steps and with probability $1 - p$ it chooses a center uniformly at random^[3]. After finding a new center, the excluded mass of the vertices is updated, but in contrast to the original MEMB algorithm, to reduce the time complexity, it only updates the mass for the nodes that are inside of the newly covered ball of radius r_B . The assignment of the center nodes to the non-center nodes, i.e. the construction of the actual boxes, is the same as in the MEMB algorithm.

^[3]Here, the choice is made such that covered nodes except the ones with $m_{ex} = 0$ are allowed.

Note that the setting of the mixing parameter p is indeterminate. The authors apply the algorithm with different p settings on real networks without a suggested default setting. However, it is clear that if $p = 0$, the MCWR is the same as the RS, and similarly if $p = 1$, it works like the MEMB algorithm. Therefore, the smaller the p value is, the “closer” the algorithm is to the random sequential, hence the faster and less accurate the MCWR is.

Algorithm 7 MCWR

Require: $G = (V, E)$, r_B , p
 $U = V$ # uncovered nodes
 $C = \{\}$ # centers
 calculate m_i excluded mass for all nodes
while $U \neq \emptyset$ **do**
 if $UNI[0, 1] < p$ **then**
 let v be the node for which m_v is maximal
 else
 let v a random non-center node
 while $B(v, r_B)$ has only marked nodes **do**
 let v a random non-center node
 end while
 end if
 $N = U \cap B(v, r_B)$ # newly covered nodes
 for n in N **do**
 for l in $B(n, r_B)$ **do**
 decrease m_l (by one)
 end for
 end for
 $C = C \cup \{v\}$
 $U = U \setminus B(v, r_B)$
end while
 let c_{dist} contain the distance to the closest center for every node
 let C' the list of non-center nodes sorted by their c_{dist} values
for n in C' **do**
 $m =$ find a random neighbour of n whose c_{dist} is smaller
 allocate n to the same center as of m 's
end for
return the established boxes identified by centers

2.8 Merge algorithm (MA)

The merge algorithm (MA) has been introduced by Locci *et al.* [18], who investigated the fractal dimension of a software network using the merge algorithm, the simulated annealing, and the greedy coloring box covering algorithms.

The merge algorithm is based on the following simple idea: first, every node itself is a box (the authors refer to the boxes as clusters), and then for $l_B > 0$ the boxes are formed using a successive aggregation approach, i.e., two boxes are merged if their distance is less than l_B , more precisely, if the size of the union of the boxes is still less than l_B . Thus, to perform the box-covering of a network with box size $l_B = k + 1$, the Merge algorithm uses the previous results, i.e., the cover of the network with $l_B = k$ sized boxes. The pseudocode of the merge algorithm is detailed in Algorithm 8. Note that Locci *et al.* refers to the boxes as clusters, that is why in the code they are denoted by c .

Algorithm 8 Merge algorithm

Require: $G = (V, E)$, l_B
 $C = [\{v_i\} \mid v_i \in V]$
 $l = 1$
while $l \leq l_B$ **do**
 $C' = []$
 while $C \neq \emptyset$ **do**
 $c_i = \text{random}(C)$
 find all c_j ($i \neq j$) such that $c_i \cup c_j$ is a valid box of size l
 if c_j 's exist **then**
 choose a random c_j
 append $c_i \cup c_j$ to C'
 remove c_i, c_j from C
 else
 append c_i to C'
 remove c_i from C
 end if
 end while
 $C = C'$
 $l = l + 1$
end while
return C

2.9 Simulated Annealing (SA)

The Simulated Annealing (SA) box-covering algorithm has also been introduced by Locci *et al* [18]. Generally, simulated annealing is a meta-heuristic technique that was inspired by the annealing in metallurgy and it is used in optimization problems for approximating the global optimum in a large (typically discrete) search space, hence it can also be applied to approximate the minimum number of boxes needed to cover a network. In the simulated annealing context, the state of the physical system is the box covering of the network and the “internal energy” of the state is the number of boxes N_B .

In the simulated annealing process several states, i.e., coverings are checked, and a new neighbor state S' of the current state S is created using the following three operations: (i) moving a single node from one box (with at least two nodes) to another if the size of the extended box is still less than l_B , (ii) creating new box by excluding a node from a box, and (iii) merging boxes using the merge algorithm (see Algorithm 8).

After performing these steps in the above sequence, the internal energy $E(S')$ of the new state S' , i.e., the new approximation of the number of boxes is checked, and if $E(S') \leq E(S)$ then the algorithm continues with the new configuration. However, if the new boxing is worse than the previous one, i.e., $E(S') > E(S)$ then with probability $p = \exp\left(-\frac{\Delta N_B}{T}\right) = \exp\left(-\frac{E(S') - E(S)}{T}\right)$ it is still accepted. Note that at each iteration, the system is cooled down, which means that the probability p of accepting a worse covering is reduced: $T' = T \cdot c$, where $c < 1$ is the cooling constant parameter.

We introduced several modifications in the implementation compared to the original paper. First, the operations (i) and (ii) are rather vaguely defined in the paper. To be able to perform these operations, it must be ensured for example that after the removal of a given node, the original box would remain nonempty. Thus the changes compared to the paper of Locci *et al.* [18] are as follows:

- **moving nodes:** we only try to move nodes into neighboring boxes to spare iterating over all nodes when checking the distance (l_B) condition. Moreover,

instead of ensuring that k_1 movements are performed, we perform $2 \cdot k_1$ trials, which may fail if for a randomly chosen box we cannot move any additional node from the neighbor boxes. If k_1 movements are successfully performed, the process is terminated.

- **creating new boxes:** we proceed in an analogous manner, we perform at most k_2 trials on creating new boxes: a random box is chosen and if it has at least two nodes then a random node of this box is removed and that node forms a new box on its own. If k_2 creations are successfully performed, the process is terminated.
- **merging boxes:** as opposed to the original paper [18], in our implementation this step is performed before evaluating the energy of the new state, i.e., the number of boxes are counted after the merge procedure is also done.

Our implementation of the simulated annealing box-covering algorithm is detailed in Algorithm 9.

Algorithm 9 Simulated Annealing (SA)

Require: $G = (V, E)$, l_B , k_1 , k_2 , k_3 , T_0 , c
 $T = T_0$
 $S = \text{merge}(G, l_B)$ # the initial boxes are produced by the merge algorithm
for $i = 1$ to k_3 **do**
 $S' = S$
 try at most $2 \cdot k_1$ times:
 choose a b random box
 try to find a $v_a \notin b$ node that has a neighbor in b ,
 and that can be moved into b and its box has at least 2 members
 if v_a exists, move it into b (in S')
 if moved k_1 nodes successfully: stop trying
 try at most $2 \cdot k_2$ times:
 choose a b random box
 if it has at least 2 nodes: remove one random and make it to a new box in S'
 if moved k_2 nodes successfully: stop trying
 merge boxes in S' using the Merge Algorithm 8.
 if $E(S') \leq E(S)$ or $UNI[0, 1) < \exp\left(-\frac{E(S') - E(S)}{T}\right)$ **then**
 $S = S'$
 end if
 $T = c \cdot T$
end for
return S

Zhou *et al.* [23] proposed an edge-covering method, where the covering is performed with the simulated annealing optimization. Obviously, an edge-covering approach automatically covers the nodes as well, but the estimated number of boxes is greater than or equal to the number of boxes returned by a node-covering method since in the edge-covering method some nodes may be covered multiple times. Thus, the edge-cover method also estimates a different box-dimension of the network.

2.10 Overlapping-Box-Covering Algorithm (OBCA)

The overlapping-box-covering algorithm was introduced by Sun & Zhao in 2014 [29]. As the name of the algorithm suggests, the novelty of this method is that instead of partitioning the nodes, it uses overlapping boxes. The authors claim that this technique yields a more robust estimation of the number of boxes required to cover the network because separated boxes are prone to randomness. The authors suggest that instead of burning boxes on the fly, one should only mark possible boxes while processing data and then choose the final boxing in the end.

The algorithm proceeds by first only creating box proposals, during which possible center nodes are iterated over in ascending order with respect to the degree.

- A node is a possible center if it is uncovered yet. The algorithm starts with the small-degree nodes and large-degree nodes are checked at last.
- In a “proposed box”, those nodes are included whose distance from each other is at most l_B . They are chosen from nodes whose distance from the center is at most l_B .
- Once a proposed box is formed, the “covered frequency” of all nodes belonging to the newly proposed box is increased by one. The covered frequency of a node denotes how many overlapping proposed boxes contain it.

The final step of the algorithm is the revision of the proposed boxes. A box is called “redundant” if it only contains nodes that are also contained by other boxes, i.e., the covered frequency of all the nodes in a redundant box is larger than 1. In the last step, the redundant boxes are deleted and the covered frequency of the nodes of the recently removed box is decreased by 1. After the iteration is over only non-redundant boxes remain. The detailed pseudo-code of the overlapping-box-covering method is described in Algorithm 10.

Algorithm 10 Overlapping Box Covering Algorithm (OBCA)

```

Require:  $G = (V, E)$ ,  $l_B$ 
 $boxes = []$  # list (ordered sequence)
let  $f$  contain the covering frequency for each node, initialized with 0
let  $N$  contain the nodes sorted ascending by degree
for  $n$  in  $N$  do
  if  $f[n] > 0$  continue
   $box = B(n, l_B)$ 
  let  $C$  be  $box$ , sorted ascending by  $f[\cdot]$ 
  for  $i = 1$  to  $|C|$  do
    if  $C[i] \notin box$  continue
    for  $j = i + 1$  to  $|C|$  do
      if  $d(C[i], C[j]) > l_B$  then
        if  $C[j] = n$  then
          remove  $C[i]$  from  $box$ 
          break
        else
          remove  $C[j]$  from  $box$ 
        end if
      end if
    end for
  end for
  for  $b$  in  $box$  do
     $f[b] + = 1$ 
  end for
  append  $box$  to  $boxes$ 
end for
for  $box$  in  $boxes$  do
  if all  $b \in box$  have  $f[b] > 1$  then
    remove  $box$  from  $boxes$ 
     $f[b] - = 1$  for all  $b \in box$ 
  end if
end for
return  $boxes$ 

```

In a recent work, Zheng *et al.* proposed a modification of this algorithm, which they refer to as improved overlapping box covering algorithm (IOB) [30]. The authors argue that the algorithm could achieve better results if it would rank and sort the nodes according to the excluded mass of closeness centrality instead of the degree.

2.11 Differential Evolution (DE)

The differential evolution (DE) box-covering algorithm has been introduced by Kuang *et al.* [24] in 2014. In general, differential evolution is also a meta-heuristic optimization method that belongs to the class of evolutionary algorithms, and it does not require the optimization problem to be differentiable since it optimizes a problem by iteratively trying to improve a candidate solution.

The proposed differential evolution box-covering algorithm uses the deterministic sequential greedy coloring algorithm such that the coloring sequence of the nodes is represented by an N -dimensional vector, where N is the size of the network. The vector encoding of the different sequential greedy coloring procedures transforms the optimization problem into an N -dimensional space, which makes it possible to use the differential evolution paradigm.

Similarly to the simulated annealing, the DE algorithm also performs some operations on the population of these vectors to generate new possible solutions. Namely, there are two operations: mutation and crossover. In the mutation process, new vectors are created using randomly chosen three existing vectors. Moreover, to further increase the diversity of the set of examined solutions, the crossover operation generates new random vectors by randomly mixing the coordinates of the existing vectors and the newcomer vectors that were created in the mutation process. At the end of each iteration, the best solution is saved. The algorithm is detailed in Algorithm 11.

Algorithm 11 Differential Evolution (DE)

```

Require:  $G = (V, E)$ ,  $l_B$ ,  $p$ ,  $f$ ,  $c$ ,  $g$ 
 $G' = \text{auxiliary\_graph}(G, l_B)$ 
 $X_0 = [[UNI[0, 1)^N] \times p]$  # population of  $p$  random vectors
for  $i = 1$  to  $g$  do
  # The mutation phase
  for  $j = 1$  to  $p$  do
    draw  $r_1, r_2, r_3$  mutually different indices that also differ from  $j$ 
     $v_j = X_{i-1}[r_1] + f \cdot (X_{i-1}[r_2] - X_{i-1}[r_3])$ 
  end for
  # The crossover phase
  for  $j = 1$  to  $p$  do
    draw  $k$  coordinates from  $\{1, 2, \dots, N\}$  randomly
    for  $m = 1$  to  $N$  do
      if  $UNI[0, 1) < c$  or  $m = k$  then
         $u_j[m] = v_j[m]$ 
      else
         $u_j[m] = X_{i-1}[j][m]$ 
      end if
    end for
  end for
  # The selection phase
  for  $j = 1$  to  $p$  do
    Let  $s_1$  and  $s_2$  be the sequence of nodes defined by  $u_j$  and  $X_{i-1}[j]$  respectively.
     $n_1 = \text{greedy}(G, s_1)$  # number of boxes
     $n_2 = \text{greedy}(G, s_2)$ 
    if  $n_1 < n_2$  then
       $X_i[j] = u_j$ 
    else
       $X_i[j] = X_{i-1}[j]$ 
    end if
     $best = \text{save the best boxing from } s_1 \text{ and } s_2 \text{ if it is better than the current global best}$ 
  end for
end for
return  $best$ 

```

2.12 Particle Swarm Optimization (PSO)

A box-covering method using a heuristic optimization method called discrete Particle Swarm Optimization was presented by Kuang *et al.* [25] in 2015. The authors argue that differential evolution algorithm (DE), introduced in their previous work [24], has two main drawbacks that can be improved by the PSO algorithm. First, the DE algorithm has a continuous search space which increases the computational complexity. Moreover, it extensively uses the greedy algorithm which increases the time complexity.

To be able to use the PSO optimization method, the box-covering problem has to be encoded in a discrete form using the *position* and *velocity* of so-called “particles”. A particle represents a valid boxing of the network, more precisely, if the size of the network is N , then the position of the particle is an N -dimensional vector $X = (x_1, \dots, x_N)$ where the i th coordinate x_i denotes the ID of the box where the i th node belongs to, moreover $x_i \in 1, 2, \dots, N$. The velocity of a particle is an N -dimensional binary vector $V = (v_1, \dots, v_N)$ where v_i indicates whether the i th node is ready to change its box, i.e., the value of x_i can be changed.

The algorithm operates with a set (swarm) of particles and in every step, each vector (particle) may be updated depending on its velocity, its most optimal boxing, the whole swarm’s best boxing, and on random variables as well. In the end, the best overall boxing is returned. The PSO algorithm is detailed in Algorithm 12. Note that we defined some auxiliary functions and operators before the actual algorithm. Unfortunately, the \oplus operator is vaguely defined in the original paper but we believe that the one below is the most meaningful interpretation of it.

In a follow-up paper, the authors propose a modification of the PSO algorithm [26], called multiobjective discrete particle swarm optimization (MOPSO) box-covering algorithm, which aims to solve two optimization problems simultaneously. Besides minimizing the number of boxes required to cover the network, the algorithm maximizes the fractal modularity [42] defined by the boxing, which was motivated by the observation that fractal networks have a highly modular structure [39]. The pseudocode of the MOPSO box-covering algorithm is almost the same as the PSO. The only difference is that in the last part of the code, where it checks whether the current solution is better than the population and global best, it is not enough to check the number of used boxes but a better solution is also required to have a higher modularity [26].

Algorithm 12 Particle Swarm Optimization (PSO)

```

# Preliminary definitions

⊕ operator
  x ⊕ y = integer(x ≠ y)  # for integers

def sig(z)  # for numbers
return 1 if UNI[0, 1) <  $\frac{1}{1+e^{-z}}$ , and 0 otherwise

def nbest(n, xi, B)  # node, current box, neighbor boxes
while B ≠ ∅ do
  let xk be randomly drawn from B
  discard xk from B
  if xk = xi continue
  if d(n, m) ≤ lB for all m ∈ box(xk) then
    return xk
  end if
end while
return xi

# The PSO algorithm
Require: G = (V, E), lB, g, p, c1, c2
P = [encode(greedy(G, lb, random_sequencei)) | i = {1, 2, ..., p}]
V = [zeros of shape of P]
Pbest = P
let gbest be the best boxing from P
for i = 1 to g do
  for j = 1 to p do
    for k = 1 to |V| do
      # for the sake of simplicity, we write Vjk and Pjk instead of V[j][k] and P[j][k]
      Vjk = sig(UNI[0, 1) · Vjk + UNI[0, 1) · c1(Pjkbest ⊕ Pjk) + UNI[0, 1) · c2(gbest[k] ⊕ Pjk))
      if Vjk = 1 then
        Pjk = nbest(k, Pjk, {boxes of neighbors of k})
        if changed box: add the node to the new box, and delete it from the old one.
      end if
    end for
  end for
  if number of boxes less than for Pbest[j] then
    Pbest[j] = P[j]
    if P[j] is the overall best: gbest = P[j]
  end if
end for
return gbest

```

2.13 Fuzzy algorithm

The fuzzy box-covering algorithm and the corresponding concept of fuzzy fractal dimension were introduced by Zheng *et al.* [28]. The authors propose a novel scheme for estimating the fractal dimension of a network. Instead of assigning boxes, they introduce a measure to estimate the fraction of the network one box covers on average. For each node, a box of radius r_B around a central node is constructed and the contributions of the nodes of the box are summed. This contribution is a so-called “membership function” that exponentially decays with the distance from the central node. After aggregating and normalizing these contributions, we get an estimation of the proportion of the network that a box covers on average. Taking its inverse gives the approximating box number.

It must be noted, however, that in our experience this approximating number of boxes is not meaningful, only the regressed d_B fractal dimension may be of practical interest. Pseudo-code of the fuzzy box-covering method is presented in Algorithm 13. Note that our pseudo-code is slightly different from the code presented in [28] because we assumed that the networks are undirected, hence it is enough to calculate the distance between v_j and v_k only once.

Algorithm 13 Fuzzy algorithm

Require: $G = (V, E)$, $R = \{r_i\}$

```

for  $r_i$  in  $R$  do
   $N^{-1}(r_i) = 0$ 
  for  $j = 1$  to  $|V|$  do
    for  $k = j + 1$  to  $|V|$  do
      if  $d(v_j, v_k) \leq r_i$  then
         $N^{-1}(r_i) += 2 \cdot \exp\left(-\frac{d^2(v_j, v_k)}{r_i^2}\right)$ 
      end if
    end for
  end for
   $N^{-1}(r_i) = \frac{N^{-1}(r_i)}{|V|(|V|-1)}$ 
end for
return  $\{N^{-1}(r_i)\}$ 

```

2.14 Sampling-based method

Recently, Wei *et al.* [32] proposed a novel way to tile a network, that could be considered as an “advanced version” and extension of the overlapping-box-covering algorithm, however, the authors did not compare it to the OBCA algorithm. Note that this proposal of Wei *et al.* is rather a framework than a particular algorithm.

There are two main stages in the covering process: the first step is the generation of many box proposals, for example by running the random sequential or CBB algorithms – n times. In the second phase, the authors suggest picking some of the proposed boxes in a greedy manner to tile the network. Obviously, a particular realization of the covering is defined by the employed algorithm, since the final cover consists of the boxes that the greedy strategy selected from the box proposals.

Besides CBB and random sequential, the authors proposed a so-called *maximal box sampling* strategy for sampling box proposals which is described in Algorithm 14. Wei *et al.* also proposed two greedy strategies: *big-box first* and *small-box removal*. These procedures are detailed in Algorithm 15. The authors show that the small-box-removal sampling considerably outperforms the big-box-first strategy and classical algorithms such as MEMB and CBB.

Algorithm 14 The maximal box sampling method

Require: $G = (V, E)$, l_B , n

```

 $U = V$ 
 $P = []$ 
for  $i = 1$  to  $n$  do
  if  $U \neq \emptyset$  then
    let  $s \in U$  random
  else
    let  $s \in V$  random
  end if
   $C = B(s, l_B) \setminus \{s\}$ 
   $box = \{s\}$ 
  while  $C \neq \emptyset$  do
    let  $t \in C$  random
    add  $t$  to  $box$ 
    remove  $t$  from  $C$ 
     $C = C \cap B(t, l_b)$ 
  end while
  append  $box$  to  $P$ 
   $U = U \setminus box$ 
end for

```

Algorithm 15 Greedy selection strategies

```

# Big-box first strategy

Require:  $P = [p_i]$  box proposals,  $S = [s_i = |p_i|]$  box sizes
sort  $P$  ascending by corresponding  $S$  values
 $U = V$ 
 $R = []$ 
while  $s_l > 0$  with  $s_l$  being the size of the last element of  $P$  do
  append  $p_l \cap U$  to  $R$ 
  cover the (uncovered) nodes in  $p_l$ :  $U = U \setminus p_l$ 
  modify  $S$  accordingly:  $s_i = |p_i \cap U|$ 
  sort  $P$  ascending by corresponding  $S$  values
end while
return  $R$ 

# Small-box first strategy

Require:  $P = [p_i]$  box proposals,  $S = [s_i = |p_i|]$  box sizes
# sizes are directly associated to the proposals and do not form an ordered sequence
sort  $P$  ascending by corresponding  $S$  values
 $U = V$ 
 $R = []$ 
let  $C(n)$  contain the number of box proposals that contain  $n \in V$ 
for  $j = 1$  to  $|P|$  do
  if there is  $n \in p_j$ :  $C(n) = 1$  then
    append  $p_j \cap U$  to  $R$ 
    # cover the (uncovered) nodes in  $p_j$ :
     $C(n) = 0$  for all  $n \in p_j \cap U$ 
     $U = U \setminus p_j$ 
    modify  $S$  accordingly:  $s_i = |p_i \cap U|$ 
    sort  $P[j + 1 :]$  ascending by  $S$ 
  else
     $C(n) -= 1$  for all  $n \in p_j$ 
  end if
end for
return  $R$ 

```

Further methods

Note that there are a few algorithms that are not implemented in our Python package yet, but for the sake of completeness, we briefly introduce these methods in this section.

Schneider *et al.* [31] introduced a box-covering algorithm that is usually referred to as minimal-value burning (MVB) algorithm in the related works. Their algorithm first creates a box around every node, and then it removes the unnecessary boxes. Although their algorithm is said to be nearly optimal, it comes at a price: its computational complexity is high, i.e. for regular networks it scales exponentially with the number of nodes.

Akiba *et al.* [35] introduced a sketch-based box-covering algorithm, which uses bottom- k min-hash sketch representation of the boxes and it is based on the reduction of the box-covering problem to a set-covering problem. The authors compare their algorithm to the GC [7], CBB [7], MEMB [7], and the MVB algorithm [31]. Akiba *et al.* also made their implementations of these algorithms publicly available, which can be found at <http://git.io/fractality>.

Recently, Giudicianni *et al.* [36] proposed a community-structure-based algorithm that can be used for networks with uniform degree distribution, i.e., where the nodes have roughly the same amount of connections such as in infrastructure networks (e.g., road, electrical grid, and water distribution networks).

Table 2 The analyzed networks

code	full name, description	reference
phd	CSpd: PhD's in computer science	[46]
cel	C. elegans: metabolic reactions between substrates	[46]
soc	Caltech36: social network from Facebook	[46]
ful	Archaeoglobus Fulgidus Whole Network: cellular network	[47]
pol	Polbooks: Books about US politics, compiled by V. Krebs	[46]
dol	dolphins: Dolphins social network	[46]
mou	mouse brain data, edges represent fiber tracts	[46]
min	minnesota: Minnesota road network	[46]
eco	E. Coli Whole Network: cellular network	[48]
tok	Tokyo metro: Tokyo underground network	[49]

Note that in this work we do not touch upon the concept of multifractality, but for the sake of completeness we mention that the sandbox algorithm, introduced by Tél *et al.* [43], can be used to estimate the multifractal dimension of networks [44].

3 Network data

We have tested the implemented algorithms on numerous real-world networks, many of which are already known from the related literature (see e.g. [3, 26, 45]). The analyzed networks are listed in Table 2.

Some of the considered networks are directed or contain more than one connected component. Since box-covering algorithms are developed for undirected and connected graphs, our policy was to connect nodes with an undirected edge if there was a link between them in any direction, moreover, we worked with the largest connected component of unconnected networks. We also remark that there were networks containing loops but we believe that they do not have any effect since any node has 0 distance from itself.

We summarize some simple structural features of these networks in Table 3. Besides the usual basic metrics, the value calling for more explanation is the GINI-score. It was introduced by the Italian statistician and sociologist Corrado Gini to quantify wealth inequality in society. This motivated the use of the metric since we wanted to account for the 'inequality of degree distribution' among the vertices of the network. In our work, the GINI-score is defined as follows:

$$\frac{N+1}{N} - 2 \cdot \frac{\sum_{i=0}^{N-1} (N-i) \cdot k_i}{N \cdot \sum_{i=0}^{N-1} k_i}, \quad (1)$$

where k_i stands for the degree of the i^{th} node, N is the number of nodes and the sum in the numerator runs over the nodes sorted by their degree in ascending order.

Note that formula (1) gives 0 for "total equality" (all vertices have the same degree) and bounded by $1 + 1/N$, that is practically 1 for large networks.

We note here that the clustering coefficient was calculated with the built-in `networkx.average_clustering` method with default arguments. The modularity was calculated from a partition with the Girvan-Newman method (see `girvan_newman` in `networkx` with default arguments). To calculate the modularity, we used `quality.modularity` from `networkx` with `weight=None`.

Table 3 Structural properties of the analyzed networks. Columns contain: N: number of nodes, E: number of edges, D: network diameter, gini: GINI coefficient of the degree distribution, C: clustering coefficient, Q: modularity

network	N	E	D	gini	C	Q
phd	1025	1043	28	0.43	0.00	0.35
cel	453	2025	7	0.49	0.65	0.03
soc	762	16651	6	0.45	0.41	0.00
ful	1557	3571	14	0.39	0.00	0.01
pol	105	441	7	0.33	0.49	0.44
dol	62	159	8	0.33	0.26	0.38
mou	213	16242	2	0.10	0.76	-0.00
min	2640	3302	99	0.15	0.02	0.38
eco	2859	6890	18	0.41	0.00	0.00
tok	248	319	36	0.22	0.02	0.45

4 Evaluation

In this section, we turn to the evaluation and comparison of the implemented algorithms on the networks. Before starting investigations, the reader is reminded that this is the point where we return to the *evaluation* convention for box sizes, see the introduction of Section 2. The difference between the two conventions might seem very minor and some authors argue that the particular definition has no effect on the fractal scaling, however, Rosenberg emphasizes that it can indeed make a large difference [8]. Thus, it makes it essential for the evaluation part – especially for the box dimension approximation – to return to the more frequently used convention on the box size.

4.1 Preliminaries

Here we describe the boxing process we applied in our experiments. It is presented in a pseudocode format (see Algorithm 16), however, this pseudocode does not necessarily follow the Python code strictly in all cases.

Algorithm 16 Evaluation framework

Require: $G = (V, E)$, m
 Consider G 's maximal connected component
 Establish r_B and l_B values for which we box (around 15 different values up to the diameter for r_B , for l_B same equivalent sizes)
 Measure and store the time needed for preprocessing (e.g., computing shortest path data, and auxiliary graph construction)
for alg in algorithms **do**
 set random seed
 for b in box sizes that apply to alg **do**
 for $i = 1$ to m **do**
 Perform a boxing with alg on G with box size b and measure its running time t .
 Add the additional time to t that was necessary in the preprocessing state
 Store the obtained number of boxes N_B and the execution time together
 end for
 if all the m iterations yielded 1 box **then**
 break
 end if
 end for
 Write the results into log files
end for

We note that for the merge algorithm the actual process of measuring the running time was a bit more complicated since it computes N_B values for all box sizes up to a maximal value (see Algorithm 8). We recorded the execution time plus the preprocessing time for all box sizes, including $l_B = 1$. Furthermore, to avoid counting the preprocessing time multiple times, we retained the total execution time

by subtracting the preprocessing time (that is the running time of the algorithm with $l_B = 1$) from the execution time of the $l_B \geq 2$ coverings, and finally, we summed up these “corrected” runtimes.

In the current analysis, we performed the box covering $n = 15$ times for each box size, for each network, for each algorithm. The algorithms and their parameter settings – along with their respective abbreviations – are listed in Table 4. We intended to choose the shorthand notations to be as intuitive as possible.

Table 4 The analyzed algorithms with their respective parameter values. The leftmost column stands for the abbreviation. In some plots, the expanded version of these abbreviations appears but it is clear what they mean.


Abbr.	Algorithm	Hyperparameters
cbb	cbb	-
d30	differential evolution	p: 40, f: 0.9, c: 0.85, g: 30
d70	differential evolution	p: 40, f: 0.9, c: 0.85, g: 70
fuz	fuzzy	-
gre	greedy	strategy: random_sequential (see networkx package)
mc.25	mcwr	p: 0.25
mc.5	mcwr	p: 0.5
mc.75	mcwr	p: 0.75
memb	memb	-
mer	merge	-
obca	obca	-
ps.2k	pso	g: 200, p: 99, c_1 : 1.494, c_2 : 1.494
ps1k	pso	g: 1000, p: 99, c_1 : 1.494, c_2 : 1.494
remcc	remcc	-
rs	random sequential	-
sa	simulated annealing	k_1 : 5000, k_2 : 5, k_3 : 20, T_0 : 0.6, c: 0.995
sm10	sampling	inner algorithm: maximal box sampling, n: 10, strategy: small first
sm40	sampling	inner algorithm: maximal box sampling, n: 40, strategy: small first
sr10	sampling	inner algorithm: random sequential, n: 10, strategy: small first
sr40	sampling	inner algorithm: random sequential, n: 40, strategy: small first

4.2 Comparison of the number of boxes

The most obvious way to analyze our results is to prepare $N_B(l_B)$ plots and inspect them. In these plots, we show the mean N_B value (denoted by \bar{N}_B) against the box size l_B for each network. To retain comprehensibility, we only plot around 5 algorithms in the same figure, where the algorithms are denoted with different colors and markers. For comparison, we included the greedy algorithm in each plot. Also, note that we only plotted for box sizes appearing in the greedy algorithm’s output. Figure 5 illustrates the $N_B(l_B)$ plot for the Tokyo metro network with five algorithms, similar plots for all the other networks and algorithms are available in the supplementary material^[4].

Similarly to the related works [26, 31], we also plot the difference of the N_B values and the number of boxes returned by a baseline algorithm, which is denoted by N_B^{base} . In our work, the baseline N_B^{base} was chosen to be the minimal (best) value returned by the greedy algorithm. With this, we plot the difference of the mean N_B and the baseline N_B^{base} , which is denoted by $\Delta\bar{N}_B$. Figure 5 shows the $\Delta\bar{N}_B(l_B)$ plot for the Tokyo metro network with five algorithms, similar plots for all the other networks and algorithms are available in the supplementary material.

^[4]<https://github.com/PeterTKovacs/boxes>

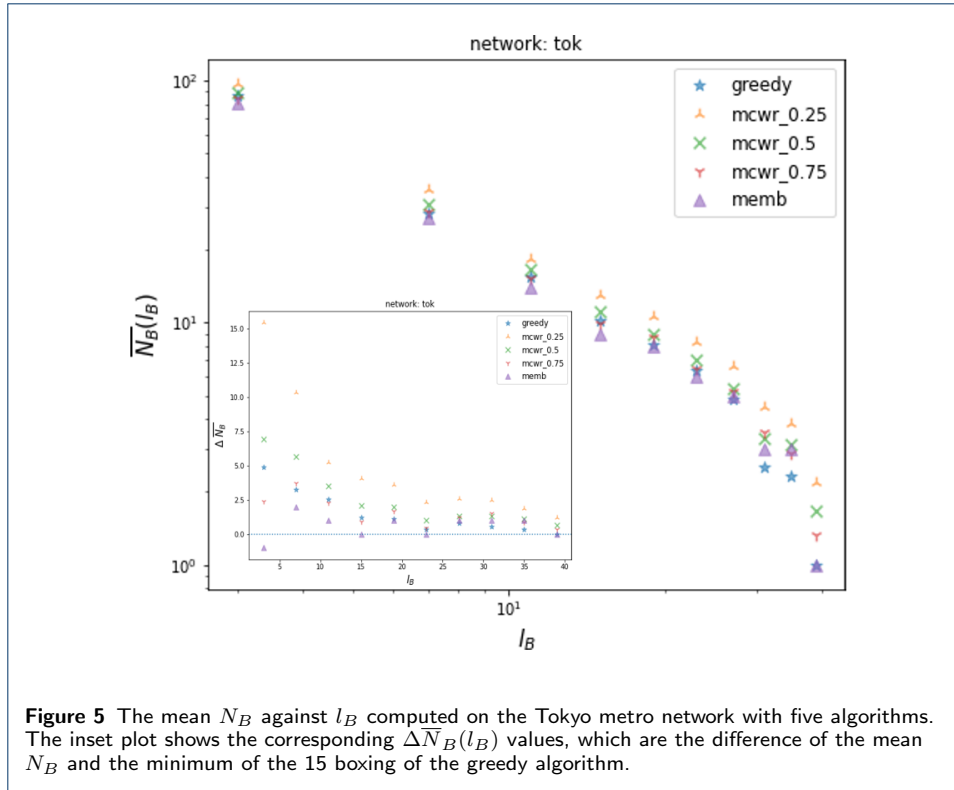

4.3 Comparison with performance scores


In the following step, we assess the performance of the algorithms with a performance score, defined as the normalized deviation from the baseline, formally:

$$P(l_B) = \frac{N_B(l_B) - N_B^{\text{base}}(l_B)}{N_B^{\text{base}}(l_B)} \quad (2)$$

Behold that the lower this score is, the better the coverage of the algorithm is. Also note that the score is defined for every boxing output, meaning that we have $n = 15$ scores for each algorithm, box size, and network. The reason behind the definition of this P performance score is that these values – expressing relative performance – can be aggregated over box sizes since they are “dimensionless”. This is a very desirable property since we want to draw some conclusions from an intimidating amount of data. There is an additional caveat though, we shall define an appropriate interval of box sizes on which we investigate performance scores. The motivation behind limiting the analysis on certain box sizes is that the performance score is not so informative in those cases when the whole network is covered with very few boxes. In practice, the tail distribution of the N_B is usually noisy, thus it is pruned from the fitting when the fractal dimension is estimated. Our criterion to consider a box size was that the baseline shall have at least ten boxes. Otherwise even if the difference between N_B and N_B^{base} is only one, the relative change compared to the value of N_B^{base} would be misleadingly large.

Following this line of thought, we also normalized runtimes to assess the average speed of our algorithms. This is done by dividing the runtime of an algorithm by

the time that was needed to calculate the N_B^{base} baseline number of boxes. By doing this, we can get an overall speed measure for the algorithms.

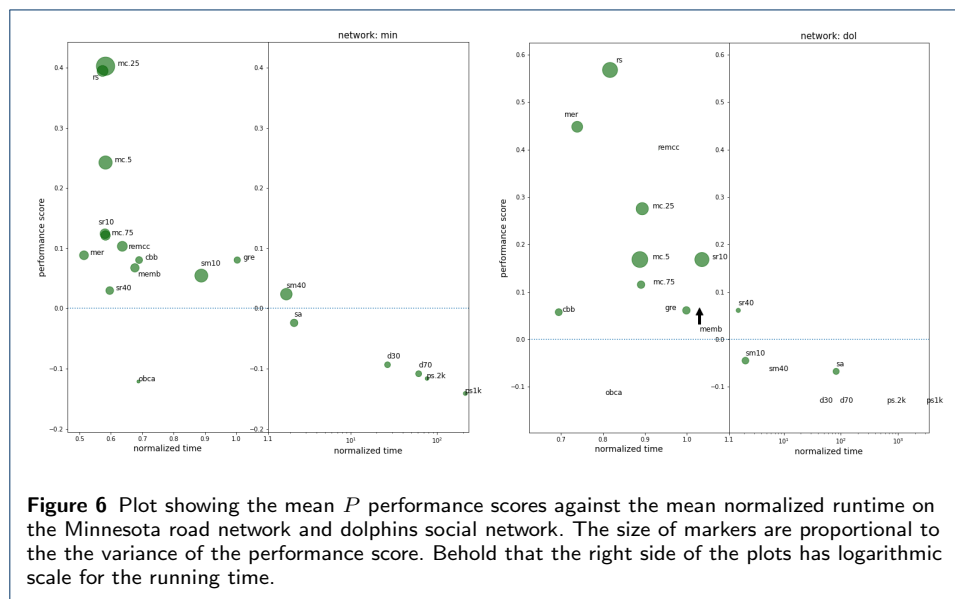


At last, we are in the position to concisely define the way we compare the algorithms: we plot the mean performance scores versus the mean normalized runtimes with averaging over the accepted l_B values (defined earlier). With this, we get one plot per network where the algorithms are represented by one marker as Figure 6 shows. To increase information content, the area of the markers is proportional to the empirical variance of the performance score (so the radius of the dots is proportional to the standard deviation). Note that the sizes of markers on plots for different networks are not to be compared due to varying scaling. Due to the great differences in runtimes, we divided plots into two sections, with the left having linear and the right having logarithmic horizontal axis (the plots join at 1.1) – see Figure 6.

The abbreviated name of the algorithms is written next to their corresponding marker. As a general rule, if the marker is barely visible due to the small standard deviation, the labels give guidance about the markers' location. There are some cases, where this would lead to ambiguity, which is avoided by arrows pointing to the position of the marker. Due to extremely long running time, we had to terminate the simulated annealing and the PSO algorithms on the *E. coli* network. Hence, these data points are missing from the set but we can confidently say that their absence does not alter our conclusions. The results on the Minnesota road network and dolphin social network are depicted in Figure 6, similar figures for all the remaining networks are available in the supplementary material^[5].

Finally, we conclude this section by comparing performance on multiple networks on the same plot. We chose the following real networks: Minnesota road network (min), Tokyo metro (tok), computer science PhD's collaboration network (phd), *A. fulgidus* network (ful), and *E. coli* cellular network (ec). The reason why we

[5] <https://github.com/PeterTKovacs/boxes>

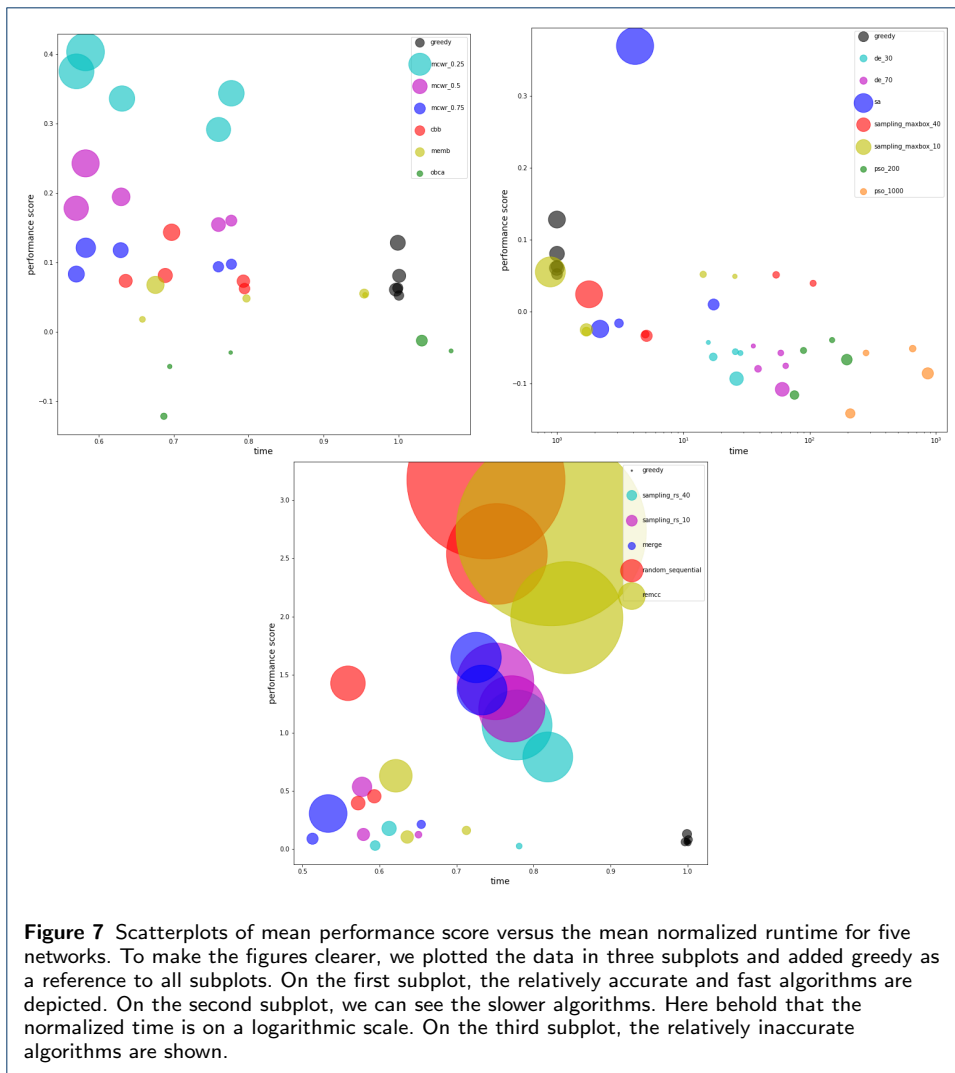

chose these networks is that the number of accepted box sizes was more than one. To make the figures clean, we formed three groups of the algorithms and plotted these groups in separate graphs, the results are shown in Figure 7. For comparison, the results of the greedy algorithm are always shown. Although we stress that this investigation is insufficient for deciding which algorithms are “the best”, we can observe some patterns that will allow us to propose general conclusions in Section 5.

4.4 Remark about variances

In the analysis so far, we used the variance of the P performance score on the acceptance region, which is determined by the number of boxes in the corresponding baseline value. One shall notice that in general, this deviation can come from two sources. First, the *intrinsic* variance of the algorithm, which is the uncertainty of the outcome for a fixed box size (on a given network). The second possible source is that in the acceptance range the average performance of the algorithm varies with respect to the baseline value.

In the plots so far, we accounted for both types of variances, since we considered the variance of all the P scores on the acceptance region. However, It would be also informative to assess the intrinsic variance too, since our baseline is just another approximating algorithm, even if it is an established one. This comparison is done in Table 5 where the mean intrinsic standard deviations and the total standard deviation of the P performance scores are reported (considering scores only for the accepted box sizes). It is interesting to see that the “volatile” algorithms depicted in the third subplot of Figure 7 behave differently through this lens: for example, the intrinsic deviation is often much smaller than the total deviation for the merge algorithm and especially for the REMCC, however, in the case of the random sequential, they are much closer to each another. Hence the readers should behold the difference between the notions of intrinsic and total deviations and use the appropriate one for their purpose.

Table 5 Variance in the P performance score: mean intrinsic/total standard deviation. Values for mouse brain network (mou) are missing due to our criterion on the number of boxes.

	phd	eco	ful	min	tok
cbb	0.04/0.08	0.03/0.06	0.05/0.07	0.05/0.08	0.06/0.10
d30	0.00/0.03	0.01/0.02	0.02/0.04	0.02/0.07	0.02/0.03
d70	0.00/0.03	0.01/0.02	0.01/0.03	0.02/0.07	0.02/0.03
gre	0.04/0.07	0.03/0.06	0.04/0.06	0.05/0.08	0.06/0.09
mc.25	0.11/0.20	0.07/0.14	0.09/0.15	0.11/0.22	0.10/0.15
mc.5	0.07/0.14	0.05/0.08	0.05/0.06	0.07/0.16	0.06/0.10
mc.75	0.05/0.09	0.03/0.06	0.04/0.06	0.05/0.11	0.05/0.09
memb	0.00/0.03	0.00/0.05	0.00/0.03	0.00/0.10	0.00/0.04
mer	0.03/0.35	0.05/0.47	0.05/0.47	0.04/0.11	0.05/0.08
obca	0.00/0.03	0.00/0.02	0.00/0.06	0.00/0.04	0.00/0.02
ps.2k	0.01/0.03	na	0.01/0.03	0.02/0.04	0.01/0.05
ps1k	0.00/0.03	na	0.01/0.03	0.02/0.05	0.01/0.06
remcc	0.00/0.31	0.00/1.78	0.00/1.05	0.00/0.12	0.00/0.08
rs	0.13/0.32	0.51/1.48	0.36/0.94	0.07/0.13	0.08/0.13
sa	0.02/0.04	na	0.06/0.19	0.05/0.09	0.04/0.06
sm10	0.01/0.06	0.02/0.02	0.01/0.03	0.06/0.15	0.03/0.04
sm40	0.01/0.06	0.01/0.03	0.01/0.03	0.06/0.14	0.02/0.04
sr10	0.09/0.18	0.10/0.72	0.19/0.62	0.04/0.12	0.04/0.06
sr40	0.08/0.14	0.23/0.65	0.20/0.47	0.05/0.09	0.04/0.06

	soc	pol	cel	dol
cbb	0.04/0.04	0.06/0.06	0.04/0.04	0.05/0.05
d30	0.01/0.01	0.02/0.02	0.00/0.00	0.00/0.00
d70	0.01/0.01	0.00/0.00	0.00/0.00	0.00/0.00
gre	0.05/0.05	0.05/0.05	0.05/0.05	0.05/0.05
mc.25	0.09/0.09	0.23/0.23	0.13/0.13	0.08/0.08
mc.5	0.04/0.04	0.15/0.15	0.06/0.06	0.11/0.11
mc.75	0.03/0.03	0.08/0.08	0.03/0.03	0.05/0.05
memb	0.00/0.00	0.00/0.00	0.00/0.00	0.00/0.00
mer	0.03/0.03	0.08/0.08	0.06/0.06	0.07/0.07
obca	0.00/0.00	0.00/0.00	0.00/0.00	0.00/0.00
ps.2k	0.01/0.01	0.00/0.00	0.00/0.00	0.00/0.00
ps1k	0.01/0.01	0.00/0.00	0.00/0.00	0.00/0.00
remcc	0.00/0.00	0.00/0.00	0.00/0.00	0.00/0.00
rs	0.13/0.13	0.18/0.18	0.25/0.25	0.10/0.10
sa	0.05/0.05	0.05/0.05	0.06/0.06	0.04/0.04
sm10	0.03/0.03	0.06/0.06	0.00/0.00	0.05/0.05
sm40	0.02/0.02	0.03/0.03	0.00/0.00	0.00/0.00
sr10	0.10/0.10	0.12/0.12	0.45/0.45	0.10/0.10
sr40	0.07/0.07	0.04/0.04	0.56/0.56	0.03/0.03

4.5 Approximating the box dimension

As a final step in the evaluation, we aim to estimate the fractal dimension of the investigated networks. Here we returned to the mean N_B values for each algorithm, and we did not impose the acceptance criterion for the l_B box sizes for this analysis.

We plotted the logarithm of the average N_B versus the logarithm for l_B and tried to fit a linear function to it. This seemingly easy task involved a lot of subjective judgments on whether the relationship could be called linear and on what range of box sizes shall we perform the regression and if there are enough points on the plot to be able to make a confident statement. Behold that fitting linear functions by consulting the plot and adjusting the setup if necessary is a prerequisite for having meaningful results. In practice, the $\log(N_B) - \log(l_B)$ plot is mostly not linear on the whole range. Generally speaking, the characterization of power laws in empirical data is cumbersome, since the tail of the distribution is usually unreliable due to the large fluctuations, furthermore, the identification of the range, where the power-law relation holds is difficult [50].

In this experiment, there may be three outcomes: 1) the fit is performed and the relationship is found to be linear, 2) it is realized that the plot is not “linear enough”, or 3) the fit was not possible to carry out (missing or too few points: mouse brain (mou), and *E. coli* (eco) networks). In addition to the estimated fractal dimension, we also accounted for the error of the fit (sum of squared errors) with the following expression:

$$SSE = \sqrt{\frac{\sum(y - \hat{y})^2}{(n - 2) \cdot \sum(x - \bar{x})^2}}, \quad (3)$$

where x and y stand for the $\log(l_B)$ and $\log(N_B)$ values respectively. The numerator is the sum of squared residuals of the fit, in the denominator, \bar{x} is the mean of x values, n is the number of data points in the fit. Due to the subjective nature of the experiment, the first two authors have performed this fitting procedure independently and then compared the results. Numerical values are reported in Tables 6 and 7.

5 Discussion and conclusion

In this final section, we summarize our observations and point out some directions our analysis could be extended.

5.1 Comparison of algorithms

We compared the algorithms primarily based on their P performance scores that measure relative performance to the baseline values (the best result of the greedy coloring algorithm). The main tool of comparison is to plot the mean P scores against the average relative runtime with respect to the baseline for networks with sufficiently large diameters. The radius of the markers is proportional to the standard deviations of the P performance score. Firstly, the P scores and runtimes shall be considered and the standard deviations should be considered only as a secondary feature due to the multiple sources of the variance.

The results shown in Figure 6 and 7 might allow us drawing the following conclusions. First, it should be noted that there are many algorithms that turned to be way too slow on the analyzed networks: differential evolution (DE), particle swarm optimization (PSO), sampling with maximal box sampling, and simulated annealing (SA). We must also note that these methods yield relatively low box numbers (which is favorable) but the price for this seems to be too heavy. It is also interesting to note that three of these methods (DE, PSO, SA) are metaheuristic algorithms with several hyperparameters. We followed the instructions of the original papers to set the parameters but it seems that tuning the hyperparameters has a high effect on the results and it might be troublesome.

Our results are congruent with that of the related works, for example, Locci *et al.* reported the running time of the greedy coloring, merge, and simulated annealing algorithms, and their results also show that the order of magnitude of the runtime of the SA algorithm (1177s) is twice as much as that of the GC (13s) and the merge algorithm (21s) on the *E. coli* network [18]. Furthermore, Akiba *et al.* reported that the MEMB algorithm is faster than the greedy coloring and the CBB algorithms [35], however, in our experiments the difference between the time complexity of the CBB and MEMB algorithm was smaller.

Secondly, there is a group of relatively inaccurate methods as random sequential, REMCC, merge, and sampling with random sequential. Although these algorithms have acceptable runtimes, they fail to have good performance consistently.

The third group is which may be called “the most desirable” according to our criteria, that consists of the MCWR, OBCA, MEMB, and CBB algorithms. These algorithms are quite decent both in terms of speed and accuracy. Note that OBCA is the most accurate in this group but it has sometimes a relatively long running time, and it is not applicable if one is also interested in the created boxes. In some sense, the greedy coloring algorithm also belongs to this third group but it is usually slightly slower than the other members of this group. From Figure 6 and Figure 7 we can observe that the performance of the MEMB and the greedy algorithms are very similar, which has been also shown by Wu *et al.* [26].


From Figure 7 and Table 5, it is apparent that the random sequential and the REMCC algorithms have the highest variance in the performance scores, Moreover, the RS algorithm has also high intrinsic variance that has been also pointed out by Song *et al.* [7].

One may be tempted to draw some general conclusions about the relation between the structure of the network and the performance of the algorithms but it is a very challenging task considering the limited number of analyzed networks. However, without going into details about the qualitative behavior of the algorithms, we can notice that the “fast but inaccurate” random sequential and merge algorithms achieve one magnitude lower performance scores on the Minnesota road network than on the *C. elegans* network. We speculate that this may occur because the road network has concentrated degree distribution (most of the nodes have 2-4 neighbors), which is also shown by the low GINI score (see Table 3), whereas in the *C. elegans* network, the degree distribution is much more uneven (higher GINI score).

5.2 Comparing the estimated fractal dimensions

As estimating the fractal dimension is one of the main points of box-covering algorithms, we also investigated what fractal dimensions the various algorithms yield on the investigated networks. Table 6 and Table 8 suggest, that the dimension of the fractal networks is typically between 1.5 and 3.5. For example, the dimension of the Tokyo metro network is around 1.5, which makes sense, since the metro network is a composition of path graphs, however, at the transfer stations, these one-dimensional graphs are joined, which increases the fractal dimension of the network. On the other hand, clearly, a metro network does not contain as many junctions as the Minnesota road network, whose fractal dimension is around 2.0, as one would expect from a grid-like network.

We can observe that the estimated fractal dimension varies with the applied box-counting algorithm significantly. For example, on the *phd* network it ranges from 1.81 (REMCC) to 2.50 (merge) at the first experimenter and from 1.97 (REMCC) to 2.43 (merge) at the second experimenter. Similarly, the estimated fractal dimension of the Minnesota road network ranges from 1.60 (REMCC and SM) to 2.11 (merge) at the first experimenter and from 1.63 (SM) to 2.20 (DE) at the second experimenter. Interestingly, the dimension estimated using the merge algorithm is generally much higher than the dimension resulted with the other algorithms. It is due to the fact that for small l_B values the merge algorithm performs quite poorly but for larger l_b values its performance increases, see Figure 8.

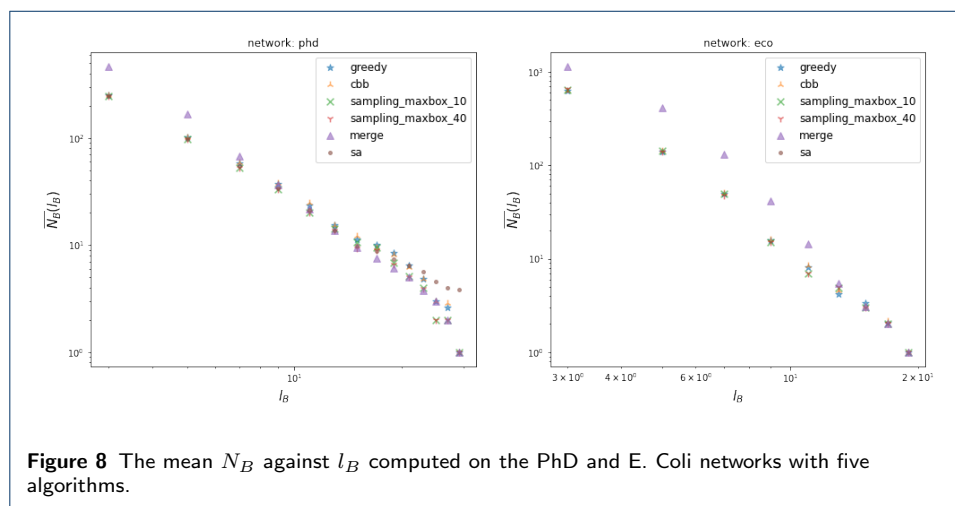

In related works, the reported dimensions are close to our approximations. However, we found that the estimated fractal dimension not only depends on the applied algorithm but also on the way the regression is carried out, especially when the diameter of the network is small. For example, our first experimenter found that the d_B dimension of the *dolphin* network is around 1.8, which is in alignment with the findings of Zheng *et al.* who found that the dimension is 1.86 using the MEMB algorithm [21]. On the other hand, the estimated d_B of the *dolphin* network according to our second experimenter is between 2.3 and 2.4, which is congruent with the result of Rosenberg, who reported a dimension of 2.38 [8]. Hence, we can conclude that in the literature the reported fractal dimensions of the networks, especially of

the small ones, are subject to the experimenters' subjective views, more specifically, what range of l_b values is used for fitting.

In the case of the other networks, the difference between the two experimenters is not so significant, however, the first experimenter's estimated values are usually below that of the second experimenter, which is probably due to the fact that the second experimenter fitted the line on a smaller range of l_B values. This is also the reason why there are many missing data in the first experimenter's estimations. According to our experimenters, most of the box-covering algorithms' results suggested that the fractal dimension of the *E. coli* network is around 3.5, which is close to the estimation of the related works: Zhang *et al.* used the greedy and the fuzzy algorithms and the estimated dimensions are $d_B = 3.54$ and $d_B = 3.54$ respectively [28]. Similarly, Sun & Zhao reported $d_B = 3.47$ and $d_B = 3.35$ for the *E. coli* network based on the CBB and OBCA algorithms [29]. Likewise, Locci *et al.* used the merge, the simulated annealing based, and the greedy coloring algorithms, and their estimations for the *E. coli* network are $d_B = 3.57$, $d_B = 3.47$, and $d_B = 3.44$ respectively [18].

Sun & Zhao also estimated the fractal dimension of the *C. elegans* network with the OBCA and the CBB algorithms [29]: $d_B = 2.99$ and $d_B = 2.95$, which are also close to the estimations of our experimenters, which is around 3.0.

Note that the Facebook social network and the brain network could not be considered fractal networks, since the N_B decays rather exponentially with the size of the boxes, and the estimated dimension would be above 5 in these networks.

The related works do not report the error of the regression analysis, however, we believe that to gain a better understanding of the goodness-of-fit of the line, it is also important to measure the SSE values, which are shown in Table 7 and Table 9. We can observe that these SSE values are relatively large that is due to the small number of observations, especially in the case of the second experimenter (Table 9). These results also support the fact that the exact choice of the range of the l_B values where the linear regression is carried out significantly influences both the value and the error of the estimated fractal dimension. We argue that the impact of the range on estimating the dimension might be greater than the impact of the applied box-covering algorithm itself, especially in the case of small networks. Unfortunately, there is no canonical method for determining the appropriate range where the fractal scaling holds, which calls for further research.

Table 6 Estimated d_B values for the first experimenter. Here, 0 means that the fit could not be carried out, -1 stands for not fractal or too few datapoints.

	phd	soc	mou	eco	pol	cel	ful	dol	min	tok
cbb	1.94	-1	0	3.38	-1	-1	3.25	-1	1.76	1.29
d30	2.20	-1	0	3.45	-1	-1	-1	-1	1.88	1.35
d70	2.13	-1	0	3.44	-1	-1	3.43	-1	1.87	1.35
fuz	2.33	-1	0	-1	-1	-1	-1	-1	1.90	1.87
gre	2.00	-1	0	3.46	-1	-1	3.07	-1	1.77	1.30
mc.25	1.95	-1	0	3.07	-1	2.70	3.06	1.74	1.74	1.28
mc.5	2.00	-1	0	3.24	-1	-1	3.16	1.88	1.72	1.35
mc.75	2.09	-1	0	3.33	-1	-1	3.28	-1	1.72	1.33
memb	2.00	-1	0	3.48	-1	-1	3.15	-1	1.71	1.27
mer	2.50	-1	-1	4.86	-1	-1	-1	-1	2.11	1.55
obca	2.07	-1	0	3.44	-1	-1	3.20	-1	1.84	1.36
ps.2k	2.12	-1	0	-	-1	-1	3.58	-1	1.82	1.33
ps1k	2.20	-1	0	-	-1	-1	3.57	-1	1.80	1.33
remcc	1.81	-1	0	-1	-1	-1	2.73	1.77	1.60	1.12
rs	2.20	-1	0	-1	-1	3.44	2.96	2.08	1.77	1.27
sa	1.90	-1	0	-	-1	-1	3.07	-1	1.65	1.06
sm10	2.00	-1	0	3.48	-1	-1	3.64	-1	1.60	1.37
sm40	2.03	-1	0	3.48	-1	-1	3.25	-1	1.63	1.38
sr10	2.13	-1	0	3.38	-1	-1	3.97	-1	1.83	1.38
sr40	2.10	-1	0	3.40	-1	-1	3.05	-1	1.83	1.28

Table 7 SSE values for the fractal dimension estimation according to the first experimenter. Here, 0 means that the fit could not be carried out, -1 stands for not fractal or too few datapoints.

	phd	soc	mou	eco	pol	cel	ful	dol	min	tok
cbb	0.04	-1	0	0.08	-1	-1	0.14	-1	0.06	0.02
d30	0.08	-1	0	0.09	-1	-1	-1	-1	0.09	0.03
d70	0.07	-1	0	0.09	-1	-1	0.16	-1	0.06	0.03
fuz	0.01	-1	0	-1	-1	-1	-1	-1	0.04	0.13
gre	0.07	-1	0	0.10	-1	-1	0.10	-1	0.06	0.02
mc.25	0.04	-1	0	0.07	-1	0.07	0.10	0.07	0.04	0.04
mc.5	0.05	-1	0	0.08	-1	-1	0.06	0.09	0.04	0.05
mc.75	0.07	-1	0	0.08	-1	-1	0.14	-1	0.04	0.05
memb	0.06	-1	0	0.09	-1	-1	0.12	-1	0.07	0.04
mer	0.04	-1	-1	0.09	-1	-1	-1	-1	0.01	0.04
obca	0.06	-1	0	0.09	-1	-1	0.14	-1	0.07	0.02
ps.2k	0.06	-1	0	-	-1	-1	0.20	-1	0.07	0.03
ps1k	0.08	-1	0	-	-1	-1	0.20	-1	0.05	0.03
remcc	0.03	-1	0	-1	-1	-1	0.10	0.10	0.04	0.07
rs	0.05	-1	0	-1	-1	0.15	0.19	0.08	0.03	0.02
sa	0.04	-1	0	-	-1	-1	0.15	-1	0.03	0.04
sm10	0.04	-1	0	0.09	-1	-1	0.22	-1	0.03	0.03
sm40	0.04	-1	0	0.09	-1	-1	0.17	-1	0.02	0.03
sr10	0.04	-1	0	0.11	-1	-1	0.15	-1	0.05	0.07
sr40	0.05	-1	0	0.13	-1	-1	0.22	-1	0.05	0.03

Table 8 Estimated d_B values according to the second experimenter. Here, -1.0 means that the network could not be considered fractal or there were too few datapoints.

	phd	soc	mou	eco	pol	cel	ful	dol	min	tok
cbb	2.01	-1	-1	3.51	2.38	3.02	3.51	2.37	1.93	1.50
d30	2.17	-1	-1	3.48	2.13	2.97	3.59	2.30	2.19	1.51
d70	2.18	-1	-1	3.54	2.12	2.97	3.58	2.30	2.20	1.49
fuz	2.33	-1	-1	2.90	1.40	1.47	2.94	1.43	1.91	1.99
gre	1.99	-1	-1	3.51	2.39	3.05	3.51	2.36	2.02	1.53
mc.25	2.19	-1	-1	3.27	2.47	3.20	3.55	2.06	2.00	1.42
mc.5	2.19	-1	-1	3.57	2.35	3.42	3.73	2.08	1.98	1.50
mc.75	2.18	-1	-1	3.85	2.69	3.39	4.06	2.30	1.91	1.46
memb	2.29	-1	-1	3.94	2.70	3.64	4.19	2.39	1.95	1.44
mer	2.43	-1	-1	4.90	2.87	3.64	4.80	2.54	2.13	1.46
obca	2.14	-1	-1	3.50	2.32	2.97	3.93	2.37	2.15	1.54
ps1k	2.17	-1	-1	-	2.12	2.97	3.90	2.30	2.09	1.48
ps.2k	2.16	-1	-1	-	2.12	2.97	3.93	2.30	2.15	1.50
remcc	1.97	-1	-1	3.49	3.20	2.88	3.17	2.08	1.73	1.23
rs	2.36	-1	-1	4.08	2.90	4.17	3.71	2.23	2.03	1.53
sa	2.10	-1	-1	-	1.45	1.60	3.31	1.31	1.80	1.20
sm10	2.07	-1	-1	3.62	2.35	2.97	4.03	2.39	1.58	1.53
sm40	2.10	-1	-1	3.59	2.35	2.97	4.02	2.37	1.63	1.53
sr10	2.37	-1	-1	4.28	2.647	4.40	4.40	2.31	2.08	1.41
sr40	2.33	-1	-1	4.19	2.87	4.29	4.02	2.40	2.07	1.44

Table 9 SSE values for the fractal dimension estimation according to the second experimenter. Here, -1.0 means that the network is not fractal or there are too few datapoints.

	sse	phd	soc	mou	eco	pol	cel	ful	dol	min	tok
cbb	0.05	-1	-1	0.10	0.31	0.22	0.23	0.29	0.05	0.11	
d30	0.08	-1	-1	0.15	0.50	0.22	0.18	0.07	0.04	0.12	
d70	0.08	-1	-1	0.12	0.50	0.22	0.17	0.07	0.05	0.12	
fuz	0.01	-1	-1	0.31	0.22	0.34	0.28	0.18	0.04	0.10	
gre	0.05	-1	-1	0.13	0.28	0.22	0.24	0.32	0.10	0.13	
mc.25	0.04	-1	-1	0.13	0.25	0.04	0.09	0.13	0.04	0.07	
mc.5	0.04	-1	-1	0.15	0.32	0.20	0.07	0.15	0.05	0.08	
mc.75	0.04	-1	-1	0.08	0.60	0.11	0.19	0.10	0.05	0.08	
memb	0.05	-1	-1	0.13	0.70	0.24	0.23	0.16	0.07	0.08	
mer	0.07	-1	-1	0.10	0.11	0.20	0.22	0.11	0.01	0.02	
obca	0.07	-1	-1	0.13	0.26	0.22	0.27	0.07	0.03	0.12	
ps1k	0.08	-1	-1	-	0.50	0.22	0.25	0.07	0.05	0.13	
ps.2k	0.07	-1	-1	-	0.50	0.22	0.25	0.07	0.04	0.13	
remcc	0.08	-1	-1	0.19	0.36	0.27	0.13	0.15	0.05	0.05	
rs	0.04	-1	-1	0.12	0.30	0.23	0.19	0.12	0.02	0.07	
sa	0.09	-1	-1	-	0.11	0.26	0.15	0.11	0.04	0.06	
sm10	0.05	-1	-1	0.12	0.58	0.22	0.27	0.07	0.03	0.12	
sm40	0.05	-1	-1	0.12	0.58	0.22	0.27	0.07	0.02	0.12	
sr10	0.04	-1	-1	0.11	0.26	0.18	0.14	0.20	0.03	0.07	
sr40	0.04	-1	-1	0.14	0.41	0.20	0.18	0.28	0.04	0.05	

5.3 Limitations and future work

In this review, we attempted to be as comprehensive as possible but the dynamic improvements in the field of fractal networks and box-covering algorithms make it hardly possible to be fully comprehensive. However, since our implementation is open source, one can easily integrate novel algorithms into our package.

It is also fair to acknowledge that our analysis contains some arbitrary decisions. For example, the number of repetitions at each l_B or the way we defined the acceptance region for box sizes might seem arbitrary. We believe, however, that for meaningful comparison with a comprehensible performance measure, the aggregation of the results based on some arbitrary decisions is inevitable.

We only reported on the *total* variance of the G performance scores of the algorithm, but one can argue that in some situations the *intrinsic* variation is more informative to use. Furthermore, we assessed the runtime of the algorithms by averaging the normalized runtimes. In this setting, the relative runtimes have the same

'weight' for each box size what we believe is desirable but one could be more interested in the cases where the running time is quite long and not so much in the "easy and fast" cases.

Due to the shortcomings of the evaluation framework, this study alone is by no means authorized to give a final verdict on the algorithms. We believe that the proposed framework together with the open-source code base is an important contribution to the community and it can serve as a starting point for future investigations. To gain a better understanding and make a more confident judgment on the performance of the algorithms, a higher number of networks from various domains could be used, perhaps together with more illuminating performance measures.

Moreover, another interesting further direction of research is to study box-covering algorithms on mathematical network models.

Acknowledgments

We are grateful to Botond Diviki-Nagy for taking part in the implementation of the algorithms.

Funding

The research reported in this paper and carried out at the BME has been supported by the NRD Fund based on the charter of bolster issued by the NRD Office under the auspices of the Ministry for Innovation and Technology. The work of M. Nagy is also funded by the ÚNKP-20-3-1 New National Excellence Program of the Ministry for Innovation and Technology, Hungary. The work of R. Molontay is also supported by the NKFIH K123782 research grant.

Abbreviations

- RS: random sequential
- GC: greedy coloring
- MA: merge algorithm
- CBB: compact-box burning
- MBC: modified box counting
- MEMB: max-excluded mass burning
- REMCC: ratio of excluded mass to closeness centrality
- ECSA: edge-covering with simulated annealing
- SA: simulated annealing
- DE: differential evolution
- PSO: particle swarm optimization
- MOPSO: multiple-objective particle swarm optimization
- ACO: ant colony optimization
- OBCA: overlapping box-covering algorithm
- IOB: improved overlapping box-covering
- MVB: minimal-value burning
- SM: sampling-based method
- CL: Coulomb's Law
- DBCA: deterministic box-covering algorithm
- COM: community-structure-based
- Abbr: Abbreviation
- Ref: Reference
- phd: CSPhd network
- cel: C. elegans metabolic network
- soc: Caltech36 social network from Facebook
- ful: A. Fulgidus cellular network
- pol: polbooks network
- dol: dolphins social network
- mou: mouse brain network
- min: Minnesota road network
- eco: E. coli cellular network
- tok: Tokyo metro network
- SSE: sum of squared errors

Availability of data and materials

The datasets analyzed in this study and the algorithms implemented in Python are publicly available at the following GitHub repository: <https://github.com/PeterTKovacs/boxes>.

Competing interests

The authors declare that they have no competing interests.

Authors' contributions

RM has conceived the study. RM and MN reviewed the literature and collected the algorithms. PTK and MN implemented the algorithms, PTK developed the framework of the algorithms, and PTK performed the analysis. PTK prepared the original draft. MN and RM reviewed and edited the manuscript. All authors have read and agreed to the published version of the manuscript.

Authors' information

Péter Tamás Kovács is a Master student in mathematics at the Budapest University of Technology and Economics. He earned his BSc degree in physics with highest honors.

Marcell Nagy is PhD student in applied mathematics at the Department of Stochastics, Budapest University of Technology and Economics. His research focuses on data-driven network analysis and educational data science. He is the deputy team leader of the Human and Social Data Science Lab.

Roland Molontay is a research fellow at the MTA-BME Stochastics Research Group and an assistant professor of applied mathematics and data science at the Budapest University of Technology and Economics (BME). His research focuses on network theory and on data-driven educational research. He is the founder and leader of the Human and Social Data Science Lab at BME.

Author details

¹Department of Stochastics, Budapest University of Technology and Economics, Budapest, Hungary. ²MTA-BME Stochastics Research Group, Budapest, Hungary.

References

- Newman, M., Barabási, A.-L., Watts, D.J.: The Structure and Dynamics of Networks. Princeton University Press, Princeton (2011)
- Molontay, R., Nagy, M.: Twenty years of network science: A bibliographic and co-authorship network analysis. arXiv preprint arXiv:2001.09006 (2020)
- Song, C., Havlin, S., Makse, H.A.: Self-similarity of complex networks. *Nature* **433**(7024), 392–395 (2005)
- Wen, T., Cheong, K.H.: Invited review: The fractal dimension of complex networks: A review. *Information Fusion* (2021)
- Rozenfeld, H.D., Havlin, S., Ben-Avraham, D.: Fractal and transfractal recursive scale-free nets. *New Journal of Physics* **9**(6), 175 (2007)
- Gallos, L., Song, C., Makse, H.: A review of fractality and self-similarity in complex networks. *Physica A: Statistical Mechanics and its Applications* **386**, 686–691 (2007). doi:[10.1016/j.physa.2007.07.069](https://doi.org/10.1016/j.physa.2007.07.069)
- Song, C., Gallos, L.K., Havlin, S., Makse, H.A.: How to calculate the fractal dimension of a complex network: the box covering algorithm. *Journal of Statistical Mechanics: Theory and Experiment* **2007**(03), 03006–03006 (2007). doi:[10.1088/1742-5468/2007/03/p03006](https://doi.org/10.1088/1742-5468/2007/03/p03006)
- Rosenberg, E.: Fractal Dimensions of Networks. Springer, Cham (2020)
- Huang, Y., Zhang, S., Bao, X.-l., Yao, M.-h., Wang, Y.: Survey on fractality in complex networks. *Recent Developments in Intelligent Computing, Communication and Devices*, 675–692 (2019)
- Mandelbrot, B.B., Mandelbrot, B.B.: The Fractal Geometry of Nature vol. 1. WH freeman New York, ??? (1982)
- Falconer, K.: Fractal Geometry: Mathematical Foundations and Applications. John Wiley & Sons, ??? (2004)
- Komjáthy, J., Molontay, R., Simon, K.: Transfinite fractal dimension of trees and hierarchical scale-free graphs. *Journal of Complex Networks* **7**(5), 764–791 (2019)
- Wei, D.-J., Liu, Q., Zhang, H.-X., Hu, Y., Deng, Y., Mahadevan, S.: Box-covering algorithm for fractal dimension of weighted networks. *Scientific reports* **3**(1), 1–8 (2013)
- Wang, L., Wang, Q., Xi, L., Chen, J., Wang, S., Bao, L., Yu, Z., Zhao, L.: On the fractality of complex networks: Covering problem, algorithms and ahlfors regularity. *Scientific reports* **7**(1), 1–15 (2017)
- Rosenberg, E.: A Survey of Fractal Dimensions of Networks. Springer, Cham (2018)
- Kim, J., Goh, K.-l., Kahng, B., Kim, D.: A box-covering algorithm for fractal scaling in scale-free networks. *Chaos (Woodbury, N.Y.)* **17**, 026116 (2007). doi:[10.1063/1.2737827](https://doi.org/10.1063/1.2737827)
- Gao, L., Hu, Y., Di, Z.: Accuracy of the ball-covering approach for fractal dimensions of complex networks and a rank-driven algorithm. *Physical Review E* **78**(4), 046109 (2008)
- Locci, M., Concas, G., Tonelli, R., Turnu, I.: Three algorithms for analyzing fractal software networks. *WSEAS Transactions on Information Science and Applications* **7** (2010)
- Kitsak, M., Havlin, S., Paul, G., Riccaboni, M., Pammolli, F., Stanley, H.E.: Betweenness centrality of fractal and nonfractal scale-free model networks and tests on real networks. *Physical Review E* **75**(5), 056115 (2007)
- Yuan, C., Zhao, Z., Li, R., Li, M., Zhang, H.: The emergence of scaling law, fractal patterns and small-world in wireless networks. *IEEE Access* **5**, 3121–3130 (2017)
- Zheng, W., Pan, Q., Sun, C., Deng, Y.-F., Zhao, X.-K., Kang, Z.: Fractal analysis of mobile social networks. *Chinese Physics Letters* **33**(3), 038901 (2016). doi:[10.1088/0256-307x/33/3/038901](https://doi.org/10.1088/0256-307x/33/3/038901)
- Liao, H., Wu, X., Wang, B.-H., Wu, X., Zhou, M.: Solving the speed and accuracy of box-covering problem in complex networks. *Physica A: Statistical Mechanics and its Applications* **523**, 954–963 (2019). doi:[10.1016/j.physa.2019.04.242](https://doi.org/10.1016/j.physa.2019.04.242)
- Zhou, W.-X., Jiang, Z.-Q., Sornette, D.: Exploring self-similarity of complex cellular networks: The edge-covering method with simulated annealing and log-periodic sampling. *Physica A: Statistical Mechanics and its Applications* **375**(2), 741–752 (2007)
- Kuang, L., Z.Zhao, Wang, F., Li, Y., Yu, F., Li, Z.: A differential evolution box-covering algorithm for fractal dimension on complex networks. In: 2014 IEEE Congress on Evolutionary Computation (CEC), pp. 693–699 (2014). doi:[10.1109/CEC.2014.6900383](https://doi.org/10.1109/CEC.2014.6900383)

25. Kuang, L., Wang, F., Li, Y., Mao, H., Lin, M., Yu, F.: A discrete particle swarm optimization box-covering algorithm for fractal dimension on complex networks. In: 2015 IEEE Congress on Evolutionary Computation (CEC), pp. 1396–1403 (2015). doi:[10.1109/CEC.2015.7257051](https://doi.org/10.1109/CEC.2015.7257051)
26. Wu, H., Kuang, L., Wang, F., Rao, Q., Gong, M., Li, Y.: A multiobjective box-covering algorithm for fractal modularity on complex networks. *Applied Soft Computing* **61**, 294–313 (2017). doi:[10.1016/j.asoc.2017.07.034](https://doi.org/10.1016/j.asoc.2017.07.034)
27. Li, D., Wang, X., Huang, P.: A max-min ant colony algorithm for fractal dimension of complex networks. *International Journal of Computer Mathematics* **95**, 1–12 (2017). doi:[10.1080/00207160.2017.1364370](https://doi.org/10.1080/00207160.2017.1364370)
28. Zhang, H., Hu, Y., Lan, X., Mahadevan, S., Deng, Y.: Fuzzy fractal dimension of complex networks. *Applied Soft Computing* **25**, 514–518 (2014). doi:[10.1016/j.asoc.2014.08.019](https://doi.org/10.1016/j.asoc.2014.08.019)
29. Sun, Y., Zhao, Y.: Overlapping-box-covering method for the fractal dimension of complex networks. *Physical Review E* **89** (2014). doi:[10.1103/PhysRevE.89.042809](https://doi.org/10.1103/PhysRevE.89.042809)
30. Zheng, W., You, Q., Liu, F., Yang, F., Fan, X.: Fractal analysis of overlapping box covering algorithm for complex networks. *IEEE Access* **8**, 53274–53280 (2020). doi:[10.1109/ACCESS.2020.2981044](https://doi.org/10.1109/ACCESS.2020.2981044)
31. Schneider, C., Kesselring, T., Jr, J., Herrmann, H.: Box-covering algorithm for fractal dimension of complex networks. *Physical Review E* **86** (2012). doi:[10.1103/PhysRevE.86.016707](https://doi.org/10.1103/PhysRevE.86.016707)
32. Wei, Z.-W., Wang, B.-H., Wu, X.-T., He, Y., Liao, H., Zhou, M.-Y.: Sampling-based box-covering algorithm for renormalization of networks. *Chaos: An Interdisciplinary Journal of Nonlinear Science* **29**(6), 063122 (2019). doi:[10.1063/1.5093174](https://doi.org/10.1063/1.5093174)
33. Zhang, H., Wei, D., Hu, Y., Lan, X., Deng, Y.: Modeling the self-similarity in complex networks based on coulomb's law. *Communications in Nonlinear Science and Numerical Simulation* **35**, 97–104 (2016)
34. Gong, F., Li, Y., Zhao, D., Zhang, L.: A deterministic box-covering algorithm for fractal dimension calculation of complex networks. In: 2020 IEEE 9th Data Driven Control and Learning Systems Conference (DDCLS), pp. 409–414 (2020). IEEE
35. Akiba, T., Nakamura, K., Takaguchi, T.: Fractality of Massive Graphs: Scalable Analysis with Sketch-Based Box-Covering Algorithm (2016). [1609.07994](https://arxiv.org/abs/1609.07994)
36. Giudicianni, C., Di Nardo, A., Greco, R., Scala, A.: A community-structure-based method for estimating the fractal dimension, and its application to water networks for the assessment of vulnerability to disasters. *Water Resources Management* **35**(4), 1197–1210 (2021)
37. Kosowski, A., Manuszewski, K.: Classical coloring of graphs. *Contemporary Mathematics* **352**, 1–20 (2004)
38. Hagberg, A., Swart, P., S Chult, D.: Exploring network structure, dynamics, and function using networkx. Technical report, Los Alamos National Lab.(LANL), Los Alamos, NM (United States) (2008)
39. Song, C., Havlin, S., Makse, H.A.: Origins of fractality in the growth of complex networks. *Nature physics* **2**(4), 275–281 (2006)
40. Kuang, L., Zheng, B., Li, D., Li, Y., Sun, Y.: A fractal and scale-free model of complex networks with hub attraction behaviors. *Science China Information Sciences* **58**(1), 1–10 (2015)
41. Nagy, M.: Data-driven analysis of fractality and other characteristics of complex networks. Department of Stochastics, Budapest University of Technology and Economics (2018)
42. Gallos, L.K., Song, C., Havlin, S., Makse, H.A.: Scaling theory of transport in complex biological networks. *Proceedings of the National Academy of Sciences* **104**(19), 7746–7751 (2007)
43. Tél, T., Fülöp, Á., Vicsek, T.: Determination of fractal dimensions for geometrical multifractals. *Physica A: Statistical Mechanics and its Applications* **159**(2), 155–166 (1989)
44. Liu, J.-L., Yu, Z.-G., Anh, V.: Determination of multifractal dimensions of complex networks by means of the sandbox algorithm. *Chaos: An Interdisciplinary Journal of Nonlinear Science* **25**(2), 023103 (2015)
45. Deng, Y., Zheng, W., Pan, Q.: Performance evaluation of fractal dimension method based on box-covering algorithm in complex network. In: 2016 IEEE 20th International Conference on Computer Supported Cooperative Work in Design (CSCWD), pp. 682–686 (2016). doi:[10.1109/CSCWD.2016.7566071](https://doi.org/10.1109/CSCWD.2016.7566071)
46. Rossi, R.A., Ahmed, N.K.: The network data repository with interactive graph analytics and visualization. In: AAAI (2015). <http://networkrepository.com>
47. Wolfram Data Repository, W.R.: Archaeoglobus Fulgidus Whole Network (2019)
48. Wolfram Data Repository, W.R.: Escherichia Coli Whole Network (2019)
49. Chen, J.: Tokyo Metro. <https://github.com/onlyuser/tokyo-metro> (2017)
50. Clauset, A., Shalizi, C.R., Newman, M.E.: Power-law distributions in empirical data. *SIAM Review* **51**(4), 661–703 (2009)