

## Semantics in Multi-objective Genetic Programming

Edgar Galván · Leonardo Trujillo ·  
Fergal Stapleton

Received: date / Accepted: date

**Abstract** Semantics has become a key topic of research in Genetic Programming (GP). Semantics refers to the outputs (behaviour) of a GP individual when this is run on a data set. The majority of works that focus on semantic diversity in single-objective GP indicates that it is highly beneficial in evolutionary search. Surprisingly, there is minuscule research conducted in semantics in Multi-objective GP (MOGP). In this work we make a leap beyond our understanding of semantics in MOGP and propose SDO: Semantic-based Distance as an additional criterion. This naturally encourages semantic diversity in MOGP. To do so, we find a pivot in the less dense region of the first Pareto front (most promising front). This is then used to compute a distance between the pivot and every individual in the population. The resulting distance is then used as an additional criterion to be optimised to favour semantic diversity. We also use two other semantic-based methods as baselines, called Semantic Similarity-based Crossover and Semantic-based Crowding Distance. Furthermore, we also use the NSGA-II and the SPEA2 for comparison too. We use highly unbalanced binary classification problems and consistently show how our proposed SDO approach produces more non-dominated solutions and better diversity, leading to better statistically significant results, using the hypervolume results as evaluation measure, compared to the rest of the other four methods.

---

Edgar Galván  
Naturally Inspired Computation Research Group, Department of Computer Science, National University of Ireland Maynooth, Lero, Ireland  
E-mail: edgar.galvan@mu.ie

Leonardo Trujillo  
Tecnológico Nacional de México/IT de Tijuana, Tijuana, BC, México  
E-mail: leonardo.trujillo@tectijuana.edu.mx

Fergal Stapleton  
Naturally Inspired Computation Research Group, Department of Computer Science, National University of Ireland Maynooth, Ireland  
E-mail: fergal.stapleton.2020@mumail.ie

## 1 Introduction

Genetic Programming (GP) [33] is a powerful Evolutionary Algorithm (EA) [16] that has been successfully applied in a variety of challenging problems, including in neuroevolution in deep neural networks [14], energy-based problems [21], games [31,23], to mention a few examples. Despite the popularity of GP and its proven effectiveness in the face of challenging problem features such as deceptiveness and multiple local optima [15], it is also well-known that canonical GP has some limitations and researchers have developed new approaches to make it more reliable. To this end, researchers have focused their attention on neutrality [14,28,22,43,44,30], locality [24,26,25], reuse of code [29], to mention some research topics.

One of the most popular elements studied by GP researchers during recent years is semantics, with many works reporting substantial improvements of GP performance achieved by encouraging semantic diversity during evolutionary runs. While multiple definitions of semantics have been proposed in the GP community, it is commonly accepted that semantics refers to the output of a GP program when it is executed on a (training) data set (also known as fitness cases). We give a formal treat of semantics in Section 4.

Semantics can be classified into one of two main categories: indirect or direct. Indirect semantic approaches refer to those that act on the syntax (genotype) of GP individuals to indirectly increase semantic diversity. On the other hand, direct semantic approaches refer to those mechanisms that adapt genetic operators to work directly on the semantics of GP individuals. Both type of approaches have benefits and limitations. This work focuses on indirect semantic-based approaches.

To the best of our knowledge, however, there is no study on the adoption of semantics in Evolutionary Multi-Objective Optimisation (EMO) at large [11], and in Multi-objective GP (MOGP), in particular, except from the first author’s work [18,19,27,32,46], and the present work extends this line of research.

The goal of this paper is to promote semantic diversity in MOGP. To this end, we use two well-known and widely used EMO algorithms: the Non-dominated Sorting Genetic Algorithm II (NSGA-II) [12] and the Strength Pareto Evolutionary Algorithm (SPEA2) [52]. Furthermore, we also use three semantic-based approaches within MOGP to promote diversity. These are:

1. *Semantic Similarity-based Crossover* (SSC) is based on a popular, but computationally costly, form of semantic-based single objective GP approach that promotes semantic diversity by applying crossover between two parents multiple times [47],
2. *Semantic-based Crowding Distance* (SCD) incorporates a semantic-based distance into the core of an EMO algorithm to improve the standard crowding distance, originally proposed in [27,32],

3. *Semantic-based Distance as an additional criterion* (SDO) is based on SCD and uses the resulting semantic-based distance values as another value to be considered in the solution selection, briefly analysed in [18].

Using these three semantic-based methods allows us to show the following. Firstly, by using SSC, we show how the semantic distance computed in the crossover operator and used to promote diversity, a technique that has been reported to be beneficial in single-objective optimisation, does not have the same positive impact in MOGP. Secondly, by using SCD, inspired by the crowding distance commonly used in EMO, we show that a semantic distance can be naturally computed by using a point from a sparse region in the objective space and comparing it to every individual in the population, rather than trying to promote semantic diversity when applying crossover. Finally, we extend SCD and show in SDO how the resulting semantic distance value can be used as an additional criterion to choose the solutions to remain in the population and then promote semantic diversity, resulting in better Pareto front approximations compared to the aforementioned canonical EMO algorithms, as well as SSC and SCD.

To study the effects of these semantic-based MOGP approaches we use challenging binary and highly unbalanced classification problems. The experimental results show that promoting semantic diversity in MOGP optimisation is beneficial, particularly when using the proposed SDO paradigm.

The main contribution of this work is to show how semantic diversity can be naturally promoted in MOGP leading to an increase in search performance. Compared to our previous work [18, 27, 32], where we gradually introduced the notion of semantics in MOGP, in this work we present a robust approach that consistently yields better, and statistically significant, results based on the average hypervolume of the evolved Pareto approximations as a measure of performance, compared to canonical EMO approaches (NSGA-II and SPEA2) as well as the other two semantic-based approaches (SSC and SCD) evaluated in this study.

The remainder of this paper is organised as follows. Section 2 includes the related work. Section 3 outlines the background in semantics and multi-objective genetic programming. Section 4 presents the semantic-based approaches proposed and used in this work. Section 5 explains the experimental setup used and Section 6 shows and discusses the results obtained by all the approaches adopted in this study. Finally, Section 7 concludes this paper and provides direction for future work.

## 2 Related Work

This section provides a brief overview of the two main research areas that converge in this paper, Semantics and EMO, both in GP search.

## 2.1 Semantics in Genetic Programming

Scientific studies of semantics in GP have increased dramatically over the last years given that it has been consistently reported to be beneficial in GP search, ranging from the study of geometric operators [36], including the analysis of indirect semantics [27, 47] up to the use of semantics in real-world problems [49]. A summary of semantic works carried out by the GP community can be found in [50]. We discuss next the most relevant works to the research discussed in this paper.

Even though researchers have proposed a variety of mechanisms to use the semantics of GP programs to guide a search, it is commonly accepted that semantics refers to the output of a GP program once it is executed on a data set (also known as fitness cases in the specialised GP literature). The work conducted by McPhee et al. [35] paved the way for the proliferation of indirect semantics works. In their research, the authors studied the semantics of subtrees and the semantics of context (the remainder of a tree after the removal of a subtree). In their studies, the authors pointed out how a high proportion of individuals created by the widely used 90-10 crossover operator (i.e., 90%-10% internal-external node selection policy) are semantically equivalent. That is, the crossover operator does not have any useful impact on the semantic GP space, which in consequence leads to a lack of performance increase as evolution continues.

With the goal to overcome the lack of semantic diversity reported by McPhee et al. [35], Beadle and Johnson [3] proposed a Semantically Driven Crossover (SDC) operator that promotes semantic diversity over generations. More specifically, they used reduced ordered binary decision diagrams (ROBDD) on Boolean problems (i.e., Multiplexer and the even-5-parity problem) to check for semantic similarity between parents and offspring. The authors showed a significant gain in terms of fitness improvement when promoting semantic diversity using the SDC operator. They also showed that by using ROBDD on these particular problems, the SDC operator was able to considerably reduce bloat (dramatic increase of tree sizes as evolution proceeds with a proportional improvement in fitness). Later, Beadle and Johnson [4] also explored a similar technique for the mutation operator, called Semantically Driven Mutation (SDM). The authors inspected the use of semantics when applied to subtree mutation; i.e., this operator replaces the tree at any node with a randomly generated subtree. The resulting individual is checked for semantic equivalence through reducing it to a canonical form which can be easily compared to parent trees that were similarly reduced. SDM increases bloat more than SDC, and when both operators are used, bloat is greatly increased. The authors reported that these techniques can increase semantic diversity and led to improved evolutionary search.

These works, however, used discrete fitness-valued cases, impeding their findings to be generalised in continuous search spaces. Uy et al. [38] addressed this limitation and multiple works followed their approach thanks to its simplicity. Uy et al. proposed four different forms of applying semantic crossover

operators on real-valued problems (e.g., symbolic regression problems). To this end, the authors measured the semantic equivalence of two expressions by measuring them against a random set of points sampled from the domain. If the resulting outputs of these two expressions were close to each other, subject to a threshold value called semantic sensitivity, these expressions were regarded as semantically equivalent. In their experimental design, the authors proposed four scenarios. In their first two scenarios, Uy et al. focused their attention on the semantics of subtrees. More specifically, for Scenario I, they tried to encourage semantic diversity by repeating crossover for a number of trials if two subtrees were semantically equivalent. Scenario II explored the opposite idea of Scenario I. For the last two scenarios, the authors focused their attention on the entire trees. That is, for Scenario III Uy et al. checked if offspring and parents were semantically equivalent. If so, the parents were transmitted into the following generation and the offspring were discarded. The authors explored the opposite of this idea in Scenario IV (children semantically different from their parents). They showed, for a number of symbolic regression problems, that Scenario I produced better results compared to the other three scenarios.

The major drawback with the Uy et al. [38] approach is that it can be computationally expensive, since it relies on a trial mechanism that attempts to find semantically different individuals via the execution of the crossover operator multiple times. To overcome this limitation, Galván et al. [20] proposed a cost-effective mechanism based on the tournament selection operator to promote semantic diversity. More specifically, the tournament selection of the first parent is done as usual. That is, the fittest individual is chosen from a pool of individuals randomly picked from the population. The second parent is chosen from a pool of individuals that are semantically different from the first parent and it is also the fittest individual. If there is no individual semantically different from the first parent, then the tournament selection of the second parent is performed as usual. The proposed approach resulted in similar, and in some cases better, results compared to those reported by Uy et al. [38,47] without the need of a trial and error (expensive) mechanism.

More recently, Forstenlechner et al. [17] investigated the use of semantics in a different domain from those discussed before (Symbolic Regression and Boolean problems). The authors showed how it is possible to compute the semantics of GP individuals for program synthesis. This operates on a range of different data types as opposed to those working on a single type of data. They computed the semantics of a GP individual by tracing it, which shows the behaviour of a program. To promote semantic diversity the authors used two approaches to determine semantic similarity, named (1) ‘partial change’, used in the first instance, and (2) ‘any change’, used if the first instance fails to be satisfied, to try to avoid using standard crossover. ‘Partial change’ is when at least one entry has to be different and when at least one entry has to be identical, for a pair of semantic results stored in vectors. On the other hand, ‘any change’ does not have the constraint shown in ‘partial change’. In their results, the authors reported that a semantic-based GP system achieved better results in four out of eight problems used in their work.

Indirect semantic analysis has also been used in local search methods. Of particular interest is the work recently conducted by Dou and Rockett [13], where the authors focused their attention on how the performance of a GP system improves when semantically-aware local search methods are used. To this end, the authors used a MOGP paradigm to handle both ‘goodness-of-fit’ and model complexity. In their work, the authors used a wide variety of GP and local search variants, that included three subtree selection methods and four replacement mechanisms to perform local search. The authors reported interesting findings including the fact that a given local search algorithm following a steady-state global search performs significantly better than the corresponding algorithm that uses generational local search. It was also reported that when GP is used as a local search operator, the steady-state GP system does not show any consistent advantage over generational GP.

Direct semantic approaches have also received attention in the GP community thanks to the improvement on search performance compared to a standard GP system. One of the first papers that discusses the idea of acting directly on the semantic space is Moraglio et al. work [36]. The motivation to propose a direct semantic approach was because many of the proposed indirect semantic approaches are wasteful [38,47]. To address this issue, the authors used previous theoretical results obtained by Moraglio and Poli [37] to allow transformations on the structure of tree-like GP individuals that correspond to geometric operators, and by doing so, being able to inherit their properties. This results in having a cone landscape by construction making the evolutionary search “easy” to be solved. These findings are encouraging. However, there are some limitations acknowledged by the authors themselves. One limitation is that their approach allows the presence of neutrality which can be harmful in problems with certain properties (e.g., unimodal landscapes, see for example [44] where Poli and Galván give an in-depth explanation on the effects of neutrality in different type of problems). Another limitation in Moraglio et al. work is that the transformations applied to GP individuals make them significantly larger. Thus, over generations the individuals grow exponentially when crossover is used and linearly when only mutation is applied. To deal with this, the authors proposed to simplify the expressions while maintaining the same computed function. More recent works have tried to limit this issue by incorporating a local search into the mutation operation and thus reducing the number of generations required by the algorithm to converge [7].

As pointed by Vanneschi et al. [49], the simplification step proposed by Moraglio et al. is computationally expensive. To overcome this, Vanneschi and co-authors proposed an efficient cache implementation of the geometric semantic operators. The proposed approach is based, among other things, on storing the semantics of individuals into a table, which makes the process much more efficient since geometric operators do not need to evaluate the syntax of the parent trees to compute the semantics of the offspring. There is at least one limitation with their approach, however, that the reconstruction of individuals is cumbersome and difficult to obtain in some cases. This is a limitation, in particular, for applications where the expression is required. Uy

et al. [39] proposed a subtree semantic geometric crossover (SSGX) operator that is based on Moraglio et al. approach [36] and for efficiency purposes they also adopted the cache approach proposed by Vanneschi et al. [49]. Uy and co-authors indicated that even when Vanneschi's cache approach alleviates some limitations of the semantic geometric crossover (SGX) proposed by Moraglio et al., the cache approach has also the limitation of creating complex and large structures. To this end, Uy et al. proposed creating offspring via the use of their proposed crossover operator that allows to control the size of individuals. An interesting aspect of the results reported by the authors is that their approach produces offspring with semantic distances that are larger with respect to the semantics of their parents. This intuitively means that SGX could take many more generations to solve a problem compared to SSGX. The results reported by Uy et al. are encouraging. However, their approach has some limitations too, such as determining the right values for multiple parameters that are needed to apply subtree SGX in a GP system. Moreover, it is also based on an expensive trial and error mechanism (a maximum of 20 trials is set in their work to search for suitable subtrees).

## 2.2 Multi-Objective Genetic Programming

In a multi-objective optimisation (MO) problem, one optimises with respect to multiple goals or objective functions. Thus, the task of the algorithm is to find acceptable solutions by considering all the criteria simultaneously. This can be achieved in various ways. Broadly speaking, MO in GP has been adopted in two forms: (a) combining multiple objectives into an aggregate scalar fitness function; and (b) keeping the objectives separate. For the former, it is easy to imagine how multiple objectives/fitness functions can be combined into one. By doing so, a MO problem can be solved by a single-objective optimisation technique. The latter form keeps the objectives separate and uses the notion of *Pareto dominance* [8,10,11]. In this way, EMO offers an elegant solution to the problem of optimising two or more conflicting objectives. As will be explained in Section 3.2, the aim of EMO is to simultaneously evolve a set of the best tradeoff solutions along the objectives in a single run. EMO is one of the most active research areas in EAs thanks to its wide applicability as well as the impressive results achieved by these techniques [8,10,11]. Here we discuss just a few works that have adopted EMO within GP systems.

Bloat, dramatic increase of GP individuals' size as evolution progresses, is a phenomenon commonly seen in GP runs. Bleuler et al. [6] proposed a MO approach to naturally control bloat. The authors defined two, potentially, conflicting objectives: the functionality (fitness) of a program and the size of the tree. They compared their, at the time, innovative approach against well-adopted techniques (e.g., constant parsimony) to control the size of GP programs. They showed how their MO approach successfully controlled GP bloat, which leads to the benefit that solutions are evaluated faster compared to the other methods.

MOGP has been used to classify highly unbalanced binary data [5,27]. To do so, the authors treated each objective (class) ‘separately’ using EMO approaches [12,52]. Bhowan et al. [5] and Galván et al. [18,27,32] showed, independently, how MOGP was able to achieve high accuracy in classifying binary data in conflicting learning objectives (i.e., normally a high accuracy of one class results in lower accuracy on the other).

In the same vein, Zhao showed how MOGP can be successfully used to specify partial preferences on the conflicting objectives by embedding these preferences into the fitness function [51]. The motivation to do this is the fact that misclassification errors are often not equally costly. For example, it is more costly to approve a bad loan than denying a good loan.

MOGP has been also successfully used in computer vision problems. For example, Shao et al. showed how it is possible to automatically generate domain-adaptive global feature descriptors for the classification of images [45]. Similarly to the work conducted by Bleuler et al. [6], Shao and co-authors also considered the size of the trees as one of objectives in MOGP, where the other natural objective for image classification considered in their studies was the classification error rate. They tested their approach in four well-know data sets. The authors showed how their proposed MOGP approach always produced better results compared to other 14 methods used in their studies, including two neural network-based approaches. Other examples include the use of MOGP to detect interest points in images, a low-level feature extraction procedure that is often used as an initial step in feature-based scene analysis and object recognition techniques [40,41]. In this domain, MOGP has produced novel image operators with unique properties that are not present in standard techniques [40].

### 3 Background

This section defines some of the basic concepts relevant to this work, namely semantics, MO and EMO algorithms.

#### 3.1 Semantics

For clarity purposes, we first briefly give some definitions on semantics, based on the work by Pawlak et al. [42], that will allow us to describe our approach in Section 4.

Let  $p \in P$  be a program from a programming language  $P$ . When  $p$  is applied to an input  $in \in I$ ,  $p$  produces an output  $p(in)$ .

**Def. 1** *The semantic mapping function  $s : P \rightarrow S$  maps any program  $p$  to its semantics  $s(p)$ .*

This intuitively means that,

$$s(p_1) = s(p_2) \iff \forall in \in I : p_1(in) = p_2(in).$$

The semantics given in Def. 1 has three properties. First, every program has exactly one semantics. Second, two or more programs can have the same semantics. Third, programs that produce different outputs have different semantics.

Def. 1 is general as it does not specify how semantics are represented. This work uses a popular version of semantics in GP, where the semantics of a program is defined as the vector of output values computed by this program for an input data set or set of fitness cases. A fitness case is a pair consisting of a program input and its corresponding desired program output. Thus, a fitness case is a pair from  $I \times O$ . Assuming we use a finite set of fitness cases, as normally adopted in GP, we can now define the semantics of a program.

**Def. 2** *The semantics  $s(p)$  of a program  $p$  is the vector of values from  $O$  obtained by executing  $p$  on every  $in$  from  $I$ ,*

Thus, we have that the semantics of a program is given by,

$$s(p) = [p(in_1), p(in_2), \dots, p(in_l)]$$

where  $l = |I|$  is the size of the fitness cases set.

### 3.2 Multi-objective Optimisation

MO is concerned with the simultaneous optimisation of more than one objective function. When such functions are in conflict, a set of trade-off solutions among the objectives is sought as no single global optimum exists. The optimal trade-offs are those solutions for which no objective can be further improved without degrading another one. This idea is captured in the Pareto dominance relation: a solution  $x$  in the search space is said to *Pareto-dominate* another solution  $y$  if  $x$  is at least as good as  $y$  on all objectives and strictly better on at least one objective. This is an important aspect in EMO because it allows solutions to be ranked according to their performance on all objectives with respect to all solutions in the population.

In this work, the objectives are to be maximised. Thus, the *Pareto dominance* concept is defined as in Eq. (1):

$$S_i \succeq S_j \iff \forall m [(S_i)_m \geq (S_j)_m] \wedge \exists k [(S_i)_k > (S_j)_k] \quad (1)$$

where  $(S_i)_m$  indicates the value of solution  $S_i$  in the  $m$ th objective. Similarly, solutions are *nondominated* if they are not dominated by any other solution in the current population.

The set of optimal trade-off solutions of a MO problem at hand is called the *Pareto optimal set*. Therefore, the goal of an EMO is to find such Pareto optimal set, or at least a good approximation of it. The *Pareto optimal front* is the image of the Pareto optimal set in the objective space.

The notion of Pareto-dominance has inspired different ways to handle such criterion to bias the search in an EMO algorithm. Some of the most well-known are dominance rank [12] and dominance count [6]. The former refers to the number of solutions in the population that dominate a given solution (lower is better). The latter refers to the number of other solutions that a particular solution dominates (higher is better).

There are two popular EMO algorithms that include the aforementioned ways to use Pareto-dominance and they are adopted in this work: the Non-dominated Sorting Genetic Algorithm II (NSGA-II) [12] that uses dominance rank, and the Strength Pareto Evolutionary Algorithm (SPEA2) [6] that employs both dominance rank and dominance count.

In NSGA-II, the dominance rank determines the fitness of a solution  $S_i$ : This is expressed as in Eq. (2):

$$\text{NSGA-II}(S_i) = \{\#j, j \in \text{Pop} | S_j \succeq S_i\} \quad (2)$$

Thus, the best fitness value of a solution is 0 (non-dominated solution). Those rank 0 solutions are removed from the population and then the set of non-dominated solutions are obtained and assigned rank 1. Such solutions are then removed and those non-dominated solutions obtained from the remaining solutions are assigned a rank 2. The process finishes when no solutions remain in the population.

In SPEA2, as aforementioned indicated, both dominance rank and dominance count are considered to compute the fitness of a solution. First, each solution in the population is assigned a strength value  $D$ . This denotes the number of solutions that  $S_i$  dominates (dominance count for solution  $S_i$ ), given by Eq. (3):

$$D(S_i) = |\{j | j \in \text{Pop} \wedge S_i \succeq S_j\}|. \quad (3)$$

To determine the fitness of a given solution  $i$  in SPEA2, we then use the strengths of all the solutions that dominate solution  $i$ . This is expressed as in Eq. (4):

$$\text{SPEA2}(S_i) = \sum_{j \in \text{Pop}, S_j \succeq S_i} D(S_j) \quad (4)$$

As in NSGA-II, the fitness in SPEA2 is to be minimised where non-dominated solutions have the best fitness value of 0.

### 3.2.1 Crowding Distance

Because Pareto dominance does not provide a total order, an additional criterion must be used so as to allow the comparison of any pair of points of the search space, i.e., *crowding distance* measure. This is the Manhattan distance between solutions in the objective space, where sparsely populated regions are preferred over densely populated regions. This distance is only used to resolve selection when the primary fitness is equal between two or more individuals.

Thus, the crowding distance promotes diversity among individuals having the same Pareto rank: in objective space, for each objective, the individuals in the population are ordered, and the partial crowding distance for each of them is the difference in fitness between its two immediate neighbours. The crowding distance is the sum over all objectives of these partial crowding distances [12]. Intuitively, it can be seen as the Manhattan distance between the extreme vertices of the largest hypercube containing the point at hand and no other point of the population. Selecting points with the largest crowding distance amounts favours sparse regions of the objective space, i.e., it favours diversity.

### 3.2.2 MOGP Algorithm

The MOGP algorithm used in this work is based on NSGA-II. Both, parent and offspring populations are merged at every generation. The fittest individuals from this merged population are copied into a new population called the archive population, which is the same size as the original parent population. This in consequence serves as the parent population for the following generation. This archive population simulates elitism in the population which preserves the set of non-dominated solutions over generations.

## 4 Semantic-based MOGP Methods

### 4.1 Semantic Similarity-based Crossover MOGP

To incorporate semantics in a MOGP paradigm, we first use the Semantic Similarity-based Crossover (SSC) originally proposed by Uy et al. [47] which, to the best of our knowledge, has been exclusively used in single-objective GP.

To use SSC in single-objective GP a semantic distance must be computed first. Using Def. 2, this distance is obtained by computing the average of the absolute difference of values for every  $in \in I$  between parent and offspring. If the distance value lies within a range, defined by one or two threshold values, then crossover is used to generate offspring. Because this condition may be hard to satisfy, the authors tried to encourage semantic diversity by repeatedly applying crossover up to 20 times. If after this, the condition is not satisfied, then crossover is executed as usual.

SSC made a notable impact in GP, showing, for the first time, how semantic diversity can be promoted in continuous search spaces, with several subsequent papers following along this line [2, 18, 20, 34, 48]. We incorporate SSC in NSGA-II and SPEA2. However, the performance increase reported when adopting SSC in single-objective optimisation is not observed in MOGP, as discussed in Section 6.

## 4.2 Semantic-based Crowding Distance MOGP

In Semantic-based Crowding Distance (SCD), the key element is to define an individual (pivot) that can be used to compute a semantic distance to all other individuals from a given Pareto front. Algorithm 1 shows how the SCD MOGP works. It creates a new population  $P_{t+1}$  using the nondominated sorted solutions from the parent population  $P_t$  and the offspring population  $Q_t$ , which are merged into population  $R_t$  (Line 2 – 3). This continues until the size of  $P_{t+1}$  is equal to the size of  $P_t$  (Lines 4 – 12). It may be the case that a particular front does not fit entirely into the new population and a second criterion is necessary to complete  $P_{t+1}$ . If this is the case, we proceed to store ( $F_r$ ) the remaining of those individuals that have not been used to complete the population (Lines 13 – 24). We then use the semantic distance as a criterion to select those points from  $F_r$  to complete  $P_{t+1}$ . To do so, we proceed to find a pivot  $v$  which is the furthest point from the first front using the crowding distance, explained in Section 3.2.1 (Lines 15 – 16).

The semantic distance between every point in  $F_r$  and the pivot is computed (Line 17). Thus, only one pivot is necessary to compute this distance. This distance is calculated using Def. 2. Formally, this distance is computed as in Eq. (5):

$$d(p_j, v) = \sum_{i=1}^l 1 \text{ if } \text{LBSS} \leq |p(in_i) - v(in_i)| \leq \text{UBSS} \quad (5)$$

where  $p_j$  is an individual in  $R_t$ ,  $l$  is the number of fitness cases, and LBSS and UBSS are the lower bound and upper bound for the semantic similarity values, respectively. These last two values are used to promote semantic diversity within a range, as reported beneficial in [47].

There is also a number of studies that have concluded that only one threshold value is necessary to promote semantic diversity [18, 27, 39]. We can compute the semantic distance between the pivot  $v$  and every individual in  $R_t$  using the following distance in Eq. (6),

$$d(p_j, v) = \sum_{i=1}^l 1 \text{ if } |p(in_i) - v(in_i)| > \text{UBSS} \quad (6)$$

we then use the crowding distance but now using the semantic distance values on the stored  $F_r$  (Line 18) and select the individuals that are in sparse regions of the search space, until we complete  $P_{t+1}$  (Lines 20 – 23).

## 4.3 Semantic-based Distance as an additional criterion MOGP

We further expand SCD by now using the resulting semantic distance values as an additional criterion to select solutions by the MO process. We refer to this approach as Semantic-based Distance as an additional criterion (SDO). As

**Algorithm 1** Semantic-based Crowding Distance

---

```

1: procedure FORMING_NEW_POPULATION
2:    $R_t \leftarrow P_t \cup Q_t$ 
3:    $F \leftarrow \text{non\_dominated\_sort}(R_t)$ 
4:    $P_{t+1} \leftarrow 0; i \leftarrow 1;$ 
5:   while  $|P_{t+1}| \leq |P|$  do
6:     if  $|P_{t+1}| + |F_i| < |P|$  then
7:        $P_{t+1} \leftarrow P_{t+1} \cup F_i$ 
8:        $i \leftarrow i+1$ 
9:     else
10:      break
11:    end if
12:  end while
13:  if  $|P_{t+1}| < |P|$  then
14:     $F_r \leftarrow F \cap \{F_1 \cdots F_i\}$ 
15:     $CD_1 \leftarrow \text{crowding\_distance}(F_1)$ 
16:     $\text{pivot} \leftarrow \text{furthest\_point}(CD_1)$ 
17:     $SV \leftarrow \text{compute\_semantics}(F_r, \text{pivot})$ 
18:     $F_r \leftarrow \text{crowding\_distance}(SV(F_r))$ 
19:     $j \leftarrow 0$ 
20:    for  $j + |P_{t+1}| < |P|$  do
21:       $P_{t+1} \leftarrow P_{t+1} \cup F_{r[j]}$ 
22:       $j \leftarrow j + 1$ 
23:    end for
24:  end if
25: end procedure

```

---

**Algorithm 2** Semantic-based Distance as an Additional Criterion

---

```

1: procedure FORMING_NEW_POPULATION
2:    $R_t \leftarrow P_t \cup Q_t$ 
3:    $F \leftarrow \text{non\_dominated\_sort}(R_t)$ 
4:    $CD_1 \leftarrow \text{crowding\_distance}(F_1)$ 
5:    $\text{pivot} \leftarrow \text{furthest\_point}(CD_1)$ 
6:    $R_t \leftarrow \text{compute\_semantics}(R_t, \text{pivot})$ 
7:    $F \leftarrow \text{sort}(R_t)$ 
8:    $P_{t+1} \leftarrow 0; j \leftarrow 0$ 
9:   for  $j < |P|$  do
10:     $P_{t+1} \leftarrow P_{t+1} \cup F[j]$ 
11:     $j \leftarrow j + 1$ 
12:  end for
13: end procedure

```

---

with SSC and SCD, we use the MOGP algorithm described above, computing SDO as shown in Algorithm 2.

First, we merge the parent population  $P_t$  and the offspring population  $Q_t$  into  $R_t$ . We then get the nondominated sorted solutions (Lines 2 – 3). To compute the semantic distance for each point contained in  $R_t$  we proceed as follows. We first compute the crowding distance from the first front and select the point that is the furthest away (in a sparse region). We use this as pivot  $v$  to then compute the semantic distance of each individual contained in  $R_t$  (Lines 4 – 5). We then use the resulting distance value, using either Eq. (5) (two threshold values are required) or Eq. (6) (one threshold value is necessary), as

**Table 1** Binary unbalanced classification datasets used in our research

Data set	Classes Positive/Negative (Brief description)	Total	Number of examples		Unb. Ratio	Features	
			Positive	Negative		No.	Type
Ion	Good/bad (ionsphere radar signal)	351	126 (35.8%)	225 (64.2%)	1:3	34	Real
Spect	Abnormal/normal (cardiac tom. scan)	267	55 (20.6%)	212 (79.4%)	1:4	22	Binary
Yeast <sub>1</sub>	mit/other (protein sequence)	1482	244 (16.5%)	1238 (83.5%)	1:6	8	Real
Yeast <sub>2</sub>	me3/other (protein sequence)	1482	163 (10.9%)	1319 (89.1%)	1:9	8	Real
Abal <sub>1</sub>	9/18 (biology of abalone)	731	42 (5.75%)	689 (94.25%)	1:17	8	Real
Abal <sub>2</sub>	19/other (biology of abalone)	4177	32 (0.77%)	4145 (99.23%)	1:130	8	Real

**Table 2** Confusion Matrix

	Predicted positive	Predicted negative
Actual positive	True Positive (TP)	False Negative (FN)
Actual negative	False Positive (FP)	True Negative (TN)

a another criterion to be computed (Line 6). Next, we sort  $R_t$  based precisely in this criterion (Line 7) and form the new population  $P_{t+1}$  (Lines 8 – 12). In case the size of  $P_{t+1} \cup F[j]$  is greater than  $|P_t|$ , we proceed to take only the individuals needed to complete  $P_{t+1}$ .

## 5 Experimental Setup

To study the effects of semantics in MOGP, we use challenging binary classification problems that are highly unbalanced, taken from the well-known UCI Machine Learning repository [1]. These problems are of different nature and complexity. They have from a few features up to dozens of them. These include binary, integer, and real-valued features. These benchmark problems are carefully selected to encompass a varied collection of problem domains to ensure that the evaluation of the approaches used in this work, including NSGA-II, SPEA2, SDO, SSC and SCD, is not problem or domain specific.

Table 1, adapted from [5], gives the details of all datasets used in this work. They have been used ‘as is’. That is, we did not try to balance the classes out. For each dataset, half of the data (with the same class balance than in the whole dataset) was used as a training set and the rest as a test set. All reported results in this work are on the latter.

The terminal and function sets used in this work are as follows. The terminals are the problem features. The function set consists of the typical four standard arithmetic operators:  $\mathcal{F} = \{+, -, *, /\}$ , where the latter operator is the protected division, which returns the numerator if the denominator is zero. These functions are used to build a classifier (mathematical expression) that returns a single value for a given input (data example to be classified). This number is mapped onto a set of class labels using zero as the class threshold. In our work, an example is assigned to the minority class if the output of the classifier is greater or equal to zero. It is assigned to the majority class, otherwise.

The common way to measure the fitness of a classifier for classification tasks is the overall classification accuracy: for binary classification, the four possible

**Table 3** Summary of parameters

<i>Parameter</i>	<i>Value</i>
Population Size	500
Generations	50
Type of Crossover	90% internal nodes, 10% leaves
Crossover Rate	0.60
Type of Mutation	Subtree
Mutation Rate	0.40
Selection	Tournament (size = 7)
Initialisation Method	Ramped half-and-half
Initialisation Depths:	
Initial Depth	1 (Root = 0)
Final Depth	5
Maximum Length	800
Maximum Final Depth	8
Independent Runs	50
Semantic Thresholds	UBSS = {0.25, 0.5, 0.75, 1.0} LBSS = {-, 0.001, 0.01, 0.1}

cases are shown in Table 2. Assuming the minority class is the positive class, the accuracy is given by  $\text{Acc} = \frac{TP+TN}{TP+TN+FP+FN}$ . The drawback of using Acc alone is that it rapidly biases the evolutionary search towards the majority class [5]. A better approach is to treat each class ‘separately’ using a MO approach. Two objectives are considered: the true positive rate given by  $\text{TPR} = \frac{TP}{TP+FN}$ , and the true negative rate given by  $\text{TNR} = \frac{TN}{TN+FP}$ . They measure the distinct accuracy for the minority (TPR) and majority class (TNR).

The experiments were conducted using a generational approach. Tree size was controlled by using a maximum length or a maximum final depth, whatever happens first. The parameters used are shown in Table 3. These include the use of different threshold values, defined as Upper Bound Semantic Similarity (UBSS) = {0.25, 0.50, 0.75, 1.0} values and Lower Bound Semantic Similarity (LBSS) = {0.001, 0.01, 0.1} values, to compute the semantic distances defined in Eqs. (5) and (6). This results in conducting a thorough analysis: for each of the semantic-based approaches and for each of the datasets used, we have 16 independent results, each being the result of 50 independent runs.

To obtain meaningful results, we performed an extensive empirical experimentation (29,400 independent runs in total)<sup>1</sup>.

## 6 Results and Analysis

### 6.1 Diversity

We quantify diversity by computing the number of unique solutions in the minority and in the majority classes found by either a canonical EMO approach (NSGA-II or SPEA2) *vs.* a semantic-based approach (SDO, SSC or

<sup>1</sup> 50 independent runs, 6 datasets, 3 semantic-based MOGP approaches (SSC, SCD, SDO), 16 different combination of values for UBSS and LBSS, 2 canonical EMO methods (NSGA-II, SPEA2).

**Table 4** Number of unique solutions on the minority and majority classes found by either NSGA-II *vs.* SDO, SSC or SCD.

Data Set	NSGA-II					
	Canonical	SDO	Canonical	SSC	Canonical	SCD
Ion	162.5 ± 20.1	751.1 ± 187.9	269.7 ± 11.2	252.8 ± 20.5	270.0 ± 25.8	245.4 ± 27.5
Spect	81.1 ± 13.9	331.7 ± 56.7	151.8 ± 9.5	155.8 ± 14.3	156.7 ± 9.1	159.5 ± 24.0
Yeast <sub>1</sub>	798.5 ± 33.3	1991.5 ± 149.0	1166.5 ± 26.1	1050.4 ± 30.6	1168.7 ± 19.4	1058.0 ± 44.5
Yeast <sub>2</sub>	235.9 ± 15.53	855.1 ± 138.5	418.8 ± 13.3	414.9 ± 16.9	418.0 ± 9.9	398.1 ± 16.7
Abal <sub>1</sub>	128.6 ± 13.2	485.8 ± 55.3	192.6 ± 5.9	205.1 ± 9.1	193.4 ± 6.0	204.5 ± 6.2
Abal <sub>2</sub>	183.5 ± 21.3	1034.7 ± 284.8	248.9 ± 2.4	187.9 ± 11.8	244.4 ± 4.2	215.7 ± 13.2


**Table 5** Number of unique solutions on the minority and majority classes found by either SPEA2 *vs.* SDO, SSC or SCD.

Data Set	SPEA2					
	Canonical	SDO	Canonical	SSC	Canonical	SCD
Ion	147.8 ± 15.7	775.5 ± 161.9	247.2 ± 9.1	82.6 ± 14.0	242.1 ± 6.6	273.9 ± 18.3
Spect	95.5 ± 18.1	334.1 ± 45.2	169.8 ± 16.0	168.8 ± 16.5	183.5 ± 12.5	147.8 ± 13.4
Yeast <sub>1</sub>	749.1 ± 40.7	2076.6 ± 189.5	1144.0 ± 22.8	1067.5 ± 36.9	1131.9 ± 35.6	1087.6 ± 44.4
Yeast <sub>2</sub>	253.1 ± 21.4	886.3 ± 153.1	439.1875 ± 14.3	399.8125 ± 10.1	430.25 ± 8.6	411.5 ± 26.
Abal <sub>1</sub>	149.3 ± 12.7	498.1 ± 70.9	213.7 ± 6.6	198.8 ± 7.7	213.7 ± 8.1	205.0 ± 11.6
Abal <sub>2</sub>	166.1 ± 13.9	1120.4 ± 233.3	218.8 ± 2.5	198.1 ± 14.7	216.6 ± 3.8	230.5 ± 14.3

SCD) for each of the six datasets used in this work (see Table 1). A unique solution is defined as a solution that was yield by a particular approach (for instance NSGA-II) and not yield by another approach (for instance SDO). Consequently, a non unique solution is that one yield by two approaches.

We know from Section 5, that we used 16 different configurations of values to compute the semantic distance for each of the semantic-based approaches in each of the datasets used. We summarised these by computing the average of these 16 values and compared it against a canonical MO approach. Table 4 reports the number of unique pair solutions on the minority and majority classes found by either NSGA-II or SDO, NSGA-II or SSC and NSGA-II or SCD. As can be seen from this table, our proposed SDO approach, that treats semantic distance values as an additional criterion, third column from left to right of Table 4, produces many more unique solutions compared to canonical NSGA-II for any of the datasets used. For example, the lowest ratio of SDO *vs.* NSGA-II is  $\approx 2.4$  on the Yeast<sub>1</sub> dataset. That is, there are 2.4 more solutions produced by SDO compared to NSGA-II (1991.5 ± 149.0 *vs.* 798.5 ± 33.3). At the opposite end, we have that the highest ratio of SDO *vs.* NSGA-II is  $\approx 5.6$  on the Abal<sub>2</sub> dataset (183.5 ± 21.3 *vs.* 1034.7 ± 284.8). When we then turn our attention to the other two semantic-based approaches, we can see that there is no real advantage for SSC or SCD over NSGA-II, in terms of producing more solutions on these two conflicting classes.

Table 5 reports the number of unique solutions on the minority and majority classes found by either SPEA2 *vs.* any of the semantic-based approaches used in this work. Similarly to what has been reported in Table 4, as well as discussed before, we can observe that our proposed SDO produces significantly more solutions compared to canonical SPEA2. For example, the lowest ratio of SDO *vs.* SPEA2 is  $\approx 2.7$  on the Yeast<sub>2</sub> dataset (253.1 ± 21.4 *vs.* 886.3 ± 153.1) and the highest ratio of SDO *vs.* SPEA2 is  $\approx 6.7$  on the Abal<sub>2</sub> dataset

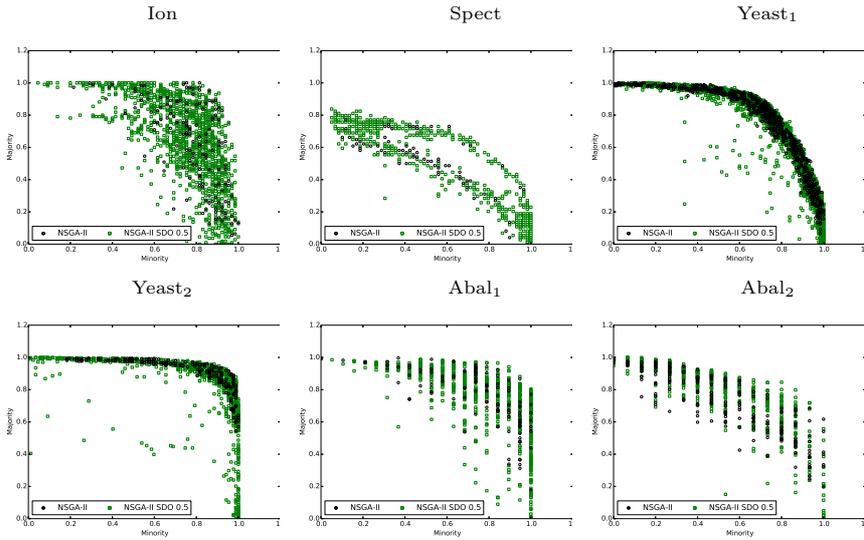


**Fig. 1** Evolved solutions that were exclusively found by either NSGA-II, represented by black hollow circle symbols, and its SDO variant, represented by green hollow square symbols, setting  $UBSS = 0.5$ , for all the datasets used in this work.

( $166.1 \pm 13.9$  vs.  $1120.4 \pm 233.3$ ). Similarly to what can be seen in Table 4, the other two semantic-based approaches (SSC and SCD) do not show a significant improvement when compared to SPEA2.

From this analysis, it is clear that our proposed SDO produces many more solutions on the minority and majority classes compared to any of the canonical MO approaches used in this work, regardless of the dataset used. However, we cannot say whether these unique solutions found by our approach are better or worse compared to those obtained by NSGA-II or SPEA2. Figures 1 and 2 show the evolved solutions that were exclusively found by (i) either NSGA-II or NSGA-II SDO, and (ii) either SPEA2 or SPEA2 SDO, respectively, for all the datasets used in this work. It is clear to see from Figures 1 and 2, that the unique evolved solutions that were found by SDO (setting  $UBSS = 0.5$  to be used in Eq. (6)), represented by green hollow square symbols, are more numerous and more spread than those yielded by the canonical EMO approaches: NSGA-II (Figure 1) or SPEA2 (Figure 2), represented by black hollow circles. This is particularly clear for the Ion, Spect, Abal<sub>1</sub> and Abal<sub>2</sub> datasets. The situation is less clear for the Yeast<sub>1</sub> dataset.

## 6.2 Hypervolume Comparison

In order to further compare the approaches used in this work, we use the hypervolume [9] of the evolved Pareto approximations as a performance measure. For bi-objective problems, as the binary highly unbalanced classifications

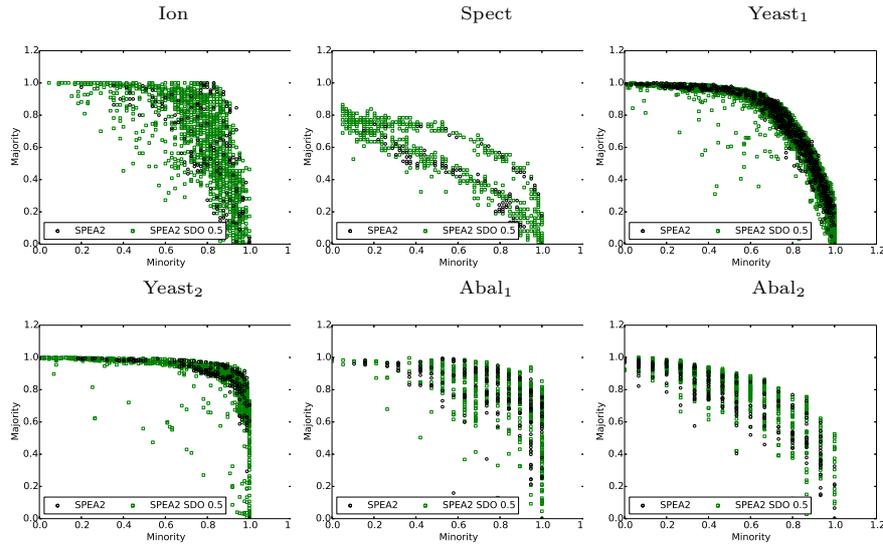

**Fig. 2** Evolved solutions that were exclusively found by either SPEA2, represented by black hollow circle symbols, and its SDO variant, represented by green hollow square symbols, setting  $UBSS = 0.5$ , for all the datasets used in this work.

problems used in this work, the hypervolume of a set of points in objective space, using reference point  $(0, 0)$ , is easily computed as the sum of the areas of all trapezoids fitted under each point. The hypervolume was chosen because it is the one of the most widely used performance indicator in the EMO literature. We also computed the accumulated Pareto-optimal (PO) front with respect to 50 runs: the set of non-dominated solutions after merging all 50 Pareto-approximated fronts.

**Table 6** Average ( $\pm$  standard deviation) hyperarea of evolved Pareto-approximated fronts and PO fronts for NSGA-II and SPEA2 over 50 independent runs. No significant differences were found in any single dataset

Dataset	NSGA-II		SPEA2	
	Average Hypervolume	PO Front	Average Hypervolume	PO Front
Ion	$0.766 \pm 0.114$	0.938	$0.786 \pm 0.094$	0.948
Spect	$0.534 \pm 0.024$	0.647	$0.544 \pm 0.032$	0.659
Yeast <sub>1</sub>	$0.838 \pm 0.011$	0.876	$0.838 \pm 0.008$	0.877
Yeast <sub>2</sub>	$0.950 \pm 0.009$	0.976	$0.946 \pm 0.015$	0.978
Abal <sub>1</sub>	$0.847 \pm 0.058$	0.961	$0.832 \pm 0.078$	0.960
Abal <sub>2</sub>	$0.576 \pm 0.122$	0.842	$0.544 \pm 0.147$	0.834

Tables 6, 7 and 8 report, for each problem defined in Table 1 both, the average hypervolume over 50 runs and also the hypervolume of the accumulated PO front with respect to all 50 runs. To obtain a statistically sound conclusion, the Wilcoxon rank-sum test was run with a significance level of

$\alpha=0.05$  on the average hypervolume results. These statistically significant differences are highlighted in boldface in Tables 7 and 8. Moreover, in these tables, the symbols “+”, “-”, and “=” indicate that the results of a given semantic-based approach are significantly better, worse, or equal, respectively, than those found by the canonical NSGA-II (Table 7) and SPEA2 (Table 8), all the above based on the Wilcoxon rank-sum statistical test.

Let us first focus our attention on the average hypervolume and PO front results yield by NSGA-II and SPEA2 shown in Table 6. Such observed differences between them are not statistically significant in any of the dataset used. We now turn our attention to the results yield by the semantic-based approaches using NSGA-II shown in Table 7. Each set of results yield by SDO, SSC and SCD are independently compared against those results yield by the canonical NSGA-II shown in Table 6. We can see how our proposed approach that aims to optimise the semantic distance values as an additional criterion to choose solutions and referred as SDO in Table 7, produces 88 cases (out of 96) that are statistically significant better results on the average hypervolume in comparison to NSGA-II. The remaining 8 results were not statistically significant. The PO front results yield by SDO are also highly encouraging: 94 (out of 96) are better compared to the results yield by NSGA-II, and in only two instances, these are worse.

The results by SSC and SCD, second and third section, from top to bottom in Table 7, show that the vast majority of the average hypervolume results obtained by any of these two semantic-based approaches compared to the results found by the canonical NSGA-II in Table 6, are not statistically significant (93 and 95, out of 96, for SSC and SCD, respectively). For those results that are statistically significant, the performance of SSC or SCD are worse compared to NSGA-II. These results clearly indicate that there is no advantage when semantic diversity is promoted when using these two approaches (see Section 4 to see how these work).

Furthermore, no general conclusion can be drawn in terms of what semantic-based approach is better *vs.* NSGA-II, when analysing the PO front values obtained by each of these two approaches (SSC or SCD). This is because there is a mixed picture when analysing such results. See the summary reported in the middle and the end of Table 7, for SSC and SCD, respectively.

We can carry out the same analysis using now SPEA2 *vs.* each of the semantic-based methods of Section 4. The results are shown in Table 8. Concerning SDO in Table 8, the majority of the average hypervolume values are better compared to SPEA2, regardless of the semantic similarity values defined in Table 3, with 88 out of 96 being statistically significant and better. When we analyse the PO front results, we see that the SDO approach achieves better results compared to SPEA2, with 86 out of 96, summarised in Table 8. On the other hand, SSC and SCD show no statistically significant differences against SPEA2 compared both, on average hypervolume values and the PO front.

These results show how consistent our SDO approach is in finding better results in both, the average hypervolume and the PO front compared to the

**Table 7** Average ( $\pm$  standard deviation) hypervolume of evolved Pareto-approximated fronts and PO fronts for the NSGA-II semantic-based methods (SDO, SSC, SCD) over 50 independent runs

		Hypervolume							
		Average UBSS				PO Front UBSS			
LBSS		0.25	0.5	0.75	1.0	0.25	0.5	0.75	1.0
<b>NSGA-II SDO</b>									
Ion	-	<b>0.860</b> $\pm$ <b>0.033</b> +	<b>0.869</b> $\pm$ <b>0.037</b> +	<b>0.869</b> $\pm$ <b>0.033</b> +	<b>0.845</b> $\pm$ <b>0.057</b> +	0.948+	0.958+	0.962+	0.950+
	0.001	<b>0.817</b> $\pm$ <b>0.087</b> +	<b>0.819</b> $\pm$ <b>0.104</b> +	<b>0.857</b> $\pm$ <b>0.057</b> +	<b>0.861</b> $\pm$ <b>0.047</b> +	<i>0.942</i>	0.957+	0.954+	0.958+
	0.01	<b>0.825</b> $\pm$ <b>0.084</b> +	<b>0.843</b> $\pm$ <b>0.073</b> +	<b>0.861</b> $\pm$ <b>0.045</b> +	<b>0.861</b> $\pm$ <b>0.038</b> +	0.946+	0.956+	0.957+	0.944+
	0.1	<b>0.846</b> $\pm$ <b>0.070</b> +	<b>0.848</b> $\pm$ <b>0.068</b> +	<b>0.844</b> $\pm$ <b>0.075</b> +	<b>0.864</b> $\pm$ <b>0.044</b> +	0.950+	0.956+	0.953+	<b>0.960</b> +
Spect	-	<b>0.591</b> $\pm$ <b>0.027</b> +	<b>0.593</b> $\pm$ <b>0.025</b> +	<b>0.594</b> $\pm$ <b>0.023</b> +	<b>0.600</b> $\pm$ <b>0.019</b> +	0.684+	0.679+	0.689+	<b>0.694</b> +
	0.001	<b>0.562</b> $\pm$ <b>0.021</b> +	<b>0.558</b> $\pm$ <b>0.025</b> +	<b>0.561</b> $\pm$ <b>0.019</b> +	<b>0.560</b> $\pm$ <b>0.016</b> +	0.688+	0.653+	0.660+	0.644-
	0.01	<b>0.564</b> $\pm$ <b>0.025</b> +	<b>0.560</b> $\pm$ <b>0.023</b> +	<b>0.566</b> $\pm$ <b>0.024</b> +	<b>0.559</b> $\pm$ <b>0.016</b> +	0.672+	0.650+	0.669+	<i>0.643</i>
	0.1	<b>0.563</b> $\pm$ <b>0.022</b> +	<b>0.563</b> $\pm$ <b>0.024</b> +	<b>0.567</b> $\pm$ <b>0.018</b> +	<b>0.561</b> $\pm$ <b>0.024</b> +	0.664+	0.658+	0.655+	0.658+
Yeast <sub>1</sub>	-	<b>0.850</b> $\pm$ <b>0.006</b> +	<b>0.849</b> $\pm$ <b>0.008</b> +	<b>0.849</b> $\pm$ <b>0.006</b> +	<b>0.849</b> $\pm$ <b>0.006</b> +	0.881+	0.881+	0.882+	0.881+
	0.001	<b>0.845</b> $\pm$ <b>0.007</b> +	<b>0.847</b> $\pm$ <b>0.006</b> +	<b>0.848</b> $\pm$ <b>0.004</b> +	<b>0.848</b> $\pm$ <b>0.005</b> +	0.879+	0.882+	0.879+	0.880+
	0.01	<b>0.848</b> $\pm$ <b>0.006</b> +	<b>0.849</b> $\pm$ <b>0.005</b> +	<b>0.848</b> $\pm$ <b>0.005</b> +	<b>0.850</b> $\pm$ <b>0.005</b> +	0.881+	0.881+	0.879+	0.881+
	0.1	<b>0.847</b> $\pm$ <b>0.005</b> +	<b>0.848</b> $\pm$ <b>0.005</b> +	<b>0.848</b> $\pm$ <b>0.005</b> +	<b>0.850</b> $\pm$ <b>0.005</b> +	<i>0.878</i>	0.879+	0.879+	<b>0.883</b> +
Yeast <sub>2</sub>	-	<b>0.961</b> $\pm$ <b>0.007</b> +	<b>0.961</b> $\pm$ <b>0.007</b> +	<b>0.960</b> $\pm$ <b>0.008</b> +	<b>0.962</b> $\pm$ <b>0.007</b> +	0.978+	0.979+	0.979+	0.979+
	0.001	<b>0.959</b> $\pm$ <b>0.008</b> +	<b>0.958</b> $\pm$ <b>0.007</b> +	<b>0.961</b> $\pm$ <b>0.006</b> +	<b>0.961</b> $\pm$ <b>0.006</b> +	0.981+	0.978+	0.979+	0.978+
	0.01	<b>0.955</b> $\pm$ <b>0.009</b> +	<b>0.959</b> $\pm$ <b>0.007</b> +	<b>0.960</b> $\pm$ <b>0.009</b> +	<b>0.961</b> $\pm$ <b>0.007</b> +	0.979+	0.980+	0.979+	0.978+
	0.1	<b>0.958</b> $\pm$ <b>0.009</b> +	<b>0.960</b> $\pm$ <b>0.007</b> +	<b>0.961</b> $\pm$ <b>0.007</b> +	<b>0.962</b> $\pm$ <b>0.006</b> +	<i>0.978</i>	0.978+	<b>0.981</b> +	0.979+
Abal <sub>1</sub>	-	<b>0.849</b> $\pm$ <b>0.081</b>	<b>0.862</b> $\pm$ <b>0.087</b>	<b>0.847</b> $\pm$ <b>0.089</b>	<b>0.849</b> $\pm$ <b>0.085</b>	<i>0.964</i>	0.970+	0.966+	0.967+
	0.001	<b>0.892</b> $\pm$ <b>0.054</b> +	<b>0.905</b> $\pm$ <b>0.036</b> +	<b>0.907</b> $\pm$ <b>0.036</b> +	<b>0.906</b> $\pm$ <b>0.034</b> +	0.970+	0.968+	0.969+	0.971+
	0.01	<b>0.908</b> $\pm$ <b>0.038</b> +	<b>0.900</b> $\pm$ <b>0.056</b> +	<b>0.919</b> $\pm$ <b>0.022</b> +	<b>0.919</b> $\pm$ <b>0.026</b> +	0.969+	<b>0.973</b> +	0.970+	0.972+
	0.1	<b>0.910</b> $\pm$ <b>0.037</b> +	<b>0.911</b> $\pm$ <b>0.046</b> +	<b>0.912</b> $\pm$ <b>0.049</b> +	<b>0.916</b> $\pm$ <b>0.031</b> +	0.970+	0.972+	0.969+	0.970+
Abal <sub>2</sub>	-	<b>0.591</b> $\pm$ <b>0.102</b>	<b>0.623</b> $\pm$ <b>0.138</b>	<b>0.634</b> $\pm$ <b>0.115</b>	<b>0.617</b> $\pm$ <b>0.137</b>	0.862+	0.878+	0.881+	0.873+
	0.001	<b>0.729</b> $\pm$ <b>0.070</b> +	<b>0.722</b> $\pm$ <b>0.063</b> +	<b>0.709</b> $\pm$ <b>0.080</b> +	<b>0.735</b> $\pm$ <b>0.074</b> +	0.877+	0.870+	0.879+	0.885+
	0.01	<b>0.721</b> $\pm$ <b>0.067</b> +	<b>0.725</b> $\pm$ <b>0.075</b> +	<b>0.721</b> $\pm$ <b>0.074</b> +	<b>0.723</b> $\pm$ <b>0.066</b> +	0.881+	0.879+	0.884+	0.880+
	0.1	<b>0.724</b> $\pm$ <b>0.076</b> +	<b>0.739</b> $\pm$ <b>0.065</b> +	<b>0.736</b> $\pm$ <b>0.063</b> +	<b>0.756</b> $\pm$ <b>0.065</b> +	0.888+	0.883+	0.886+	<b>0.890</b> +
Better (+) / Worse (-)		22 / 0	22 / 0	22 / 0	22 / 0	24 / 0	24 / 0	24 / 0	22 / 2
Same (=) / NSS		0 / 2	0 / 2	0 / 2	0 / 2	0 / -	0 / -	0 / -	0 / -
<b>NSGA-II SSC</b>									
Ion	-	0.761 $\pm$ 0.108	0.749 $\pm$ 0.161	0.763 $\pm$ 0.152	0.744 $\pm$ 0.137	0.941+	0.937-	0.951+	0.949+
	0.001	0.765 $\pm$ 0.134	0.753 $\pm$ 0.124	0.699 $\pm$ 0.188	0.803 $\pm$ 0.103	0.954+	0.935-	<i>0.928-</i>	0.946+
	0.01	0.760 $\pm$ 0.125	0.751 $\pm$ 0.123	0.710 $\pm$ 0.161	0.802 $\pm$ 0.104	0.947+	0.929-	0.928-	0.947+
	0.1	0.775 $\pm$ 0.095	0.738 $\pm$ 0.184	0.746 $\pm$ 0.141	0.778 $\pm$ 0.099	<b>0.957</b> +	0.951+	0.945+	0.936-
Spect	-	0.525 $\pm$ 0.025	0.532 $\pm$ 0.029	0.537 $\pm$ 0.020	0.535 $\pm$ 0.029	0.633-	0.634-	0.634-	0.634-
	0.001	0.530 $\pm$ 0.029	0.539 $\pm$ 0.030	0.542 $\pm$ 0.023	0.540 $\pm$ 0.025	0.651+	0.635-	0.638-	0.654+
	0.01	0.535 $\pm$ 0.029	0.537 $\pm$ 0.027	0.541 $\pm$ 0.027	0.540 $\pm$ 0.028	0.655+	0.633-	<b>0.658</b> +	0.651+
	0.1	0.532 $\pm$ 0.029	0.531 $\pm$ 0.026	0.534 $\pm$ 0.027	0.533 $\pm$ 0.022	<i>0.632-</i>	0.641-	0.635-	0.635-
Yeast <sub>1</sub>	-	0.819 $\pm$ 0.041	0.829 $\pm$ 0.023	0.835 $\pm$ 0.014	0.834 $\pm$ 0.017	<i>0.874-</i>	0.875-	0.878+	0.878+
	0.001	0.825 $\pm$ 0.031	0.834 $\pm$ 0.029	0.834 $\pm$ 0.019	0.826 $\pm$ 0.039	0.877+	0.877+	0.877+	0.877+
	0.01	0.827 $\pm$ 0.027	0.835 $\pm$ 0.016	0.836 $\pm$ 0.019	0.830 $\pm$ 0.030	0.874+	0.877+	0.877+	0.879+
	0.1	0.831 $\pm$ 0.027	0.828 $\pm$ 0.034	0.831 $\pm$ 0.028	0.835 $\pm$ 0.014	0.879+	0.876=	0.876=	0.875-
Yeast <sub>2</sub>	-	0.950 $\pm$ 0.013	0.948 $\pm$ 0.010	0.945 $\pm$ 0.032	0.947 $\pm$ 0.009	0.978+	0.977+	0.978+	0.977+
	0.001	0.946 $\pm$ 0.013	0.944 $\pm$ 0.028	0.947 $\pm$ 0.013	0.950 $\pm$ 0.011	<i>0.976=</i>	0.976=	0.977+	<b>0.979</b> +
	0.01	0.947 $\pm$ 0.014	0.944 $\pm$ 0.024	0.946 $\pm$ 0.015	0.949 $\pm$ 0.012	0.978+	0.978+	0.978+	0.978+
	0.1	0.948 $\pm$ 0.014	0.948 $\pm$ 0.012	0.946 $\pm$ 0.009	0.947 $\pm$ 0.016	0.978+	0.978+	0.977+	0.977+
Abal <sub>1</sub>	-	0.844 $\pm$ 0.084	0.839 $\pm$ 0.083	0.834 $\pm$ 0.070	0.824 $\pm$ 0.099	0.963+	0.967+	0.962+	0.962+
	0.001	0.851 $\pm$ 0.062	0.812 $\pm$ 0.086	0.845 $\pm$ 0.077	0.844 $\pm$ 0.079	0.964+	<i>0.961=</i>	0.959-	0.967+
	0.01	0.850 $\pm$ 0.076	0.833 $\pm$ 0.091	0.829 $\pm$ 0.096	0.836 $\pm$ 0.090	<b>0.972</b> +	0.957-	0.959-	0.963+
	0.1	0.869 $\pm$ 0.064	0.838 $\pm$ 0.083	0.844 $\pm$ 0.075	0.834 $\pm$ 0.084	0.963+	0.965+	0.965+	0.962+
Abal <sub>2</sub>	-	0.521 $\pm$ 0.121	0.532 $\pm$ 0.103	0.529 $\pm$ 0.128	0.511 $\pm$ 0.118	0.810-	0.802-	0.841-	0.801-
	0.001	0.561 $\pm$ 0.082	0.534 $\pm$ 0.102	0.542 $\pm$ 0.104	0.502 $\pm$ 0.161	0.823-	<b>0.865</b> +	0.829-	0.820-
	0.01	<b>0.494</b> $\pm$ <b>0.147</b>	0.536 $\pm$ 0.114	0.533 $\pm$ 0.134	0.547 $\pm$ 0.123	0.844+	0.826-	0.841-	0.850+
	0.1	<b>0.513</b> $\pm$ <b>0.132</b>	0.549 $\pm$ 0.120	<b>0.514</b> $\pm$ <b>0.112</b>	0.532 $\pm$ 0.131	0.806-	0.820-	<i>0.785-</i>	0.831-
Better (+) / Worse (-)		0 / 2	0 / 0	0 / 1	0 / 0	16 / 7	9 / 12	12 / 11	17 / 7
Same (=) / NSS		0 / 22	0 / 24	0 / 23	0 / 24	1 / -	3 / -	1 / -	0 / -
<b>NSGA-II SCD</b>									
Ion	-	0.788 $\pm$ 0.114	0.800 $\pm$ 0.109	0.771 $\pm$ 0.145	0.791 $\pm$ 0.111	0.943+	0.946+	0.932-	0.952+
	0.001	<b>0.542</b> $\pm$ <b>0.127</b>	0.789 $\pm$ 0.110	0.789 $\pm$ 0.110	0.766 $\pm$ 0.120	<i>0.876-</i>	<b>0.955</b> +	0.955+	0.940+
	0.01	0.772 $\pm$ 0.119	0.801 $\pm$ 0.099	0.801 $\pm$ 0.099	0.756 $\pm$ 0.158	0.946+	0.941+	0.941+	0.941+
	0.1	0.770 $\pm$ 0.109	0.771 $\pm$ 0.124	0.771 $\pm$ 0.124	0.756 $\pm$ 0.097	0.947+	0.951+	0.951+	0.940+
Spect	-	0.542 $\pm$ 0.022	0.537 $\pm$ 0.027	0.538 $\pm$ 0.037	0.537 $\pm$ 0.037	0.642-	<b>0.658</b> +	0.652+	0.643-
	0.001	0.539 $\pm$ 0.032	0.538 $\pm$ 0.026	0.538 $\pm$ 0.027	0.535 $\pm$ 0.036	0.650+	0.643-	0.644-	0.648+
	0.01	0.537 $\pm$ 0.037	0.538 $\pm$ 0.026	0.538 $\pm$ 0.027	0.535 $\pm$ 0.036	0.650+	0.643-	0.644-	0.648+
	0.1	0.542 $\pm$ 0.025	0.535 $\pm$ 0.027	0.536 $\pm$ 0.024	0.538 $\pm$ 0.024	0.652+	0.643-	<i>0.632-</i>	0.644-
Yeast <sub>1</sub>	-	0.836 $\pm$ 0.014	0.826 $\pm$ 0.038	0.838 $\pm$ 0.008	0.837 $\pm$ 0.011	0.877+	0.874-	0.876=	0.877+
	0.001	0.834 $\pm$ 0.026	0.836 $\pm$ 0.015	0.837 $\pm$ 0.016	0.834 $\pm$ 0.016	0.877+	<i>0.873-</i>	0.875-	0.876=
	0.01	0.834 $\pm$ 0.015	0.836 $\pm$ 0.011	0.834 $\pm$ 0.018	0.835 $\pm$ 0.015	0.876=	0.877+	0.875-	0.878+
	0.1	0.836 $\pm$ 0.014	0.826 $\pm$ 0.038	0.838 $\pm$ 0.008	0.837 $\pm$ 0.011	<b>0.879</b> +	0.875-	0.877+	0.876=
Yeast <sub>2</sub>	-	0.948 $\pm$ 0.013	0.950 $\pm$ 0.009	0.947 $\pm$ 0.011	0.946 $\pm$ 0.011	0.978+	0.977+	0.976=	<i>0.976=</i>
	0.001	0.947 $\pm$ 0.016	0.946 $\pm$ 0.016	0.946 $\pm$ 0.016	0.950 $\pm$ 0.012	0.976=	0.976=	0.976=	<b>0.979</b> +
	0.01	0.950 $\pm$ 0.010	0.949 $\pm$ 0.009	0.949 $\pm$ 0.009	0.947 $\pm$ 0.011	0.979+	0.979+	0.979+	0.977+
	0.1	<b>0.948</b> $\pm$ <b>0.010</b>	<b>0.947</b> $\pm$ <b>0.009</b>	<b>0.947</b> $\pm$ <b>0.009</b>	<b>0.952</b> $\pm$ <b>0.008</b>	0.977+	<b>0.978</b> +	<b>0.978</b> +	<b>0.978</b> +
Abal <sub>1</sub>	-	0.841 $\pm$ 0.089	0.838 $\pm$ 0.073	0.838 $\pm$ 0.080					

other two semantic-based approaches (SSC and SCD) as well as any of the EMO approaches used in this work (NSGA-II or SPEA2).

### 6.3 Counting number of SDO “wins”

From Tables 7 and 8, we have learnt that our proposed Semantic-based Distance as an additional criterion (SDO) approach performs better compared to either NSGA-II and SPEA2. We, however, do not know how well or how poorly our SDO approach behaves overall by considering the results provided by any of the other approaches used in this work: canonical EMO, SSC and SCD. In Table 9, we report the number of “wins” achieved by SDO *vs.* NSGA-II, SSC and SCD. A win between our SDO *vs.* any of these methods is when the former achieves better results on either the average hypervolume values or on the PO front results, for any pair of combination values for the semantic similarity threshold values used in this work. For example the average hypervolume results for the Ion dataset when using SDO, SSC, SCD (reported in Table 7) and NSGA-II (reported in Table 6), are  $0.860 \pm 0.033$ ,  $0.761 \pm 0.108$ ,  $0.788 \pm 0.114$  and  $0.766 \pm 0.114$ , respectively, when  $UBSS = 0.25$ . This corresponds to SDO “winning” over the other three approaches, as reported with a 3 in Table 9, for the Ion dataset and  $UBSS = 0.25$  (omitting the value for LBSS).

From Table 9, it is clear to see how our SDO approach performs better on the average hypervolume values compared to the other three methods for the Ion, Spec, Yeast<sub>1</sub> and Yeast<sub>2</sub> datasets. For the last two datasets, Abal<sub>1</sub> and Abal<sub>2</sub>, we can easily observe from Table 9, that SDO is better compared to SSC and SCD and similar to NSGA-II when the LBSS values are not defined (using Eq. (6)). When we perform the same analysis on the PO fronts values, reported on the last four columns of Table 9, from left to right, we can observe how the SDO approach consistently “wins” over the three approaches and, in a few cases, performs poorly.

We now carry out the same summary analysis when comparing SDO *vs.* SSC, SCD, reported in the top, middle and bottom of Table 8, respectively, and *vs.* SPEA2, reported in Table 6. Table 10 reports the summary of analysing these results. We can see the same trend reported in Table 9, SDO “wins” over the three approaches on the average hypervolume results, regardless of the values used for LBSS and UBSS and for any of the datasets adopted in this work.

A similar trend is observed when we analyse the results obtained by SDO on the PO front *vs.* any of the other tree approaches. In most of the cases, SDO is able to “win” over the other three approaches, and in a few cases performs poorly, e.g., in the Ion dataset and setting  $LBSS = 0.001$  and  $UBSS = 0.25$ , where SDO does not win over any of the other three approaches (denoted with 0 in the table).

**Table 8** Average ( $\pm$  standard deviation) hypervarea of evolved Pareto-approximated fronts and PO fronts for the SPEA2 semantic-based methods (SDO, SSC, SCD) over 50 independent runs

		Hypervolume							
		Average UBSS				PO Front UBSS			
LBSS		0.25	0.5	0.75	1.0	0.25	0.5	0.75	1.0
<b>SPEA2 SDO</b>									
Ion	-	<b>0.859 <math>\pm</math> 0.031+</b>	<b>0.869 <math>\pm</math> 0.029+</b>	<b>0.862 <math>\pm</math> 0.034+</b>	<b>0.865 <math>\pm</math> 0.047+</b>	0.951+	0.952+	0.950+	0.961+
	0.001	<b>0.858 <math>\pm</math> 0.041+</b>	<b>0.852 <math>\pm</math> 0.075+</b>	<b>0.870 <math>\pm</math> 0.055+</b>	<b>0.874 <math>\pm</math> 0.055+</b>	0.946-	0.955+	0.952+	0.956+
	0.01	<b>0.837 <math>\pm</math> 0.097+</b>	<b>0.851 <math>\pm</math> 0.077+</b>	<b>0.875 <math>\pm</math> 0.032+</b>	<b>0.863 <math>\pm</math> 0.049+</b>	0.956+	0.951+	0.953+	0.959+
	0.1	<b>0.852 <math>\pm</math> 0.071+</b>	<b>0.856 <math>\pm</math> 0.053+</b>	<b>0.873 <math>\pm</math> 0.035+</b>	<b>0.862 <math>\pm</math> 0.038+</b>	0.947-	0.949+	0.952+	0.950+
Spect	-	<b>0.591 <math>\pm</math> 0.020+</b>	<b>0.599 <math>\pm</math> 0.021+</b>	<b>0.597 <math>\pm</math> 0.018+</b>	<b>0.595 <math>\pm</math> 0.022+</b>	0.678+	0.688+	0.686+	0.695+
	0.001	<b>0.569 <math>\pm</math> 0.021+</b>	<b>0.565 <math>\pm</math> 0.024+</b>	<b>0.566 <math>\pm</math> 0.023+</b>	<b>0.563 <math>\pm</math> 0.023+</b>	0.668+	0.666+	0.672+	0.658-
	0.01	<b>0.568 <math>\pm</math> 0.023+</b>	<b>0.567 <math>\pm</math> 0.024+</b>	<b>0.564 <math>\pm</math> 0.025+</b>	<b>0.563 <math>\pm</math> 0.023+</b>	0.666+	0.674+	0.664+	0.658-
	0.1	<b>0.566 <math>\pm</math> 0.023+</b>	<b>0.560 <math>\pm</math> 0.020+</b>	<b>0.567 <math>\pm</math> 0.027+</b>	<b>0.561 <math>\pm</math> 0.022+</b>	0.666+	0.654-	0.673+	0.658-
Yeast <sub>1</sub>	-	<b>0.850 <math>\pm</math> 0.007+</b>	<b>0.850 <math>\pm</math> 0.006+</b>	<b>0.849 <math>\pm</math> 0.008+</b>	<b>0.849 <math>\pm</math> 0.004+</b>	0.882+	0.881+	0.881+	0.881+
	0.001	<b>0.848 <math>\pm</math> 0.006+</b>	<b>0.847 <math>\pm</math> 0.007+</b>	<b>0.848 <math>\pm</math> 0.004+</b>	<b>0.850 <math>\pm</math> 0.006+</b>	0.880+	0.883+	0.880+	0.883+
	0.01	<b>0.848 <math>\pm</math> 0.006+</b>	<b>0.847 <math>\pm</math> 0.006+</b>	<b>0.850 <math>\pm</math> 0.005+</b>	<b>0.850 <math>\pm</math> 0.005+</b>	0.881+	0.880+	0.882+	0.879+
	0.1	<b>0.847 <math>\pm</math> 0.005+</b>	<b>0.849 <math>\pm</math> 0.006+</b>	<b>0.848 <math>\pm</math> 0.005+</b>	<b>0.849 <math>\pm</math> 0.006+</b>	0.879+	0.882+	0.880+	0.882+
Yeast <sub>2</sub>	-	<b>0.962 <math>\pm</math> 0.007+</b>	<b>0.962 <math>\pm</math> 0.006+</b>	<b>0.962 <math>\pm</math> 0.006+</b>	<b>0.963 <math>\pm</math> 0.008+</b>	0.979+	0.979+	0.979+	0.977-
	0.001	<b>0.958 <math>\pm</math> 0.008+</b>	<b>0.960 <math>\pm</math> 0.007+</b>	<b>0.960 <math>\pm</math> 0.005+</b>	<b>0.960 <math>\pm</math> 0.005+</b>	0.980+	0.979+	0.979+	0.977-
	0.01	<b>0.959 <math>\pm</math> 0.008+</b>	<b>0.961 <math>\pm</math> 0.007+</b>	<b>0.961 <math>\pm</math> 0.005+</b>	<b>0.962 <math>\pm</math> 0.007+</b>	0.979+	0.980+	0.978=	0.978=
	0.1	<b>0.961 <math>\pm</math> 0.007+</b>	<b>0.961 <math>\pm</math> 0.007+</b>	<b>0.960 <math>\pm</math> 0.007+</b>	<b>0.964 <math>\pm</math> 0.007+</b>	0.980+	0.979+	0.979+	0.980+
Abal <sub>1</sub>	-	<b>0.875 <math>\pm</math> 0.059+</b>	<b>0.868 <math>\pm</math> 0.081+</b>	<b>0.875 <math>\pm</math> 0.059+</b>	<b>0.873 <math>\pm</math> 0.069+</b>	0.965+	0.974+	0.968+	0.972+
	0.001	<b>0.895 <math>\pm</math> 0.061+</b>	<b>0.911 <math>\pm</math> 0.031+</b>	<b>0.905 <math>\pm</math> 0.044+</b>	<b>0.903 <math>\pm</math> 0.036+</b>	0.974+	0.973+	0.972+	0.972+
	0.01	<b>0.903 <math>\pm</math> 0.038+</b>	<b>0.906 <math>\pm</math> 0.042+</b>	<b>0.901 <math>\pm</math> 0.048+</b>	<b>0.910 <math>\pm</math> 0.039+</b>	0.966+	0.969+	0.972+	0.974+
	0.1	<b>0.888 <math>\pm</math> 0.067+</b>	<b>0.918 <math>\pm</math> 0.032+</b>	<b>0.910 <math>\pm</math> 0.046+</b>	<b>0.916 <math>\pm</math> 0.027+</b>	0.974+	0.970+	0.968+	0.967+
Abal <sub>2</sub>	-	<b>0.620 <math>\pm</math> 0.148+</b>	<b>0.633 <math>\pm</math> 0.124+</b>	<b>0.651 <math>\pm</math> 0.146+</b>	<b>0.630 <math>\pm</math> 0.138+</b>	0.874+	0.867+	0.879+	0.876+
	0.001	<b>0.717 <math>\pm</math> 0.069+</b>	<b>0.709 <math>\pm</math> 0.079+</b>	<b>0.722 <math>\pm</math> 0.083+</b>	<b>0.733 <math>\pm</math> 0.075+</b>	0.868+	0.883+	0.886+	0.891+
	0.01	<b>0.706 <math>\pm</math> 0.084+</b>	<b>0.720 <math>\pm</math> 0.067+</b>	<b>0.726 <math>\pm</math> 0.067+</b>	<b>0.747 <math>\pm</math> 0.070+</b>	0.884+	0.880+	0.877+	0.887+
	0.1	<b>0.732 <math>\pm</math> 0.064+</b>	<b>0.733 <math>\pm</math> 0.066+</b>	<b>0.749 <math>\pm</math> 0.063+</b>	<b>0.737 <math>\pm</math> 0.081+</b>	0.880+	0.876+	0.883+	0.877+
Better (+) / Worse (-)		24 / 0	24 / 0	24 / 0	24 / 0	22 / 2	23 / 1	23 / 0	18 / 5
Eq. ( $\equiv$ ) / NS (x)		0 / 0	0 / 0	0 / 0	0 / 0	0 / -	0 / -	1 / -	1 / -
<b>SPEA2 SSC</b>									
Ion	-	0.724 $\pm$ 0.157	0.767 $\pm$ 0.081	0.743 $\pm$ 0.120	0.764 $\pm$ 0.100	0.935-	0.924-	0.939-	0.939-
	0.001	0.747 $\pm$ 0.173	0.767 $\pm$ 0.121	0.755 $\pm$ 0.155	0.790 $\pm$ 0.101	0.951+	0.936-	0.934-	0.947-
	0.01	0.741 $\pm$ 0.172	0.765 $\pm$ 0.117	0.757 $\pm$ 0.147	0.790 $\pm$ 0.101	0.955+	0.942-	0.940-	0.947-
	0.1	0.787 $\pm$ 0.106	0.782 $\pm$ 0.108	0.778 $\pm$ 0.124	0.787 $\pm$ 0.119	0.939-	0.942-	0.956+	0.961+
Spect	-	0.521 $\pm$ 0.045	0.536 $\pm$ 0.021	0.543 $\pm$ 0.028	0.533 $\pm$ 0.027	0.639-	0.648-	0.657-	0.650-
	0.001	0.533 $\pm$ 0.028	0.536 $\pm$ 0.022	0.530 $\pm$ 0.035	0.536 $\pm$ 0.021	0.644-	0.659=	0.634-	0.634-
	0.01	0.530 $\pm$ 0.027	0.534 $\pm$ 0.029	0.535 $\pm$ 0.023	0.538 $\pm$ 0.028	0.648-	0.644-	0.636-	0.660+
	0.1	0.537 $\pm$ 0.021	0.542 $\pm$ 0.025	0.536 $\pm$ 0.034	0.533 $\pm$ 0.028	0.640-	0.650-	0.641-	0.645-
Yeast <sub>1</sub>	-	0.824 $\pm$ 0.030	0.824 $\pm$ 0.042	0.831 $\pm$ 0.020	0.828 $\pm$ 0.030	0.877=	0.876-	0.877=	0.874-
	0.001	0.826 $\pm$ 0.029	0.824 $\pm$ 0.062	0.828 $\pm$ 0.025	0.833 $\pm$ 0.017	0.877=	0.875-	0.876-	0.877=
	0.01	0.830 $\pm$ 0.020	0.829 $\pm$ 0.033	0.832 $\pm$ 0.021	0.832 $\pm$ 0.020	0.874-	0.876-	0.876-	0.876-
	0.1	0.828 $\pm$ 0.032	0.836 $\pm$ 0.015	0.830 $\pm$ 0.028	0.836 $\pm$ 0.014	0.875-	0.877=	0.877=	0.876-
Yeast <sub>2</sub>	-	0.950 $\pm$ 0.010	0.947 $\pm$ 0.011	0.950 $\pm$ 0.010	0.951 $\pm$ 0.010	0.977-	0.976-	0.978=	0.979+
	0.001	0.947 $\pm$ 0.015	0.947 $\pm$ 0.010	0.948 $\pm$ 0.011	0.948 $\pm$ 0.010	0.978=	0.977-	0.978=	0.976-
	0.01	0.948 $\pm$ 0.012	0.948 $\pm$ 0.013	0.943 $\pm$ 0.022	0.950 $\pm$ 0.010	0.978=	0.979+	0.977-	0.978=
	0.1	0.944 $\pm$ 0.024	0.943 $\pm$ 0.017	0.947 $\pm$ 0.010	0.945 $\pm$ 0.015	0.976-	0.977-	0.975-	0.975-
Abal <sub>1</sub>	-	0.833 $\pm$ 0.071	0.856 $\pm$ 0.088	0.822 $\pm$ 0.080	0.851 $\pm$ 0.061	0.960=	0.960=	0.966+	0.961+
	0.001	0.812 $\pm$ 0.094	0.854 $\pm$ 0.082	0.836 $\pm$ 0.076	0.847 $\pm$ 0.065	0.963+	0.965+	0.966+	0.963+
	0.01	0.819 $\pm$ 0.098	0.824 $\pm$ 0.106	0.841 $\pm$ 0.070	0.851 $\pm$ 0.063	0.969+	0.965+	0.964+	0.962+
	0.1	0.844 $\pm$ 0.083	0.833 $\pm$ 0.088	0.853 $\pm$ 0.095	0.837 $\pm$ 0.090	0.965+	0.967+	0.963+	0.965+
Abal <sub>2</sub>	-	0.548 $\pm$ 0.120	0.500 $\pm$ 0.139	0.515 $\pm$ 0.137	0.532 $\pm$ 0.107	0.819-	0.790-	0.815-	0.802-
	0.001	0.515 $\pm$ 0.135	0.518 $\pm$ 0.125	0.541 $\pm$ 0.111	0.521 $\pm$ 0.127	0.812-	0.829-	0.836+	0.807-
	0.01	0.537 $\pm$ 0.105	0.500 $\pm$ 0.163	0.527 $\pm$ 0.152	0.521 $\pm$ 0.095	0.820-	0.817-	0.816-	0.816-
	0.1	0.561 $\pm$ 0.111	0.556 $\pm$ 0.094	0.516 $\pm$ 0.142	0.558 $\pm$ 0.098	0.840+	0.838+	0.838+	0.838+
Better (+) / Worse (-)		0 / 0	0 / 0	0 / 0	0 / 0	6 / 13	5 / 16	7 / 13	8 / 14
Eq. ( $\equiv$ ) / NS (x)		0 / 24	0 / 24	0 / 24	0 / 24	5 / -	3 / -	4 / -	2 / -
<b>SPEA2 SCD</b>									
Ion	-	0.804 $\pm$ 0.100	0.785 $\pm$ 0.138	0.785 $\pm$ 0.116	0.819 $\pm$ 0.073	0.956+	0.951+	0.948=	0.944-
	0.001	0.790 $\pm$ 0.093	0.786 $\pm$ 0.103	0.786 $\pm$ 0.103	0.790 $\pm$ 0.088	0.950+	0.942-	0.942-	0.952+
	0.01	0.765 $\pm$ 0.156	0.803 $\pm$ 0.074	0.803 $\pm$ 0.074	0.794 $\pm$ 0.098	0.962+	0.938-	0.938-	0.949+
	0.1	0.806 $\pm$ 0.110	0.794 $\pm$ 0.096	0.794 $\pm$ 0.096	0.773 $\pm$ 0.142	0.956+	0.941-	0.941-	0.955+
Spect	-	0.541 $\pm$ 0.027	0.547 $\pm$ 0.020	0.548 $\pm$ 0.023	0.533 $\pm$ 0.027	0.656-	0.652-	0.663+	0.632-
	0.001	0.546 $\pm$ 0.024	0.544 $\pm$ 0.024	0.543 $\pm$ 0.026	0.540 $\pm$ 0.027	0.645-	0.659=	0.655-	0.651-
	0.01	0.545 $\pm$ 0.023	0.544 $\pm$ 0.024	0.543 $\pm$ 0.026	0.540 $\pm$ 0.027	0.647-	0.659=	0.654-	0.651-
	0.1	0.546 $\pm$ 0.018	0.543 $\pm$ 0.025	0.542 $\pm$ 0.025	0.541 $\pm$ 0.025	0.646-	0.653-	0.657-	0.655-
Yeast <sub>1</sub>	-	0.835 $\pm$ 0.015	0.836 $\pm$ 0.011	0.836 $\pm$ 0.014	0.837 $\pm$ 0.016	0.878+	0.876-	0.879+	0.880+
	0.001	0.835 $\pm$ 0.020	0.835 $\pm$ 0.014	0.834 $\pm$ 0.014	0.836 $\pm$ 0.020	0.874-	0.878+	0.876-	0.878+
	0.01	0.838 $\pm$ 0.008	0.832 $\pm$ 0.023	0.832 $\pm$ 0.017	0.836 $\pm$ 0.011	0.876-	0.879+	0.875-	0.874-
	0.1	0.835 $\pm$ 0.015	0.825 $\pm$ 0.061	0.834 $\pm$ 0.023	0.835 $\pm$ 0.012	0.877=	0.875-	0.879+	0.876-
Yeast <sub>2</sub>	-	0.949 $\pm$ 0.008	0.946 $\pm$ 0.015	0.948 $\pm$ 0.009	0.948 $\pm$ 0.009	0.977-	0.978=	0.976-	0.978=
	0.001	0.948 $\pm$ 0.012	0.948 $\pm$ 0.009	0.948 $\pm$ 0.011	0.947 $\pm$ 0.011	0.978=	0.977-	0.977-	0.977-
	0.01	0.948 $\pm$ 0.010	0.948 $\pm$ 0.011	0.948 $\pm$ 0.011	0.948 $\pm$ 0.015	0.975-	0.977-	0.977-	0.977-
	0.1	0.949 $\pm$ 0.010	0.950 $\pm$ 0.012	0.950 $\pm$ 0.012	0.945 $\pm$ 0.036	0.977-	0.978=	0.978=	0.977-
Abal <sub>1</sub>	-	0.829 $\pm$ 0.086	0.834 $\pm$ 0.072	0.840 $\pm$ 0.083	0.835 $\pm$ 0.074	0.961+	0.955-	0.960=	0.968+
	0.001	0.829 $\pm$ 0.072	0.834 $\pm$ 0.069	0.834 $\pm$ 0.069	0.819 $\pm$ 0.088	0.959-	0.957-	0.957-	0.960=
	0.01	0.834 $\pm$ 0.084	0.800 $\pm$ 0.078	0.800 $\pm$ 0.078	0.816 $\pm$ 0.097	0.962+	0.960=	0.960=	0.952-
	0.1	0.841 $\pm$ 0.085	0.827 $\pm$ 0.071	0.827 $\pm$ 0.071	0.842 $\pm$ 0.067	0.965+	0.955-	0.955-	0.964+
Abal <sub>2</sub>	-	0.572 $\pm$ 0.111	0.577 $\pm$ 0.103	0.562 $\pm$ 0.127	0.560 $\pm$ 0.094	0.828-	0.837+	0.856+	0.839+
	0.001	0.557 $\pm$ 0.094	0.578 $\$						



## 6.4 Semantic Similarity Values


From the previous analysis, it is clear that SDO behaves, in average, better compared to any of the approaches used in this work (canonical EMO and the two other semantic-based approaches). The summaries presented in Tables 9 and 10 also help us to easily see what semantic similarity values used in our SDO approach tend to yield good results.

As discussed previously, SDO tends to “win” on the average hypervolume results over NSGA-II, SSC and SCD, as reported in Table 9. When we take a closer look to the results reported in this table, we can see that in only two datasets,  $Abal_1$  and  $Abal_2$ , SDO is able to win over SSC and SDO and it is not significantly better than NSGA-II when LBSS is omitted. This would indicate that the use of Eq. (5), requiring the use of LBSS and UBSS, is preferred to obtain better results. That is, when both semantic similarity values are defined for Eq. (5), SDO performs better with respect to the three approaches, regardless of the values defined for these semantic similarity values, for any of the datasets adopted. The situation on the results achieved by SDO *vs.* NSGA-II, SSC and SCD on the PO front values is also good, although one can expect for SDO to consistently achieve better results compared to the other three approaches when  $UBSS = 0.5$ , regardless of the value defined for LBSS.

The situation when comparing SDO *vs.* SPEA2, SSC and SCD, summarised in Table 10, is even clearer to the one presented in Table 9. When one analyses the results on the average hypervolume, we can see that SDO “wins” over the other three approaches regardless of the values defined for LBSS and UBSS for any of the datasets used in this work. When we turn our attention on the PO fronts achieved by SDO *vs.* SPEA2, SSC and SCD, the scenario is also favourable to SDO “winning” to the other three approaches in most cases. The most consistent scenarios is when  $UBSS = \{0.5, 0.75\}$ , regardless of the value defined for LBSS, where there is only one scenario in each of these cases values where SDO “loses” against SPEA2 (Spect dataset) or SSC (Ion dataset).

We can see from this analysis on the semantic similarity values, that setting UBSS at 0.5, will tend to consistently yield better results on the average hypervolume values and on the PO front results when promoting semantic diversity using the semantic distance values as additional criterion in the optimisation process, captured by the proposed SDO approach. For example, the Pareto fronts obtained by our proposed semantic-based approaches, setting UBSS at 0.5, as well as the NSGA-II and SPEA2, can be seen at the top and at the bottom of Figure 3, respectively, for the Spect,  $Abal_1$  and  $Abal_2$  datasets.

From this figure, it is easy to see how SDO, represented by blue hollow squares connected by a solid line, achieves better coverage of the objective space compared to the other three approaches. This is evident for the Abal datasets, using either NSGA-II or SPEA2, shown in the middle and last column of Figure 3, as well as for the Spect dataset when using SPEA2 and less clear when using NSGA-II. We omit presenting the results for the Ion and Yeast

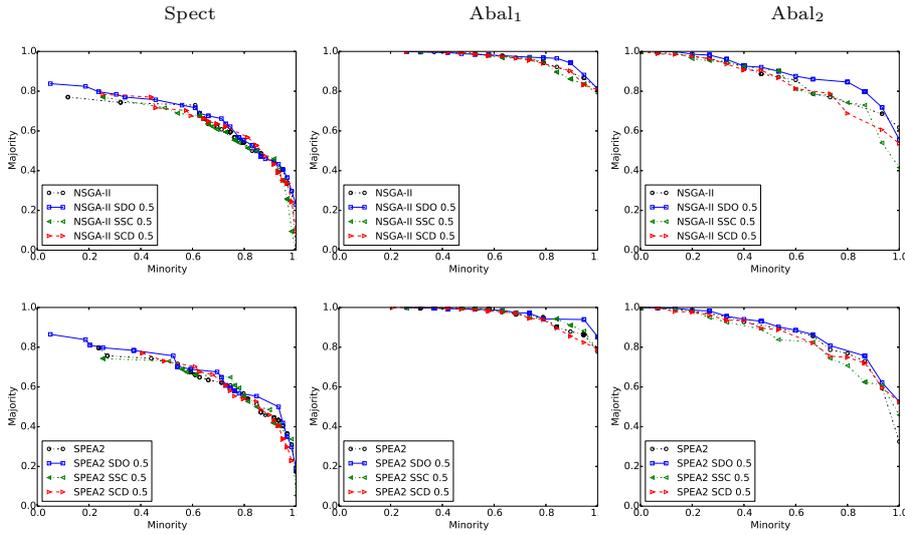

**Fig. 3** Pareto fronts for Spect, Abal<sub>1</sub>, Abal<sub>2</sub> data sets using NSGA-II and its semantic-based variants (top) and using SPEA2 and its variants (bottom). Semantic-based variants set UBSS = 0.5.


datasets due to their PO values being close to each other, making hard to draw any conclusions.

### 6.5 Size of GP solutions

Bloat, increase in average tree size without a corresponding increase in performance, is a phenomenon commonly observed in GP variable length representations, such as the one used in this study. Figure 4 shows the average number of nodes per run for each one of the 50 independent runs for each dataset and for each approach used in this work, including NSGA-II and SPEA2, shown in the left and in the right of Figure 4, respectively, including their semantic-based variants, setting UBSS = 0.5 for each of these three variants (SDO, SSC and SCD).

We have grouped, for each of the six datasets used in this work (see Table 1), the average number of nodes evaluated by either NSGA-II/SPEA2, SDO, SSC or SCD. From Figure 4, it is easy to observe that when we compare the semantic-based approaches (last three box-plots, from left to right, for each of the six datasets groups) either using NSGA-II (left) or SPEA (right), SDO (second box-plot, from left to right) tends to evaluate more nodes compared to the other two semantic-based approaches (last two box-plots for each of these six groups) as well as their EMO counterparts (first box-plot for each of these groups). This is particularly visible in the Abal<sub>2</sub> dataset.

When we compare the number of nodes evaluated by SDO *vs.* NSGA-II or SPEA2, left and right of Figure 4, respectively, we can see that SDO

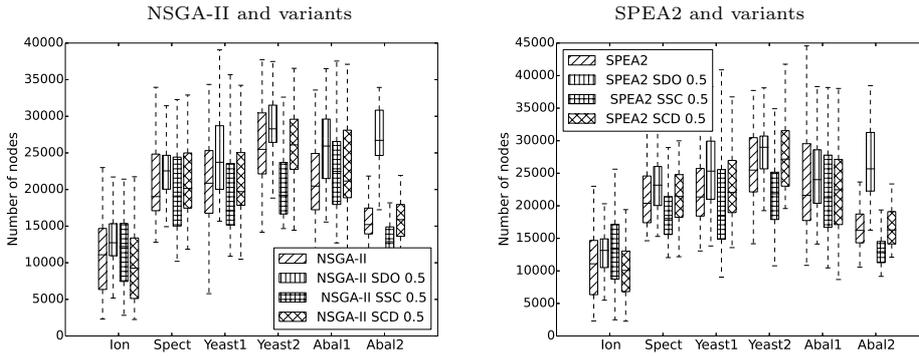

**Fig. 4** Average size of GP individuals using NSGA-II (left) and SPEA2 (right) and their corresponding semantic-based variants (SDO, SSC and SCD, setting UBSS = 0.5).

does not evaluate many more nodes compared to the two canonical EMO approaches when using the Ion, Spect and Yeast<sub>2</sub> datasets. From this analysis, it is interesting to note that there is a tendency to get a better Pareto front when more nodes are evaluated. For example, see in Figure 3, how the Pareto front by the SDO approach is better compared to the other three approaches in the Abal<sub>2</sub> dataset (right-hand side of the figure). SDO evaluates significantly more nodes compared to the other three approaches in this dataset (see right-hand side of Figure 4).

The same tendency is observed when using the Abal<sub>1</sub> dataset. SDO evaluates more nodes compared to NSGA-II (left of Figure 4) and achieves a better Pareto front (see middle-top of Figure 3). This analysis would suggest that evaluating more nodes would tend to achieve better results in the objective space.

## 7 Conclusions

In Genetic Programming, semantics is commonly defined as the output of syntactically correct programs. In canonical GP, semantics is represented by the output vector of the tree for different known inputs and the similarity between the semantics of two trees gives a much smoother idea of the similarity between the trees than either the syntactic description of the trees or their raw fitness.

This work proposes a new form to add semantics into the core of a MOGP using the well-known NSGA-II and SPEA2. Our approach, named Semantic-based Distance as an additional criterion (SDO), consists of using semantic distance values as another criterion to choose solutions with the hope to promote more ‘spreadness’ in the semantic space. We also use this distance in lieu of the crowding distance at the heart of the aforementioned EMO algorithms.

We have shown that this form of semantics achieves better results compared to other forms of semantics used in EMO approaches as well as the results

yield by canonical NSGA-II and SPEA2 algorithms. We have learned how it is feasible to promote semantic diversity in a MOGP by using a well-defined semantic-based distance.

A drawback currently present in any GP semantic-based approach used in continuous fitness-valued cases, including ours, is the threshold values needed to compute the semantic distance. Our immediate goal is to evolve these values during search. We have conducted a thorough analysis on the impact of different semantic similarity values used, and even though, we make recommendations on these values, the automatic setting of these, via evolution, could improve the results presented in this scientific work.

## Acknowledgments

This publication has emanated from research conducted with the financial support of Science Foundation Ireland under Grant number 18/CRT/6049. The authors wish to acknowledge the DJEI/DES/SFI/HEA Irish Centre for High-End Computing (ICHEC) for the provision of computational facilities and support. We thank E. Mezura Montes for his comments on the work.

## References

1. D. N. A. Asuncion. UCI machine learning repository, 2007.
2. P. T. Anh, Q. U. Nguyen, X. H. Nguyen, and M. O'Neill. Examining the diversity property of semantic similarity based crossover. In K. Krawiec, A. Moraglio, T. Hu, A. S. Etnaner-Uyar, and B. Hu, editors, *Genetic Programming - 16th European Conference, EuroGP 2013, Vienna, Austria, April 3-5, 2013. Proceedings*, volume 7831 of *Lecture Notes in Computer Science*, pages 265–276. Springer, 2013.
3. L. Beadle and C. Johnson. Semantically driven crossover in genetic programming. In *Evolutionary Computation, 2008. CEC 2008. (IEEE World Congress on Computational Intelligence)*, pages 111–116, june 2008.
4. L. Beadle and C. Johnson. Semantically driven mutation in genetic programming. In *Evolutionary Computation, 2009. CEC '09. IEEE Congress on*, pages 1336–1342, may 2009.
5. U. Bhowan, M. Johnston, M. Zhang, and X. Yao. Evolving diverse ensembles using genetic programming for classification with unbalanced data. *IEEE Transactions on Evolutionary Computation*, 17(3):368–386, June 2013.
6. S. Bleuler, M. Brack, L. Thiele, and E. Zitzler. Multiobjective genetic programming: reducing bloat using spea2. In *Proceedings of the 2001 Congress on Evolutionary Computation (IEEE Cat. No.01TH8546)*, volume 1, pages 536–543 vol. 1, 2001.
7. M. Castelli, L. Trujillo, L. Vanneschi, S. Silva, E. Z-Flores, and P. Legrand. Geometric semantic genetic programming with local search. In *Proceedings of the 2015 Annual Conference on Genetic and Evolutionary Computation, GECCO '15*, page 999–1006, New York, NY, USA, 2015. Association for Computing Machinery.
8. C. A. C. Coello. Evolutionary multi-objective optimization: a historical view of the field. *IEEE Computational Intelligence Magazine*, 1(1):28–36, Feb 2006.
9. C. A. C. Coello, G. B. Lamont, and D. A. V. Veldhuizen. *Evolutionary Algorithms for Solving Multi-Objective Problems (Genetic and Evolutionary Computation)*. Springer-Verlag New York, Inc., Secaucus, NJ, USA, 2006.
10. C. A. Coello Coello. A comprehensive survey of evolutionary-based multiobjective optimization techniques. *Knowledge and Information Systems*, 1(3):269–308, 1999.

11. K. Deb. *Multi-Objective Optimization Using Evolutionary Algorithms*. John Wiley & Sons, Inc., New York, NY, USA, 2001.
12. K. Deb, A. Pratap, S. Agarwal, and T. Meyarivan. A fast and elitist multiobjective genetic algorithm: Nsga-ii. *IEEE Transactions on Evolutionary Computation*, 6:182–197, 2002.
13. T. Dou and P. Rockett. Comparison of semantic-based local search methods for multiobjective genetic programming. *Genetic Programming and Evolvable Machines*, 19(4):535–563, Dec 2018.
14. E. Galván and P. Mooney. Neuroevolution in Deep Neural Networks: Current Trends and Future Challenges. arXiv preprint arXiv: 2006.05415, 2020.
15. A. E. Eiben and J. Smith. From evolutionary computation to the evolution of things. *Nature*, 521:476–482, 28 May 2015.
16. A. E. Eiben and J. E. Smith. *Introduction to Evolutionary Computing*. Springer Verlag, 2003.
17. S. Forstenlechner, D. Fagan, M. Nicolau, and M. O’Neill. Towards effective semantic operators for program synthesis in genetic programming. In *Proceedings of the Genetic and Evolutionary Computation Conference, GECCO ’18*, pages 1119–1126, New York, NY, USA, 2018. ACM.
18. E. Galván and M. Schoenauer. Promoting semantic diversity in multi-objective genetic programming. In A. Auger and T. Stützle, editors, *Proceedings of the Genetic and Evolutionary Computation Conference, GECCO 2019, Prague, Czech Republic, July 13-17, 2019*, pages 1021–1029. ACM, 2019.
19. E. Galván and F. Stapleton. Semantic-based distance approaches in multi-objective genetic programming. In *2020 IEEE Symposium Series on Computational Intelligence, SSCI 2020, Canberra, Australia, December 1-4, 2020*, pages 149–156. IEEE, 2020.
20. E. Galván-López, B. Cody-Kenny, L. Trujillo, and A. Kattan. Using semantics in the selection mechanism in genetic programming: A simple method for promoting semantic diversity. In *2013 IEEE Congress on Evolutionary Computation*, pages 2972–2979, June 2013.
21. E. Galván-López, T. Curran, J. McDermott, and P. Carroll. Design of an autonomous intelligent demand-side management system using stochastic optimisation evolutionary algorithms. *Neurocomputing*, 170:270–285, 2015.
22. E. Galván-López, S. Dignum, and R. Poli. The effects of constant neutrality on performance and problem hardness in GP. In M. O’Neill, L. Vanneschi, S. M. Gustafson, A. Esparcia-Alcázar, I. D. Falco, A. D. Cioppa, and E. Tarantino, editors, *Genetic Programming, 11th European Conference, EuroGP 2008, Naples, Italy, March 26-28, 2008. Proceedings*, volume 4971 of *Lecture Notes in Computer Science*, pages 312–324. Springer, 2008.
23. E. Galván-López, D. Fagan, E. Murphy, J. Swafford, A. Agapitos, M. O’Neill, and A. Brabazon. Comparing the performance of the evolvable  $\pi$ grammatical evolution genotype-phenotype map to grammatical evolution in the dynamic ms. pac-man environment. In *Evolutionary Computation (CEC), 2010 IEEE Congress on*, pages 1–8, July 2010.
24. E. Galván-López, J. McDermott, M. O’Neill, and A. Brabazon. Defining locality in genetic programming to predict performance. In *Proceedings of the IEEE Congress on Evolutionary Computation, CEC 2010, Barcelona, Spain, 18-23 July 2010*, pages 1–8, 2010.
25. E. Galván-López, J. McDermott, M. O’Neill, and A. Brabazon. Towards an understanding of locality in genetic programming. In *Proceedings of the 12th Annual Conference on Genetic and Evolutionary Computation, GECCO ’10*, pages 901–908, New York, NY, USA, 2010. ACM.
26. E. Galván-López, J. McDermott, M. O’Neill, and A. Brabazon. Defining locality as a problem difficulty measure in genetic programming. *Genetic Programming and Evolvable Machines*, 12(4):365–401, 2011.
27. E. Galván-López, E. Mezura-Montes, O. Ait ElHara, and M. Schoenauer. On the use of semantics in multi-objective genetic programming. In J. Handl et al., editors, *Parallel Problem Solving from Nature – PPSN XIV: 14th International Conference, Edinburgh, UK, September 17-21, 2016, Proceedings*, pages 353–363. Springer, 2016.

28. E. Galván-López and R. Poli. Some steps towards understanding how neutrality affects evolutionary search. In T. P. Runarsson, H. Beyer, E. K. Burke, J. J. Merelo Guervós, L. D. Whitley, and X. Yao, editors, *Parallel Problem Solving from Nature - PPSN IX, 9th International Conference, Reykjavik, Iceland, September 9-13, 2006, Proceedings*, volume 4193, pages 778–787. Springer, 2006.
29. E. Galván-López, R. Poli, and C. A. C. Coello. Reusing code in genetic programming. In M. Keijzer, U. O’Reilly, S. M. Lucas, E. Costa, and T. Soule, editors, *Genetic Programming, 7th European Conference, EuroGP2004, Coimbra, Portugal, April 5-7, 2004, Proceedings*, volume 3003 of *Lecture Notes in Computer Science*, pages 359–368. Springer, 2004.
30. E. Galván-López, R. Poli, A. Kattan, M. O’Neill, and A. Brabazon. Neutrality in evolutionary algorithms... what do we know? *Evolving Systems*, 2(3):145–163, 2011.
31. E. Galván-López, J. M. Swafford, M. O’Neill, and A. Brabazon. Evolving a Ms. PacMan controller using grammatical evolution. In C. D. Chio, S. Cagnoni, C. Cotta, M. Ebner, A. Ekárt, A. Esparcia-Alcázar, C. K. Goh, J. J. M. Guervós, F. Neri, M. Preuss, J. Togelius, and G. N. Yannakakis, editors, *EvoApplications (1)*, volume 6024 of *Lecture Notes in Computer Science*, pages 161–170. Springer, 2010.
32. E. Galván-López, L. Vázquez-Mendoza, and L. Trujillo. Stochastic semantic-based multi-objective genetic programming optimisation for classification of imbalanced data. In O. Pichardo-Lagunas and S. Miranda-Jiménez, editors, *Advances in Soft Computing*, chapter 22, pages 261–272. Springer, 2016.
33. J. R. Koza. *Genetic Programming: On the Programming of Computers by Means of Natural Selection*. MIT Press, Cambridge, MA, USA, 1992.
34. K. Krawiec and T. Pawlak. Locally geometric semantic crossover: a study on the roles of semantics and homology in recombination operators. *Genetic Programming and Evolvable Machines*, 14:31–63, 2013.
35. N. F. McPhee, B. Ohs, and T. Hutchison. Semantic building blocks in genetic programming. In *Proceedings of the 11th European conference on Genetic programming, EuroGP’08*, pages 134–145, Berlin, Heidelberg, 2008. Springer-Verlag.
36. A. Moraglio, K. Krawiec, and C. G. Johnson. Geometric semantic genetic programming. In C. A. C. Coello, V. Cutello, K. Deb, S. Forrest, G. Nicosia, and M. Pavone, editors, *PPSN (1)*, volume 7491 of *LNCS*, pages 21–31. Springer, 2012.
37. A. Moraglio and R. Poli. *Topological Interpretation of Crossover*, pages 1377–1388. Springer Berlin Heidelberg, Berlin, Heidelberg, 2004.
38. Q. U. Nguyen, X. H. Nguyen, and M. O’Neill. Semantic aware crossover for genetic programming: The case for real-valued function regression. In *Proceedings of the 12th European Conference on Genetic Programming, EuroGP ’09*, pages 292–302, Berlin, Heidelberg, 2009. Springer-Verlag.
39. Q. U. Nguyen, T. A. Pham, X. H. Nguyen, and J. McDermott. Subtree semantic geometric crossover for genetic programming. *Genetic Programming and Evolvable Machines*, 17(1):25–53, 2016.
40. G. Olague and L. Trujillo. Evolutionary-computer-assisted design of image operators that detect interest points using genetic programming. *Image and Vision Computing*, 29(7):484 – 498, 2011.
41. G. Olague and L. Trujillo. Interest point detection through multiobjective genetic programming. *Applied Soft Computing*, 12(8):2566 – 2582, 2012.
42. T. P. Pawlak, B. Wieloch, and K. Krawiec. Semantic backpropagation for designing search operators in genetic programming. *IEEE Transactions on Evolutionary Computation*, 19(3):326–340, June 2015.
43. R. Poli and E. Galván-López. On the effects of bit-wise neutrality on fitness distance correlation, phenotypic mutation rates and problem hardness. In C. R. Stephens, M. Toussaint, D. Whitley, and P. F. Stadler, editors, *Foundations of Genetic Algorithms*, pages 138–164, Berlin, Heidelberg, 2007. Springer Berlin Heidelberg.
44. R. Poli and E. Galván-López. The effects of constant and bit-wise neutrality on problem hardness, fitness distance correlation and phenotypic mutation rates. *IEEE Trans. Evolutionary Computation*, 16(2):279–300, 2012.
45. L. Shao, L. Liu, and X. Li. Feature learning for image classification via multiobjective genetic programming. *IEEE Transactions on Neural Networks and Learning Systems*, 25(7):1359–1371, July 2014.

46. F. Stapleton and E. Galván. Semantic neighborhood ordering in multi-objective genetic programming based on decomposition. *CoRR*, abs/2103.00480, 2021.
47. N. Q. Uy, N. X. Hoai, M. O’Neill, R. I. McKay, and E. Galván-López. Semantically-based crossover in genetic programming: application to real-valued symbolic regression. *Genetic Programming and Evolvable Machines*, 12(2):91–119, 2011.
48. N. Q. Uy, E. Murphy, M. O’Neill, and N. X. Hoai. Semantic-based subtree crossover applied to dynamic problems. In *2011 Third International Conference on Knowledge and Systems Engineering*, pages 78–84, Oct 2011.
49. L. Vanneschi, M. Castelli, L. Manzoni, and S. Silva. *A New Implementation of Geometric Semantic GP and Its Application to Problems in Pharmacokinetics*, pages 205–216. Springer Berlin Heidelberg, Berlin, Heidelberg, 2013.
50. L. Vanneschi, M. Castelli, and S. Silva. A survey of semantic methods in genetic programming. *Genetic Programming and Evolvable Machines*, 15(2):195–214, June 2014.
51. H. Zhao. A multi-objective genetic programming approach to developing pareto optimal decision trees. *Decision Support Systems*, 43(3):809 – 826, 2007. Integrated Decision Support.
52. E. Zitzler, M. Laumanns, and L. Thiele. Spea2: Improving the strength pareto evolutionary algorithm. Technical report, 2001.