

A quantum algorithm for the classification of Supersymmetric top quark events

Pedrame Bargassa^{1,2}, Timothée Cabos³, Samuele Cavinato^{4,5},
Artur Cordeiro Oudot Choi³, Timothée Hessel³

¹Physics of Information & Quantum Technologies Group, Instituto de Telecomunicações, Lisbon, Portugal

²Laboratório de Instrumentação e Física Experimental de Partículas, Lisbon, Portugal

³Sorbonne Université, Paris - France

⁴Dipartimento di Fisica e Astronomia “G. Galilei”, Università di Padova, Italy

⁵Medical Physics Department, Veneto Institute of Oncology IOV-IRCCS, Padova, Italy

Abstract

The search for supersymmetric particles is one of the major goals in the next high luminosity phase of the Large Hadron Collider. Supersymmetric top (stop) searches play a very important role in this respect, but the unprecedented collision rate that will be attained at this phase poses new challenges for the separation between any new signal and the Standard Model background. While classical multivariate techniques might be insufficient in this new environment, the massive parallelism provided by quantum computing techniques may yield an efficient solution for the problem. In this paper we make a novel application of the QAML-Z approach to classify the stop signal versus the background, and implement it in a quantum annealer machine. We show that this approach together with the pre-processing of the data with Principal Component Analysis may yield better results than conventional multivariate approaches.

1 Introduction

After attaining its nominal energy, the Large Hadron Collider (LHC) will reach an unprecedented collision rate during its high luminosity phase, opening the stage to discoveries beyond the Standard Model (SM) of particle physics. One of the most challenging tasks in searches taking place at the LHC is the capacity to categorize events of new phenomena (signal) and those of SM processes (background) which mimic the signal. Machine learning (ML) tools are among the most powerful means for separating signal from background events, having been key to the discovery of the Higgs boson [1, 2]. Beyond classical ML approaches, the quantum annealing for machine learning (QAML) [3], and its zooming variant (QAML-Z) [4] are the first adaptations of a quantum approach to a classification problem in a high energy physics search.

In this paper, we study the application of the QAML-Z to the classification of Supersymmetric top quark (stop) versus SM events. A result on the stop search based on the data accumulated by the LHC in 2016 (35.9 fb^{-1}) has been published [5]. It is based on a classical ML tool which will serve as a reference for gauging the performance of the new classifiers. The variables discriminating between the stop signal and the SM background, which are used to train the QAML-Z, are based on the same ones as in the classical ML tool [5]. We present results of the QAML-Z for different schemes of zoomed quantum annealing, and various sets of variables used in the annealer. In a novel approach, we pass the data through the Principal Component Analysis [6] procedure before feeding it to the annealer.

2 Search of Supersymmetric top quark

One of the main objectives of the physics program at the LHC are searches for Supersymmetry (SUSY) [7, 8, 9, 10, 11, 12], one of the most promising extensions of the SM. SUSY predicts superpartners of SM particles (sparticles) having the same gauge interactions, and whose spin differs by one-half unit with respect to their SM partners. The search for SUSY has special interest in view of the recent discovery of a Higgs boson [1, 2] as it naturally solves the problem of quadratically divergent loop corrections to the Higgs boson mass. After the symmetry breaking, the mass splitting between mass eigenstates is proportional to the mass of the SM partner of the squark. The mixing between chiral supersymmetric partners of the top can therefore be the largest among all squarks, where the lightest supersymmetric partner of the top quark \tilde{t}_1 might be the lightest squark. In this study we describe the classification aspect of a search for pair production of the \tilde{t}_1 at the LHC machine at $\sqrt{s} = 13$ TeV, where each stop decays in four bodies, see figure 1. The lightest neutralino $\tilde{\chi}_1^0$ is considered as stable, and to be the lightest supersymmetric particle. The final states considered contain jets, missing transverse energy (E_T^{miss}), and a lepton which can be either a muon or an electron.

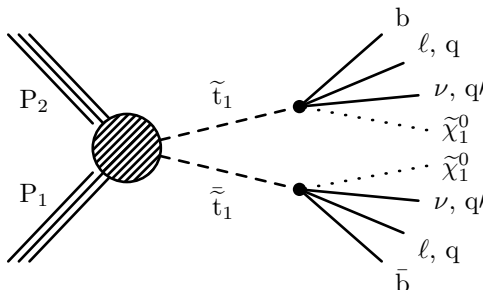


Figure 1: Stop pair production at the LHC with four-body decays.

The sensitivity of this type of search is dominated by the capacity to distinguish the stop signal from background events, whose production dominates the signal by several orders of magnitude, and whose observables overlap with the ones of the stop signal. In this search, the main background processes are the $t\bar{t}$ and W +jets productions. In the search based on a classical ML tool [5], a pre-selection is first applied to decrease the overwhelming background stemming from the SM. In a second stage, Boosted Decision Trees (BDT) [13] are used to classify events as signal and background. For finding which variables are the most discriminating and should be fed as input to the BDT, different sets of variables are tested as input to a BDT whose output is used to maximize a figure of merit (FOM):

$$FOM = \sqrt{2 \left((S+B) \ln \left[\frac{(S+B) \cdot (B + \sigma_B^2)}{B^2 + (S+B) \cdot \sigma_B^2} \right] - \frac{B^2}{\sigma_B^2} \ln \left[1 + \frac{\sigma_B^2 \cdot S}{B \cdot (B + \sigma_B^2)} \right] \right)}, \quad (1)$$

where S and B respectively stand for the expected signal and background yields for an integrated luminosity of 35.9 fb^{-1} at the LHC. The term $\sigma_B = (f \cdot B)$ represents the expected systematic uncertainty on the background with f being the relative uncertainty of the background yield, taken to be $f = 20\%$ as in [5]. The set of variables leading to the highest maximum of the FOM is chosen as final set of input variables to the BDT. Capturing the full information of the statistical and systematic uncertainties of a given selection, the approach based on the maximization of this FOM has been very effective to find the set of most reduced while most discriminating variables out of numerous combinations of variables. The list of the retained variables is given in table 1 and their distribution for signal and background is provided in figure 2.

To render the results of the classification based on QAML-Z as comparable as possible to the one of ref. [5], we use the same pre-selection of events before training, see section A. Furthermore, since the FOM as defined in eq. 1 represents a complete and single-number measure of the power of a selection, we will evaluate the performance of the QAML-Z by a maximization of the FOM versus a cut on its output. Finally, for the comparison of performances to reflect only the difference of a quantum based versus a classical tool,

Variable	Description
$p_T(l)$	p_T of the lepton l
$\eta(l)$	Pseudo-rapidity of the lepton l
$Q(l)$	Charge of the lepton l
E_T^{miss}	Missing transverse-energy
M_T	Transverse invariant mass of the $(E_T^{\text{miss}}, p_T(l))$ system
$N(\text{jets})$	Multiplicity of selected jets
$p_T(j_1)$	p_T of the leading jet
H_T	$\sum_i p_T(\text{jet}(i))$
$\text{Disc}(b)$	b-quark tagging discriminant of the jet with the highest b-discriminant
$N(b)$	Number of b-tagged jets
$p_T(b)$	p_T of the jet with the highest b-discriminant
$\Delta R(l, b)$	Distance between the lepton and the jet with the highest b-discriminant

Table 1: List of discriminating variables used as input to a BDT in ref. [5].

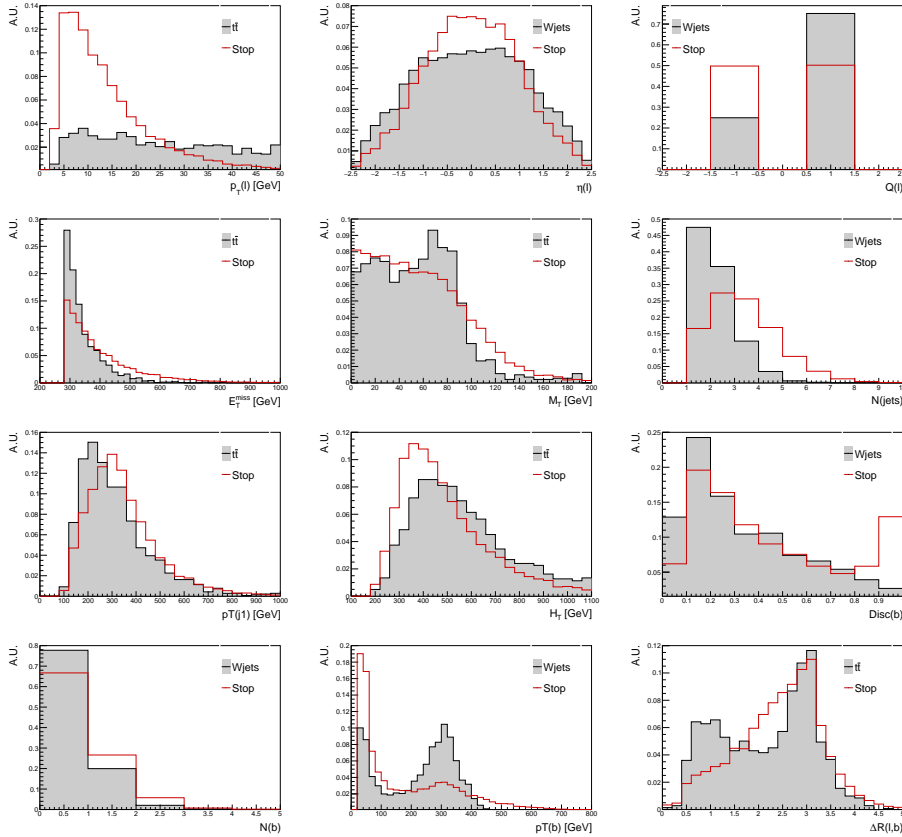


Figure 2: Distribution of the discriminating variables for the stop signal with $\Delta m = 30$, $W+\text{jets}$ and $t\bar{t}$, used as input to a BDT in ref. [5]. Starting from top-left to bottom-right: $p_T(l)$, $\eta(l)$, $Q(l)$, E_T^{miss} , M_T , $N(\text{jets})$, $p_T(j_1)$, H_T , $\text{Disc}(b)$, $N(b)$, $p_T(b)$, $\Delta R(l, b)$. Distributions are normalized to the same area and shown at pre-selection.

we train QAML-Z with different sets made of the same discriminating variables as in the BDT based search [5] (see table 1).

3 Quantum annealing & zooming

From the distribution of variables in signal and background events (see section 2), we construct weak classifiers as in ref. [3] which retain the discriminant character of each variable while adapting them to an annealing process. As in ref. [3], the tails of these distributions are truncated. We then construct an Ising problem as follows. For each training event $\tau \in [1, S]$, we consider the vector x_τ of the values of each variable of index i we use, and a binary tag y_τ labeling the event τ as either signal (+1) or background (-1). The value of the i -th weak classifier for the event τ is given by $c_i(x_\tau) = \pm 1/N$, where N is the number of weak classifiers. In the quantum annealing for machine learning (QAML) algorithm [3], the optimization of the signal-background classification problem is expressed in terms of the search for the set of spins s_i minimizing the Ising Hamiltonian:

$$\begin{aligned} H_{Ising} &= \sum_{i=1}^N h_i s_i + \sum_{i=1}^N \sum_{j>i}^N J_{ij} s_i s_j \\ &= \sum_{i=1}^N \left(\lambda - C_i + \frac{1}{2} \sum_{j>i}^N C_{ij} \right) s_i + \frac{1}{4} \sum_{i=1}^N \sum_{j>i}^N C_{ij} s_i s_j \end{aligned} \quad (2)$$

where h_i is the local field on spin s_i , and J_{ij} is the coupling between spins s_i and s_j . λ is a regularization constant, and the terms C_i and C_{ij} are defined as function of weak classifier values and event tags as:

$$C_i = \sum_{\tau=1}^S c_i(x_\tau) y_\tau, \quad C_{ij} = \sum_{\tau=1}^S c_i(x_\tau) c_j(x_\tau). \quad (3)$$

A strong classifier R is then built as a linear combination of all weak classifiers and the spins, merging for each event the discriminating power provided by all c_i 's and the spins s_i obtained from the quantum annealing process. The minimization of the classification error is performed by the minimization of the euclidean distance between the binary tag of each event and its classification R as obtained by the annealing:

$$\|y - R\|^2 = \sum_{\tau=1}^S \left| y_\tau - \sum_{i=1}^N s_i c_i(x_\tau) \right|^2. \quad (4)$$

In the zoomed QAML approach (QAML-Z) [4], the quantum annealing is operated iteratively while a substitution is made to the spin s_i :

$$s_i \longrightarrow \mu_i(t) + s_i \cdot \sigma(t) = \mu_i(t+1), \quad (5)$$

where:

- $\mu_i(t)$ is the mean value of qubit i at time t . We have: $\forall i \mu_i(0) = 0$.
- $\sigma(t)$ is the search width at each annealing iteration t . We have: $\sigma(t) = b^t$ where $b = \frac{1}{2}$ and $t \in [0, T-1]$.

This iterative procedure effectively shifts and narrows the region of search in the space of spins. It updates the vector μ_i which is collected at the final iteration to form the strong classifier:

$$R(x_\tau) = \sum_{i=1}^N \mu_i(T-1) c_i(x_\tau), \quad (6)$$

where the use of the weak classifiers isn't limited to the binary choice $\{0, 1\}$, but is extended to the continuous interval $[-1, 1]$ via the use of the vector μ_i . The classification capacity of the QAML-Z is further enhanced by an augmentation scheme applied on the weak classifiers. For each h_i , several new classifiers c_{il} are created:

$$c_{il}(x_\tau) = \frac{\text{sgn}(h_i(x_\tau) + \delta l)}{N}, \quad (7)$$

where $l \in \mathbb{Z}$ is the offset: $-A \leq l \leq A$, and δ is the step size. While the value c_i of the old classifier has only a binary outcome for each h_i , the new classifiers c_{il} have similar but $(2A + 1)$ different outcomes depending on the very distribution of h_i . We therefore have a better discrimination because a more continuous, thus more precise representation of the spectrum of h_i with c_{il} than with c_i . Applying the substitution of eq. 5 in eq. 4, omitting spin independent and quadratic self-spin interaction terms, and defining new indices I as $\{il\}$ and J as $\{j'l'\}$, we obtain the Hamiltonian (see section B):

$$H(t) = \sum_{I=1}^{N(2A+1)} \left(-C_I + \sum_{J=1}^{N(2A+1)} \mu_J(t) C_{IJ} \right) \sigma(t) s_I + \frac{1}{2} \sum_{I=1}^{N(2A+1)} \sum_{J \neq I}^{N(2A+1)} C_{IJ} \sigma^2(t) s_I s_J, \quad (8)$$

with:

$$C_I = \sum_{\tau=1}^S c_{il}(x_\tau) y_\tau, \quad C_{IJ} = \sum_{\tau=1}^S c_{il}(x_\tau) c_{j'l'}(x_\tau). \quad (9)$$

The Hamiltonian $H(t)$ is iteratively optimized for t , with the vector μ_I updated similarly to eq. 5. To average out random errors on the local fields and couplings, each annealing is run and averaged over n_g gauges [14] and n_e maximal number of excited states, where n_g and n_e can be made to monotonically decrease with each iteration. To mitigate the impact of over-fitting due to the zooming, we follow a two-step randomization procedure in each iteration: if the energy of the qubit i worsens, a sign flip $s_i \rightarrow -s_i$ is applied with a monotonically decreasing probability $p_f(t)$, followed by a randomly uniform spin flip for all qubits with probability: $q_f(t) < p_f(t) \forall t$; the values of the two probabilities per iteration are kept the same as in ref. [4]. Building on the results of ref. [3, 4], we set the number of iterations to 8, while setting the annealing time to 20 μs . We ensure that the Ising model energy decreases and stabilizes for this setting (see section C).

4 Classification of stop with QAML-Z

As in ref. [5] for the BDT, only the main background processes W +jets and $t\bar{t}$ are used for training the QAML-Z. To realistically represent the SM in the training, a background sample is formed where events of these two processes are present proportionally to their production rate at the LHC. We divide this sample in two equal parts, one being used in the QAML-Z process and one to assess the performance of the strong classifier through the maximization of the FOM: $N(\text{Sample}) = N(QA) + N(\text{Assess})$. The QA sample is further divided in two equal parts, one to train the annealer and another to test if there is an over-training of the annealer: $N(QA) = N(\text{Train}) + N(\text{Test})$. It has to be noted that only the Train sample is involved in the annealing process. Having shown [5] that the kinematic properties of all signal points ($m(\tilde{t}_1), m(\tilde{\chi}_1^0)$) are quasi identical along the line $\Delta m = m(\tilde{t}_1) - m(\tilde{\chi}_1^0)$, we use all signal events with $\Delta m = 30$ except the signal point (550, 520) as QA sample, while entirely using this latter signal as Assess sample. This organization of samples allows the usage of a maximal number of both signal and background events for assessing the performance of the classification as well as testing the annealing process.

The data is run on the 2000Q quantum annealer of D-Wave Systems Inc. [15]. This computer is based on the Chimera graph which has 2048 qubits and 5600 couplers. To embed the Ising Hamiltonian in the annealer, qubits of the graph are ferromagnetically coupled into a chain to represent a single spin of the Hamiltonian $H(t)$. While the Hamiltonian of eq. 8 is fully connected, the Chimera graph is not, thus limiting the implementation of the classification problem in the hardware. The number of J_{ij} couplers in the Hamiltonian is given by: $N(J_{ij}) = N_v \cdot (N_v - 1)/2$ with $N_v = N_{var} \cdot (2A + 1)$, where N_{var} is the number of variables used to train QAML-Z, and A is a parameter of the augmentation scheme (see eq. 7). Given the number of variables and the augmentation schemes used in most of cases of this study, the limit of 5600 couplers can be exceeded by $N(J_{ij})$; typically, for $N_v=12$ and for an augmentation with $A=5$, the needed number of couplers is 8646. We therefore prune the elements of the J_{ij} matrix, retaining the largest $(1 - C)$ elements, where C is a cutoff percentage. Different cutoff values are expected to optimize the performance for different sets of variables and different augmentations schemes (A, δ). As a further option to reduce the size

of the Ising model to be encoded on the annealer, we use the polynomial-time variable fixing scheme of the D-Wave API. An illustration of the effect of the cutoff C , the use of variable fixing, and the augmentation scheme is given in section C.

In order to compare the performance of a classification based on quantum annealing with a classical ML, we explore various *settings* of QAML-Z, namely different augmentation schemes, cutoffs, and variable fixing options, reporting only the performance of the best setting for each tested set of variables (see section 5). Despite averaging out the random errors on the annealing and mitigating the possible effects of over-fitting due to zooming (see section 3), the outcome of the annealing (the vector μ_I) can vary due to the probabilistic nature of these schemes and to the variations of the machine itself (e.g. low-frequency flux noise of the qubits), leading to an uncertainty on the performance. In order to estimate this uncertainty, we run the annealing ten times with the same input variables, in the very same setting, and on the same sample of events, and consider the standard deviation of the corresponding maximal FOMs as uncertainty of the performance for a given set of variables and setting. In figure 3 we report the performance of QAML-Z with the variables of table 1 as input and with a given augmentation scheme and cutoff as a function of the number of events used in the training. The performance of the annealer increases with $N(\text{Train})$, witnessing a clear rise for rather small number of events and a more moderate increase for larger numbers of events, confirming the results of ref. [3] with another signal. Henceforth, we will present all results for $N(\text{Train})=50 \cdot 10^3$, benefiting from a large sample size to train QAML-Z, while observing a quasi identical evolution of the Hamiltonian energy for the *Train* and *Test* samples (see figure 5 in section C). In figure 4 we present the distribution of the strong classifier for signal, and the two main background processes. As can be observed, there is no over-training of the QAML-Z as the response of the strong classifier is statistically very similar for events which are used to train the annealer and those not exposed to the training, this for different physics processes. Also shown in figure 4 is the evolution of the FOM in the *Assess* sample as function of the cut applied on the output of the strong classifier. Henceforth, all the reported values of maximal FOM are checked to correspond to a cut where there are enough events in both signal and background samples.

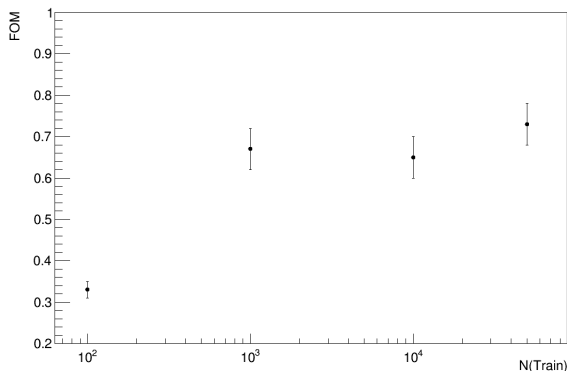


Figure 3: Evolution of the FOM as a function of the number events used for training. The QAML-Z uses the variables of table 1 transformed in weak classifiers, with an augmentation scheme of $(\delta, A)=(0.025, 3)$, and with a cutoff $C=85\%$, without using a variable-fixing procedure.

5 Approaches and results

In this section, we define the main sets of tested variables, which are reported in table 2. For each set, we tested different cutoffs and augmentation schemes, reporting the optimal setting and the corresponding performance in table 3.

We define a as the set of variables defined in table 1 where the discriminating variables are not transformed into weak classifiers, being only normalized to the $[-1, +1]$ interval. The set b consists of the same variables

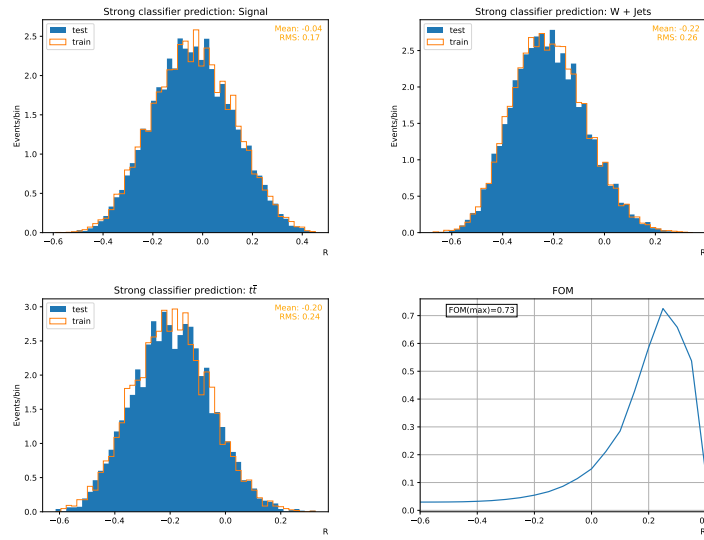


Figure 4: The output of the strong classifier for the signal (top-left), W +jets (top-right) and $t\bar{t}$ background (bottom-left) in the train (orange) and test (blue) events within the QA sample. The evolution of the FOM as a function of the cut applied on the strong classifier's output is illustrated in the plot in the bottom-right. The QAML-Z uses the variables of table 1 transformed in weak classifiers, with an augmentation scheme of $(\delta, A) = (0.025, 3)$, and with a cutoff $C = 85\%$, without using a variable-fixing procedure. The number of events used for training is $N(Train) = 50 \cdot 10^3$.

where these are transformed into weak classifiers as in ref. [3]. As can be seen in table 3, the performance of the set b is expectedly higher than for the set a , where the weak classifiers are scaled as a function of the initial distribution of the discriminating variables to better reflect the separation between signal and background. The transformation into weak classifiers is performed for all subsequent tests.

We explore in a second step the effect of additional discriminating variables built from the same initial set of table 1. The methodology followed to build these new variables is explained in section D, where the discriminating power of each variable is appraised via its maximal FOM. Two new sets of variables are constructed based on these new variables, as reported in table 2: the set A including the variables of the table 1 and new variables with the highest FOMs, and the set B including those of set A and additional variables with the lower FOMs (see table 4). As can be observed in table 3, the addition of variables with higher maximal FOMs in the set A (see section D) increases the performance of the QAML-Z, while the further addition of variables with lower FOM in the set B doesn't significantly improve the quality of the classification.

The results of the search [5] are based on the use of BDT where the discriminating variables are diagonalized before being fed to the training [13]. This step better prepares the data for classification because the original discriminating variables do not necessarily constitute the optimal basis in which signal and background are optimally separated. In order to render our approach as comparable as possible to the one followed with a BDT [5], we pass our data through the procedure of Principal Component Analysis [6] (PCA) before feeding it to the QAML-Z. It must be noted that the use of PCA is only one method for diagonalizing the data, other methods also being applicable to this end. The application of PCA on the data before the quantum annealing further improves the results for the set of variables A, and to a lesser extent for B, as can be seen in table 3. We note a larger uncertainty of the QAML-Z where the data is prepared with the PCA, this for the same set of variables. In the PCA basis, the weak classifiers are more decorrelated from each other, rendering the corresponding weights μ_I more independent from one another. When a μ_I fluctuates (e.g. because of the state of the machine), the strong classifier R (eq. 6) is sensitive to the variations of a larger number of μ_I 's, hence a larger variation of its outcome. It is noticeable that the QAML-Z, once put on a footing as similar as possible to the BDT based approach [5], can reach an equivalent, possibly better performance. It is interesting to observe that the best result is achieved without using the variable fixing scheme, where the annealing is put at full use.

Variable set name	List of variables	Use of weak classifiers
a / b	Table 1	No / Yes
A	Table 1 and: $p_T(l)/E_T^{\text{miss}}, p_T(l)/p_T(j_1),$ $(Disc(b) - 1)p_T(b),$ $ (E_T^{\text{miss}} - 280)(M_T - 80) ,$ $ (E_T^{\text{miss}} - 280)(H_T - 400) $	Yes
B	Variables of set A and: $\Delta R(l, b) - (M_T/40),$ $H_T^2/N(jets), p_T + 3.5\eta(l)^2,$ p_T/H_T	Yes

Table 2: Definition of different variable sets as a function of the used variables.

6 Summary

We studied the classification power of the quantum annealing, where the zoomed and augmented QAML-Z [4] approach is used to discriminate between the SM background and stop events. The classification is based on well motivated variables whose discriminating power has been tested with a procedure of FOM maximization, a subset of which have been used in a search of stop with a classical ML tool [5]. Each set

Variable set	Fixing variable	C [%]	(δ, A)	FOM
a	False	85	$(2.50 \cdot 10^{-2}, 3)$	0.48 ± 0.03
b	False	85	$(2.50 \cdot 10^{-2}, 3)$	0.73 ± 0.03
A	True	95	$(0.90 \cdot 10^{-2}, 5)$	0.88 ± 0.04
B	True	85	$(0.70 \cdot 10^{-2}, 3)$	0.91 ± 0.05
PCA(A)	False	95	$(1.45 \cdot 10^{-2}, 3)$	1.57 ± 0.24
PCA(B)	True	95	$(0.70 \cdot 10^{-2}, 5)$	1.09 ± 0.17
BDT	NA	NA	NA	1.44 ± 0.06

Table 3: Best performance obtained for different sets of variables as defined in table 2 and their corresponding cutoff and augmentation scheme. All results are provided for $N(\text{Train})=50000$. For comparison, the performance of the BDT of ref. [5] is also reported, where “NA” stands for non-applicable.

of variables used for the annealing is tested for different augmentation schemes and percentages of pruning on the couplers of the annealer as to find the optimal setting. The performance of different settings is assessed for large training samples which are observed to yield the best performances, and are also more adapted to the needs of experimental particle physics where very large data samples are used. We observe an improvement of the classification performance when adding variables with a high FOM. To put the annealing approach on a base very similar to the one of BDT approach, we pass the data through a PCA procedure before feeding it to the quantum annealer. On this base, the QAML-Z approach running on the Chimera graph reaches a performance which is compatible, possibly better than the one of a classical ML tool, a very encouraging result for a quantum based classification in particle physics. With more recent graphs, there is the prospect that the larger number of connected qubits will yield to a better correspondence between the Ising Hamiltonian and the system of qubits of the annealer. The larger number of available couplers in the machine will allow a more complete use of the information contained in the couplers of the Hamiltonian; it will render each chain more stable, thus less prone to be broken, where the discriminating information of the classification will be more effectively used.

Acknowledgements

We acknowledge the authors of [3, 4] for their seminal work, and would like to thank them for their help which has been key in this study. We specially thank the Center for Quantum Information Science & Technology of the University of Southern California in Los Angeles for granting us access to the 2000Q quantum annealer of D-Wave Systems Inc. [15].

References

- [1] S. Chatrchyan *et al.*, Physics Letters B **716** 30 (2012).
- [2] G. Aad *et al.*, Physics Letters B **716** 1 (2012).
- [3] A. Mott *et al.*, Nature **550** 375 (2017).
- [4] A. Zlokapa *et al.*, Physical Review A **102** 062405 (2020).
- [5] S. Chatrchyan *et al.*, Journal of High Energy Physics **09** 065 (2018).
- [6] J. Shlens, arXiv:1404.1100 (2014).
- [7] J. Wess *et al.*, Nuclear Physics B **70** 39 (1974).
- [8] R. Barbieri *et al.*, Physics Letters B **119** 343 (1982) 343.
- [9] H. O. Nilles, Physics Reports **110** 1 (1984).
- [10] H.E. Haber *et al.*, Physics Reports **117** 75 (1985).
- [11] S. Dawson *et al.*, Physical Review D **31** 1581 (1985).
- [12] J.P. Martin arXiv:9709356 (1997).
- [13] L. Rokach *et al.*, World Scientific Pub. Co. Inc. (2008), ISBN: 978-981-277-171-1.
- [14] Joshua Job and Daniel Lidar, Quantum Science and Technology **3.3** 030501 (2018).
- [15] P. I. Bunyk *et al.*, IEEE Transactions on Applied Superconductivity **24.4** 1 (2014).
- [16] Davide Venturelli *et al.*, Physical Review X **5** 031040 (2015).

A Pre-selection

The data used for training the QAML-Z are events simulating proton-proton collisions of the LHC at $\sqrt{s} = 13$ TeV. The first step in the search is designed to serve as a basis for the event selection. We require $E_T^{\text{miss}} > 280$ GeV to select preferentially signal, as the production of two $\tilde{\chi}_1^0$ escaping detection increases the missing transverse energy in the detector. The leading jet of each event is required to fulfill $p_T > 110$ GeV and $|\eta| < 2.4$. A cut of $H_T > 200$ GeV is imposed. This cut diminishes the contribution of the W +jets background where jets are softer than for signal. At least one identified muon (electron) with $p_T > 3.5$ (5) GeV and $|\eta| < 2.4$ (2.5) must be present. Events with additional leptons with $p_T > 20$ GeV are rejected, diminishing the contribution of the $t\bar{t}$ background with two leptons. Background from SM dijet and multijet production are suppressed by requiring the azimuthal angle between the momentum vectors of the two leading jets to be smaller than 2.5 rad for all events with a second hard jet of $p_T > 60$ GeV.

B Derivation of the Hamiltonian

In this section, we derive the expression of the Hamiltonian to be iteratively minimized, first for the zooming and then for the augmentation step. If we expand the euclidian distance of eq. 4 to be minimized, we obtain:

$$\sum_{\tau=1}^S \left[\|y_\tau\|^2 + \left(\sum_{i=1}^N s_i c_i(\mathbf{x}_\tau) \right)^2 - 2y_\tau \left(\sum_{i=1}^N s_i c_i(\mathbf{x}_\tau) \right) \right]. \quad (10)$$

Omitting the first term which is constant, and inserting the zooming substitution of eq. 5 in eq. 10, we obtain:

$$\sum_{\tau=1}^S \left[\left(\sum_{i=1}^N (\sigma(t) s_i + \mu_i(t)) c_i(\mathbf{x}_\tau) \right)^2 - 2y_\tau \left(\sum_{i=1}^N (\sigma(t) s_i + \mu_i(t)) c_i(\mathbf{x}_\tau) \right) \right]. \quad (11)$$

Fully developing the eq. 11 while neglecting constant, spin independent, and quadratic self-spin interaction terms, we get:

$$\sum_{\tau=1}^S \left[-2y_\tau \sum_{i=1}^N \sigma(t) c_i(\mathbf{x}_\tau) s_i + 2 \sum_{i=1}^N \left(\sum_{j=1}^N \mu_j(t) c_j(\mathbf{x}_\tau) \right) \sigma(t) c_i(\mathbf{x}_\tau) s_i + 2 \sum_{i=1}^N \sum_{j>i}^N (\sigma^2(t) c_i(\mathbf{x}_\tau) c_j(\mathbf{x}_\tau)) s_i s_j \right]. \quad (12)$$

Recalling the definition of the terms C_i and C_{ij} in eq. 3, and dividing the expression 12 by two, we obtain the expression of the Hamiltonian with the zooming approach:

$$H(t) = \sum_{i=1}^N \left(-C_i + \sum_{j=1}^N \mu_j(t) C_{ij} \right) \sigma(t) s_i + \sum_{i=1}^N \sum_{j>i}^N C_{ij} \sigma^2(t) s_i s_j. \quad (13)$$

Now we augment each classifier i with $(2A + 1)$ classifiers:

$$\forall i, \exists l \quad / \quad c_i \longrightarrow c_{il}, \quad (14)$$

where $l \in \mathbb{Z}$ is the offset: $-A \leq l \leq A$, as defined in eq. 7. Inserting the augmentation substitution 14 in eq. 13 and omitting constant terms, we obtain:

$$H(t) = \sum_{l=-A}^{+A} \sum_{i=1}^N \left(- \sum_{\tau=1}^S c_{il} y_\tau + \sum_{l'=-A}^{+A} \sum_{j=1}^N \mu_{jl'}(t) \sum_{\tau=1}^S c_{il} c_{jl'} \right) \sigma(t) s_{il} + \frac{1}{2} \sum_{l=-A}^{+A} \sum_{i=1}^N \sum_{\{j,l'\} \neq \{i,l\}} \sum_{\tau=1}^S c_{il} c_{jl'} \sigma^2(t) s_{il} s_{jl'}. \quad (15)$$

Using the equivalence:

$$\forall X, \quad \sum_{i=1}^N \sum_{l=-A}^A X_{il} \equiv \sum_{I=1}^{N(2A+1)} X_I, \quad (16)$$

and defining the new indices I and J as $\{il\}$ and $\{j'l'\}$ respectively, we obtain the expression of the final Hamiltonian which includes the zooming and augmentation approaches:

$$H(t) = \sum_{I=1}^{N(2A+1)} \left(-C_I + \sum_{J=1}^{N(2A+1)} \mu_J(t) C_{IJ} \right) \sigma(t)_{s_I} + \frac{1}{2} \sum_{I=1}^{N(2A+1)} \sum_{J \neq I}^{N(2A+1)} C_{IJ} \sigma^2(t)_{s_I s_J}, \quad (17)$$

with:

$$C_I = \sum_{\tau=1}^S c_{il}(x_\tau) y_\tau, \quad C_{IJ} = \sum_{\tau=1}^S c_{il}(x_\tau) c_{j'l'}(x_\tau). \quad (18)$$

It has to be noted that the Hamiltonians of both equations 13 & 17 are fully connected.

C Quantum annealing: parameters and control results

During the iterative optimization of the Hamiltonian, the annealing is run for n_g gauges at each iteration to reduce random errors on the local fields h_i and couplers J_{ij} . For each gauge, the annealing result is sampled 200 times, and the set of spins leading to the lowest energy is collected. The selection of the excited states is based on a distance d to the state of lowest energy and a maximal number n_e of excited states as in ref. [4], where the value of n_g , n_e and d varies with the iteration. This means that after the iteration t we have a set of $n_g(t)$ different μ_I 's, out of which at most $n_e(t)$ are kept for the next iteration, corresponding to the best energies. At iteration $t + 1$, we have at most $n_e(t) \cdot n_g(t)$ annealings, thus states, out of which at most $n_e(t + 1)$ are kept. This represents a lot of computing time. For the problem optimized in this paper, and for a given set of variables, we compared results obtained with $n_g = \{50, 10, 1, \dots, 1\}$ and $n_e = \{16, 4, 1, \dots, 1\}$ as in ref. [4] on one hand, with results obtained with $n_g = \{50, 10, \dots, 10\}$ and $n_e = \{1, \dots, 1\}$ on the other. We observed that the obtained energies were quasi identical for a large number of training events, showing that picking the state of best energy out of $n_g > 1$ is sufficient to mitigate the uncertainties of the annealing process, while saving computing time. We therefore retain the latter options for n_g and n_e . Finally, the chain strength r is defined as the ratio of the coupling within each chain over the largest coupling in Hamiltonian. If r is very large, the chains will be too strong to allow a multi-qubit flipping which is necessary to explore the space of spins. If on the contrary r is very small, the chains will be broken by the tension induced by the problem or by thermal excitation. The chain strength can be set to decay monotonically with each iteration as to allow $H(t)$ to drive the system dynamics while preventing the chains of qubits from breaking [16]. The value of r at each iteration is the same as in ref. [4]. In the case where the chain is broken, the measure of the qubit chains is performed through a majority vote, possibly leading to the collection of non-optimal sets of solution spins, thus to a possible loss of discriminating information.

In figure 5 we present the evolution of the Ising Hamiltonian energy as a function of the optimization iteration for different numbers of events used to train the QAML-Z. One can observe that the energy decreases with the iteration, and that the difference of energy between events used to train and test the annealer decreases for higher $N(\text{Train})$. In figures 6 and 7 we report the performance of the QAML-Z for variable sets A and B as defined in table 2, and for different augmentation schemes, cutoffs C and variable-fixing options. Lower values of C than those illustrated in these figures are not reported because no embedding was found given the number of variables and tested augmentation scheme. It is interesting to note that the lowest bound for C is higher for the set B where the number of variables is higher, and for a higher augmentation range (variable A) which leads to a larger number of c_{il} (eq. 7), thus coupling terms C_{IJ} (eq. 9). Depending on the set of variables and the augmentation scheme, different values of C are optimal. The performance is generally higher when the variable-fixing procedure is used. For a given set of variables, small or big values of the offset δ (eq. 7) might lead to a disadvantageous augmentation of the weak classifiers, leading to non-optimal performance. This is illustrated for the performances of the set B in figure 7 where the FOM raises then drops for decreasing values of δ , this for almost all values of cutoff.

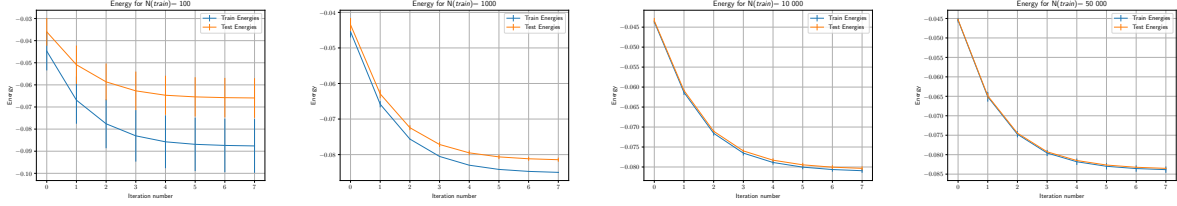


Figure 5: Evolution of the Ising Hamiltonian energy as a function of the iteration for $N(\text{Train})$ varying from 100 (left) to 50000 (right), these in the train (blue) and test (orange) samples. The QAML-Z uses the variables of table 1 transformed in weak classifiers, with an augmentation scheme of $(\delta, A) = (0.025, 3)$ and a cutoff of 85%, without using a variable-fixing procedure.

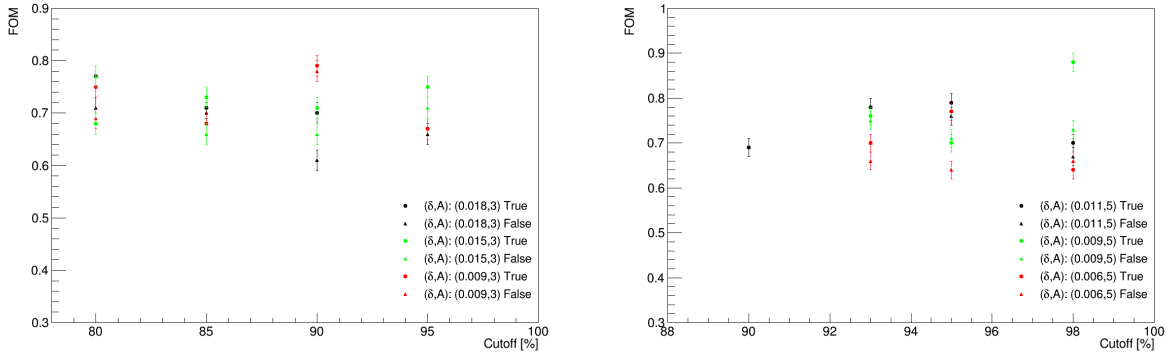


Figure 6: Evolution of the FOM as a function of the cutoff C and for variable-fixing set to true (full circle) & false (full triangle). The QAML-Z uses the variable set A of table 2. The left plot presents results for an augmentation scheme of $(\delta, A) = (0.018, 3)$ in black, $(0.015, 3)$ in green and $(0.009, 3)$ in red. The right plot shows results for $(\delta, A) = (0.011, 5)$ in black, $(0.009, 5)$ in green and $(0.006, 5)$ in red.

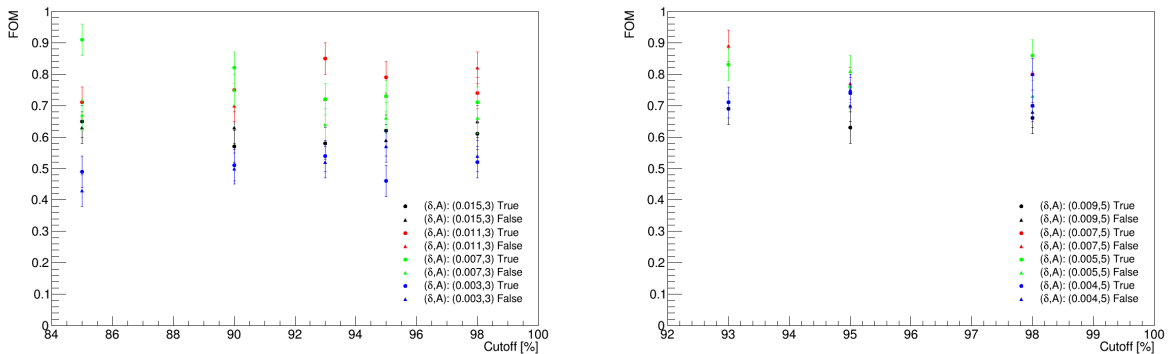


Figure 7: Evolution of the FOM as a function of the cutoff C and for variable-fixing set to true (full circle) & false (full triangle). The QAML-Z uses the variable set B of table 2. The left plot presents results for an augmentation scheme of $(\delta, A) = (0.015, 3)$ in black, $(0.011, 3)$ in red, $(0.007, 3)$ in green, and $(0.003, 3)$ in blue. The right plot shows results for $(\delta, A) = (0.009, 5)$ in black, $(0.007, 5)$ in red, $(0.005, 5)$ in green, and $(0.004, 5)$ in blue.

D Advanced variables

We construct new variables by performing operations between the discriminating variables of table 1, where each new variable is built from two variables of this list. A two-dimensional distribution for each pair of initial variables allows to gauge the separation between signal and various background processes. Several analytic functions of the two variables are considered, and the one allowing to reach the highest FOM is retained per pair of variables. Seventeen new variables are constructed with this method, out of which nine are considered, see table 4. Based on the discriminating power of each new variable, we consider two groups of variables, one made of the five new variables with the highest FOMs, and a second with the four subsequent ones.

Variables	FOM
$p_T(l)/E_T^{\text{miss}}$	0.35
$p_T(l)/p_T(j_1)$	0.22
$(Disc(b) - 1)p_T(b)$	0.20
$ (E_T^{\text{miss}} - 280)(M_T - 80) $	0.20
$ (E_T^{\text{miss}} - 280)(H_T - 400) $	0.18
$\Delta R(l, b) - (M_T/40)$	0.12
$H_T^2/N(jets)$	0.09
$p_T + 3.5\eta(l)^2$	0.08
p_T/H_T	0.03

Table 4: New discriminating variables constructed via operations on the ones of table 1. For each new variable, the maximal value of the FOM is reported, where the corresponding uncertainty is negligible.