

# Relational Reasoning Networks

Giuseppe Marra, Michelangelo Diligenti, Francesco Giannini

**Abstract**—Neuro-symbolic methods integrate neural architectures, knowledge representation and reasoning. However, they have been struggling at both dealing with the intrinsic uncertainty of the observations and scaling to real-world applications. This paper presents Relational Reasoning Networks (R2N), a novel end-to-end model that performs relational reasoning in the latent space of a deep learner architecture, where the representations of constants, ground atoms and their manipulations are learned in an integrated fashion. Unlike flat architectures like Knowledge Graph Embedders, which can only represent relations between entities, R2Ns define an additional computational structure, accounting for higher-level relations among the ground atoms. The considered relations can be explicitly known, like the ones defined by logic formulas, or defined as unconstrained correlations among groups of ground atoms. R2Ns can be applied to purely symbolic tasks or as a neuro-symbolic platform to integrate learning and reasoning in heterogeneous problems with both symbolic and feature-based represented entities. The proposed model overtakes the limitations of previous neuro-symbolic methods that have been either limited in terms of scalability or expressivity. The proposed methodology is shown to achieve state-of-the-art results in different experimental settings.

**Index Terms**—Neuro-Symbolic methods, First-Order Logic, Knowledge Graph Embeddings, Relational Reasoning

## I. INTRODUCTION

Enriching deep learning models with explicit reasoning capabilities is a fundamental challenge in the AI agenda to realize semantically sound, robust and trustworthy AI systems [1], [2], [3], [4]. This is especially relevant for industrial applications, where (potentially large) relational databases are generally available as input knowledge to solve different tasks like query answering or knowledge base completion. A powerful class of methodologies [5] uses logic formulas as templates for Probabilistic Graphical Models (PGM), which explicitly encode statistical dependencies among entities and their relationships. However, the application of these methods has been strongly limited due to their computational complexity. An interesting line of research is represented by solutions focusing on reasoning over a set of objects represented via trainable embeddings [6], like Knowledge Graph Embeddings (KGE). Once the entities and relations are embedded, it is possible to use classical distance-based or neural-based decision functions to generalize the knowledge to new embedded facts, while scaling to very large domains. However, a limitation of these approaches is that they model statistical regularities among relations and/or entities but they fail to detect and exploit higher level logical knowledge, like formulas or programs.

Devising a model that can effectively and efficiently preserve and integrate the benefits of embedded representations, probabilistic logic inference and neural architectures is still an open research problem. In this regard, the presented work represents a relevant step forward towards this integration, as it enables to perform probabilistic logic reasoning on embedding representations by means of neural computations. This claim is also supported by achieving state-of-the-art results in the experimental analysis.

This paper introduces Relational Reasoning Networks (R2N), a class of models that exploits logic knowledge in a relational domain to define its structure and to produce semantically refined embedding representations. R2Ns jointly develop integrated representations for constants, ground atoms and ground knowledge by computing multiple sub-symbolic reasoning steps in a latent space. The learning of embedding representations allows the model to automatically select whether and how much some specific logic knowledge is useful for the specific task. As a result, R2Ns maintain enough expressive power to perform relational reasoning under uncertainty, while allowing to scale up to larger relational settings compared to PGM-based approaches. R2N inference mechanism is divided into three phases. Firstly, symbolic ground atoms are embedded in a latent space using representation learning techniques, e.g. KGE. Secondly, the relations among atoms provided in the logic theory are used to sub-symbolically aggregate and refine the atom embeddings in a multi-layer fashion. This phase resembles multi-hop automated reasoning, as we discuss in Sec. VII, but in a latent space. Embedding representations of the correlated groups of atoms, i.e. ground logic rules, are also computed in this phase. Lastly, the final embedding representations are used to make predictions. These predictions can be used to train the model end-to-end with respect to a supervised task.

**Contributions.** The main contribution of the paper is the introduction of a neuro-symbolic architecture performing relational reasoning in a latent space. Distilling the relational structure at the embedding level allows to perform both learning and reasoning in a more scalable way. Experimental results show the effectiveness of the approach achieving state-of-the-art results on different experimental settings. In addition, the proposed methodology is very general, as it can be used both in relational tasks where the prior logic knowledge is explicitly available, even if noisy (e.g. predictions can deviate from the knowledge with a variable degree that must be co-learned), and in tasks where the relational structure is present but left latent. Last but not least, the methodology provides a general platform for neuro-symbolic integration [4], as it can be transparently applied to pure symbolic inputs, or to cases where the inputs have a feature-based representation, like images. The experimental section provides examples of

G. Marra is with the Department of Computer Science, KULeuven, Leuven, Belgium, (e-mail: giuseppe.marra@kuleuven.be). M. Diligenti and F. Giannini are with the Department of Information Engineering and Mathematics, University of Siena, Siena, Italy, (e-mail: {michelangelo.diligenti, francesco.giannini}@unisi.it).

applications of all these cases.

The outline of the paper is the following: Sec. II summarizes basic notions relevant to define our model, while Sec. III explicitly formulates the problem statement that is solved by the proposed model. Sec. IV presents the model and how it approximates the reasoning process, Sec. V provides insights and theoretical guarantees for the reasoning process implemented by R2Ns, and Sec. VI shows the experimental results on multiple datasets and learning tasks. Finally, Sec. VII presents an overview of related works, while some conclusions and remarks on future works are drawn in Sec. VIII.

## II. PRELIMINARY

### A. First-Order Logic

We consider a function-free First-Order Logic (FOL) language  $\mathcal{L}$ , composed of a finite set of constants  $\mathcal{C}$  for specific domain entities, a set  $\mathcal{X}$  of variables for anonymous entities and a set  $\mathcal{P}$  of  $n$ -ary predicates for relations among constants. Given an  $n$ -ary predicate  $P$  and a tuple  $(t_1, \dots, t_n)$  of constants or variables,  $P(t_1, \dots, t_n)$  is called an *atom*. If  $t_1, \dots, t_n$  are only constants,  $P(t_1, \dots, t_n)$  is called a *ground atom*. The set of all the possible ground atoms of a FOL language is called Herbrand Base (HB).

**Example 1** (FOL Language). *Consider a set of constants  $\mathcal{C} = \{a, b, c\}$  representing people (e.g. (a)lice, (b)ob and (c)arl), and the predicate set  $\mathcal{P} = \{S(\cdot), F(\cdot, \cdot)\}$  stating if a person (S)mokes or if two people are (F)riends, respectively. The Herbrand Base of this language is composed of 12 ground atoms, obtained by grounding the predicate  $S$  over the constants in  $\mathcal{C}$  and the predicate  $F$  over the pair of constants in  $\mathcal{C}$ , i.e.  $HB = \{S(a), S(b), S(c), F(a, a), F(a, b), \dots, F(c, c)\}$ .*

Our approach considers a logic theory  $\mathcal{T}$  as a set of unquantified FOL rules  $r_i$ , each depending on a set of variables  $X_i \subset \mathcal{X}$ , i.e.  $\mathcal{T} = \{r_1(X_1), r_2(X_2), \dots, r_m(X_m)\}$ . A substitution  $\theta$  for  $X_i$  is a replacement of constants in  $\mathcal{C}$  to the variables in  $X_i$ . Given a rule  $r_i(X_i)$  and a substitution  $\theta$  for  $X_i$ , we obtain a ground rule by applying the substitution  $\theta$  to the variables in  $X_i$ . *Grounding* a rule  $r_i(X_i)$  refers to the process of applying all the possible substitutions  $\Theta$  for  $X_i$  given  $\mathcal{C}$ , where  $|\Theta| = |\mathcal{C}|^{|X_i|}$ . We indicate by  $R_i$  the set of all the groundings of  $r_i(X_i)$ . Grounding the entire  $\mathcal{T}$  refers to grounding all its rules and the resulting set is indicated by  $R$ .

**Example 2** (Logic Theory). *Consider  $\mathcal{T} = \{r_1(X_1)\}$ , with  $r_1(X_1) = S(x) \wedge F(x, y) \rightarrow S(y)$  stating that “if a person  $x$  smokes and  $x$  and  $y$  are friends, then also  $y$  smokes”. Here,  $X_1 = \{x, y\}$  is the set of variables of  $r_1$ . For instance, we can ground  $r_1(X_1)$  by the substitution  $\theta = \{x : a, y : b\}$  for  $X_1$ , thus obtaining  $S(a) \wedge F(a, b) \rightarrow S(b)$ . If  $\mathcal{C} = \{a, b, c\}$  we get  $R_1 = \{S(a) \wedge F(a, a) \rightarrow S(a), S(a) \wedge F(a, b) \rightarrow S(b), \dots, S(c) \wedge F(c, c) \rightarrow S(c)\}$ , with  $|R_1| = 3^2 = 9$ .*

Logic theories can benefit from graph representations to define inference and learning algorithms according to their underlying relational structures. In this paper, we encode two

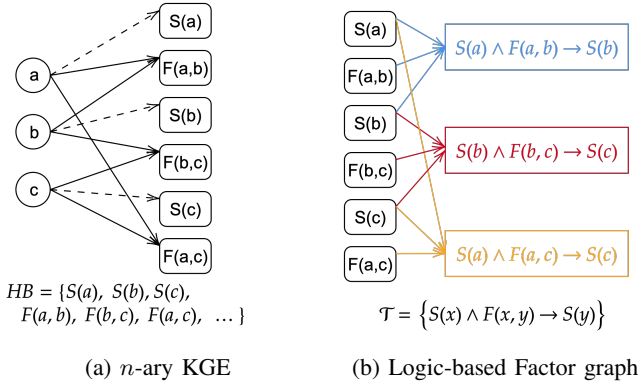


Fig. 1: **(a)** An  $n$ -ary KGE where different arrows correspond to different predicates, here we used the dashed one for  $S$  and the solid one for  $F$ . **(b)** A factor graph for the logic theory  $\mathcal{T} = \{S(x) \wedge F(x, y) \rightarrow S(y)\}$ , grounded for the constants  $\{a, b, c\}$ , where each ground formula is highlighted with a different colour. In both graph representations some nodes/edges have been omitted for readability reasons.

components of our logic language as graphs: (i) the set HB of ground atoms as an  $n$ -ary knowledge graph (Sec. II-B); (ii) the set of ground rules  $R$  as a factor graph (Sec. II-C).

### B. Knowledge Graph Embeddings

Knowledge graphs (KG) are graph data structures representing relational knowledge consisting of facts (ground atoms) in form of triples formed by two entities (constants) and a relation (binary predicate). In a KG each considered entity is a node and each fact is a relation establishing an edge between two entities. KGs are incomplete and Knowledge Graph Embeddings (KGE) are a powerful approach for populating KGs by mapping entities and relations to a latent representation, which generalizes the assignments to unknown facts. Indeed, KGE methods learn the entity and relation embeddings by defining scoring functions that are trained to match the supervisions.

**Example 3** (KGE). *Let  $F(a, b)$  be a fact of a KG with  $e_a, e_b, W_F$  indicating trainable embedding vectors for entities  $a, b$  and the relation  $F$ , respectively. TransE [7] is a well-known KGE that models relations as translation operations on the embeddings of the entities, where the internal atom representation  $e_a + W_F - e_b$  is scored as  $1/(1 + \|e_a + W_F - e_b\|)$ .*

KGs can be extended to an HB with generic  $n$ -ary relations, where the bipartite graph representation is generalized such that an  $n$ -ary atom establishes  $n$  edges from the atom node to the  $n$  entities appearing in the atom, see e.g. Fig. 1-(a). Many KGE approaches can also be trivially extended to  $n$ -ary relations as discussed by Fatemi et al. [8].

### C. Encoding grounded FOL Formulas as Factor Graphs

A common practice in the field of Statistical Relational AI (StarAI) [9] is to map FOL theories to undirected probabilistic graphical models, represented via factor graphs [10], to get advantage of the available standard tools for model training

and inference. This paper exploits the translation used by Markov Logic Networks (MLN) [11], mapping a logic theory into a factor graph by grounding all the rules.

A factor graph  $(V, F, \mathcal{E})$  is a bipartite undirected graph, whose vertices are divided into two disjoint sets: the variable nodes  $V$  and the factor nodes  $F$ . Edges in  $\mathcal{E}$  connect nodes in  $V$  to nodes in  $F$ . A *logic-based factor graph* can be built given the HB of a FOL language and a logic theory  $\mathcal{T}$  by:

- adding a variable node  $a$  for each ground atom:  $V = HB$ ;
- adding a factor node  $g$  for each ground rule:  $F = R$ ;
- adding an edge  $(a, g)$  in  $\mathcal{E}$  if the atom associated to  $a$  occurs in the ground rule associated to  $g$ .

Given an atom  $a$  and a ground rule  $g$ ,  $ne(a)$  and  $ne(g)$  indicate the list of neighbor nodes of  $a$  and  $g$ , respectively.  $ne(a, i)$  and  $ne(g, i)$  denote the  $i$ -th elements of such lists, respectively.

**Example 4** (Factor Graph). *The factor graph corresponding to the FOL theory  $\mathcal{T}$  in Example 2 is represented in Fig. 1-(b).*

### III. THE PROBLEM

**Problem Definition. Given:**

- a FOL language  $\mathcal{L} = (\mathcal{C}, \mathcal{P})$  and a logic theory  $\mathcal{T}$ ;
- the ground truth  $y_e$  for  $E \subset HB$  (i.e. the evidence)
- (optional) a feature representation  $I$  of constants in  $\mathcal{C}$ ;

**Find:**

- the truth values  $y_Q$  for  $Q \subset HB$  (i.e. the queries).

Examples of instances of the problem:

- *Classification:*  $\mathcal{C}$  is the set of input patterns and  $I$  their feature representation,  $\mathcal{P}$  is the set of classes,  $\mathcal{T} = \emptyset$ .  $y_E$  are the class labels for the subset of the patterns in  $\mathcal{C}$  (i.e. the training set).  $y_Q$  are the class predictions for another subset of the patterns in  $\mathcal{C}$  (i.e. the test set).
- *Link Prediction:*  $I = \mathcal{T} = \emptyset$ .  $E$  is the set of of the known links on the graph,  $Q$  is the set of unknown links to predict.
- *Logical Reasoning:*  $I = \emptyset$ ,  $\mathcal{T}$  is the logic theory.  $E$  is the set of known logic facts.  $Q$  is a subset of the conclusions of the reasoning process.
- *Neuro-Symbolic:* all the elements of the previous points can be integrated to add logical reasoning or link prediction on top of a pattern recognition task.

### IV. THE MODEL

Relational Reasoning Networks (R2N) are neuro-symbolic reasoning models composed of three high-level components.

- 1) The **Input Atom Embedding Layer** maps each ground atom  $a_i \in HB$  into an embedding vector.
- 2) **Reasoning Layers** (recursively) update the atom embeddings according to the structure imposed by the logic-based factor graph associated to  $\mathcal{T}$ .
- 3) **Output Layers** use the final atom embeddings to take decisions on the query atoms in  $Q$ .

The overall model is shown in Fig. 2.

#### A. Input Atom Embedding Layer

The first layer of an R2N assigns a numeric representation to all the ground atoms in the HB. In particular, each ground atom is assigned an embedding vector in some *latent* space whose semantics is not defined a-priori. Given a ground atom  $a = P(c_1, \dots, c_n)$  and  $Emb(c_i)$  the embedding of  $c_i \in \mathcal{C}$ , the input atom embedding layer computes the embedding  $Emb^0(a)$  as:

$$Emb^0(a) = f_P(Emb(c_1), \dots, Emb(c_n)) \quad (1)$$

A vast range of representation learning approaches can be employed to implement and co-train the function  $f_P$ . In particular, in this paper we consider Knowledge Graph Embeddings and latent representations of deep neural networks.

a) *Knowledge Graph Embeddings:* KGEs (Sec. II-B) encode entities and relations with real-valued embedding vectors in order to represent the relational structure among different objects in a meaningful latent space. All KGE methods internally perform two operations: reconstruct an atom representation from the representations of the constants and the predicate, and compute a score from this representation via a scoring function.

b) *Latent Representations of deep networks:* In case a feature representation  $I$  of the constants (cf. Sec. III) is provided, such as with images, time series, videos, text, etc., we can obtain the atom embedding representations by direct extraction from hidden representations of neural architectures.

#### B. Reasoning Layers

Reasoning layers recursively take a HB representation as input and provide an updated HB representation as output. Inspired by recent advances in the Graph Neural Network (GNN) community [12], [13], we implement reasoning layers as the unfolding network of a message passing process [14] over the logic-based factor graph. The message from an atom node  $a$  to a ground rule node  $g$  at layer  $\ell$  is defined as:

$$M_{a \rightarrow g}^\ell = Emb^{\ell-1}(a) \quad (2)$$

where  $Emb^{\ell-1}(a)$  is the embedding of the atom  $a$  at layer  $\ell-1$ , which resolves to the output of the input atom embedding layer for the first reasoning layer, i.e. for  $\ell = 1$ .

The embedding of the ground rule node  $g \in R_j$  for rule  $r_j$  at layer  $\ell$  is then computed as an MLP on the messages of its neighbor atom nodes:

$$Emb^\ell(g) = MLP_j^1(M_{ne(g,1) \rightarrow g}^\ell, \dots, M_{ne(g,d_j) \rightarrow g}^\ell) \quad (3)$$

where  $d_j = |ne(g)|$ , i.e. the number of atoms occurring in  $r_j$ . Notice that we have a different function  $MLP_j^1$  for each rule  $r_j$ . This is important so that different rules can aggregate differently the incoming messages from their neighbor atoms.

The message from a ground rule node  $g \in R_j$  to its  $i$ -th neighbor atom node  $a = ne(g, i)$  is defined as:

$$M_{g \rightarrow a}^\ell = MLP_{j,i}^2(Emb^\ell(g)) \quad (4)$$

where, the message function  $MLP_{j,i}^2$  is different for each rule  $r_j$  and for each position  $i$  of the recipient node of the message.

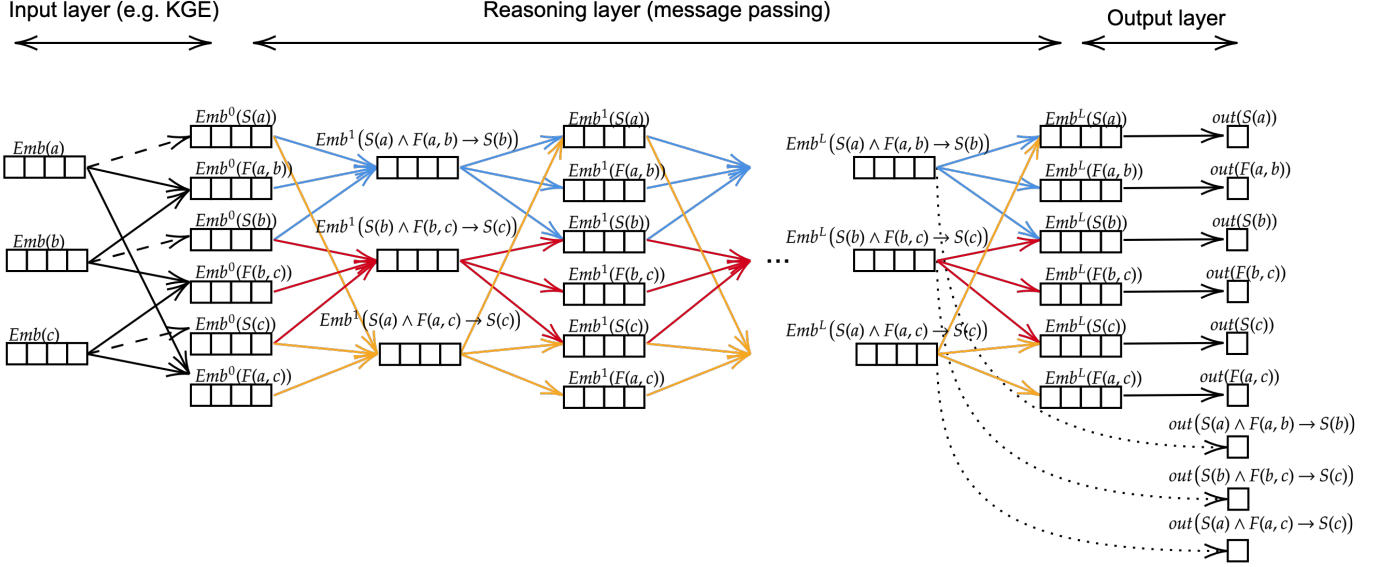


Fig. 2: **Overall structure of the model.** The model can be seamlessly used to: (i) *classify* whether  $a \in \mathcal{C}$  smokes by computing  $out(S(a))$ ; (ii) *predict the link* stating whether  $a, b \in \mathcal{C}$  are friends by computing  $out(F(a, b))$ ; and (iii) *reason* about  $b \in \mathcal{C}$  smoking because being a friend of the smoker  $a$  by exploiting the rule  $F(a, b) \wedge S(a) \rightarrow S(b)$ .

Finally, the embedding of an atom node  $a$  at layer  $\ell$  is updated by aggregating the messages of all the ground rule nodes  $g$ , where  $a$  is a neighbor of  $g$ :

$$Emb^\ell(a) = \underset{(g,i): a=ne(g,i)}{\mathcal{A}} M_{g \rightarrow a}^\ell \quad (5)$$

where  $\mathcal{A}$  is an aggregation operator like sum, mean or max. In the experiments we used a summation aggregator.

The message passing equations (2)–(5) implement an update scheme for the atom embeddings, which can be repeated multiple times in a recursive fashion. Each atom embedding is initialized by the input atom embedding layer (see IV-A) and then updated multiple times by the message passing scheme. Our message passing process is also inspired by standard logic reasoning, e.g. forward chaining, where the truth degree of the atoms is iteratively updated from the truth degree of other atoms appearing in the same rules.

### C. Output Layers and Loss Functions

The output layers consist in an *atom output layer* and (possibly) a *rule output layer*.

For each atom  $a$ , the atom output layer takes its last available embedding, i.e.  $Emb^L(a)$ , and returns the prediction

$$out(a) = MLP^A(Emb^L(a))$$

A similar output can be obtained for a ground rule embedding, i.e.  $Emb^L(g)$ , to get the ground rule prediction:

$$out(g) = MLP^R(Emb^L(g))$$

The overall model is then optimized by minimizing the loss:

$$\mathcal{L} = \sum_{a \in E} L_{sup}(out(a), y_a) + \quad (6)$$

$$+ \lambda \sum_{r_j \in \mathcal{T}} \sum_{g \in R_j^E} L_{sem}(out(g), r_j(\mathbf{y}_{ne(g)})) \quad (7)$$

where  $\lambda \geq 0$  is a meta-parameter,  $L_{sup}$  and  $L_{sem}$  are standard supervised classification losses, which force the outputs of the model on the evidence  $E$ . In particular,  $L_{sup}$  enforces each  $out(a)$  with  $a \in E$  to match the available ground truth  $y_a$ . For instance for KGE tasks, where only positive examples are provided, the *negative softmax-loss* is used with negative examples automatically obtained through corruptions of the positive ones. On the other hand,  $L_{sem}$  enforces each  $out(g)$  with  $g \in R_j^E = \{g : a \in E, \forall a \in ne(g)\}$ , i.e. for the ground rules whose all neighbor atoms  $ne(g)$  are in the evidence  $E$ , to match the evaluation of the rule  $r_j$  on their overall ground truth  $\mathbf{y}_{ne(g)}$ . This can be done by simply evaluating the logic formula  $r_j(\mathbf{y}_{ne(g)}) = r_j(y_{ne(g,1)}, \dots, y_{ne(g,d_j)})$ .

### D. Discussion

**Complexity Analysis.** An R2N implements a message passing scheme over the factor graph obtained by grounding the logical theory. Such message passing is linear in the size of the factor graph and quadratic on the embedding size:  $O(|R| \cdot d_{max} \cdot |Emb|^2)$ , where  $|Emb|$  is the atom embedding size,  $|R|$  is the total number of ground rule nodes and  $d_{max} = \max_{g \in R} |ne(g)|$  is the maximum number of atoms in the rules. If we can consider  $d_{max} \cdot |Emb|^2$  a fixed constant, the computational cost is mainly determined by the  $|R|$  value. As explained in Sec. II-A, the number of ground rules is a polynomial depending on the number of constants in each rule  $|R| = \sum_{r_j} |\mathcal{C}|^{|X_j|}$ , where  $|X_j|$  is the number of variables in  $r_j$ . The resulting complexity is in between KGE inference, which has a complexity quadratic in the number of constants (and linear or quadratic in the embedding size depending on the selected KGE), and other statistical neuro-symbolic methods, which are exponential in the number of constants. However, one could rely on the sparsity of the input graph to selectively

ground the logical theory around the query atoms and largely improve the scalability. We leave this study to future work and we focus on the full exact grounding in this paper.

**The role of Logic Theories.** The employed logic theory  $\mathcal{T} = \{r_1(X_1), \dots, r_m(X_m)\}$  has the fundamental role of determining the structure of an R2N. An R2N fully grounds the rules  $r_i$  on  $\mathcal{C}$ , without assuming that a rule holds true for a grounding, as the satisfaction or the dissatisfaction of a rule on a grounding is determined according to the available evidence. Therefore, the model learns the contexts where a rule is satisfied, driven by the ground truth. A rule that is always satisfied by the training data it will be enforced like if it was universally quantified. On the other hand, a partially violated rule will be enforced only in the contexts where it is expected to hold true. This property makes R2Ns very versatile and suitable to deal with either hard or soft rules whose percentage of fulfillment is not known in advance.

**Implicit Logic Rules.** Let us suppose that we know a group of atoms to be semantically connected, but without having explicitly available the logic expression of the rule correlating them, that we refer as an *implicit* rule. For instance, let  $X_i$  be the set of variables for an implicit rule  $r_i(P_1(\bar{x}_1), \dots, P_l(\bar{x}_l))$ , where each  $\bar{x}_k \subseteq X_i$  denotes the set of variables  $P_k$  depends on, for all  $k \in \{1, \dots, l\}$ . The grounding process and the construction of the corresponding logic-based factor graph for  $r_i$  (as described in Sec. II-C) can take place like with fully specified FOL formulas. However, since the semantics of the rule is not specified (the logical connectives are unknown), it is not possible to determine the truth-value of the evidence groundings of  $r_i$ , hence the loss components given by equation (7) can not be considered, e.g.  $\lambda = 0$ . In the experimental results, we show a use case of implicit logic rules used by R2N in Sec. VI-C. Even if beyond the scope of this paper, we notice that it is possible to use explainability methods to explicitly extract the logic rules a posteriori [15].

## V. R2N AS A PROBABILISTIC GRAPHICAL MODEL

One natural question that arises is which kind of reasoning can be approximated by an R2N. As shown in Fig. 1-(b), the underlying structure of an R2N can be regarded as a factor graph. Let we call  $\mathbf{x}$  a possible truth assignment to all the ground atoms in HB. A factor graph corresponds to the factorized probability distribution:

$$p(\mathbf{x}) = \frac{1}{Z} \exp \left( \sum_{g \in R} \phi_g(\mathbf{x}_{ne(g)}) \right)$$

where  $\phi_g(\mathbf{x}_{ne(g)})$  is a potential function corresponding to one ground rule (factor) node correlating the neighboring atom variables  $\mathbf{x}_{ne(g)} \subset \mathbf{x}$ . This section shows that the Belief Propagation (BP) algorithm, commonly applied to factor graphs, can be approximated by a forward pass within the R2N model.

**Belief Propagation.** The (loopy) Belief Propagation algorithm defines an efficient inference schema for Probabilistic Graphical Models, like Markov Random Fields, that is based on iterative message passing. The algorithm computes an approximation of the marginal distribution for each unobserved variable, given the observed ones. Let us consider a logic

based factor graph as in Sec. II-C. The max-product belief propagation algorithm can be defined as follows:

$$b(x_i) = \prod_{g: i \in ne(g)} m_{g \rightarrow i}(x_i),$$

where  $x_i$  is a discrete random variable with  $i \in \text{HB}$  an atom node, whose belief  $b(x_i)$  is computed as an aggregation over each neighbor factor node  $g$ . The message from a factor  $g$  to the atom node  $i$  ( $m_{g \rightarrow i}$ ) defines the effect of that factor on the belief for that atom:

$$m_{g \rightarrow i}(x_i) = \max_{\mathbf{x}_g: \mathbf{x}_i = x_i} \phi_g(\mathbf{x}_g) \prod_{j \in ne(g): i \neq j} b(\mathbf{x}_j)$$

where  $\phi_g(\mathbf{x}_g)$  is the potential associated to the factor  $g$  when instantiated with the variable values  $\mathbf{x}_g$  and the max is performed over all possible assignments to the variables in the factor, for a fixed  $x_i$ .

Lets now consider binary potentials and variables, which are the ones used in networks representing classic logic knowledge, i.e.  $\phi_g(\mathbf{x}_g) \in \{0, 1\}$ . Hence, we have:

$$\begin{aligned} b(x_i) &= \prod_{g: i \in ne(g)} \max_{\mathbf{x}_g: \mathbf{x}_i = x_i} \left[ \phi_g(\mathbf{x}_g) \cdot \prod_{j \in ne(g): i \neq j} b(\mathbf{x}_j) \right] = \\ &= \prod_{g: i \in ne(g)} \max_{\mathbf{x}_g \in \mathcal{T}_g: \mathbf{x}_i = x_i} \left[ \prod_{j \in ne(g): i \neq j} b(\mathbf{x}_j) \right] \end{aligned} \quad (8)$$

where  $\mathcal{T}_g$  is the set of assignments  $\mathbf{x}_g$  such that  $\phi_g(\mathbf{x}_g) = 1$ , i.e. that satisfy the formula associated to factor  $g$ . The same equation can be expressed in terms of log-beliefs, which highlights the connections with neural-based implementations:

$$\log b(x_i) = \sum_{g: i \in ne(g)} \max_{\mathbf{x}_g \in \mathcal{T}_g: \mathbf{x}_i = x_i} \left[ \sum_{j \in ne(g): i \neq j} \log b(\mathbf{x}_j) \right] \quad (9)$$

Some examples of the computation of believes are shown in the appendix.

**BP and R2N.** The BP computation can be factorized in terms of the R2N modules as follows:

$$\begin{aligned} \log b(x_i) &= \sum_{g: i \in ne(g)} \max_{\mathbf{x}_g \in \mathcal{T}_g: \mathbf{x}_i = x_i} \left[ \sum_{j \in ne(g): i \neq j} \log b(\mathbf{x}_j) \right] = \\ &= \sum_{g: i \in ne(g)} \underbrace{MLP_{\varphi(g), i}^2 \left( \underbrace{MLP_{\varphi(g)}^1(\log_b(\mathbf{x}_g))}_{\text{nodes to factor eqs. (2)-(3)}} \right)}_{\text{factor to node equation (4)}} \\ &\quad \underbrace{\hspace{10em}}_{\text{aggregation equation (5)}} \end{aligned}$$

where  $\varphi(g)$  is the index of the formula for which  $g$  has been instantiated, i.e.  $g$  is a grounding of  $r_{\varphi(g)} \in \mathcal{T}$  and  $\log_b(\mathbf{x}_g) = [\log b(x_1), \dots, \log b(x_{|ne(g)|})]$  indicates the log beliefs of neighbors of  $g$  factor. In the context of an R2N, each variable  $x_i$  corresponds to one ground atom e.g.  $F(a, b)$ . This iterative inference schema is initialized within an R2N with the beliefs computed by the input layer, which provides a solid initial guess of the values.

The following theorem shows how this factorization allows us to approximate BP with arbitrary precision, provided sufficient computational power.

**Theorem 1.** *An R2N reasoning block can exactly compute one iteration of the max-product belief propagation algorithm as a forward step within the architecture.*

*Proof:* The proof is in the appendix. ■

**Discussion.** When belief propagation can find an optimal solution, an R2N can perfectly reconstruct the same optimal output. Please note that loopy BP is often initialized with random or constant initial beliefs and it is known to not always converge to a satisfactory solution. However, thanks to the neuro-symbolic integration of R2Ns, the atom beliefs are instantiated by the input layer, like a KGE, which can often provide an accurate initialization of the beliefs, which are later corrected and improved by the reasoning process. For example, as described earlier in this paper, the output of a KGE is a scoring function  $f_{KGE}(x_a, \theta)$ , where the parameters  $\theta$  and a hidden latent representation  $x_a$  of the atom are used to express the confidence that an atom is true. The quantities  $\sigma(f_{KGE}(x_a, \theta))$  and  $1 - \sigma(f_{KGE}(x_a, \theta))$  can be interpreted as the initial beliefs for atom  $a$ , as shown by Nickel et al. [16], where the KGE assignments are used to define a Bernoulli probability distribution. In particular, the probability of an assignment  $\mathbf{y}$  with  $y_a$  indicating the assignment to atom  $a$  can be computed as:

$$\begin{aligned} p(\mathbf{y}|\mathbf{x}, \theta) &= \prod_a p(y_a|x_a, \theta) = \\ &= \prod_a \begin{cases} \sigma(f_{KGE}(x_a, \theta)) & \text{if } y_a = 1 \\ 1 - \sigma(f_{KGE}(x_a, \theta)) & \text{if } y_a = 0 \end{cases} \\ &= \prod_a [1 - y_a + \sigma(f_{KGE}(x_a, \theta))(2y_a - 1)] \end{aligned}$$

In practice, an R2N usually employs a larger atom embedding space than the one required to represent only the beliefs of a binary variable. As a consequence, the model can perform complex atom transformations and can learn how each formula should be accounted depending on the input constants and predicates. In this scenario, the internal representation  $x_a$  of the atom of a KGE can be directly passed to the reasoning steps, without the information bottleneck of compressing it to scalar beliefs.

## VI. EXPERIMENTS

The experiments explore the performances of the model in different contexts<sup>1</sup>: symbolic reasoning with explicit logic-knowledge (Sec. VI-B), symbolic reasoning with implicit logic rules (Sec. VI-C) and, finally, symbolic and sub-symbolic integration (Sec. VI-D). Table I reports the basic statistics about the datasets. Additional details on the experimental settings can be found in the appendix.

Dataset	#Entities	#Relations	#Facts	#Degree
Countries	272	2	1158	4.35
Nations	14	55	1992	142.3
Kinship	104	25	8544	85.15
UMLS	135	46	5216	38.63
Cora	700	9	18561	26.51

TABLE I: Basic statistics of datasets. For Cora, we report the average over the five splits.

### A. Competitors

The proposed model is compared against state-of-the-art knowledge graph embeddings or neuro-symbolic approaches. The following baselines have been used in the experiments:

- KGEs like ComplEx [17] and DistMult [18], and query oriented versions, like MINERVA [19];
- Neural Theorem Provers (NTP), with their greedy attention (GNTP-Attn, [20]) and conditional (CTP, [21]) versions;
- a differentiable rule learning system based on stochastic logic programs, i.e. NeuralLP [22];
- GNN methods on factor graphs, like FGNN [23];
- ExpressGNN, a GNN-based variational approach to inference in MLNs [24].

In the following, to distinguish if an R2N uses explicit logic rules ( $\lambda > 0$ ) with also the semantic loss provided by equation (7) or just implicit logic rules ( $\lambda = 0$ ), we will use the notation R2NS and R2NC, respectively.

### B. Countries Dataset

The Countries dataset (ODbL licence) [25] defines a set of countries, regions and sub-regions as basic entities. We used splits and setup from [26], which reports the basic statistics of the dataset and defines 3 tasks named  $S1, S2, S3$ , each requiring reasoning chains of increasing length. The task consists in predicting the unknown facts  $LocIn(country, continent)$ , stating country location within a continent, given the evidence in form of country neighbourhoods and some known country/region locations. The model is provided with knowledge about the task like the hierarchical nature of the  $LocIn$  (located in) relation,

$$\forall c \forall r \forall k \text{ LocIn}(c, r) \wedge \text{LocIn}(r, k) \rightarrow \text{LocIn}(c, k) \quad (10)$$

and the manifold created across neighbouring countries:

$$\forall c \forall c_1 \forall k \text{ NeighOf}(c, c_1) \wedge \text{LocIn}(c, k) \rightarrow \text{LocIn}(c_1, k) \quad (11)$$

The task  $S1$  can be solved exactly by applying the first rule. In task  $S2$ , some facts supporting the first rule are removed, and one has to rely on a soft application of the second rule. In task  $S3$ , facts supporting directly the second rule are removed, making multiple recursive applications of the second rule necessary. Table II reports the area under the precision-recall curve (AUC-PR) metric and one standard error for the different reasoning tasks as an average over 5 different runs. In order to ensure that the best possible results are obtained for the baseline methods, the values are taken from the original papers whenever available, for example theorem provers results have

<sup>1</sup>Code/data will be released upon publication.

TABLE II: AUC-PR metric and average train/inference times on the 3 tasks of the Countries dataset using different KGE and neural reasoning systems, R2NS indicates the relational reasoner network proposed in this paper. A bold font indicates the best method for each task.

Task	Complex	DistMult	NTP- $\lambda$	Gntp-Attn	CTP	NeuralLP	Minerva	FGNN	R2NS
S1	0.993 $\pm$ 0.00	0.922 $\pm$ 0.05	<b>1.000</b> $\pm$ 0.00	<b>1.000</b> $\pm$ 0.00	<b>1.000</b> $\pm$ 0.00	<b>1.000</b> $\pm$ 0.00	<b>1.000</b> $\pm$ 0.00	0.935 $\pm$ 0.04	<b>1.000</b> $\pm$ 0.00
S2	0.880 $\pm$ 0.03	0.571 $\pm$ 0.09	0.930 $\pm$ 0.00	0.930 $\pm$ 0.03	0.918 $\pm$ 0.01	0.751 $\pm$ 0.00	0.924 $\pm$ 0.02	0.823 $\pm$ 0.09	<b>0.992</b> $\pm$ 0.00
S3	0.484 $\pm$ 0.06	0.554 $\pm$ 0.05	0.773 $\pm$ 0.17	0.913 $\pm$ 0.04	0.948 $\pm$ 0.00	0.922 $\pm$ 0.00	<b>0.951</b> $\pm$ 0.01	0.560 $\pm$ 0.06	<b>0.951</b> $\pm$ 0.03
Time	67s/0.4s	31s/0.2s	-	-	-	-	-	71s/0.2s	125s/1.2s

TABLE III: Ablation study for R2NS in the 3 tasks of the Countries dataset, varying the number of reasoning blocks and using Complex as input layer. The results report the AUC-PR metric computed as average over 10 runs.

Task	Number Reasoning Blocks			
	0	1	2	3
S1	0.922 $\pm$ 0.05	1.000 $\pm$ 0.00	1.000 $\pm$ 0.00	1.000 $\pm$ 0.00
S2	0.880 $\pm$ 0.03	0.975 $\pm$ 0.01	0.987 $\pm$ 0.01	0.992 $\pm$ 0.00
S3	0.484 $\pm$ 0.06	0.739 $\pm$ 0.06	0.848 $\pm$ 0.15	0.951 $\pm$ 0.03

been extracted from Minervini et al. [21]. R2NS shows better performance both w.r.t. plain KGEs and state-of-the-art neural theorem provers. The advantage w.r.t. KGE approaches is due to their lack of multi-hop reasoning. In fact, multi-hop reasoning is more important in S2 and S3 tasks where KGE methods clearly underperform. The advantage w.r.t. NTP is due to the fact that the grounding process in R2N is symbolic. In fact, we instantiate the same ground rules that a standard forward chaining solver will instantiate. On the contrary, NTP uses soft-unification, which introduces more ground rules than those required by the symbolic solver (i.e. backward chaining in their case). Such ground rules are a source of noise, which becomes worse when multiple hops of reasoning are required. This is also signalled by the fact that extensions with sparser grounding techniques (e.g. CTP) tend to perform better when longer reasoning paths are required.

**Ablation Study.** This experiment studies how the results on the Countries dataset are affected by the number of stacked reasoners. Table III reports the detailed results as average over 10 different runs. Since the S1 task is constructed to be solved by the simple application of equation (10), one reasoner block is enough to exactly solve the task. Moving to the more difficult S2 task, making more complex inference paths help the generalization. Finally, in the harder S3 task, which can be solved only via a longer reasoning chaining formed by the recursive application of equation (11), the results are significantly improved by adding more reasoning layers. Even if not reported in the table, we observed a saturation effect when moving beyond 3 reasoning layers on this task.

### C. KGE datasets: Nations, Kinship, UMLS

The Nations, Kinship, and UMLS datasets [27] (CC0 licence) are popular datasets for relational reasoning, where a set of triples (entity, relation, entity) expresses known true facts and the goal is to infer the unknown true facts. We used the setup and splits defined by [21], which also reports the basics statistics for the datasets. In particular, the Kinship dataset is based on the kinship relationships recorded among

the members of the Central Australia Alyawarra tribe, and the Unified Medical Language System (UMLS) dataset defines a set of entities representing biomedical concepts and relations. These tasks can be addressed using KGE approaches, which learn the atom representations based on the entities and relation correlations over the true facts. The main limitation of these approaches is that they fail to represent higher-order correlations among the predicates like taxonomic relations or among the constants like in transitive relations. No logic knowledge is explicitly provided for these datasets, therefore an R2NC model is instructed to correlate all predicates over each pair of constants:  $r_1(P_1(x, y), P_2(x, y), \dots, P_n(x, y))$ . The model exploits the correlations to correct and improve the KGE predictions via an implicit and latent reasoning process.

Table IV reports training/inference times and the standard metrics for these tasks, where the proposed methodology outperforms KGEs and state-of-the-art reasoning systems on all datasets. The model co-trains a KGE layer, therefore adding some time overhead. In spite of the extra reasoning, running times were in the same order of magnitude for all experiments. In order to ensure that the best possible results are obtained for the baseline methods, the values are taken from the original papers whenever available, for example NTP/Gntp results have been extracted from Minervini et al. [21]. R2N outperforms the competitors, due to its ability to perform a more complex higher level reasoning. In particular, when explicit symbolic knowledge is not available, like in these Knowledge Graph Completion (KGC) tasks, the correlations exploited by R2NC should not be restricted to definite clauses templates exploited in backward chaining theorem provers.

### D. Symbolic and Sub-Symbolic Integration: Cora

The Cora dataset [28] (CC0 licence) defines a deduplication task which aims at reconciling small differences in paper citations. Each paper is associated to its author, title and venue attributes. We used the setup defined by [24], which measures the performance of the model in terms of the prediction accuracy of the predicates  $SameAuthor(author, author)$ ,  $SameTitle(title, title)$ ,  $SameVenue(venue, venue)$ , detecting whether two entries refer to the same author, title and venue, respectively. Neuro-symbolic methods, which focus only on the logical representation like ExpressGNN, map the textual information contained in titles/authors/venues to one binary feature modeling the presence of each term in the corresponding text. A main limitation of this class of models is that they can not easily capture complex term correlations, required to construct powerful text similarity distances. Pure sub-symbolic models, like neural net-

TABLE IV: Results and training/inference times for KGE datasets. Missing values indicate values not reported in the original papers, for which it was not possible to re-run the experiments. The best model for each metric is shown in bold.

Dataset	Metric	ComplEx	DistMult	NTP	GNTP	CTP	NeuralLP	Minerva	R2NC
Nations	Hits@1	0.627	0.617	0.45	0.493	0.562	-	-	<b>0.793</b>
	Hits@3	0.858	0.868	0.73	0.781	0.813	-	-	<b>0.930</b>
	Hits@10	0.998	<b>1.000</b>	0.87	0.985	0.995	-	-	<b>1.000</b>
	MRR	0.749	0.754	0.61	0.658	0.709	-	-	<b>0.862</b>
	Time	63s/0.02s	53s/0.02s	-	-	-	-	-	170s/0.03s
Kinship	Hits@1	0.623	0.352	0.24	0.586	0.646	0.475	0.605	<b>0.814</b>
	Hits@3	0.843	0.574	0.37	0.815	0.859	0.707	0.812	<b>0.942</b>
	Hits@10	0.965	0.967	0.57	0.959	0.958	0.912	0.924	<b>0.978</b>
	MRR	0.745	0.508	0.35	0.658	0.709	0.619	0.720	<b>0.881</b>
	Time	827s/0.02s	507s/0.02s	-	-	-	-	-	2442s/0.04s
UMLS	Hits@1	0.877	0.341	0.70	0.761	0.752	0.643	0.728	<b>0.924</b>
	Hits@3	<b>0.987</b>	0.542	0.88	0.947	0.947	0.869	0.900	<b>0.987</b>
	Hits@10	<b>0.998</b>	0.736	0.95	0.983	0.984	0.962	0.968	0.996
	MRR	0.923	0.479	0.80	0.857	0.852	0.778	0.825	<b>0.952</b>
	Time	109s/0.02s	125s/0.03s	-	-	-	-	-	877s/0.12s

TABLE V: AUC-PR on test for the 5 folds and global average, training/inference mean running time for the Cora dataset for different tested models. A dash indicates a missing result not reported in the original paper. Statistically significant (95%) best results reported in bold.

Split	ExpressGNN	MLP	R2NS	R2NC
S1	0.62	0.830 ± 0.007	<b>0.898</b> ± 0.021	0.823 ± 0.015
S2	0.79	0.781 ± 0.007	<b>0.920</b> ± 0.007	0.819 ± 0.023
S3	0.46	0.843 ± 0.009	<b>0.957</b> ± 0.003	0.888 ± 0.015
S4	0.57	0.774 ± 0.011	<b>0.923</b> ± 0.011	0.837 ± 0.039
S5	0.75	0.838 ± 0.006	<b>0.913</b> ± 0.010	0.800 ± 0.019
Avg	0.64	0.812 ± 0.007	<b>0.922</b> ± 0.012	0.833 ± 0.024
Time	-	120.2s/0.8s	1142s/3.6s	809.8s/3.6s

TABLE VI: Logic knowledge used by the presented models for the Cora dataset.  $SamePaper(x, y)$  is defined on the union of  $Author$ ,  $Title$  and  $Venue$  domains and expresses that two entities  $x, y$  are related to a common paper in the known facts.

$$\begin{aligned}
& SamePaper(x, y) \rightarrow SameAuthor(x, y) \\
& SamePaper(x, y) \rightarrow SameTitle(x, y) \\
& SamePaper(x, y) \rightarrow SameVenue(x, y) \\
& SameVenue(x, y) \rightarrow SameVenue(y, x) \\
& SameAuthor(x, y) \rightarrow SameAuthor(y, x) \\
& SameTitle(x, y) \rightarrow SameTitle(y, x) \\
& SamePaper(x, y) \wedge SamePaper(y, z) \rightarrow SameAuthor(x, z) \\
& SamePaper(x, y) \wedge SamePaper(y, z) \rightarrow SameTitle(x, z) \\
& SamePaper(x, y) \wedge SamePaper(y, z) \rightarrow SameVenue(x, z) \\
& SameAuthor(x, y) \wedge SameAuthor(y, z) \rightarrow SameAuthor(x, z) \\
& SameTitle(x, y) \wedge SameTitle(y, z) \rightarrow SameTitle(x, z) \\
& SameVenue(x, y) \wedge SameVenue(y, z) \rightarrow SameVenue(x, z)
\end{aligned}$$

works, can learn arbitrary complex functions to approximate the  $SameAuthor$ ,  $SameTitle$ ,  $SameVenue$  predicates. However, they can not easily model the relational dependencies among tasks and/or groundings.

The proposed model reasons over the latent representations generated by the underlying classifiers processing the textual information. Hence, they can simultaneously optimize the classifiers learning the text similarity predicates and the inference process defined by the available logic knowledge. Table VI shows the logic knowledge used for this task, which is equivalent to the one used by ExpressGNN.

Table V reports the average AUC-PR scores and 95%

confidence error over 10 different runs for the five folds. The  $Avg$  split is the average of all the runs on all the folds. R2NS outperforms all the other baselines. ExpressGNN is separated by a large gap, which provides further evidence on the importance of exploiting low-level embedding functions to correlate the terms in each title, venue or author name. This is evident by also looking at the good performances of a simple MLP with no relational information. R2NS outperforms also the R2NC model, which however performs better than the MLP classifier. This is a confirmation of what previously discussed on the advantages of using more specific knowledge, when available. The accuracy of the factor predictions is  $0.822 \pm 0.031$  (95% confidence error) for factors of grounded formulas with at least one test atom, which means that the predictions of the network are consistent with the semantics of the provided formulas.

## VII. RELATED WORK

Relational Reasoning Networks bridge ideas from different research areas, like logic, neural networks, probability, and, as a result, they present several connections with different AI models. In the following, the links between R2Ns and prominent work in different areas are highlighted.

**R2Ns and (Probabilistic) Reasoning.** The capability of make inference is a fundamental property of AI systems whose behaviour could be considered intelligent, and possible ways on how to automatize the process of reasoning have received a lot of attention over the years [29]. In forward chaining (or forward reasoning) [30] novel true facts are produced as a result of the application of one or more inference steps, starting with a set of known true facts. In the same spirit, an R2N performs one or more sub-symbolic reasoning steps by manipulating a set of input fact embeddings into a set of refined new ones, accounting for the relational structure of the task. Probabilistic reasoners define a more flexible inference process than their counterparts based on standard logic. For example, Statistical Relational Learning approaches like Markov Logic Networks (MLN) [11] translate a First-Order Logic (FOL) logic theory into an undirected graphical model. Probabilistic Soft Logic [31] tried to overtake the scalability



limitations of MLNs by defining a tractable fraction of FOL and relaxing inference using fuzzy logic. R2Ns exploit the same graph construction of MLNs but inference is performed faster as a forward step of a neural architecture.

**R2Ns and Neuro-Symbolic AI.** Neuro-symbolic methods [4] bridge the reasoning capabilities of logic reasoners with the ability of sub-symbolic systems to deal with the feature-based representations that typically represent sensorial inputs like video, images or sounds. In particular, neuro-symbolic distillation methods like Semantic-based Regularization [32], teacher-student setups [33] and Logic Tensor Networks [34] inject logic knowledge into the network weights by enforcing the knowledge on the predictor outputs. In spite of their simplicity, these methods are powerful when the logic knowledge should be applied to the entire output space in a flat fashion, unlike what is needed to obtain a full probabilistic reasoning process. R2Ns define a more flexible employment of the logic knowledge, since reasoning over latent representation learns how and where to apply the available knowledge. Neural Logic Machines (NLM) [35] exploit neural networks and logic programming to carry out both inductive learning and logic reasoning tasks. However, NLM could not be applied to Knowledge Graph Embeddings tasks, where the relational information is not fully known. Further NLMs directly compute output Boolean values, which strongly limits the flexibility of reasoning under uncertainty, while reasoning in R2Ns happens at latent level. Another class of neuro-symbolic approaches, like Deep ProbLog [36], Semantic Loss [37], Deep Logic Models [38] and Relational Neural Machines [39] define directed or undirected graphical models to jointly train predicates approximated by deep learners and reasoning layers in a single differentiable architecture. Exact inference over the graphical models is generally intractable and these systems rely on heuristics to apply to any real-world problem [40], [41]. Lifted Relational Neural Networks [42] and Neural Theorem Provers (NTP) [26], [20], [21] realize a soft forward or backward chaining via an end-to-end gradient-based scheme. NTP allows soft-unification among symbols using a tensorial representation to allow a more flexible matching. However, this introduces scalability issues as reasoning paths can not be easily pruned without relying on heuristics. Neural LP [22] learns rules using differentiable operators defined in TensorLog [43], which is a framework to get advantage of deep learning computational power to perform probabilistic logical reasoning. Unlike this class of models, R2N approximates relational inference using a forward step in a neural architecture and can scale up to much larger problems.

**R2Ns and KGEs.** With the emergence of Knowledge Graphs (KG), representation learning has played a pivotal role in learning embedding spaces, which allow efficient inference and query answering. Knowledge Graph Embeddings (KGE), initially built from the statistical co-occurrences of entities and relations, have been later enriched with semantic information carried by higher-level logic knowledge to improve embedding accuracy and explainability. As an example of this line of research, both probabilistic Logic Neural Networks [44] and the work by Niu et al. [45] inject logic knowledge into a KGE. However, both approaches require strong assumptions on the

form of the distributions to make inference tractable. Another related class of approaches uses KGs for question answering by modeling multi-hop reasoning in latent space. For example, MINERVA [19] learns to do query answering by walking on a knowledge graph conditioned on a query, and then by stopping when reaching the answer node. DeepPath [46] uses reinforcement learning to find paths in a KG but, like [47], its applicability is limited to cases where the target entity is known in advance.

**R2Ns and GNNs.** Finally, R2N is related to a recent line of research using Graph Neural Networks (GNNs) [12], [13] to approximate inference in PGMs. Standard GNNs are examples of Message Passing Neural Networks [14], whose expressiveness can be interpreted in terms of two variable counting logic [48], a small fragment of First-Order Logic. In order to overtake the limitations of standard GNNs in approximating inference, some authors have proposed hybrid models where GNNs are integrated to replace one step of a traditional inference algorithm like Belief Propagation [49], [50]. Other work has instead attempted at defining higher-order GNNs [51] which yield expressive models at the cost of a combinatorial explosion of the higher-order edges. R2Ns stand in the middle of standard GNNs and higher-order GNNs as the logic provides a bias on which “higher-order edges” (i.e. factors) to instantiate. The proposed model can indeed be seen as a higher-order GNN, where the layers computing the factor representations process the higher-order information. In this regard, R2N is related to Factor Graph Neural Networks (FGNN) [23], but applied to structures representing a grounded FOL logic theory. Unlike FGNNs, R2Ns are aware of the order of the in-going and outgoing edges in the factor graph. In particular,  $MLP_j^1$  concatenates its in-going messages following the order in which atoms appear in a rule, and one different  $MLP_{j,i}^2$  is specialized to correctly predict the embedding for the  $i$ -th element in the list of the outgoing neighbors. Furthermore, unlike what done by FGNNs, R2N is designed to work in a neuro-symbolic environment, where the input representations are also co-developed during training. R2Ns are also related to graph recurrent neural networks (like graph LSTMs) with constrained gating mechanisms [52], [53]. Here, activation in both the spatial and temporal domain are constrained to be coherent.

Other GNNs have been defined to process the KG topological structure. For example, ExpressGNN [24] attempts at overtaking the scalability limitations of probabilistic reasoning approaches using a GNN defined over the KG to embed the constants. Since the employed GNN does not have enough expressive power to perform reasoning, as there are isomorphic substructures in the KG that can not be distinguished, reasoning is performed via an external variational process. A similar relational structure is considered by Discriminative Gaifman models [54], which translate FOL formulas into a set of features. Unlike this class of models, the proposed architecture directly compiles the relational structures required to approximate the reasoning process into the model architecture. Therefore, R2N can embed the constants and the atoms via the knowledge in the forward step of the network without employing an external inference step.

## VIII. CONCLUSIONS

This paper presents a neural architecture to perform relational reasoning using latent representations. The model can be applied on top of different input feeds like KGEs or the embeddings computed by deep neural networks. The presented model provides a flexible and expressive platform for neuro-symbolic integration, which can be used either when logic knowledge is explicitly available or when the expression of the relational knowledge is not fully known.

While the scalability of the presented model is a huge step forward to classical Statistical Relational Learning methods, application on large domains can still be impractical when working on a fully grounded HB, as the number of possible ground atoms grows polynomially on the arity of the considered relations. An accurate approximation of the inference process on the relevant subset of ground atoms is a promising line of research, currently explored by the authors.

## ACKNOWLEDGMENTS

We thank Filippo Guarranti for his help in running one experiment presented in this paper. This project has received funding from the European Union’s Horizon 2020 research and innovation program under grant agreement No 825619. This work was also supported by TAILOR, a project funded by EU Horizon 2020 research and innovation programme under GA No 952215. Giuseppe Marra is funded by Research Foundation-Flanders (FWO-Vlaanderen, 1239422N).

## REFERENCES

- [1] P. Hitzler and M. K. Sarker, *Neuro-Symbolic Artificial Intelligence: The State of the Art*. IOS Press, 2022.
- [2] A. d. Garcez and L. C. Lamb, “Neurosymbolic ai: the 3rd wave,” *arXiv preprint arXiv:2012.05876*, 2020.
- [3] G. Marcus, “The next decade in ai,” *Retrieved on*, vol. 23, 2020.
- [4] L. De Raedt, S. Dumančić, R. Manhaeve, and G. Marra, “From statistical relational to neuro-symbolic ai,” in *Proceedings of the International Joint Conference on Artificial Intelligence*, 2020.
- [5] L. D. Raedt, K. Kersting, S. Natarajan, and D. Poole, “Statistical relational artificial intelligence: Logic, probability, and computation,” *Synthesis Lectures on Artificial Intelligence and Machine Learning*, vol. 10, no. 2, pp. 1–189, 2016.
- [6] Q. Wang, Z. Mao, B. Wang, and L. Guo, “Knowledge graph embedding: A survey of approaches and applications,” *IEEE Transactions on Knowledge and Data Engineering*, vol. 29, no. 12, pp. 2724–2743, 2017.
- [7] A. Bordes, N. Usunier, A. Garcia-Duran, J. Weston, and O. Yakhnenko, “Translating embeddings for modeling multi-relational data,” in *Advances in Neural Information Processing Systems*, vol. 26, 2013, pp. 2787–2795.
- [8] B. Fatemi, P. Taslakian, D. Vazquez, and D. Poole, “Knowledge hypergraphs: prediction beyond binary relations,” in *IJCAI*, 2021.
- [9] R. de Salvo Braz, E. Amir, and D. Roth, “A survey of first-order probabilistic models,” in *Innovations in Bayesian Networks*. Springer, 2008, pp. 289–317.
- [10] S. Haykin, *Neural Networks: A Comprehensive Foundation*, 1st ed. Upper Saddle River, NJ, USA: Prentice Hall PTR, 1994.
- [11] M. Richardson and P. Domingos, “Markov logic networks,” *Machine learning*, vol. 62, no. 1, pp. 107–136, 2006.
- [12] F. Scarselli, M. Gori, A. C. Tsoi, M. Hagenbuchner, and G. Monfardini, “The graph neural network model,” *IEEE Transactions on Neural Networks*, vol. 20, no. 1, pp. 61–80, 2009.
- [13] Z. Wu, S. Pan, F. Chen, G. Long, C. Zhang, and S. Y. Philip, “A comprehensive survey on graph neural networks,” *IEEE transactions on neural networks and learning systems*, vol. 32, no. 1, pp. 4–24, 2020.
- [14] J. Gilmer, S. S. Schoenholz, P. F. Riley, O. Vinyals, and G. E. Dahl, “Neural message passing for quantum chemistry,” in *Proceedings of the International Conference on Machine Learning*. PMLR, 2017, pp. 1263–1272.
- [15] G. Ciravegna, F. Giannini, M. Gori, M. Maggini, and S. Melacci, “Human-driven fol explanations of deep learning,” in *IJCAI-PRICAI 2020-29th International Joint Conference on Artificial Intelligence and the 17th Pacific Rim International Conference on Artificial Intelligence*. International Joint Conferences on Artificial Intelligence Organization, 2020, pp. 2234–2240.
- [16] M. Nickel, K. Murphy, V. Tresp, and E. Gabrilovich, “A review of relational machine learning for knowledge graphs: From multi-relational link prediction to automated knowledge graph construction,” *CoRR*, vol. abs/1503.00759, 2015. [Online]. Available: <http://arxiv.org/abs/1503.00759>
- [17] T. Trouillon, J. Welbl, S. Riedel, É. Gaussier, and G. Bouchard, “Complex embeddings for simple link prediction,” in *International conference on machine learning*. PMLR, 2016, pp. 2071–2080.
- [18] B. Yang, W. Yih, X. He, J. Gao, and L. Deng, “Embedding entities and relations for learning and inference in knowledge bases,” in *Proceedings of the International Conference on Learning Representations (ICLR)*, 2015.
- [19] R. Das, S. Dhuliawala, M. Zaheer, L. Vilnis, I. Durugkar, A. Krishnamurthy, A. Smola, and A. McCallum, “Go for a walk and arrive at the answer: Reasoning over paths in KBs using reinforcement learning,” in *Proceedings of the International Conference on Learning Representations (ICLR)*, 2018.
- [20] P. Minervini, M. Bosnjak, T. Rocktäschel, and S. Riedel, “Towards neural theorem proving at scale,” *arXiv preprint arXiv:1807.08204*, 2018.
- [21] P. Minervini, S. Riedel, P. Stenetorp, E. Grefenstette, and T. Rocktäschel, “Learning reasoning strategies in end-to-end differentiable proving,” in *Proceedings of the International Conference on Machine Learning*, 2020.
- [22] F. Yang, Z. Yang, and W. W. Cohen, “Differentiable learning of logical rules for knowledge base reasoning,” in *Proceedings of the Conference on Neural Information Processing Systems (NeurIPS)*, 2017.
- [23] Z. Zhang, F. Wu, and W. S. Lee, “Factor graph neural networks,” in *Proceedings of the Conference on Neural Information Processing Systems (NeurIPS)*, H. Larochelle, M. Ranzato, R. Hadsell, M. F. Balcan, and H. Lin, Eds., vol. 33, 2020, pp. 8577–8587.
- [24] Y. Zhang, X. Chen, Y. Yang, A. Ramamurthy, B. Li, Y. Qi, and L. Song, “Efficient probabilistic logic reasoning with graph neural networks,” in *Proceedings of the International Conference on Learning Representations (ICLR)*, 2020.
- [25] G. Bouchard, S. Singh, and T. Trouillon, “On approximate reasoning capabilities of low-rank vector spaces,” in *AAAI Spring Symposia*, 2015.
- [26] T. Rocktäschel and S. Riedel, “End-to-end differentiable proving,” in *Proceedings of the Conference on Neural Information Processing Systems (NeurIPS)*, 2017.
- [27] S. Kok and P. Domingos, “Statistical predicate invention,” in *Proceedings of the International Conference on Machine Learning*, 2007.
- [28] P. Singla and P. Domingos, “Discriminative training of markov logic networks,” in *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, vol. 5, 2005, pp. 868–873.
- [29] A. J. Robinson and A. Voronkov, *Handbook of automated reasoning*. Elsevier, 2001, vol. 1.
- [30] S. J. Russell and P. Norvig, *Artificial intelligence a modern approach, Fourth Edition*. Pearson Education, Inc., 2021.
- [31] S. H. Bach, M. Broecheler, B. Huang, and L. Getoor, “Hinge-loss markov random fields and probabilistic soft logic,” *Journal of Machine Learning Research*, vol. 18, pp. 1–67, 2017.
- [32] M. Diligenti, M. Gori, and C. Sacca, “Semantic-based regularization for learning and inference,” *Artificial Intelligence*, vol. 244, pp. 143–165, 2017.
- [33] Z. Hu, X. Ma, Z. Liu, E. H. Hovy, and E. P. Xing, “Harnessing deep neural networks with logic rules,” in *Proceedings of the Annual Meetings of the Association for Computational Linguistics (ACL)*, 2016.
- [34] I. Donadello, L. Serafini, and d’Avila Garcez, “Logic tensor networks for semantic image interpretation,” in *Proceedings of the International Joint Conference on Artificial Intelligence*, 2017.
- [35] H. Dong, J. Mao, T. Lin, C. Wang, L. Li, and D. Zhou, “Neural logic machines,” in *Proceedings of the International Conference on Learning Representations (ICLR)*, 2018.
- [36] R. Manhaeve, S. Dumancic, A. Kimmig, T. Demeester, and L. De Raedt, “Deepprolog: neural probabilistic logic programming,” in *Proceedings of the Conference on Neural Information Processing Systems (NeurIPS)*, 2018.
- [37] J. Xu, Z. Zhang, T. Friedman, Y. Liang, and G. Van den Broeck, “A semantic loss function for deep learning with symbolic knowledge,”

in *Proceedings of the International Conference on Machine Learning*, 2018.

- [38] G. Marra, F. Giannini, M. Diligenti, and M. Gori, “Integrating learning and reasoning with deep logic models,” in *Proceedings of the European Conference on Machine Learning*, 2019.
- [39] G. Marra, F. Giannini, M. Diligenti, M. Gori, and M. Maggini, “Relational neural machines,” in *Proceedings of the European Conference on Artificial Intelligence (ECAI)*, 2020.
- [40] G. Marra, F. Giannini, L. Faggi, M. Diligenti, M. Gori, and M. Maggini, “Inference in relational neural machines,” in *International Workshop on New Foundations for Human-Centered AI*, 2020.
- [41] R. Manhaeve, G. Marra, and L. De Raedt, “Approximate inference for neural probabilistic logic programming,” in *KR*, 2021, pp. 475–486.
- [42] G. Sourek, V. Aschenbrenner, F. Zelezny, S. Schockaert, and O. Kuzelka, “Lifted relational neural networks: Efficient learning of latent relational structures,” *Journal of Artificial Intelligence Research*, vol. 62, pp. 69–100, 2018.
- [43] W. Cohen, F. Yang, and K. Mazaitis, “Tensorlog: A probabilistic database implemented using deep-learning infrastructure,” *Journal of Artificial Intelligence Research*, vol. 67, pp. 285–325, 2020.
- [44] M. Qu and J. Tang, “Probabilistic logic neural networks for reasoning,” in *Proceedings of the Conference on Neural Information Processing Systems (NeurIPS)*, vol. 32, 2019.
- [45] G. Niu, Y. Zhang, B. Li, P. Cui, S. Liu, J. Li, and X. Zhang, “Rule-guided compositional representation learning on knowledge graphs,” in *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, 2020, pp. 2950–2958.
- [46] W. Xiong, T. Hoang, and W. Y. Wang, “DeepPath: A reinforcement learning method for knowledge graph reasoning,” in *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing (EMNLP 2017)*. Copenhagen, Denmark: ACL, September 2017.
- [47] H. Ren and J. Leskovec, “Beta embeddings for multi-hop logical reasoning in knowledge graphs,” in *Proceedings of the Conference on Neural Information Processing Systems (NeurIPS)*, vol. 33, 2020.
- [48] M. Grohe, “The logic of graph neural networks,” in *36th Annual ACM/IEEE Symposium on Logic in Computer Science (LICS)*. Los Alamitos, CA, USA: IEEE Computer Society, jul 2021, pp. 1–17. [Online]. Available: <https://doi.ieeecomputersociety.org/10.1109/LICS52264.2021.9470677>
- [49] J. Kuck, S. Chakraborty, H. Tang, R. Luo, J. Song, A. Sabharwal, and S. Ermon, “Belief propagation neural networks,” *arXiv preprint arXiv:2007.00295*, 2020.
- [50] V. G. Satorras and M. Welling, “Neural enhanced belief propagation on factor graphs,” in *International Conference on Artificial Intelligence and Statistics*. PMLR, 2021, pp. 685–693.
- [51] C. Morris, M. Ritzert, M. Fey, W. L. Hamilton, J. E. Lenssen, G. Rattan, and M. Grohe, “Weisfeiler and leman go neural: Higher-order graph neural networks,” in *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, vol. 33, no. 01, 2019, pp. 4602–4609.
- [52] J. Tang, X. Shu, R. Yan, and L. Zhang, “Coherence constrained graph lstm for group activity recognition,” *IEEE transactions on pattern analysis and machine intelligence*, 2019.
- [53] R. Yan, L. Xie, J. Tang, X. Shu, and Q. Tian, “Social adaptive module for weakly-supervised group activity recognition,” in *European Conference on Computer Vision*. Springer, 2020, pp. 208–224.
- [54] M. Niepert, “Discriminative gaifman models,” in *Proceedings of the Conference on Neural Information Processing Systems (Proceedings of the Conference on Neural Information Processing Systems (NeurIPS))*, 2016. [Online]. Available: <http://papers.nips.cc/paper/6098-discriminative-gaifman-models.pdf>
- [55] G. Cybenko, “Approximation by superpositions of a sigmoidal function,” *Mathematics of Control, Signals and Systems*, vol. 5, no. 4, pp. 455–455, 1992.
- [56] Z. Lu, H. Pu, F. Wang, Z. Hu, and L. Wang, “The expressive power of neural networks: A view from the width,” in *Proceedings of the 31st International Conference on Neural Information Processing Systems*, 2017, pp. 6232–6240.
- [57] J. Shavlik and S. Natarajan, “Speeding up inference in markov logic networks by preprocessing to reduce the size of the resulting grounded network,” in *Proceedings of the International Joint Conference on Artificial Intelligence*, 2009.

## APPENDIX

## R2N AS BELIEF PROPAGATION

### Logic-based Belief Propagation

In this section we report a couple of examples of the computation of beliefs of atoms occurring in logic formulas, as detailed in Sec. V.

**Example 5.** *We show how to compute the belief in case of factors expressing ground formulas. To keep the notation simple, we assume here that any variable only occurs in one single factor. Given two atoms  $a = p_1(a_1, a_2)$ ,  $b = p_2(b_1, b_2)$  co-occurring in a same factor  $g$ , the following expressions allow to recompute the beliefs for different semantics:*

- *Factor for logical OR between atoms:  $g = a \vee b$ :*

$$b(x_a) = \max_{\mathbf{x}_a \mathbf{x}_b \in \{01, 10, 11\}: \mathbf{x}_a=1} \prod_{j \in \{b\}} b(\mathbf{x}_j) = \max_{\mathbf{x}_b \in \{0, 1\}} b(\mathbf{x}_b)$$

$$b(x_b) = \max_{\mathbf{x}_a \mathbf{x}_b \in \{01, 10, 11\}: \mathbf{x}_b=1} \prod_{j \in \{a\}} b(\mathbf{x}_j) = \max_{\mathbf{x}_a \in \{0, 1\}} b(\mathbf{x}_a)$$

- *Factor for logical AND among atoms  $a \wedge b$ :*

$$b(x_a) = \max_{\mathbf{x}_a \mathbf{x}_b \in \{11\}: \mathbf{x}_a=1} \prod_{j \in \{b\}} b(\mathbf{x}_j) = b(\mathbf{x}_b = 1)$$

$$b(x_b) = \max_{\mathbf{x}_a \mathbf{x}_b \in \{11\}} \prod_{j \in \{a\}} b(\mathbf{x}_j) = b(\mathbf{x}_a = 1)$$

As shown by the previous examples, the belief of a variable appearing in a single factor can be computed as function of the beliefs of the input nodes to the factor. Even if the above examples consider only simple basic formulas, the beliefs of any logic formula can be considered by following the same pattern, just considering a different set of admissible assignments. Therefore, the structure of the function is dictated by the semantic of the ground logic formula represented by the factor.

### Proof of Theorem 1

In this section, we recall Theorem 1 and provide its proof. **Theorem 1.** *An R2N reasoning block can exactly compute one iteration of the max-product belief propagation algorithm as a forward step within the architecture.*

*Proof:* Assume without loss of generality that a two-dimensional embedding space is used to represent the atoms, such that these representations can be the log-beliefs for the  $\{0, 1\}$ -assignments for each atom at the previous iteration. For any variable  $x_i$ , an R2N reasoning block can reproduce one iteration of the max-product BP algorithm if:

- 1) for any  $g$ , the factor update function ( $MLP_{\varphi(g)}^1$ ) takes the log-beliefs of all the variables as input and computes a factor representation that collects for each assignment of  $\mathbf{x}_g$  and variable  $x_i \in \mathbf{x}_g$ :

$$\sum_{j \in ne(g): i \neq j} \log b(\mathbf{x}_j) .$$

which is a simple function of the input log-beliefs. The resulting factor representation collects these values in a vector of size  $|ne(g)| \cdot 2^{|\mathcal{T}_g|-1}$ .

- 2) The factor-to-node Multi-Layer Perceptron ( $MLP_{\varphi(g),i}^2$ ) selects the maximum over the input values, corresponding to sum of the log-belief of the assignments  $\mathbf{x}_g \in \mathcal{T}_g$ , with  $\mathbf{x}_i = x_i$ .
- 3) The final belief of a node is computed as summation over a per-factor contribution in the BP algorithm.

Since an MLP with at least one hidden layer and a sufficient number of hidden neurons is a universal function approximator [55], [56], it trivially follows that it is possible to train the MLPs to approximate the first two steps with arbitrary precision, if provided with sufficient computational power, and the factor representation has at least  $|ne(g)| \cdot 2^{|\mathcal{T}_g|-1}$  values. Finally, if the aggregation operator in equation 5 is selected to be the summation over the factor contribution, the factor aggregation step of BP is perfectly replicated by an R2N. ■

In addition, it is possible to provide a tighter definition of the minimum computational power of the MLP architectures, instead of the over-estimates provided by the universal approximation theorem. In particular, the  $MLP^1$  has to compute different summations over its inputs, such that a single layer network with linear neuron activation already provides sufficient computation power. On the other hand, the following proposition provides a direct estimate of the number of layers and neurons needed by the  $MLP^2$  networks to compute the selection of the maximum element in equation 9 using RELU neuron activations.

**Proposition 1.** *For arbitrary real valued feature matrix  $\mathbf{X} \in \mathbb{R}^{m \times n}$  with  $x_{ij}$  as its entry in the  $i$ -th row and  $j$ -th column, the feature mapping operation  $x^* = [\max_j x_{ij}]$  can be exactly parameterized with a  $2 \log_2 n$ -layer neural network with RELU as activation function and at most  $2n$  hidden units. See Zhen et al. [23] for a proof.*

## EXPERIMENTAL DETAILS

### Experimental settings

All the employed datasets do not include personal data. The inference graphs have been pruned using standard techniques [57] to remove the portions having no effect on the returned predictions. Experiments have been executed on a machine running Linux with a Volta-V100 GPU, Xeon 2.1Ghz CPU and 48GB of RAM. The size of the embedded space and the  $\lambda$  value, when used, has been selected by maximizing the target metric on the validation set for each experiments, using the grids reported in the provided code package.

### Countries experiment

In the Countries experiment (Sec. VI-B), an R2NS model with 3 stacked reasoning layers was trained for 300 epochs, Adam optimizer with initial learning rate equal to 0.01 and the reasoning embedding size was selected via a validation set in the [5, 50] range. Since FGNN requires Boolean inputs, the KGE output (i.e. the true belief for each atom) is directly fed to the FGNN, which performs the reasoning process using the same knowledge used by the R2NS.

### Knowledge graph completion experiment

In the knowledge graph completion experiment (Sec. VI-C), the different KGE methods have been tested for each dataset (ComplEx, DistMult and TransE), searching the embedding size maximizing the Mean Reciprocal Rank (MRR) metric on the validation set over a grid in the [10, 100] range. The best performing KGE was employed as first layer of the model and co-trained for 700 epochs with an initial learning rate equal to 0.01, Adam optimizer and reasoning embedding size selected using the validation set on the same grid [10, 100].

### Cora experiment

In the Cora experiment (Sec. VI-D), the input text was represented by a bag-of-word representation and processed by an input MLP with 2 layers and 35 neurons per layer. The classifier and reasoning layers have been co-trained for 400 epochs, with an initial learning rate equal to 0.01, Adam optimizer and reasoning embedding size equal to 35 (validated on the validation set). The same architecture has been used for the competitor MLP. An R2NC model was also built by discarding the available logic knowledge by defining the factors correlating all predicates over each pair of constants, as done for the experiment in Sec. VI-C.