
Syndicated Bandits: A Framework for Auto Tuning Hyper-parameters in Contextual Bandit Algorithms

Qin Ding

Department of Statistics
University of California, Davis
qding@ucdavis.edu

Yi-Wei Liu

Department of Statistics
University of California, Davis
lywliu@ucdavis.edu

Cho-Jui Hsieh

Department of Computer Science
University of California, Los Angeles
chohsieh@cs.ucla.edu

James Sharpnack

Department of Statistics
University of California, Davis
jsharpna@ucdavis.edu

Abstract

The stochastic contextual bandit problem, which models the trade-off between exploration and exploitation, has many real applications, including recommender systems, online advertising and clinical trials. As many other machine learning algorithms, contextual bandit algorithms often have one or more hyper-parameters. As an example, in most optimal stochastic contextual bandit algorithms, there is an unknown exploration parameter which controls the trade-off between exploration and exploitation. A proper choice of the hyper-parameters is essential for contextual bandit algorithms to perform well. However, it is infeasible to use offline tuning methods to select hyper-parameters in contextual bandit environment since there is no pre-collected dataset and the decisions have to be made in real time. To tackle this problem, we first propose a two-layer bandit structure for auto tuning the exploration parameter and further generalize it to the Syndicated Bandits framework which can learn multiple hyper-parameters dynamically in contextual bandit environment. We show our Syndicated Bandits framework can achieve the optimal regret upper bounds and is general enough to handle the tuning tasks in many popular contextual bandit algorithms, such as LinUCB, LinTS, UCB-GLM, etc. Experiments on both synthetic and real datasets validate the effectiveness of our proposed framework.

1 Introduction

The stochastic contextual bandit problem models the well-known exploration-exploitation dilemma in a repeated game between a player and an environment. At each round, the player sequentially interacts with the environment by pulling an arm from a pool of K arms, where every arm is associated with a d -dimensional contextual feature vector. Only the stochastic reward corresponding to the pulled arm is revealed to the player. The goal of the player is to maximize the cumulative reward or minimize the cumulative regret. Due to the partial feedback setting, the player has to balance between exploitation — pulling the arm that has the best estimated reward so far — and exploration — exploring whether there are uncertain arms that may be better than the current estimated best arm.

With substantial applications in recommender systems [15], online advertising [18], clinical trials [22], etc., bandit algorithms have been extensively studied during the past few decades. In general, there are two exploration techniques, Upper Confidence Bound (UCB) [5, 15, 16] and Thompson Sampling (TS) [3, 4] algorithms. The UCB algorithm addresses the dilemma optimistically by pulling

the arm that has the biggest upper confidence bound. The TS algorithm usually assumes that the relationship between the contextual features and rewards follows a prior model and it uses new observations at each round to estimate the posterior model. The player then pulls the arm that has the best estimated reward based on the posterior model. In general, the contextual bandit problems have regret lower bounded by $O(d\sqrt{T})$ when the number of arms K is infinite [12] and $O(\sqrt{dT})$ when the number of arms is finite [15]. Here, T is the total number of rounds. Both UCB and TS algorithms have been shown to achieve optimal regret bounds in (generalized) linear bandit problems [15, 16], kernelized bandit problems [11] and even in the contextual bandit problem with more complicated models such as neural networks [25].

Despite the popularity of the contextual bandit problem, there are some practical issues that prevent it from being used widely in practice. In both UCB and TS, there are hyper-parameters that are unknown to the player. One of the most important hyper-parameters is the exploration parameter, which controls the trade-off between exploration and exploitation. A good choice of the exploration parameter is essential for the algorithm to perform well and for the theory to hold. Another commonly seen hyper-parameter is the regularization parameter λ in ridge regression, which is used to model the relationship between features and rewards in linear bandits. In contextual bandit problems with complex models such as neural network, the recently proposed NeuralUCB [25] algorithm has far more than just two hyper-parameters. NeuralUCB also needs to select the network width, network depth, step size for gradient descent to solve the neural networks and gradient descent steps, etc. Due to the nature of the bandit environment, where the decisions have to be made in real time, it is inherently difficult to tune the hyper-parameters by the traditional offline tuning methods, such as cross validation, since when you have decided to use a parameter in partial datasets and make a decision based on this, the regret incurred by this decision will never be reversible in contextual bandit environment. In many prominent bandit works [15, 13, 25, 9], the experiments are conducted by running a grid search on the possible choices of parameters and only the best result is reported. Although the performance of the best grid search results is of academic interest, it is not possible in practice. In some other works [14], exploration parameter is set as a sufficient, theoretically derived, and often unknown value, but this value may be too conservative and may not achieve good performances in practice, which can be seen from the experiments in Table 1.

In this work, we first propose a two-layer bandit structure that can automatically tune the exploration parameter dynamically from the observed data. The two-layer bandit structure has its similarities to the bandit-over-bandit (BOB) algorithm [10] proposed for the non-stationary stochastic bandit problems, where the BOB algorithm successfully adapts its sliding-window sizes. However, the BOB algorithm requires to restart the bandit algorithm when changing the sliding-window size, which makes the theoretical regret bounds sub-optimal. On the contrary, our proposed two-layer structure does not need to restart the algorithm and can achieve near-optimal regret bounds. Motivated by the two-layer bandit structure we propose in Section 4, we generalize it to the ‘‘Syndicated Bandits’’ framework where there could be multiple hyper-parameters to be tuned in the contextual bandit algorithm. We provide theoretical guarantees for our framework and show that our proposed auto tuning method has optimal regret upper bound $\tilde{O}(d\sqrt{T}) + \tilde{O}(\sum_{l=1}^L \sqrt{n_l T})$, where L is the total number of hyper-parameters to be tuned and n_l is the number of candidates of the l -th parameter in the tuning set. Our algorithm is general enough to handle tuning tasks in any contextual bandit algorithms as long as the arms to be pulled at round t follows a fixed distribution given the hyper-parameters to be used at this round and the past information. This includes many popular contextual bandit algorithms such as Linear UCB (LinUCB) [15, 1], Linear TS (LinTS) [4, 9], UCB-GLM [16], NeuralUCB [25], etc. Our proposed Syndicated Bandits framework is the first work that considers tuning multiple parameters dynamically from observations in the contextual bandit problems with theoretical guarantees. In Section 6, we show by experiments that our proposed framework improves over existing works, as well as the bandit algorithms that use the unknown theoretically derived exploration parameter.

2 Related work

The history of bandit problems can trace back to at least almost a century ago, when Thompson first proposed the stochastic multi-armed bandit problem (MAB) [21]. This is a special case of the contextual bandit setting, where there are K fixed arms and each arm has a fixed mean reward. There are many previous works that utilize algorithms in the stochastic MAB setting to solve the

hyper-parameter optimization problem [19, 17]. Another class of the MAB problems falls into the adversarial category [6], where the rewards do not follow a well-behaved stochastic process, but an adversary has complete control over the rewards the player gets. There is also a rich line of works on stochastic contextual bandit algorithms, including (generalized) linear bandits, kernelized bandits and neural bandits, etc. Most of them follow the UCB and TS exploration techniques. We refer the readers to [15, 16, 3, 4, 9, 11, 25] for the seminal works regarding the bandit problems. In the following, we will pay attention to related works on the tuning tasks in stochastic contextual bandits.

[20] proposed a meta-learning method for learning exploration parameters in contextual bandit problems. It learns a good exploration strategy in synthetic datasets and applies it to the real contextual bandit problems by an imitation study. The meta-learning algorithm is compared with seven baseline contextual bandit algorithms and achieves good empirical results. We note that this algorithm cannot learn the exploration parameters adaptively from observations in the contextual bandit environment.

In [8], the authors first proposed OPLINUCB and DOPLINUCB algorithms to learn exploration parameters dynamically. OPLINUCB treats the possible choices of hyper-parameters as arms and uses a standard MAB TS algorithm to choose parameters. It then uses the chosen parameter in the contextual bandit algorithm. However, this method does not have theoretical guarantee in general, since the MAB TS only works when the rewards of the candidate hyper-parameters in the tuning set stay stationary over time. For hyper-parameter selections in contextual bandit problems, the best exploration parameter does not stay the same all the time. This is because in later rounds, when the learning is sophisticated, less exploration is better. However, in the beginning, more exploration is preferred due to the uncertainty. This non-stationary nature in tuning hyper-parameters makes the performance of OPLINUCB unstable in practice. DOPLINUCB is a similar tuning method as OPLINUCB, except that it uses the CTree algorithm to select hyper-parameters at each round. It is shown in [8] that DOPLINUCB does not outperform OPLINUCB in stationary contextual bandit environments, where the reward-feature model does not change over time.

We address here that 1) none of the previous works have near-optimal theoretical guarantees. 2) none of the previous works can tune multiple parameters dynamically from observations. Although they can treat all the hyper-parameters as a single parameter and set the tuning set as all the possible combinations of hyper-parameters, this will lead to exponential number of configurations which may not be efficient.

Notations: For a vector $x \in \mathbb{R}^d$, we use $\|x\|$ to denote its l_2 norm and $\|x\|_A := \sqrt{x^T A x}$ for a positive-definite matrix $A \in \mathbb{R}^{d \times d}$. Finally, we denote $[n] := \{1, 2, \dots, n\}$.

3 Preliminaries

We study the hyper-parameter selection tasks in a stochastic contextual bandit problem with K arms, where K can be an infinite number. Assume there are in total T rounds, at each round $t \in [T]$, the player is given K arms, represented by a set of feature vectors $\mathcal{A}_t = \{x_{t,a} | a \in [K]\} \subset \mathbb{R}^d$, where $x_{t,a}$ is a d -dimensional feature vector that contains the information of arm a at round t . The player makes a decision by pulling an arm $a_t \in [K]$ based on \mathcal{A}_t and past observations. The player can only observe the rewards of the pulled arms. Denote $X_t := x_{t,a_t}$ as the feature vector of the pulled arm at round t and Y_t the corresponding observed reward. We assume the expected rewards and features follow a model $\mathbb{E}[Y_t | X_t] = \mu(X_t^T \theta^*)$, where $\mu(\cdot)$ is a known model function and θ^* is the true but unknown model parameter. When $\mu(x) = x$, this becomes the well-studied linear bandits problem. When $\mu(\cdot)$ is a generalized linear model or a neural network, this becomes the generalized linear bandits (GLB) and neural bandits respectively.

Without loss of generality, we assume that there exists a positive constant S such that $\|\theta^*\| \leq S$ and $\|x_{t,a}\| \leq 1$ for all t, a . We also assume the mean rewards $\mu(x_{t,a}^T \theta^*) \in [0, 1]$ and observed rewards $Y_t \in [0, 1]$. This is a non-critical assumption, which can be easily relaxed to any bounded interval. If $\mathcal{F}_t = \sigma(\{a_s, \mathcal{A}_s, Y_s\}_{s=1}^t \cup \mathcal{A}_{t+1})$ is the information up to round t , we assume the observed rewards follow a sub-Gaussian distribution with parameter σ^2 , i.e., $Y_t = \mu(X_t^T \theta^*) + \epsilon_t$, where ϵ_t are independent random noises that satisfy $\mathbb{E}[e^{b\epsilon_t} | \mathcal{F}_{t-1}] \leq \frac{b^2 \sigma^2}{2}$ for all t and $b \in \mathbb{R}$. Denote $a_t^* = \operatorname{argmax}_{a \in [K]} \mu(X_t^T \theta^*)$ as the optimal arm at round t and $x_{t,*}$ as its corresponding feature, the

goal is to minimize the cumulative regret over T rounds defined in the following equation.

$$R(T) = \sum_{t=1}^T [\mu(x_{t,*}^T \theta^*) - \mu(X_t^T \theta^*)]. \quad (1)$$

For linear bandits where $\mu(x) = x$, classic bandit algorithms such as LinUCB [1, 15] and LinTS [2] compute an estimate of the model parameter $\hat{\theta}_t$ using ridge regression with regularization parameter $\lambda > 0$, i.e., $\hat{\theta}_t = V_t^{-1} \sum_{s=1}^{t-1} X_s Y_s$, where $V_t = \lambda I_d + \sum_{s=1}^{t-1} X_s X_s^T$. Shown by [1], with probability at least $1 - \delta$, the true model parameter θ^* is contained in the following confidence set,

$$\mathcal{C}_t = \left\{ \theta \in \mathbb{R}^d : \|\theta - \hat{\theta}_t\|_{V_t} \leq \alpha(t) \right\}, \quad (2)$$

where

$$\alpha(t) = \sigma \sqrt{d \log \left(\frac{1 + t/\lambda}{\delta} \right)} + S \sqrt{\lambda}. \quad (3)$$

To balance the trade-off between exploration and exploitation, there are in general two techniques. For example, in linear bandits, LinUCB explores optimistically by pulling the arm with the maximum upper confidence bound, while LinTS adds randomization by drawing a sample model from the posterior distribution and pulls an arm based on it.

$$a_t = \operatorname{argmax}_a x_{t,a}^T \hat{\theta}_t + \alpha(t) \|x_{t,a}\|_{V_t^{-1}}, \quad (\text{LinUCB})$$

$$\theta_t^{\text{TS}} \sim N(\hat{\theta}_t, \alpha(t)^2 V_t^{-1}) \quad \text{and} \quad a_t = \operatorname{argmax}_a x_{t,a}^T \theta_t^{\text{TS}}. \quad (\text{LinTS})$$

In the following, we call $\alpha(t)$ the exploration parameter. As suggested by the theories in [1, 15], a conservative choice of the exploration parameter is to follow Equation 3. However, in Equation 3, the upper bound of the l_2 norm of the model parameter S and the sub-Gaussian parameter σ are unknown to the player, which makes it difficult to track theoretical choices of the exploration parameter.

In Table 1, we show the cumulative regret of LinUCB [1, 15] and LinTS [4] in a simulation study with $d = 5$, $T = 10000$ and $K = 100$. Rewards are simulated from $N(x_{t,a}^T \theta^*, 0.5)$. The model parameter θ^* and feature vectors $x_{t,a}$ are drawn from $\text{Uniform}(-\frac{1}{\sqrt{d}}, \frac{1}{\sqrt{d}})$. Two scenarios are considered in this table. In the first scenario, the feature of each arm keeps the same over T rounds. While in the second scenario, the features are re-simulated from $\text{Uniform}(-\frac{1}{\sqrt{d}}, \frac{1}{\sqrt{d}})$ at different rounds. We run a grid search of the exploration parameter in $\{0, 0.5, 1, \dots, 10\}$ and report the best grid search result, as well as the results using the theoretical exploration parameter given by Equation 3 (last column in Table 1). As we shall see in Table 1, the best exploration parameter is not the same for different scenarios. Therefore, which exploration parameter to use is an instance-dependent problem and the best exploration parameter should always be chosen dynamically based on the observations. Meanwhile, theoretical exploration parameters do not always give the best performances from Table 1. On the other hand, regularization parameter λ in ridge regression is also an important hyper-parameter and it also affects the value of theoretical exploration parameter in Equation 3. In many other works where the model of contextual bandit problem is more complex, such as the generalized linear bandit [13], neural bandit [25], there may be many more hyper-parameters than just $\alpha(t)$ and λ .

Table 1: Averaged cumulative regret (cum. reg.) and standard deviation (std) of the cumulative regret based on 5 repeated experiments. ‘‘Fixed’’ means that the feature vectors of each arm are fixed over time. ‘‘Changing’’ means that the features are re-simulated from the same distribution at each round.

Algorithm	Feature type	Best $\alpha(t)$	Cum. reg. (std)	Theoretical cum. reg. (std)
LinUCB	Fixed	4.0	357.21 (188.72)	364.99 (151.54)
	Changing	1.5	312.69 (42.53)	582.59 (523.60)
LinTS	Fixed	1.5	336.44 (137.01)	576.83 (110.48)
	Changing	3.5	352.79 (109.84)	488.99 (141.34)

4 A two-layer bandit structure for tuning exploration parameters

In the previous section, we have discussed that the best hyper-parameters should be instant-dependent. In this section, we propose a two-layer bandit structure to automatically learn the best hyper-parameter from data at each round. We will take learning the best exploration parameter as an example. However, we want to emphasize that this structure can also be applied to learn other single hyper-parameter.

In this two-layer bandit structure, the top layer follows an adversarial MAB policy, namely, the EXP3 algorithm [6]. Assume J is the tuning set of all the possible exploration parameters. At each round t , the top layer will select a candidate exploration parameter $\alpha_{i_t} \in J$, where α_i is the i -th element in the set J and i_t is the selected index at round t . The bottom layer runs the contextual bandit algorithm based on the selected exploration parameter α_{i_t} . Details are listed in Algorithm 1.

Algorithm 1 A Two-layer Auto Tuning Algorithm

Input: T .

- 1: Initialize candidate hyper-parameter set $J = \{\alpha_1, \dots, \alpha_n\}$
- 2: Initialize exponential weights $w_j(1) = 1$ for $j = 1, \dots, n$.
- 3: Initialize the exploration parameter for EXP3 as $\beta = \min \left\{ 1, \sqrt{\frac{n \log n}{(e-1)T}} \right\}$.
- 4: **for** $t = 1$ **to** T **do**
- 5: Update probability distribution for pulling candidates in J

$$p_j(t) = \frac{\beta}{n} + (1 - \beta) \frac{w_j(t)}{\sum_{i=1}^n w_i(t)}$$

- 6: $i_t \leftarrow j \in [n]$ with probability $p_j(t)$.
- 7: Run the contextual bandit algorithm with hyper-parameter $\alpha(t) = \alpha_{i_t}$ to pull an arm. For example, pull arms according to the following equations

$$a_t = \operatorname{argmax}_{a=1, \dots, K} x_{t,a}^T \hat{\theta}_t + \alpha_{i_t} \|x_{t,a}\|_{V_t^{-1}} \quad (\text{LinUCB})$$

$$\theta_t^{\text{TS}} \sim N(\hat{\theta}_t, \alpha_{i_t}^2 V_t^{-1}) \quad \text{and} \quad a_t = \operatorname{argmax}_a x_{t,a}^T \theta_t^{\text{TS}}. \quad (\text{LinTS})$$

- 8: Observe reward Y_t .
- 9: Update the components in the contextual bandit algorithm.
- 10: Update EXP3 components: $\hat{y}_t(j) \leftarrow 0$ if $j \neq i_t$, $\hat{y}_t(j) \leftarrow Y_t/p_j(t)$ if $j = i_t$, and

$$w_j(t+1) = w_j(t) \times \exp\left(\frac{\beta}{n} \hat{y}_t(j)\right).$$

11: **end for**

4.1 Regret analysis

Given all the past information \mathcal{F}_{t-1} , denote $a_t(\alpha_j)$ as the pulled arm when the exploration parameter is α_j at round t . Denote $X_t(\alpha_j) = x_{t, a_t(\alpha_j)}$ as the corresponding feature vector. To analyze the cumulative regret, we first decompose the regret defined in Equation 1 into two quantities

$$\begin{aligned} \mathbb{E}[R(T)] &= \mathbb{E} \left[\sum_{t=1}^T (\mu(x_{t,*}^T \theta) - \mu(X_t^T \theta)) \right] \\ &= \underbrace{\mathbb{E} \left[\sum_{t=1}^T (\mu(x_{t,*}^T \theta) - \mu(X_t(\alpha^*)^T \theta)) \right]}_{\text{Quantity (A)}} + \underbrace{\mathbb{E} \left[\sum_{t=1}^T (\mu(X_t(\alpha^*)^T \theta) - \mu(X_t(\alpha_{i_t})^T \theta)) \right]}_{\text{Quantity (B)}}, \end{aligned}$$

where $\mu(\cdot)$ is the reward-feature model function and $\alpha^* \in J$ is the best exploration parameter that gives the lowest regret among all candidate parameters in J . Quantity (A) is the regret of the contextual bandit algorithm that runs with the same hyper-parameter α^* every round. Quantity (B) is

the extra regret paid to tune the hyper-parameter. We show by Lemma 1 and Theorem 1 below that the auto tuning method in Algorithm 1 does not cost too much in selecting parameters.

Since the arms pulled by the contextual bandit layer also affect the update of the EXP3 layer in Algorithm 1, the result of EXP3 algorithm is not directly applicable to bounding Quantity (B). We modify the proof techniques in [6] and present the proof details in Appendix.

Lemma 1. *Assume given the past information \mathcal{F}_{t-1} and the hyper-parameter to be used by the contextual bandit algorithm at round t , the arm to be pulled follows a fixed distribution. For a random sequence of hyper-parameters $\{\alpha_{i_1}, \dots, \alpha_{i_T}\}$ selected by the EXP3 layer in Algorithm 1, and arm $a_t(\alpha_{i_t})$ is pulled in the contextual bandit layer at round t , we have*

$$\max_{\alpha \in J} \mathbb{E} \left[\sum_{t=1}^T \mu(X_t(\alpha)^T \theta) \right] - \mathbb{E} \left[\sum_{t=1}^T \mu(X_t(\alpha_{i_t})^T \theta) \right] \leq 2\sqrt{(e-1)nT \log n},$$

where $J = \{\alpha_1, \dots, \alpha_n\}$ is the tuning set of the hyper-parameter and $|J| = n$.

The following theorem is the direct result of Lemma 1.

Theorem 1. *Assume given the past information \mathcal{F}_{t-1} and the hyper-parameter to be used by the contextual bandit algorithm at round t , the arm to be pulled by the contextual bandit algorithm follows a fixed distribution. Define $R(\alpha, T)$ as the cumulative regret of the contextual bandit algorithm that runs with hyper-parameter α at round t . If we run Algorithm 1 to select hyper-parameter $\alpha_{i_t} \in J$ at round t , then the regret of the proposed auto tuning algorithm satisfies*

$$\mathbb{E}[R(T)] \leq \min_{\alpha \in J} \mathbb{E}[R(\alpha, T)] + 2\sqrt{(e-1)nT \log n}.$$

Remark 1. *When the hyper-parameter to be tuned is the exploration parameter, many popular bandit algorithms such as LinTS [4], LinUCB [1, 15], UCB-GLM [16], NeuralUCB [25], etc., satisfy the conditions in Theorem 1. For (generalized) linear bandits, if $\alpha(T) \in J$, where $\alpha(T)$ is the theoretical exploration parameter at round T , or more generally, there exists an element $\tilde{\alpha} \in J$, such that $\alpha(T)$ is only slightly less than $\tilde{\alpha}$, i.e., $\alpha(T) \leq \tilde{\alpha} \leq \alpha(T) + c$, where c is a positive constant, then $\mathbb{E}[R(\tilde{\alpha}, T)] \sim \tilde{O}(d\sqrt{T})$ from [1, 25, 16, 4]. In this case, for all contextual bandit algorithms that satisfy the conditions in Theorem 1, $\mathbb{E}[R(T)] \leq \tilde{O}(d\sqrt{T}) + \tilde{O}(\sqrt{nT})$.*

Remark 2. *Note that we have shown in Table 1 that the theoretical exploration parameter does not always give the best performance in practice compared to the best grid search result. So if there exists an $\alpha^* \in J$, such that $\mathbb{E}[R(\alpha^*, T)]$ is significantly smaller than $\mathbb{E}[R(\alpha(t), T)]$, then our proposed Algorithm 1 will achieve much smaller cumulative regret in practice than using the theoretical exploration parameter, not to mention that theoretical exploration parameter is usually unknown and needs to be learnt.*

5 The Syndicated Bandits framework for selecting multiple hyper-parameters

There can be multiple hyper-parameters in the contextual bandit algorithm. For example, in linear bandit algorithms such as LinUCB[1, 15] and LinTS [4], exploration parameter α and the regularization parameter of the ridge regression λ are both hyper-parameters to be tuned. In more recent contextual bandit works, there could be even more than two hyper-parameters. For example, NeuralUCB algorithm [25], which is proposed for the contextual bandit problems with a deep neural network model, has many tuning parameters such as the network width, network depth, step size for gradient descent, number of steps for gradient descent, as well as exploration parameter and regularization parameter λ , etc. Another example can be found in [13], where an efficient SGD-TS algorithm is proposed for generalized linear bandits, the number of tuning parameters is also more than two.

A naive strategy to auto-tune multiple hyper-parameters is to use Algorithm 1 and let the tuning set J contain all the possible combinations of the hyper-parameters. Assume there are in total L hyper-parameters $\alpha^{(1)}, \alpha^{(2)}, \dots, \alpha^{(L)}$. For all $l \in [L]$, if the tuning set for $\alpha^{(l)}$ is defined as $J_l = \{\alpha_1^{(l)}, \dots, \alpha_{n_l}^{(l)}\}$, where n_l is the size of the corresponding tuning set. Then there are in total $\prod_{l=1}^L n_l$ possible combinations of the hyper-parameters. Based on Theorem 1, the regret of the two-layer auto tuning method is upper bounded by $\tilde{O}(d\sqrt{T}) + \tilde{O}(\sqrt{\prod_{l=1}^L n_l T})$. Therefore, the

aforementioned naive approach makes the regret increase exponentially with the number of tuning parameters. To mitigate this issue, we propose the Syndicated Bandits framework that can deal with multiple hyper-parameters while avoiding the exponential dependency on the number of tuning parameters in regret bounds.

We create $L + 1$ bandit instances in this framework. In the bottom layer, the contextual bandit algorithm is used to decide which arm to pull. On top of the contextual bandit layer, there are L EXP3 bandits, denoted as EXP3(l) for $l \in [L]$. Each EXP3 algorithm is responsible for tuning one hyper-parameter only. At round t , if $i_t(l)$ is the index of the hyper-parameters in J_l selected by the EXP3(l) bandit and the selected hyper-parameter is denoted as $\alpha_{i_t(l)}^{(l)}$ for $l \in [L]$, then the contextual bandit algorithm in the bottom layer will use these parameters to make a decision and receive a reward based on the pulled arm. The reward is fed to all the $L + 1$ bandits to update the components. Illustration of the algorithm and more details are formally presented in Figure 1 and Algorithm 2.

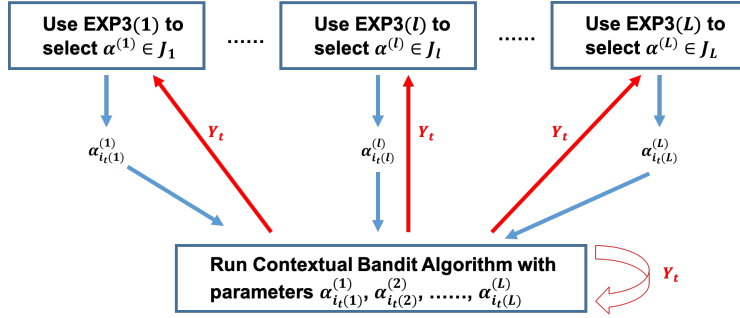


Figure 1: Illustration of the Syndicated Bandits Framework.

5.1 Regret analysis

At round t , given all the past information \mathcal{F}_{t-1} , denote $a_t(\alpha_{j_1}^{(1)}, \dots, \alpha_{j_L}^{(L)})$ as the arm pulled by the contextual bandit algorithm if the parameters are chosen as $\alpha^{(l)} = \alpha_{j_l}^{(l)}$ for all $l \in [L]$ and let $X_t(\alpha_{j_1}^{(1)}, \dots, \alpha_{j_L}^{(L)})$ be the corresponding feature vector. Recall that $\mu(\cdot)$ is the reward-feature model function, then for the optimal combination of hyper-parameters $(\alpha_*^{(1)}, \dots, \alpha_*^{(L)})$,

$$\begin{aligned} \mathbb{E}[R(T)] &= \sum_{t=1}^T \mathbb{E} \left[\mu(x_{t,*}^T \theta) - \mu \left(X_t(\alpha_*^{(1)}, \dots, \alpha_*^{(L)})^T \theta \right) \right] \\ &+ \sum_{t=1}^T \mathbb{E} \left[\mu \left(X_t(\alpha_*^{(1)}, \dots, \alpha_*^{(L)})^T \theta \right) - \mu \left(X_t(\alpha_{i_t(1)}^{(1)}, \alpha_*^{(2)}, \dots, \alpha_*^{(L)})^T \theta \right) \right] \\ &+ \sum_{t=1}^T \mathbb{E} \left[\mu \left(X_t(\alpha_{i_t(1)}^{(1)}, \alpha_*^{(2)}, \dots, \alpha_*^{(L)})^T \theta \right) - \mu \left(X_t(\alpha_{i_t(1)}^{(1)}, \alpha_{i_t(2)}^{(2)}, \alpha_*^{(3)}, \dots, \alpha_*^{(L)})^T \theta \right) \right] + \dots \\ &+ \sum_{t=1}^T \mathbb{E} \left[\mu \left(X_t(\alpha_{i_t(1)}^{(1)}, \dots, \alpha_{i_t(L-1)}^{(L-1)}, \alpha_*^{(L)})^T \theta \right) - \mu \left(X_t(\alpha_{i_t(1)}^{(1)}, \dots, \alpha_{i_t(L-1)}^{(L-1)}, \alpha_{i_t(L)}^{(L)})^T \theta \right) \right]. \end{aligned}$$

The first quantity in the above decomposition is the regret of the contextual bandit algorithm if the hyper-parameters are optimal. The next L quantities in the decomposition are the regret from tuning parameters in the EXP3 layer, which can be bounded using similar techniques in Lemma 1. However, the correlations between parameters are more complicated in the analysis now. Formally, we provide the following Theorem to guarantee the performance of the Syndicated Bandits framework. Proofs are deferred to the Appendix.

Theorem 2. *Assume given the past information \mathcal{F}_{t-1} and the hyper-parameters to be used by the contextual bandit algorithm at round t , the arm to be pulled by the contextual bandit algorithm follows a fixed distribution. Denote $R(\alpha^{(1)}, \dots, \alpha^{(L)}, T)$ as the cumulative regret of the contextual bandit*

algorithm if it is run with parameters $(\alpha^{(1)}, \dots, \alpha^{(L)})$. Then the auto tuning method in Algorithm 2 has regret that satisfies the following.

$$\mathbb{E}[R(T)] \leq \min_{(\alpha^{(1)}, \dots, \alpha^{(L)}) \in J_1 \times \dots \times J_L} \mathbb{E}[R(\alpha^{(1)}, \dots, \alpha^{(L)}, T)] + 2 \sum_{l=1}^L \sqrt{(e-1)n_l T \log n_l}.$$

Remark 3. When there is a combination of hyper-parameters in $J_1 \times \dots \times J_L$ to make the cumulative regret of the contextual bandit algorithm upper bounded by $\tilde{O}(d\sqrt{T})$, the expected regret of the Syndicated Bandits auto tuning framework has regret upper bounded by $\tilde{O}(d\sqrt{T}) + \tilde{O}(\sum_{l=1}^L \sqrt{n_l T})$. This result avoids the exponential dependency on the number of hyper-parameters in regret.

Algorithm 2 The Syndicated Bandits Framework for Auto Tuning Multiple Hyper-parameters

Input: T .

- 1: Initialize the tuning sets of hyper-parameter $\{J_l\}_{l=1}^L$.
- 2: Initialize exponential weights $w_j^{(l)}(t) = 1$ for $t = 1, j = 1, \dots, n_l$ and $l = 1, \dots, L$.
- 3: Initialize the parameters for all EXP3 layers as $\beta_l = \min \left\{ 1, \sqrt{\frac{n_l \log n_l}{(e-1)T}} \right\}$.
- 4: **for** $t = 1$ **to** T **do**
- 5: Update probability distribution for pulling candidates in J_l

$$p_j^{(l)}(t) = \frac{\beta_l}{n_l} + (1 - \beta_l) \frac{w_j^{(l)}(t)}{\sum_{i=1}^{n_l} w_i^{(l)}(t)}$$

- 6: $i_t(l) \leftarrow j \in [n_l]$ with probability $p_j^{(l)}(t)$ for all $l = 1, \dots, L$.
- 7: Run the contextual bandit algorithm with hyper-parameters $\alpha^{(l)} = \alpha_{i_t(l)}^{(l)}$ to pull an arm.
- 8: Observe reward Y_t .
- 9: Update the components in contextual bandit algorithms.
- 10: Update all L EXP3 bandits: $\hat{y}_t^{(l)}(j) \leftarrow 0$ if $j \neq i_t(l)$. Otherwise, $\hat{y}_t^{(l)}(j) \leftarrow Y_t/p_j^{(l)}(t)$.
- 11: For all $l = 1, \dots, L$, let

$$w_j^{(l)}(t+1) = w_j^{(l)}(t) \times \exp \left(\frac{\beta_l}{n_l} \hat{y}_t^{(l)}(j) \right).$$

- 12: **end for**

6 Experimental results

In this section, we show by experiments that our proposed methods outperform the contextual bandit algorithm using the theoretical exploration parameter, as well as existing tuning methods. We compare different hyper-parameter selection methods in three popular contextual bandit algorithms, LinUCB [1, 15], LinTS [4] and UCB-GLM [16] with a logistic model. The hyper-parameter selection methods are listed below. We do not include DOPLINUCB since it was shown by [8] that DOPLINUCB performs worse than OPLINUCB in stationary contextual bandit environment.

1. **Theoretical-Explore [1]:** At round t , this method uses the true theoretical exploration parameter $\alpha(t)$ defined in Equation 3.
2. **OP [8]:** This is a modification of OPLINUCB. Although this method is proposed to tune exploration parameter for LinUCB algorithm only, we modify it so that it is also applicable to LinTS and UCB-GLM.
3. **TL (Our work, Algorithm 1):** This is our proposed Algorithm 1, where we use the two-layer bandit structure to tune the exploration parameter only.
4. **TL-Combined (Our work, Algorithm 1):** This method tunes both the exploration parameter α and the regularization parameter λ using Algorithm 1, but with the tuning set containing all the possible combinations of α and λ .
5. **Syndicated (Our work, Algorithm 2):** This method keeps two separate tuning sets for α and λ respectively. It uses the Syndicated Bandits framework in Algorithm 2.

We set the tuning set for exploration parameter α as $\{0, 0.01, 0.1, 1, 10\}$ and set the tuning set for regularization parameter λ as $\{0.01, 0.1, 1\}$ in TL-Combined and Syndicated. For Theoretical-Explore, OP and TL, since they only tune the exploration parameter, we set the regularization parameter as $\lambda = 1$. In all the experiments below, the total number of rounds is $T = 10,000$. We run the comparisons on both simulations and real datasets. Averaged results over 10 independently repeated experiments are reported below.

Simulations. We use $d = 10$, $K = 100$ and draw $\theta^* \sim \text{Uniform}(-\frac{1}{\sqrt{d}}, \frac{1}{\sqrt{d}})$. For linear bandits, we draw the feature vectors $x_{t,a} \sim \text{Uniform}(-\frac{1}{\sqrt{d}}, \frac{1}{\sqrt{d}})$ and transform the mean reward of arm a at round t by $\mu_{t,a} \leftarrow \frac{\mu_{t,a} + 1}{2}$ to make sure the mean rewards are within $[0, 1]$. Each round an arm is pulled, a sample reward $Y_t \sim N(\mu_{t,a_t}, 0.1)$ is revealed to the player. For logistic models, the feature vectors $x_{t,a} \sim \text{Uniform}(-1, 1)$ and the corresponding mean reward is $\mu_{t,a} = 1/(1 + \exp(-x_{t,a}^T \theta^*))$. A sample Bernoulli reward is drawn when an arm is pulled.

Real datasets. We use the benchmark MovieLens 100K dataset similarly as in [7]. The MovieLens dataset contains 100K ratings on 1,682 movies contributed by 943 users. For data preprocessing, we apply LIBPMF [23, 24] to factorize the ratings matrix to get feature matrices for both users and movies with $d = 20$. We randomly select $K = 1000$ movies (arms) in each round, and the model parameter θ^* is defined as the averaged feature vectors of 100 randomly selected users. For linear models, the mean reward is defined as $\mu_{t,a} = x_{t,a}^T \theta$ and transformed into $[0, 1]$. The sample reward is drawn from $N(\mu_{t,a}, 1)$. For logistic models, the mean reward is defined as $\mu_{t,a} = 1/(1 + \exp(-x_{t,a}^T \theta^*))$, and the sample reward is drawn from a Bernoulli distribution.

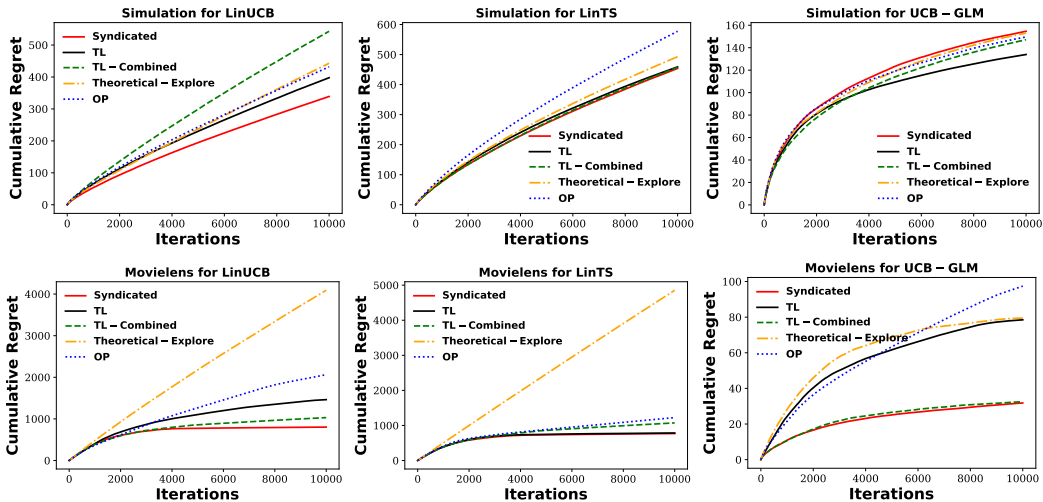


Figure 2: Comparison of hyper-parameters selection methods in LinUCB, LinTS and UCB-GLM.

From Figure 2, we observe: 1) When tuning only one hyper-parameter (exploration parameter in our experiments), the proposed method (TL) outperforms the previous tuning method (OP). Further, the theoretical exploration parameter does not perform well and it tends to be too conservative in practice, which is consistent with the results we show in Table 1. 2) When tuning multiple hyper-parameters, previous methods do not apply. We found using the Syndicated Bandits framework usually outperforms the TL-Combined method which has exponential regret with respect to number of tuning parameters. 3) Using Syndicated Bandits to tune multiple hyper-parameters usually outperforms tuning one parameter only. This demonstrates a practical need of auto-tuning multiple hyper-parameters in bandit algorithms. Additional experiments on the tuning 3 hyper-parameters in SGD-TS [13] can be found in Appendix.

7 Conclusion

In this paper, we propose a two-layer bandit structure for auto tuning the exploration parameter in contextual bandit algorithms, where the offline tuning is impossible. To further accommodate

multiple hyper-parameters tuning tasks in contextual bandit algorithms with complicated models, we generalize our method to the Syndicated Bandits framework. This is the first framework that can auto tune multiple hyper-parameters dynamically from observations in contextual bandit environment with theoretical guarantees. We show that our proposed framework can obtain optimal regret bounds and is general enough to handle the tuning tasks in almost all contextual bandit algorithms. Experimental results also validate the effectiveness of our proposed work.

References

- [1] Yasin Abbasi-Yadkori, Dávid Pál, and Csaba Szepesvári. Improved algorithms for linear stochastic bandits. In *Advances in Neural Information Processing Systems*, pages 2312–2320, 2011.
- [2] Marc Abeille and Alessandro Lazaric. Linear thompson sampling revisited. In *Artificial Intelligence and Statistics*, pages 176–184. PMLR, 2017.
- [3] Shipra Agrawal and Navin Goyal. Analysis of thompson sampling for the multi-armed bandit problem. In *Conference on learning theory*, pages 39–1, 2012.
- [4] Shipra Agrawal and Navin Goyal. Thompson sampling for contextual bandits with linear payoffs. In *International Conference on Machine Learning*, pages 127–135, 2013.
- [5] Peter Auer, Nicolo Cesa-Bianchi, and Paul Fischer. Finite-time analysis of the multiarmed bandit problem. *Machine learning*, 47(2-3):235–256, 2002.
- [6] Peter Auer, Nicolo Cesa-Bianchi, Yoav Freund, and Robert E Schapire. The nonstochastic multiarmed bandit problem. *SIAM journal on computing*, 32(1):48–77, 2002.
- [7] Ilija Bogunovic, Arpan Losalka, Andreas Krause, and Jonathan Scarlett. Stochastic linear bandits robust to adversarial attacks. In *International Conference on Artificial Intelligence and Statistics*, pages 991–999. PMLR, 2021.
- [8] Djallel Bouneffouf and Emmanuelle Claeys. Hyper-parameter tuning for the contextual bandit. *arXiv preprint arXiv:2005.02209*, 2020.
- [9] Olivier Chapelle and Lihong Li. An empirical evaluation of thompson sampling. In *Advances in neural information processing systems*, pages 2249–2257, 2011.
- [10] Wang Chi Cheung, David Simchi-Levi, and Ruihao Zhu. Learning to optimize under non-stationarity. In *The 22nd International Conference on Artificial Intelligence and Statistics*, pages 1079–1087, 2019.
- [11] Sayak Ray Chowdhury and Aditya Gopalan. On kernelized multi-armed bandits. In *International Conference on Machine Learning*, pages 844–853. PMLR, 2017.
- [12] Varsha Dani, Thomas P Hayes, and Sham M Kakade. Stochastic linear optimization under bandit feedback. In *COLT*, pages 355–366, 2008.
- [13] Qin Ding, Cho-Jui Hsieh, and James Sharpnack. An efficient algorithm for generalized linear bandit: Online stochastic gradient descent and thompson sampling. In *International Conference on Artificial Intelligence and Statistics*, pages 1585–1593. PMLR, 2021.
- [14] Sarah Filippi, Olivier Cappé, Aurélien Garivier, and Csaba Szepesvári. Parametric bandits: The generalized linear case. In *NIPS*, volume 23, pages 586–594, 2010.
- [15] Lihong Li, Wei Chu, John Langford, and Robert E Schapire. A contextual-bandit approach to personalized news article recommendation. In *Proceedings of the 19th international conference on World wide web*, pages 661–670, 2010.
- [16] Lihong Li, Yu Lu, and Dengyong Zhou. Provably optimal algorithms for generalized linear contextual bandits. In *International Conference on Machine Learning*, pages 2071–2080. PMLR, 2017.
- [17] Lisha Li, Kevin Jamieson, Giulia DeSalvo, Afshin Rostamizadeh, and Ameet Talwalkar. Hyper-band: A novel bandit-based approach to hyperparameter optimization. *The Journal of Machine Learning Research*, 18(1):6765–6816, 2017.
- [18] Eric M Schwartz, Eric T Bradlow, and Peter S Fader. Customer acquisition via display advertising using multi-armed bandit experiments. *Marketing Science*, 36(4):500–522, 2017.

- [19] Xuedong Shang, Emilie Kaufmann, and Michal Valko. A simple dynamic bandit algorithm for hyper-parameter tuning. In *Workshop on Automated Machine Learning at International Conference on Machine Learning*, Long Beach, United States, June 2019. AutoML@ICML 2019 - 6th ICML Workshop on Automated Machine Learning.
- [20] Amr Sharaf and Hal Daumé III. Meta-learning for contextual bandit exploration. *arXiv preprint arXiv:1901.08159*, 2019.
- [21] William R Thompson. On the likelihood that one unknown probability exceeds another in view of the evidence of two samples. *Biometrika*, 25(3/4):285–294, 1933.
- [22] Michael Woodroofe. A one-armed bandit problem with a concomitant variable. *Journal of the American Statistical Association*, 74(368):799–806, 1979.
- [23] Hsiang-Fu Yu, Cho-Jui Hsieh, Si Si, and Inderjit S. Dhillon. Scalable coordinate descent approaches to parallel matrix factorization for recommender systems. In *IEEE International Conference of Data Mining*, 2012.
- [24] Hsiang-Fu Yu, Cho-Jui Hsieh, Si Si, and Inderjit S Dhillon. Parallel matrix factorization for recommender systems. *Knowledge and Information Systems*, 41(3):793–819, 2014.
- [25] Dongruo Zhou, Lihong Li, and Quanquan Gu. Neural contextual bandits with ucb-based exploration. In *International Conference on Machine Learning*, pages 11492–11502. PMLR, 2020.

A Appendix

A.1 Proof of Lemma 1

Proof. The proof techniques basically follows [6]. However, since the EXP3 layer and contextual bandit layer are coupled, the result in [6] cannot be directly applied to show our result. We make modifications of the proofs in [6] below.

We first define some notations. Given all the information in the past \mathcal{F}_{t-1} , if arm $a_t(\alpha_j)$ is pulled at round t , we define the corresponding mean reward as $\mu_t(\alpha_j) = \mu(X_t(\alpha_j)^T \theta)$. The corresponding observed sample reward is $y_t(\alpha_j) = \mu_t(\alpha_j) + \epsilon_{t,j}$, where $\epsilon_{t,j}$ denotes the hypothetical random noise at round t if arm $a_t(\alpha_j)$ is pulled. Note that $\epsilon_t = \epsilon_{t,i_t}$ since $a_t(\alpha_{i_t})$ is the arm pulled by our algorithm and ϵ_t is the associated random noise. By definition, $Y_t = y_t(\alpha_{i_t})$. From the definition of $\hat{y}_t(j)$ in Algorithm 1, we have $\hat{y}_t(j) = y_t(\alpha_j)/p_j(t)$ if $j = i_t$. Otherwise $\hat{y}_t(j) = 0$. Then $w_j(t+1) = w_j(t)\exp(\frac{\beta}{n}\hat{y}_t(i))$ according to Algorithm 1.

Given all the information in the past \mathcal{F}_{t-1} , $(\hat{\theta}_t, V_t, p_j(t), w_j(t))$ are fixed. Since $0 \leq y_t(\alpha_j) \leq 1$, we have

$$\mathbb{E} \left[\sum_{i=1}^n p_i(t) \hat{y}_t(i) | \mathcal{F}_{t-1} \right] = \mathbb{E} \left[p_{i_t}(t) \frac{y_t(\alpha_{i_t})}{p_{i_t}(t)} | \mathcal{F}_{t-1} \right] = \mathbb{E} [\mu_t(\alpha_{i_t}) | \mathcal{F}_{t-1}] \quad (4)$$

$$\begin{aligned} \mathbb{E} \left[\sum_{i=1}^n p_i(t) \hat{y}_t(i)^2 | \mathcal{F}_{t-1} \right] &= \mathbb{E} \left[p_{i_t}(t) \frac{y_t(\alpha_{i_t})}{p_{i_t}(t)} \hat{y}_t(i_t) | \mathcal{F}_{t-1} \right] = \mathbb{E} [y_t(\alpha_{i_t}) \hat{y}_t(i_t) | \mathcal{F}_{t-1}] \\ &\leq \mathbb{E} [\hat{y}_t(i_t) | \mathcal{F}_{t-1}] = \mathbb{E} \left[\sum_{i=1}^n \hat{y}_t(i) | \mathcal{F}_{t-1} \right] \end{aligned} \quad (5)$$

$$= \sum_{i=1}^n \mathbb{E} [\mathbb{E} [\hat{y}_t(i) | \sigma(\mathcal{F}_{t-1}, \epsilon_{t,i}, a_t(\alpha_i))] | \mathcal{F}_{t-1}] \quad (6)$$

$$= \sum_{i=1}^n \mathbb{E} [y_t(\alpha_i) | \mathcal{F}_{t-1}] \quad (7)$$

$$= \sum_{i=1}^n \mathbb{E} [\mu_t(\alpha_i) | \mathcal{F}_{t-1}]. \quad (8)$$

Equation 5 holds since $\hat{y}_t(i) \neq 0$ only when $i = i_t$. In Equation 6, $\sigma(\mathcal{F}_{t-1}, \epsilon_{t,i}, a_t(\alpha_i))$ is the smallest σ -algebra induced by \mathcal{F}_{t-1} , $\epsilon_{t,i}$, and $a_t(\alpha_i)$. Equation 7 holds since $\hat{y}_t(i) = y_t(\alpha_i)/p_i(t) \mathbb{1}(i = i_t)$. Meanwhile, since given the hyper-parameter to be used at round t as α_i , the arm to be pulled $a_t(\alpha_i)$ follows a fixed distribution and does not affect the distribution of i_t , so $i = i_t$ is still with probability $p_i(t)$. Now we are ready to use the above results to prove the lemma. Define $W_t = \sum_{i=1}^n w_i(t)$. We find the lower bound and upper bound of $\mathbb{E}[\log \frac{W_{T+1}}{W_1}]$ below.

Lower bound. Since $w_i(1) = 1$ for all i , $\mathbb{E}[\log \frac{W_{T+1}}{W_1}] \geq \mathbb{E}[\log w_i(T+1)] - \log n$ for all $i \in [n]$.

We take a look at $\mathbb{E} \left[\log \frac{w_i(t+1)}{w_i(t)} \right]$ below.

$$\begin{aligned} \mathbb{E} \left[\log \frac{w_i(t+1)}{w_i(t)} | \mathcal{F}_{t-1} \right] &= \mathbb{E} \left[\log \left[\frac{w_i(t)}{w_i(t)} \exp \left(\frac{\beta}{n} \hat{y}_t(i) \right) \right] | \mathcal{F}_{t-1} \right] \\ &= \mathbb{E} \left[\frac{\beta}{n} \hat{y}_t(i) | \mathcal{F}_{t-1} \right] = \mathbb{E} \left[\frac{\beta}{n} y_t(i) | \mathcal{F}_{t-1} \right] = \mathbb{E} \left[\frac{\beta}{n} \mu_t(\alpha_i) | \mathcal{F}_{t-1} \right] \end{aligned}$$

The third “=” in the above is due to the same reason as in Equation 7. Take expectation on both sides and sum over t , we get

$$\mathbb{E} [\log w_i(T+1)] = \frac{\beta}{n} \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_i)]$$

Therefore, for all $i = 1, \dots, n$,

$$\mathbb{E} \left[\log \frac{W_{T+1}}{W_1} \right] \geq \frac{\beta}{n} \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_i)] - \log n. \quad (9)$$

Upper bound. On the other hand, let's look at $\mathbb{E}[\log \frac{W_{t+1}}{W_t}]$:

$$\begin{aligned} \mathbb{E} \left[\log \frac{W_{t+1}}{W_t} \middle| \mathcal{F}_{t-1} \right] &= \mathbb{E} \left[\log \sum_{i=1}^n \frac{w_i(t+1)}{W_t} \middle| \mathcal{F}_{t-1} \right] = \mathbb{E} \left[\log \sum_{i=1}^n \frac{w_i(t)}{W_t} \exp \left(\frac{\beta}{n} \hat{y}_t(i) \right) \middle| \mathcal{F}_{t-1} \right] \\ &= \mathbb{E} \left[\log \sum_{i=1}^n \frac{p_i(t) - \frac{\beta}{n}}{1 - \beta} \exp \left(\frac{\beta}{n} \hat{y}_t(i) \right) \middle| \mathcal{F}_{t-1} \right] \quad \text{definition of } p_i(t) \\ &\leq \mathbb{E} \left[\log \sum_{i=1}^n \frac{p_i(t) - \frac{\beta}{n}}{1 - \beta} \left(1 + \frac{\beta}{n} \hat{y}_t(i) + \frac{(e-2)\beta^2}{n^2} \hat{y}_t(i)^2 \right) \middle| \mathcal{F}_{t-1} \right] \\ &\leq \mathbb{E} \left[\log \left(1 + \sum_{i=1}^n \left[\frac{\beta}{n(1-\beta)} p_i(t) \hat{y}_t(i) + \frac{(e-2)\beta^2}{n^2(1-\beta)} p_i(t) \hat{y}_t(i)^2 \right] \right) \middle| \mathcal{F}_{t-1} \right] \\ &\leq \mathbb{E} \left[\sum_{i=1}^n \left(\frac{\beta}{n(1-\beta)} p_i(t) \hat{y}_t(i) + \frac{(e-2)\beta^2}{n^2(1-\beta)} p_i(t) \hat{y}_t(i)^2 \middle| \mathcal{F}_{t-1} \right) \right] \\ &\leq \frac{\beta}{n(1-\beta)} \mathbb{E} [\mu_t(\alpha_i) | \mathcal{F}_{t-1}] + \frac{(e-2)\beta^2}{n^2(1-\beta)} \sum_{i=1}^n \mathbb{E} [\mu_t(\alpha_i) | \mathcal{F}_{t-1}]. \end{aligned}$$

The first inequality in the above holds since $e^x \leq 1 + x + (e-2)x^2$ for $x \in [0, 1]$. Here, we have $0 \leq \frac{\beta}{n} \hat{y}_t(i) \leq 1$ because $p_i(t) \geq \frac{\beta}{n}$ and $0 \leq y_t(\alpha_i) \leq 1$. The third inequality " \leq " in the above holds since $\log(1+x) \leq x$ when $x \geq 0$. The last inequality is from Equation 4, 8. Take another expectation on both sides, we get

$$\mathbb{E} \left[\log \frac{W_{t+1}}{W_t} \right] \leq \frac{\beta}{n(1-\beta)} \mathbb{E} [\mu_t(\alpha_i)] + \frac{(e-2)\beta^2}{n^2(1-\beta)} \sum_{i=1}^n \mathbb{E} [\mu_t(\alpha_i)]$$

By summing the above over t , we have

$$\mathbb{E} \left[\log \frac{W_{T+1}}{W_1} \right] \leq \frac{\beta}{n(1-\beta)} \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_i)] + \frac{(e-2)\beta^2}{n^2(1-\beta)} \sum_{t=1}^T \sum_{i=1}^n \mathbb{E} [\mu_t(\alpha_i)] \quad (10)$$

Combining the lower bound (Equation 9) and upper bound (Equation 10) of $\mathbb{E} \left[\log \frac{W_{T+1}}{W_1} \right]$, we get for every $i = 1, \dots, n$,

$$\frac{\beta}{n} \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_i)] - \log n \leq \frac{\beta}{n(1-\beta)} \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_i)] + \frac{(e-2)\beta^2}{n^2(1-\beta)} \sum_{t=1}^T \sum_{i=1}^n \mathbb{E} [\mu_t(\alpha_i)] \quad (11)$$

Let

$$G_{\max} = \max_{i \in [n]} \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_i)]$$

Since Equation 11 holds for any i , we have

$$\frac{\beta}{n} G_{\max} - \log n \leq \frac{\beta}{n(1-\beta)} \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_i)] + \frac{(e-2)\beta^2}{n(1-\beta)} G_{\max} \quad (12)$$

Equation 12 can be further simplified as

$$G_{\max} - \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_i)] \leq (e-1)\beta G_{\max} + \frac{(1-\beta)n \log n}{\beta}$$

Since we choose $\beta = \min \left\{ 1, \sqrt{\frac{n \log n}{(e-1)T}} \right\}$ and note that $G_{\max} \leq T$, we get

$$G_{\max} - \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_{i_t})] \leq 2\sqrt{(e-1)Tn \log n} = \tilde{O}(\sqrt{nT}).$$

□

A.2 Proof of Theorem 1

Proof. Denote $\alpha^* = \operatorname{argmin}_{\alpha \in J} \mathbb{E}[R(\alpha, T)]$ and $X_t(\alpha)$ as the feature vector of the pulled arm at round t if the hyper-parameter used at round t is α . Then

$$\mathbb{E}[R(T)] = \sum_{t=1}^T \mathbb{E}[\mu(x_{t,*}^T \theta) - \mu(X_t(\alpha^*)^T \theta)] + \sum_{t=1}^T \mathbb{E}[\mu(X_t(\alpha^*)^T \theta) - \mu(X_t(\alpha_{i_t})^T \theta)].$$

The first quantity in the above equation is $\mathbb{E}[R(\alpha^*, T)]$ and the second quantity can be bounded using Lemma 1. □

A.3 Proof of Theorem 2

Proof. Given all the past information \mathcal{F}_{t-1} , denote $a_t \left(\alpha_{i_1}^{(1)}, \dots, \alpha_{i_L}^{(L)} \right)$ as the pulled arm at round t if the hyper-parameters selected at round t is $\left(\alpha_{i_1}^{(1)}, \dots, \alpha_{i_L}^{(L)} \right)$. Denote $X_t \left(\alpha_{i_1}^{(1)}, \dots, \alpha_{i_L}^{(L)} \right)$ as the corresponding feature vector and $\mu_t \left(\alpha_{i_1}^{(1)}, \dots, \alpha_{i_L}^{(L)} \right)$ as the corresponding expected reward. It suffices to show that for any $l = 1, \dots, L$, the following holds.

$$\begin{aligned} & \sum_{t=1}^T \mathbb{E} \left[\mu_t \left(\alpha_{i_t(1)}^{(1)}, \dots, \alpha_{i_t(l-1)}^{(l-1)}, \alpha_*^{(l)}, \dots, \alpha_*^{(L)} \right) \right] \\ & - \sum_{t=1}^T \mathbb{E} \left[\mu_t \left(\alpha_{i_t(1)}^{(1)}, \dots, \alpha_{i_t(l-1)}^{(l-1)}, \alpha_{i_t(l)}^{(l)}, \alpha_*^{(l+1)}, \dots, \alpha_*^{(L)} \right) \right] \\ & \leq 2\sqrt{(e-1)n_l T \log n_l}. \end{aligned} \quad (13)$$

For convenience, we will denote $\left(\alpha_{i_t(1)}^{(1)}, \dots, \alpha_{i_t(l-1)}^{(l-1)}, \alpha_j^{(l)}, \alpha_*^{(l+1)}, \dots, \alpha_*^{(L)} \right)$ as (α_j) when there is no ambiguity, which means that the first $l-1$ hyper-parameters are chosen as $\alpha_{i_t(s)}^{(s)}$ for $s = 1, \dots, l-1$, the l -th hyper-parameter is chosen with index j and the rest of the hyper-parameters are chosen as $\alpha_*^{(s)}$ for $s = l+1, \dots, L$. Then the result we want to show in Equation 13 can be written as

$$\sum_{t=1}^T \mathbb{E} \left[\mu_t \left(\alpha_{i_t(1)}^{(1)}, \dots, \alpha_{i_t(l-1)}^{(l-1)}, \alpha_*^{(l)}, \dots, \alpha_*^{(L)} \right) \right] - \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_{i_t(t)})] \leq 2\sqrt{(e-1)n_l T \log n_l}. \quad (14)$$

We will also omit the superscript / subscript (l) for convenience when there is no ambiguity, so $p_j^{(l)}(t), w_j^{(l)}(t), \hat{y}_t^{(l)}(j)$ are abbreviated as $p_j(t), w_j(t), \hat{y}_t(j)$ respectively. Denote $\mathcal{H}_t = \sigma \left(\alpha_{i_t(1)}^{(1)}, \dots, \alpha_{i_t(l-1)}^{(l-1)}, \alpha_*^{(l+1)}, \dots, \alpha_*^{(L)} \right)$ as the σ -algebra induced by the event that at round t , the first $l-1$ hyper-parameters are chosen as $\alpha_{i_t(s)}^{(s)}$ and for $s = l+1, \dots, L$, the hyper-parameters are chosen as $\alpha_*^{(s)}$. Given $\sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)$, denote $y_t(\alpha_j) = \mu_t(\alpha_j) + \epsilon'$ as the observed reward at round t if $\alpha^{(l)}$ is chosen as $\alpha_j^{(l)}$ and the rest hyper-parameters given by \mathcal{H}_t . Here, ϵ' is a hypothetical random noise if arm $a_t(\alpha_j)$ is pulled at round t .

Given $\sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)$, by the above definitions and Algorithm 2, $\hat{y}_t(j) = y_t(\alpha_j)/p_j(t)$ if $j = i_t(l)$. Otherwise, $\hat{y}_t(j) = 0$. Since $p_j(t) \geq \frac{\beta_t}{n_l}$, we have $\hat{y}_t(j) \leq \frac{n_l}{\beta_t}$ for all $j \in [n_l]$ and t . We also have the

following two inequalities.

$$\begin{aligned} \mathbb{E} \left(\sum_{i=1}^{n_l} p_i(t) \hat{y}_t(i) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right) &= \mathbb{E} (p_{i_t(l)}(t) \hat{y}_t(i_t(l)) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)) \\ &= \mathbb{E} (y_t(\alpha_{i_t(l)}) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)) = \mathbb{E} [\mu_t(\alpha_{i_t(l)}) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)] \end{aligned} \quad (15)$$

$$\begin{aligned} \mathbb{E} \left(\sum_{i=1}^{n_l} p_i(t) \hat{y}_t(i)^2 | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right) &= \mathbb{E} (p_{i_t(l)}(t) \hat{y}_t(i_t(l))^2 | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)) \\ &= \mathbb{E} (y_t(i_t(l)) \hat{y}_t(i_t(l)) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)) \leq \mathbb{E} (\hat{y}_t(i_t(l)) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)) \\ &= \mathbb{E} \left(\sum_{i=1}^{n_l} \hat{y}_t(i) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right) \end{aligned} \quad (16)$$

For a single $i \in [n_l]$, since given \mathcal{F}_{t-1} , $p_i^{(l)}(t)$ is already fixed, which means that the choices of other hyper-parameters do not affect the distribution of $i_t(l)$. Moreover, $a_t(\alpha_i)$ follows a fixed distribution due to the conditions in Theorem 2, i.e., the arm to be pulled follows a fixed distribution given the past information and the hyper-parameters to be used at round t . Therefore, given $\sigma(\mathcal{F}_{t-1}, \mathcal{H}_t, a_t(\alpha_i), \epsilon')$, $i = i_t(l)$ is still with probability $p_i^{(l)}(t)$ for all $i \in [n_l]$. So

$$\begin{aligned} \mathbb{E} (\hat{y}_t(i) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)) &= \mathbb{E} [\mathbb{E} (\hat{y}_t(i) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t, a_t(\alpha_i), \epsilon')) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)] \\ &= \mathbb{E} [y_t(\alpha_i) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)] \\ &= \mathbb{E} [\mu_t(\alpha_i) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)]. \end{aligned} \quad (17)$$

From Equation 16 and 17, we have

$$\mathbb{E} \left(\sum_{i=1}^{n_l} p_i(t) \hat{y}_t(i)^2 | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right) \leq \mathbb{E} \left(\sum_{i=1}^{n_l} \mu_t(\alpha_i) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right) \quad (18)$$

We still look at the lower bound and upper bound of $\mathbb{E}[\log \frac{W_{T+1}}{W_1}]$, but now $W_t = \sum_{i=1}^{n_l} w_i^{(l)}(t)$, and we will use the abbreviation $w_i(t) = w_i^{(l)}(t)$ below for ease of notation.

Lower bound:

$$\begin{aligned} \mathbb{E} \left[\log \frac{w_i(t+1)}{w_i(t)} | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right] &= \mathbb{E} \left[\frac{\beta_l}{n_l} \hat{y}_t(i) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right] \\ &= \mathbb{E} \left[\frac{\beta_l}{n_l} \mu_t(\alpha_i) | \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right] \quad \text{from Equation 17} \end{aligned}$$

Take an expectation on both sides and sum over t , we have

$$\mathbb{E} [\log w_i(T+1)] = \frac{\beta_l}{n_l} \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_i)]$$

Therefore, for all $i \in [n_l]$,

$$\mathbb{E} [\log \frac{W_{T+1}}{W_1}] \geq \mathbb{E} [\log w_i(T+1)] - \log n_l = \frac{\beta_l}{n_l} \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_i)] - \log n_l. \quad (19)$$

Upper bound: This part is almost the same as the arguments in Lemma 1, except now that the conditional expectation is taken over $\sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)$. For completeness, we write out the proof of this

part below. Again, we will use $p_i(t) = p_i^{(l)}(t)$ and $w_i(t) = w_i^{(l)}(t)$ for convenience.

$$\begin{aligned}
& \mathbb{E} \left[\log \frac{W_{t+1}}{W_t} \middle| \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right] = \mathbb{E} \left[\log \sum_{i=1}^{n_l} \frac{w_i(t+1)}{W_t} \middle| \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right] \\
& = \mathbb{E} \left[\log \sum_{i=1}^{n_l} \frac{w_i(t)}{W_t} \exp \left(\frac{\beta_l}{n_l} \hat{y}_t(i) \right) \middle| \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right] \\
& = \mathbb{E} \left[\log \sum_{i=1}^{n_l} \frac{p_i(t) - \frac{\beta_l}{n_l}}{1 - \beta_l} \exp \left(\frac{\beta_l}{n_l} \hat{y}_t(i) \right) \middle| \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right] \quad \text{definition of } p_i(t) \\
& \leq \mathbb{E} \left[\log \sum_{i=1}^{n_l} \frac{p_i(t) - \frac{\beta_l}{n_l}}{1 - \beta_l} \left(1 + \frac{\beta_l}{n_l} \hat{y}_t(i) + \frac{(e-2)\beta_l^2}{n_l^2} \hat{y}_t(i)^2 \right) \middle| \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right] \\
& \leq \mathbb{E} \left[\log \left(1 + \sum_{i=1}^{n_l} \left[\frac{\beta_l}{n_l(1-\beta_l)} p_i(t) \hat{y}_t(i) + \frac{(e-2)\beta_l^2}{n_l^2(1-\beta_l)} p_i(t) \hat{y}_t(i)^2 \right] \right) \middle| \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right] \\
& \leq \mathbb{E} \left[\sum_{i=1}^{n_l} \left(\frac{\beta_l}{n_l(1-\beta_l)} p_i(t) \hat{y}_t(i) + \frac{(e-2)\beta_l^2}{n_l^2(1-\beta_l)} p_i(t) \hat{y}_t(i)^2 \middle| \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t) \right) \right] \\
& \leq \frac{\beta_l}{n_l(1-\beta_l)} \mathbb{E} [\mu_t(\alpha_{i_t}) \middle| \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)] + \frac{(e-2)\beta_l^2}{n_l^2(1-\beta_l)} \sum_{i=1}^{n_l} \mathbb{E} [\mu_t(\alpha_i) \middle| \sigma(\mathcal{F}_{t-1}, \mathcal{H}_t)].
\end{aligned}$$

The first inequality “ \leq ” in the above holds since $e^x \leq 1 + x + (e-2)x^2$ for $x \in [0, 1]$. Here, we have $0 \leq \frac{\beta_l}{n_l} \hat{y}_t(i) \leq 1$ because $p_i(t) \geq \frac{\beta_l}{n_l}$, $0 \leq y_t(\alpha_i) \leq 1$ and $\hat{y}_t(i) \leq \frac{y_t(\alpha_i)}{p_i(t)}$. The last inequality is from Equation 15, 18. Take another expectation on both sides, we get

$$\mathbb{E} \left[\log \frac{W_{t+1}}{W_t} \right] \leq \frac{\beta_l}{n_l(1-\beta_l)} \mathbb{E} [\mu_t(\alpha_{i_t})] + \frac{(e-2)\beta_l^2}{n_l^2(1-\beta_l)} \sum_{i=1}^{n_l} \mathbb{E} [\mu_t(\alpha_i)]$$

By summing the above over t , we have

$$\mathbb{E} \left[\log \frac{W_{T+1}}{W_1} \right] \leq \frac{\beta_l}{n_l(1-\beta_l)} \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_{i_t(l)})] + \frac{(e-2)\beta_l^2}{n_l^2(1-\beta_l)} \sum_{i=1}^{n_l} \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_i)] \quad (20)$$

Note that the lower bound in Equation 19 holds for any i , so it also holds for $\alpha_*^{(l)}$. Denote

$$G_{\max} = \sum_{t=1}^T \mathbb{E} \left[\mu_t(\alpha_{i_t(1)}^{(1)}, \dots, \alpha_{i_t(l-1)}^{(l-1)}, \alpha_*^{(l)}, \dots, \alpha_*^{(L)}) \right].$$

Then

$$\frac{\beta_l}{n_l} G_{\max} - \log n_l \leq \frac{\beta_l}{n_l(1-\beta_l)} \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_{i_t(l)})] + \frac{(e-2)\beta_l^2}{n_l^2(1-\beta_l)} \sum_{i=1}^{n_l} \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_i)]$$

We note that $\sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_i)] \leq T$ for all i , so

$$\frac{\beta_l}{n_l} G_{\max} - \log n_l \leq \frac{\beta_l}{n_l(1-\beta_l)} \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_{i_t(l)})] + \frac{(e-2)\beta_l^2}{n_l(1-\beta_l)} T$$

Simplify the above inequality and due to the choice of β_l , we have

$$\begin{aligned}
G_{\max} - \sum_{t=1}^T \mathbb{E} [\mu_t(\alpha_{i_t(l)})] & \leq \beta_l G_{\max} + (e-2)\beta_l T + \frac{(1-\beta_l)n_l}{\beta_l} \log n_l \\
& \leq 2\sqrt{(e-1)n_l T \log n_l}.
\end{aligned}$$

This ends our proof. \square

A.4 Additional experiments on tuning SGD-TS

In this section, we show the comparison of different tuning methods in SGD-TS [13], a recently proposed efficient algorithm for generalized linear bandit. We apply SGD-TS with a logistic model to the datasets considered in Section 6. SGD-TS has four tuning parameters, the length of epoch τ , two exploration parameters $\alpha^{(1)}$ and $\alpha^{(2)}$, step size for stochastic gradient descent η_0 . In [13], the experiments are conducted by using a grid search of all four parameters, which is not feasible in practice. Since the epoch length has to be pre-determined, it is not applicable to tune it online. We set $\tau = 10 \times \lfloor \max(\log T, d) \rfloor$ as suggested by the grid search set in [13] and fix it for all tuning methods. The tuning set for $\alpha^{(1)}$ and $\alpha^{(2)}$ are the same $\{0, 0.01, 0.1, 1, 10\}$. The tuning set for step size η_0 is set as $\{0.01, 0.1, 1, 10\}$. The theoretical choices of step size η_0 in SGD-TS are intractable, so for the tuning methods in Section 6, we make the following modifications:

1. **OP [8]**: We modify OPLINUCB to tune step size η_0 only.
2. **TL (Our work, Algorithm 1)**: This is our proposed Algorithm 1, where we use the two-layer bandit structure to tune the step size η_0 only.
3. **TL-Combined (Our work, Algorithm 1)**: This method tunes all three hyper-parameters $\alpha^{(1)}$, $\alpha^{(2)}$ and η_0 using Algorithm 1, but with the tuning set containing all the possible combinations of the three hyper-parameters.
4. **Syndicated (Our work, Algorithm 2)**: This method keeps three separate tuning sets for $\alpha^{(1)}$, $\alpha^{(2)}$ and η_0 respectively. It uses the Syndicated Bandits framework in Algorithm 2.

For OP and TL, since they do not tune the two exploration parameters, $\alpha^{(1)}$ and $\alpha^{(2)}$ are set as the theoretical values as in [13]. Results reported in Figure 3 are averaged over 10 repeated experiments. From the plots, we can see that 1) our proposed Syndicated Bandits framework outperforms TL-combined method since now there are in total three hyper-parameters and the regret of TL-combined depends on the number of hyper-parameters exponentially. 2) Tuning all 3 hyper-parameters significantly outperforms tuning only the step size as in OP and TL. This further indicates that tuning multiple hyper-parameters is better than tuning fewer. On the other hand, it suggests that the theoretical choices of the exploration parameters do not always perform better than the fine-tuned results. 3) Our proposed TL algorithm outperforms OP when tuning only the step size.

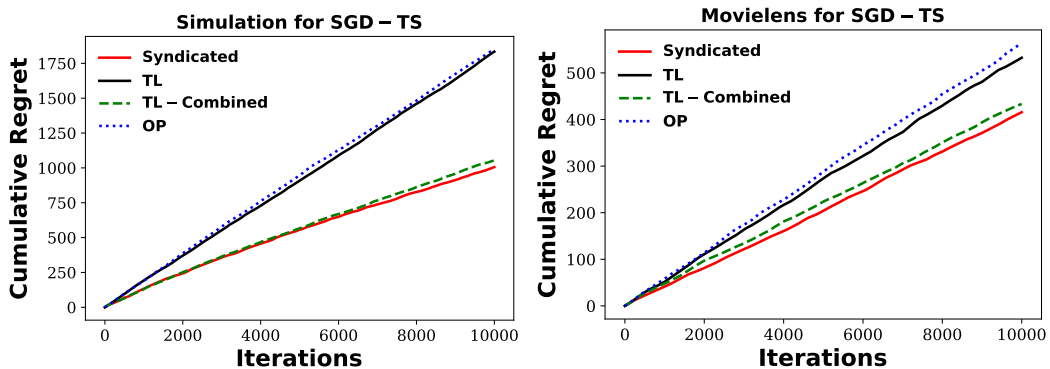


Figure 3: Comparison of hyper-parameters selection methods in SGD-TS.