
Constraining Linear-chain CRFs to Regular Languages

Sean Papay, Roman Klinger, Sebastian Padó
University of Stuttgart
sean.papay@ims.uni-stuttgart.de
klinger@ims.uni-stuttgart.de
pado@ims.uni-stuttgart.de

Abstract

In structured prediction, a major challenge for models is to represent the interdependencies within their output structures. For the common case where outputs are structured as a sequence, linear-chain conditional random fields (CRFs) are a widely used model class which can learn *local* dependencies in output sequences. However, the CRF’s Markov assumption makes it impossible for these models to capture *nonlocal* dependencies, and standard CRFs are unable to respect nonlocal constraints of the data (such as global arity constraints on output labels). We present a generalization of CRFs that can enforce a broad class of constraints, including nonlocal ones, by specifying the space of possible output structures as a regular language \mathcal{L} . The resulting regular-constrained CRF (RegCCRF) has the same formal properties as a standard CRF, but assigns zero probability to all label sequences not in \mathcal{L} . Notably, RegCCRFs can incorporate their constraints during training, while related models only enforce constraints during decoding. We prove that constrained training is never worse than constrained decoding, and show using synthetic data that it can be substantially better in practice. Additionally, we demonstrate a practical benefit on downstream tasks by incorporating a RegCCRF into a deep neural model for semantic role labeling, exceeding state-of-the-art results on a standard dataset.

1 Introduction

Structured prediction is a field of machine learning where outputs are expected to obey some pre-defined discrete structure. Instances of structured prediction with various output structures occur in many applications, including computer vision (e.g., scene graph generation (Johnson et al., 2015) with graph-structured output), natural language processing (e.g., linguistic parsing (Niculae et al., 2018) with tree-structured output, relation extraction (Roth and Yih, 2004) with tuple-structured output) or modeling the spatial structure of physical entities and processes (Jiang, 2020).

A key difficulty faced by all models is to tractably model interdependencies between different parts of the output. As output spaces tend to be combinatorially large, special techniques, approximations, and independence assumptions must be used to work with the associated probability distributions. Considerable research has investigated specific structures for which such approaches make machine learning tractable. For instance, when outputs are trees over a fixed set of nodes, maximal arborescence algorithms allow for exact inference (Chu, 1965; Edmonds, 1967); when outputs are graph-structured, loopy belief propagation can be used for approximate inference (Murphy et al., 1999).

In the specific case where outputs are structured as a linear sequence, a commonly made independence assumption is the Markov assumption. This requires that model outputs depend only on their immediate neighbors, and do not depend directly on more distant ones. A common model that makes

use of this assumption is the linear-chain conditional random field (CRF) (Lafferty et al., 2001), which has found ubiquitous use across common sequence labeling tasks, including part-of-speech tagging (Gimpel et al., 2011) and named entity recognition (Lample et al., 2016). This model became popular with the use of hand-crafted feature vectors in the 2000s, and is nowadays commonly used as an output layer in neural networks to encourage the learning of structural properties of the output sequence.

The Markov assumption makes training tractable, but also limits the CRF’s expressive power, which can hamper performance, especially for long sequences (Scheible et al., 2016). Semi-Markov CRFs (Sarawagi and Cohen, 2004) and skip-chain CRFs (Sutton and McCallum, 2004) are techniques for relaxing the Markov assumption, but both come with drawbacks in performance and expressiveness.

In this work, we propose a new method to tractably relax the Markov assumption in CRFs. Specifically, we show how to constrain the output of CRFs to a *regular language*, such that the resulting *regular-constrained CRF (RegCCRF)* is guaranteed to output label sequences from that language. Since regular languages can encode long-distance dependencies between the symbols in their strings, RegCCRFs provide a simple model for structured prediction that provides a guarantee to respect these non-local constraints. The domain knowledge specifying these constraints is defined via regular expressions, a straightforward, well understood formalism. We show that our method is distinct from the common family of approaches that enforce constraints at decoding time, and that our constrained training approach better approximates the true data distribution. We also test our method empirically as the output layer of a neural network, and attain state-of-the-art performance for semantic role labeling on the OntoNotes corpus (Weischedel et al., 2011; Pradhan et al., 2012). To encourage the use of RegCCRFs, we release our code as a Python library under the Apache 2.0 license, to be used as a drop-in replacement for traditional CRFs in PyTorch projects.¹

2 Related work

We identify three areas of structured prediction that are particularly relevant to our current work: constrained decoding, which can enforce output constraints at decoding time, techniques for weakening the Markov assumption of CRFs to learn long-distance dependencies, and structure learning for learning constraints from data in graphical models.

Constrained decoding. A common approach to enforcing constraints in model output is *constrained decoding*: Models are trained agnostic to constraints, but during decoding it is ensured that the model output satisfies the constraints. This almost always corresponds to finding or approximating a conditionalized version of the model’s distribution, conditionalized on the output obeying the specified constraints. We discuss constrained coding as it relates to RegCCRFs in Section 5.

For CRFs, Kristjansson et al. (2004) present *constrained conditional random fields*, which can enforce that particular tokens either are or are not assigned particular labels (positive and negative constraints, respectively). They propose a constrained Viterbi algorithm for MAP inference and a constrained forward-backward algorithm for marginal inference. In their task, interactive information extraction, constraints are not available at training time, and so they focus on constrained decoding. Formally, our work is a strict generalization of this approach, as position-wise constraints can be formulated as a regular language, but regular languages go beyond position-wise constraints.

Other existing works treat decoding with constraints as a search problem, searching for the most probable decoding path which satisfies all constraints. In one example of this approach, He et al. (2017) train a neural network to predict token-wise output probabilities for semantic role labeling following the BIO label-alphabet (Ramshaw and Marcus, 1999), and then use exact A* search to ensure that the output forms a valid BIO sequence and that particular task-specific constraints are satisfied. For autoregressive models, constrained beam search (Hokamp and Liu, 2017; Anderson et al., 2017; Hasler et al., 2018) can enforce regular-language constraints during search.

Markov relaxations. While our approach can relax the Markov assumption of CRFs through nonlocal hard constraints, another strand of work has developed models which can directly *learn* nonlocal dependencies in CRFs:

¹Available at <https://www.ims.uni-stuttgart.de/data/regccrf>

Semi-Markov CRFs (Sarawagi and Cohen, 2004) relax the Markov property to the semi-Markov property. In this setting, CRFs are tasked with segmentation, where individual segments may depend only on their immediate neighbors, but model behavior within a particular segment need not be Markovian. As such, semi-Markov CRFs are capable of capturing nonlocal dependencies between output variables, but only to a range of one segment and inside of a segment.

Skip-chain CRFs (Sutton and McCallum, 2004) change the expressiveness of CRFs by relaxing the assumption that only the linear structure of the input matters: they add explicit dependencies between distant nodes in an otherwise linear-chain CRF. These dependencies are picked based on particular properties, e.g., input variables of the same value or which share other properties. In doing so, they add loops to the model’s factor graph, which makes exact training and inference intractable, and leads to the use of approximation techniques such as loopy belief propagation and Gibbs sampling.

Structure learning for graphical models. While our work focuses on incorporating known constraints into machine learning methods, a related task is learning in the face of unknown constraints, which must be learned from the data. In the field of probabilistic graphical models, this is most naturally framed as structure learning. As the graphical model’s graph structure encodes conditional independence information between variables, learning that graph structure can be seen as learning potential constraints. Graph structures can be learned globally, as in Lee et al. (2007) and Schmidt et al. (2008), or independence relationships can be estimated locally, as in Bromberg et al. (2009).

3 Preliminaries and notation

As our construction involves finite-state automata and conditional random fields, we define these here and specify the notation we will use in the remainder of this work.

3.1 Finite-state automata

All automata are taken to be nondeterministic finite-state automata (NFAs) without epsilon transitions. Let such an NFA be defined as a 4-tuple (Σ, Q, F, E) , where

- $\Sigma = \{a_1, a_2, \dots, a_{|\Sigma|}\}$ is a finite alphabet of symbols,
- $Q = \{q_1, q_2, \dots, q_{|Q|}\}$ is a finite set of states. By convention, q_1 is the sole starting state.
- $F \subseteq Q$ is a set of accepting states.
- $E \subseteq Q \times \Sigma \times Q$ is a set of directed, symbol-labeled edges between states. These edges define the NFA’s transition function $\Delta : Q \times \Sigma \rightarrow 2^Q$, with $r \in \Delta(q, a) \leftrightarrow (q, a, r) \in E$.

An automaton is said to accept a string $s \in \Sigma^*$ if there exists a contiguous path of edges from q_1 to some accepting state whose edge labels are exactly the symbols of s . The *language* defined by an automaton is the set of all such accepted strings. A language is *regular* if and only if it is the language of some NFA.


3.2 Linear-chain conditional random fields

Linear-chain conditional random fields (CRFs) Lafferty et al. (2001) are a sequence labeling model. Parameterized by θ , they use a global exponential model to represent the conditional distribution over label sequences $\mathbf{y} = \langle y_1, y_2, \dots, y_t \rangle$ conditioned on input sequences $\mathbf{x} = \langle x_1, x_2, \dots, x_t \rangle$:

$$P_\theta(\mathbf{y} | \mathbf{x}) \propto \exp \sum_j f_\theta^j(\mathbf{x}, \mathbf{y}), \quad (1)$$

with individual observations x_i coming from some observation space X , and outputs y_i coming from some finite alphabet Y . In this work, we use CRFs for sequence labeling problems, but the dataset labels do not correspond directly to the CRF’s outputs y_i . In order to avoid ambiguity, and since the term “state” already has a meaning for NFAs, we call \mathbf{y} the CRF’s *tag sequence*, and each y_i a *tag*. The terms *label sequence* and *label* will thus unambiguously refer to the original dataset labels.

Each f_θ^j is a potential function of \mathbf{x} and \mathbf{y} , parameterized by θ . Importantly, in a linear-chain CRF, these potential functions are limited to two kinds: The *transition function* $g_\theta(y_i, y_{i+1})$ assigns a

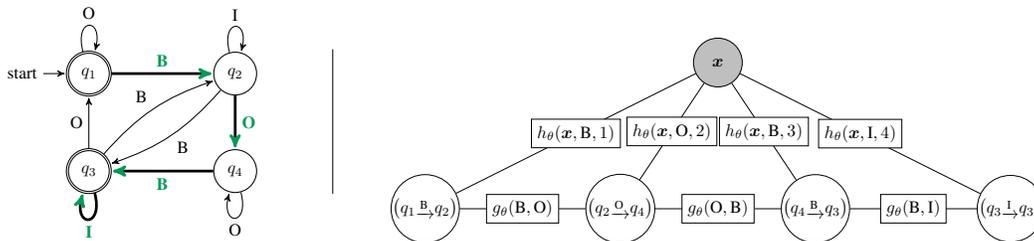

$$Y' = \{(q_1 \xrightarrow{O} q_1), (q_1 \xrightarrow{B} q_2), (q_2 \xrightarrow{I} q_2), (q_2 \xrightarrow{B} q_3), (q_2 \xrightarrow{O} q_4), (q_3 \xrightarrow{O} q_1), (q_3 \xrightarrow{B} q_2), (q_3 \xrightarrow{I} q_3), (q_4 \xrightarrow{B} q_3), (q_4 \xrightarrow{O} q_4)\}$$

Figure 1: Example for a RegCCRF, showing NFA and unrolled factor graph. \mathcal{L} describes the language $(O \mid BI^*O^*BI^*)^*$, the language of valid BIO sequences for an even number of spans. We would like to calculate $P_\theta(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$ for $\mathbf{y} = \langle B, O, B, I \rangle$. We show an unambiguous automaton M for \mathcal{L} (left), and a factor graph (right) for the auxiliary CRF computing $P_\theta(\mathbf{y}' \mid \mathbf{x})$, where $\mathbf{y}' \in Y'^*$ corresponds to the sole accepting path of \mathbf{y} through M (marked).

potential to each pair (y_i, y_{i+1}) of adjacent tags in \mathbf{y} , and the *emission function* $h_\theta(y_i \mid \mathbf{x}, i)$ assigns a potential to each possible output tag y_i given the observation sequence \mathbf{x} and its position i .

With these, the distribution defined by a CRF is

$$P_\theta(\mathbf{y} \mid \mathbf{x}) \propto \exp \left(\sum_{i=1}^{t-1} g_\theta(y_i, y_{i+1}) + \sum_{i=1}^t h_\theta(\mathbf{x}, y_i, i) \right). \quad (2)$$

Limiting our potential functions in this way imposes a Markov assumption on our model, as potential functions can only depend on a single tag or a single pair of adjacent tags. This makes learning and inference tractable: the forward algorithm (Jurafsky and Martin, 2009) can calculate negative log-likelihood loss during training, and the Viterbi algorithm (Viterbi, 1967; Jurafsky and Martin, 2009) can be used for inference. Both are linear in t , and quadratic in $|Y|$ in both time and space.

4 Regular-constrained CRFs

Given a regular language \mathcal{L} , we would like to constrain a CRF to \mathcal{L} . We formalize this notion of constraint with conditional probabilities – a CRF constrained to \mathcal{L} is described by a (further) conditionalized version of that CRF’s distribution $P_\theta(\mathbf{y} \mid \mathbf{x})$, conditioned on the event that the tag sequence \mathbf{y} is in \mathcal{L} . We write this distribution as

$$P_\theta(\mathbf{y} \mid \mathbf{x}, \mathcal{L}) = \begin{cases} \alpha \cdot P_\theta(\mathbf{y} \mid \mathbf{x}) & \text{if } \mathbf{y} \in \mathcal{L} \\ 0 & \text{otherwise,} \end{cases} \quad (3)$$

with $\alpha \geq 1$ defined as $\alpha = \frac{1}{\sum_{\mathbf{y} \in \mathcal{L}} P_\theta(\mathbf{y} \mid \mathbf{x})}$.

In order to utilize this distribution for machine learning, we need to be able to compute log-likelihood losses and perform MAP inference. As discussed in Section 3.2, both of these are efficiently computable for CRFs. Thus, if we can construct a separate CRF whose output distribution can be interpreted as $P(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$, both of these operations will be available. We do this in the next section.

4.1 Construction

Let $M := (\Sigma, Q, F, E)$ be an NFA that describes \mathcal{L} . We assume that M is *unambiguous* – i.e., every string in \mathcal{L} is accepted by exactly one path through M . As every NFA can be transformed into an equivalent unambiguous NFA (Mohri, 2012), we can make this assumption with no loss of generality.

Our plan is to represent $P_\theta(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$ by constructing a separate CRF with a distinct tag set, whose output sequences can be interpreted directly as paths through M . As M is unambiguous, each label sequence in \mathcal{L} corresponds to exactly one such path. We parameterize this auxiliary CRF identically

to our original CRF – that is, with a label-wise (not tag-wise) transition and emission functions. Thus, for all parameterizations θ , both distributions $P_\theta(\mathbf{y} \mid \mathbf{x})$ and $P_\theta(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$ are well defined.

There are many ways to construct such a CRF. As CRF training and inference are quadratic in the size of the tag set Y , we would prefer a construction which minimizes $|Y|$. However, for clarity, we will first present a conceptually simple construction, and then discuss approaches to reduce $|Y|$.

We start with our original CRF, parameterized by θ , with tag set $Y = \Sigma$, transition function g_θ , and emission function h_θ , describing the probability distribution $P_\theta(\mathbf{y} \mid \mathbf{x})$, $\mathbf{y} \in \Sigma^*$. From this, we construct a new CRF, also parameterized by the same θ , but with tag set Y' , transition function g'_θ , and emission function h'_θ . This auxiliary CRF describes the distribution $P'_\theta(\mathbf{y}' \mid \mathbf{x})$ (with $\mathbf{y}' \in Y'^*$), which we will be able to interpret as $P_\theta(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$. The construction is as follows:

$$Y' = E \tag{4}$$

$$g'_\theta((q, a, r), (q', a', r')) = \begin{cases} g_\theta(a, a') & \text{if } r = q' \\ -\infty & \text{otherwise} \end{cases} \tag{5}$$

$$h'_\theta(\mathbf{x}, (q, a, r), i) = \begin{cases} -\infty & \text{if } i = 1, q \neq q_1 \\ -\infty & \text{if } i = t, r \notin F \\ h_\theta(\mathbf{x}, a, i) & \text{otherwise.} \end{cases} \tag{6}$$

This means that the tags of our new CRF are the edges of M , the transition function assigns zero probability to transitions between edges which do not pass through a shared NFA state, and the emission function assigns zero probability to tag sequences which do not begin at the starting state or end at an accepting state. Apart from these constraints, the transition and emission functions depend only on edge labels, and not on the edges themselves, and agree with the standard CRF's g_θ and h_θ when no constraints are violated.

As M is unambiguous, every tag sequence \mathbf{y} corresponds to a single path through M , representable as an edge sequence $\boldsymbol{\pi} = (\pi_1, \pi_2, \dots, \pi_\ell)$, $\pi_i \in E$. Since this path is a tag sequence for our auxiliary CRF, we can directly calculate the auxiliary CRF's $P'_\theta(\boldsymbol{\pi} \mid \mathbf{x})$. From the construction of g'_θ and h'_θ , this must be equal to $P_\theta(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$, as it is proportional to $P_\theta(\mathbf{y} \mid \mathbf{x})$ for $\mathbf{y} \in \mathcal{L}$, and zero (or, more correctly, undefined) otherwise. Figure 1 illustrates this construction with a concrete example.

4.2 Tag-set minimization

As the Viterbi and forward algorithms are quadratic in $|Y|$, very large tag sets can lead to performance issues during training and inference. To alleviate this, we would like $|Y|$ to be as small as possible. Without changing \mathcal{L} , there are two approaches we can take here:

First, we can select M to have as few edges as possible. This problem for unambiguous NFAs is NP-complete in the general case (Jiang and Ravikumar, 1991), and, assuming $P \neq NP$, is not even efficiently approximable (Gruber and Holzer, 2007). Nonetheless, in practice many languages can be minimized manually, and heuristic approaches can reduce, if not minimize, the size of NFAs.

Second, we can reduce the size of $|Y|$ by adjusting our construction. Instead of making each edge of M a tag, we can adopt equivalence classes of edges. Reminiscent of standard NFA minimization, we define $(q, a, r) \sim (q', a', r') \leftrightarrow (q, a) = (q', a')$. When constructing our CRF, whenever a transition would have been allowed between two edges, we allow a transition between their corresponding equivalence classes. We do the same to determine which classes are allowed as initial or final tags. As each equivalence class corresponds (non-uniquely) to a single symbol a , we can translate between tag sequences and strings of \mathcal{L} just as before.

5 Constrained training vs. constrained decoding

Our construction suggests two possible use cases for a RegCCRF: *constrained decoding*, where a CRF is trained unconstrained, and the learned weights are then used in a RegCCRF at decoding time, and *constrained training*, where a RegCCRF is both trained and decoded with constraints. In this section, we compare between these two approaches and a standard, *unconstrained CRF*. We assume a machine learning setting where we have access to samples from some data distribution $\tilde{P}(\mathbf{x}, \mathbf{y})$, with each $\mathbf{x} \in X^*$, and each \mathbf{y} of matching length in some regular language $\mathcal{L} \subseteq \Sigma^*$. We wish to

model the conditional distribution $\tilde{P}(\mathbf{y} | \mathbf{x})$ with either a CRF or a RegCCRF, by way of minimizing the cross-entropy between model and data distributions.

The unconstrained CRF corresponds to a CRF that has been trained, without constraints, on data points from $\tilde{P}(\mathbf{x}, \mathbf{y})$, and is subsequently used directly. As such, it makes no use of the language \mathcal{L} . The model’s output distribution is $P_{\theta_u}(\mathbf{y} | \mathbf{x})$, with parameter vector

$$\theta_u = \arg \min_{\theta} E_{\mathbf{x}, \mathbf{y} \sim \tilde{P}} [-\ln P_{\theta}(\mathbf{y} | \mathbf{x})] \quad (7)$$

minimizing CRF cross-entropy with the data distribution.

In constrained decoding, a CRF is trained unconstrained, but its weights are used in a RegCCRF at decoding time. The output distribution of such a model is $P_{\theta_u}(\mathbf{y} | \mathbf{x}, \mathcal{L})$. It is parameterized by the same parameter vector θ_u as the unconstrained CRF, as the training procedure is identical, but the output distribution is conditioned on $\mathbf{y} \in \mathcal{L}$.

Constrained training involves directly optimizing a RegCCRF’s output distribution, avoiding any asymmetry between training and decoding time. In this case, the output distribution of the model is $P_{\theta_c}(\mathbf{y} | \mathbf{x}, \mathcal{L})$, where

$$\theta_c = \arg \min_{\theta} E_{\mathbf{x}, \mathbf{y} \sim \tilde{P}} [-\ln P_{\theta}(\mathbf{y} | \mathbf{x}, \mathcal{L})] \quad (8)$$

is the parameter vector which minimizes the RegCCRF’s cross-entropy with the data distribution.

In the remainder of this section, we will demonstrate that these three approaches form a hierarchy of sorts, when compared by their ability to match the data distribution. In particular, when compared by cross-entropy, we show that

$$H_{\text{unconstrained}} \geq H_{\text{constrained decoding}} \geq H_{\text{constrained training}}, \quad (9)$$

with each H corresponding to that model’s cross-entropy with the data distribution. This suggests we should prefer the constrained training regimen.

An unconstrained CRF cannot outperform constrained decoding. Here we compare the distributions $P_{\theta_u}(\mathbf{y} | \mathbf{x})$ and $P_{\theta_u}(\mathbf{y} | \mathbf{x}, \mathcal{L})$. We wish to demonstrate that $P_{\theta_u}(\mathbf{y} | \mathbf{x})$ can never achieve lower cross-entropy with the data distribution than $P_{\theta_u}(\mathbf{y} | \mathbf{x}, \mathcal{L})$, and that the two distributions achieve identical cross-entropy only when $P_{\theta_u}(\mathbf{y} | \mathbf{x}) = P_{\theta_u}(\mathbf{y} | \mathbf{x}, \mathcal{L})$ i.e. when constraints have no effect.

Proof. We demonstrate the more general case for arbitrary θ . Since every \mathbf{y} in \tilde{P} is in \mathcal{L} ,

$$P_{\theta}(\mathbf{y} | \mathbf{x}, \mathcal{L}) = \alpha \cdot P_{\theta}(\mathbf{y} | \mathbf{x}), \quad (10)$$

with $\alpha \geq 1$. Thus, the cross-entropy of the regular-constrained CRF is

$$E_{\mathbf{x}, \mathbf{y} \sim \tilde{P}} [-\ln P_{\theta}(\mathbf{y} | \mathbf{x}, \mathcal{L})] = E_{\mathbf{x}, \mathbf{y} \sim \tilde{P}} [-\ln P_{\theta}(\mathbf{y} | \mathbf{x})] - \ln \alpha. \quad (11)$$

This differs from the cross-entropy of the unconstrained CRF only by the term $-\ln \alpha$. As $\alpha \geq 1$, the regular-constrained CRF’s cross-entropy is less than or equal to that of the unconstrained CRF, with equality only when $\alpha = 1$ and therefore $P_{\theta}(\mathbf{y} | \mathbf{x}) = P_{\theta}(\mathbf{y} | \mathbf{x}, \mathcal{L})$. ■

Constrained decoding cannot outperform constrained training. In this case, we compare the distributions $P_{\theta_u}(\mathbf{y} | \mathbf{x}, \mathcal{L})$ and $P_{\theta_c}(\mathbf{y} | \mathbf{x}, \mathcal{L})$. We will demonstrate that the former can never outperform the latter, again as measured by cross-entropy with the data distribution.

Proof. This follows directly from our definitions, as we define θ_c to minimize cross-entropy between $P_{\theta}(\mathbf{y} | \mathbf{x}, \mathcal{L})$ and the data distribution. Thus, $P_{\theta_u}(\mathbf{y} | \mathbf{x}, \mathcal{L})$ could never yield a lower cross-entropy than $P_{\theta_c}(\mathbf{y} | \mathbf{x}, \mathcal{L})$, as that would contradict our definition of θ_c . ■

6 Synthetic Data Experiments

While we have shown that constrained training cannot underperform constrained decoding, the conditions where it is strictly better depend on exactly how the partition and emission functions are parameterized, and are not easily stated in general terms. In this section, we compare the two regimens empirically to demonstrate simple cases where the two are not equivalent.

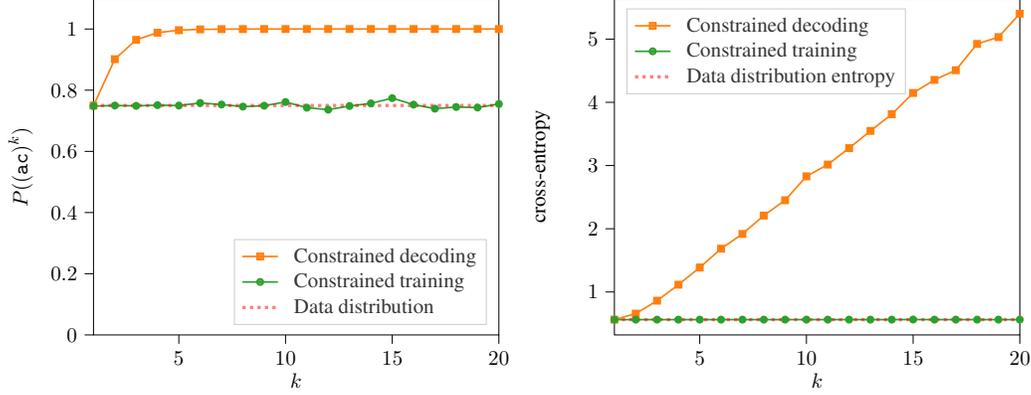


Figure 2: Model output probabilities, and cross-entropy with the data distribution, plotted against sequence length k . As k increases, constrained decoding becomes a progressively worse approximation for the data distribution, while constrained training is consistently able to match the data distribution.

The procedure is similar for both synthetic data experiments. For each experiment, we specify a regular language \mathcal{L} , an observation alphabet X , and a joint data distribution $\tilde{P}(\mathbf{x}, \mathbf{y})$ over observation sequences in X^* and label sequences in \mathcal{L} . We then train two models, one with a RegCCRF, parameterized by θ_c , and one with an unconstrained CRF, parameterized by θ_u . For each model, we initialize parameters randomly, then use stochastic gradient descent to minimize cross-entropy with \tilde{P} . We directly generate samples from \tilde{P} to use as training data. After optimizing θ_c and θ_u , construct a RegCCRF with θ_u for use as a constrained-decoding model, and we compare the constrained-training distribution $P_{\theta_c}(\mathbf{y} | \mathbf{x}, \mathcal{L})$ with the constrained-decoding distribution $P_{\theta_u}(\mathbf{y} | \mathbf{x}, \mathcal{L})$.

We use a simple architecture for our models, with both the transition functions g_θ and emission functions h_θ represented as parameter matrices. We list training hyperparameters in the Appendix A.

6.1 Arbitrary differences in cross-entropy

We would like to demonstrate that, when comparing constrained training to constrained decoding in terms of cross-entropy with the data distribution, constrained training can outperform constrained decoding by an arbitrary margin. We choose $\mathcal{L} = (\text{ac})^* | (\text{bc})^*$ to make conditional independence particularly relevant – as every even-indexed label is c , an unconstrained CRF must model odd-indexed labels independently, while a constrained CRF can use its constraints to account for nonlocal dependencies. For simplicity, we hold the input sequence constant, with $X = \{\text{o}\}$.

Our approach is to construct sequences of various lengths. For $k \in \mathbb{N}$, we let our data distribution be

$$\tilde{P}(\text{o}^{2k}, (\text{ac})^k) = \frac{3}{4} \text{ and } \tilde{P}(\text{o}^{2k}, (\text{bc})^k) = \frac{1}{4}. \quad (12)$$

We train and evaluate individual models for each sequence lengths k . Figure 2 plots model probabilities and cross-entropies for various k . We see that, regardless of k , $P_{\theta_c}(\mathbf{y} | \mathbf{x}, \mathcal{L})$ is able to match $\tilde{P}(\mathbf{y} | \mathbf{x})$ almost exactly, with only small deviations due to sampling noise in SGD. On the other hand, as sequence length increases, $P_{\theta_u}(\mathbf{y} | \mathbf{x}, \mathcal{L})$ becomes progressively “lop-sided”, assigning almost all of its probability mass to the string $(\text{ac})^k$. This behavior is reflected the models’ cross-entropies with the data distribution – constrained training stays at near-constant cross-entropy for all k , while the cross-entropy of constrained decoding grows linearly with k .

6.2 Differences in MAP inference

We show here that constrained training and constrained decoding can disagree about which label sequence they deem most likely. Furthermore, in this case, MAP inference agrees with the data distribution’s mode for constrained training, but not for constrained decoding. To do this, we construct a fixed-length output language $\mathcal{L} = \text{acd} | \text{bcd} | \text{bce}$, where an unconstrained CRF is limited by

Table 1: Output distributions for constrained decoding ($P_{\theta_u}(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$) and constrained training ($P_{\theta_c}(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$), compared to the data distribution $\tilde{P}(\mathbf{y} \mid \mathbf{x})$. Constrained decoding cannot learn the data distribution exactly, and yields a mode which disagrees with that of the data distribution.

\mathbf{y}	$\tilde{P}(\mathbf{y} \mid \mathbf{x})$	$P_{\theta_u}(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$	$P_{\theta_c}(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$
acd	0.4	0.32	0.40
bcd	0.3	0.48	0.30
bce	0.3	0.20	0.40

the Markov property to predict \mathbf{y} 's prefix and suffix independently. We select our data distribution,

$$\tilde{P}(\text{ooo}, \text{acd}) = 0.4 \text{ and } \tilde{P}(\text{ooo}, \text{bcd}) = 0.3 \text{ and } \tilde{P}(\text{ooo}, \text{bce}) = 0.3, \quad (13)$$

to be close to uniform, but with one label sequence holding the slight majority, and we ensure that the majority label sequence is *not* the label sequence with both the majority prefix and the majority suffix (i.e. bcd). As before, we hold the observation sequence as a constant (ooo). We train a constrained and an unconstrained CRF to convergence, and compare $P_{\theta_u}(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$ to $P_{\theta_c}(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$.

Table 1 shows $P_{\theta_u}(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$ and $P_{\theta_c}(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$ as they compare to $\tilde{P}(\mathbf{y} \mid \mathbf{x})$. We find that, while the mode of $\tilde{P}(\mathbf{y} \mid \mathbf{x})$ is acd, the mode of constrained decoding distribution $P_{\theta_u}(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$ is bcd, the string with the majority prefix and the majority suffix. Conversely, the constrained training distribution $P_{\theta_c}(\mathbf{y} \mid \mathbf{x}, \mathcal{L})$ matches the data distribution almost exactly, and predicts the correct mode.

7 Real-world data experiment: semantic role labeling

Task. As a final experiment, we apply our RegCCRF to the NLP task of semantic role labeling (SRL) in the popular PropBank framework (Palmer et al., 2005). In line with previous work, we adopt the *known-predicate setting*, where events are given and the task is to mark token spans as (types of) event participants. PropBank assumes 7 semantic *core roles* (ARG0 through ARG5 plus ARG6) plus 21 *non-core roles* for modifiers such as times or locations. For example, in $[\text{ARG}_0 \text{ Peter}]$ **saw** $[\text{ARG}_1 \text{ Paul}]$ $[\text{ARGM-TMP} \text{ yesterday}]$, the argument labels inform us who does the seeing (ARG0), who is seen (ARG1), and when the event took place (ARGM-TMP). In addition, role spans may be labeled as *continuations* of previous role spans, or as *references* to another role span in the sentence.

SRL can be framed rather naturally as a sequence labeling task (He et al., 2017). However, the task comes with a number of hard constraints that are not automatically satisfied by standard CRFs, namely: (1) Each core role may occur at most once per event; (2) continuations require that the same span type occurs previously in the sentence; (3) references require that the same span type occurs elsewhere in the sentence (before or after).

Data. In line with previous work (Ouchi et al., 2018), we work with the OntoNotes corpus as used in the CoNLL 2012 shared task² (Weischedel et al., 2011; Pradhan et al., 2012), whose training set comprises 66 roles (7 core roles, 21 non-core roles, 19 continuation types, and 19 reference types).

Model. To encode the three constraints listed above in a RegCCRF, we define a regular language describing valid BIO sequences (Ramshaw and Marcus, 1999) over the 66 roles. A minimal unambiguous NFA for this language has more than $2^2 \cdot 3^{19}$ states, which is too large to run the Viterbi algorithm on our hardware. However, as many labels are very rare, we can shrink our automaton by discarding them at the cost of imperfect recall. We achieve further reductions in size by ignoring constraints on reference roles, treating them identically to non-core roles. Our final automaton recognizes 5 core role types (ARG0 through ARG4), 17 non-core / reference roles, and one continuation role type (for ARG1). This automaton has 672 states, yielding a RegCCRF with 2592 tags.

Our model is then given by this RegCCRF, trained constrained, with emission scores provided by a linear projection of the output of a pretrained RoBERTa network Liu et al. (2019). In order to pro-

²As downloaded from <https://catalog.ldc.upenn.edu/LDC2013T19>, and preprocessed according to <https://cemantix.org/data/ontonotes.html>

Table 2: Results from our experiments (averaged over 5 trials), along with selected reported results from recent literature.

	Model	Precision	Recall	F_1
Our experiments	RoBERTa + CRF	86.82	87.73	87.27
	RoBERTa + RegCCRF	87.22	87.79	87.51
Results from literature	He et al. (2017)	—	—	85.5
	Ouchi et al. (2018)	87.1	85.3	86.2
	Ouchi et al. (2018) (ensemble)	88.5	85.5	87.0
	Li et al. (2019)	85.7	86.3	86.0

vide the model with event information, the given predicates are prefixed by a special reserved token in the input sequence. RoBERTa parameters are fine-tuned during the learning of transition scores and projection weights – a full description of the training procedure is provided in the Appendix A.

As RegCCRF loss is only finite for label sequences in \mathcal{L} , we must ensure that our training data do not violate our constraints. For the roles which we discard, we simply remove the offending labels from the training data. In six cases, training instances directly conflict with the constraints specified — all of these cases involve continuation roles missing a valid preceding role. We discard these instances.

Baseline. As a baseline model, we use the same architecture with a standard CRF replacing the RegCCRF. Since for this baseline, we are not limited by GPU memory, we include all role types present in the training set, and use the complete training set.

Results and analysis. We evaluate both regular-constrained and unconstrained CRF models against the evaluation partition, and measure performance using F_1 score for exact span matches. For comparability with prior work, we use the evaluation script³ for the CoNLL-2005 shared task (Carreras and Màrquez, 2005). These results, averaged over five trials, are presented in Table 2.

Both our RegCCRF and the unconstrained CRF baseline outperform the existing state-of-the-art ensemble model Ouchi et al. (2018). We ascribe this improvement over the existing literature to our use of RoBERTa – prior work in SRL tends to rely on ELMo (Peters et al., 2018), which has been show to do worse than pretrained transformer-based models in downstream tasks (Devlin et al., 2019).

Between our RegCCRF and baseline models, we find that the former significantly⁴ outperforms the latter in terms of F_1 score. This is despite the fact that our RegCCRF is unable to predict rare role types, while the CRF has no such limitation. In fact, just under 1% of all role spans in the test data are of a type not included in the RegCCRF, leaving it with a theoretical maximum of 99% recall. Nonetheless, our RegCCRF actually achieves a higher average recall than the CRF, though this difference is not significant. In contrast, unsurprisingly, the RegCCRF show significantly better precision than the CRF. No single model from the literature beats the RegCCRF in precision, only the ensemble of Ouchi et al. (2018).

8 Conclusion and Future Work

In this work, we have presented a method to constrain the output of CRFs to a regular language. Our construction allows constraints to be used at training or prediction time, and we demonstrate that training with constraints better captures the data distribution. To test our method empirically, we carry out experiments on synthetic data, and incorporate a RegCCRF into a deep neural model for semantic role labeling, demonstrating improvements over the state-of-the-art.

For enhanced expressibility, future work could investigate non-binary constraints, i.e., regular language-based constraints with learnable weights. Additionally, regular language induction (e.g. Dunay et al. (1994); Bartoli et al. (2016)) could be used to learn languages automatically, reducing manual specification and identifying non-obvious constraints.

³As available from <https://www.cs.upc.edu/~srlconll/soft.html>.

⁴All significance results are at the $p < 0.05$ level, as measured by a two-tailed permutation test.

Another avenue for continuing research lies in identifying further applications for RegCCRFs. We believe that the NLP task of relation extraction could be a fruitful target – RegCCRFs offer a mechanism to make the proposal of a relation conditional on the presence of the right number and type of arguments.

While the construction we have proposed cannot be lifted directly to context-free languages due to the unbounded state space of the corresponding pushdown automata, there is plentiful work on regular approximations of context-free languages (Mohri and Nederhof, 2001). On this basis, for example, a RegCCRF backed by a regular language describing trees of a limited depth could also be applied to tasks with context-free constraints.

Our implementation of RegCCRFs, as well as scripts for replicating our experiments, are available at <https://www.ims.uni-stuttgart.de/data/regccrf>.

Acknowledgements

This work is supported by IBM Research AI through the IBM AI Horizons Network.

References

- Peter Anderson, Basura Fernando, Mark Johnson, and Stephen Gould. Guided open vocabulary image captioning with constrained beam search. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 936–945, Copenhagen, Denmark, September 2017. Association for Computational Linguistics.
- Alberto Bartoli, Andrea De Lorenzo, Eric Medvet, and Fabiano Tarlao. Inference of regular expressions for text extraction from examples. *IEEE Transactions on Knowledge and Data Engineering*, 28(5):1217–1230, 2016.
- Facundo Bromberg, Dimitris Margaritis, and Vasant Honavar. Efficient markov network structure discovery using independence tests. *The Journal of Artificial Intelligence Research*, 35:449–484, 05 2009.
- Xavier Carreras and Lluís Màrquez. Introduction to the CoNLL-2005 shared task: Semantic role labeling. In *Proceedings of the Ninth Conference on Computational Natural Language Learning (CoNLL-2005)*, pages 152–164, Ann Arbor, Michigan, June 2005. Association for Computational Linguistics.
- Yoeng-Jin Chu. On the shortest arborescence of a directed graph. *Scientia Sinica*, 14:1396–1400, 1965.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics.
- B.D. Dunay, F.E. Petry, and B.P. Buckles. Regular language induction with genetic programming. In *Proceedings of the First IEEE Conference on Evolutionary Computation. IEEE World Congress on Computational Intelligence*, pages 396–400 vol.1, 1994.
- Jack Edmonds. Optimal branchings. *Journal of Research of the National Bureau of Standards*, 71B(4):233–240, 1967.
- Kevin Gimpel, Nathan Schneider, Brendan O’Connor, Dipanjan Das, Daniel Mills, Jacob Eisenstein, Michael Heilman, Dani Yogatama, Jeffrey Flanigan, and Noah Smith. Part-of-speech tagging for twitter: Annotation, features, and experiments. In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics*, pages 42–47, 2011.
- Hermann Gruber and Markus Holzer. Inapproximability of nondeterministic state and transition complexity assuming $P \neq NP$. In *International Conference on Developments in Language Theory*, pages 205–216. Springer, 2007.

- Eva Hasler, Adrià de Gispert, Gonzalo Iglesias, and Bill Byrne. Neural machine translation decoding with terminology constraints. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 506–512, New Orleans, Louisiana, June 2018. Association for Computational Linguistics.
- Luheng He, Kenton Lee, Mike Lewis, and Luke Zettlemoyer. Deep semantic role labeling: What works and what’s next. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 473–483, 2017.
- Chris Hokamp and Qun Liu. Lexically constrained decoding for sequence generation using grid beam search. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1535–1546, Vancouver, Canada, July 2017. Association for Computational Linguistics.
- Tao Jiang and Bala Ravikumar. Minimal NFA problems are hard. In *International Colloquium on Automata, Languages, and Programming*, pages 629–640. Springer, 1991.
- Zhe Jiang. Spatial structured prediction models: Applications, challenges, and techniques. *IEEE Access*, 8:38714–38727, 2020.
- Justin Johnson, Ranjay Krishna, Michael Stark, Li-Jia Li, David A. Shamma, Michael S. Bernstein, and Li Fei-Fei. Image retrieval using scene graphs. In *2015 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 3668–3678, 2015.
- Daniel Jurafsky and James H. Martin. *Speech and Language Processing (2nd Edition)*. Prentice-Hall, Inc., USA, 2009.
- Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In Yoshua Bengio and Yann LeCun, editors, *3rd International Conference on Learning Representations, ICLR 2015, San Diego, CA, USA, May 7-9, 2015, Conference Track Proceedings*, 2015.
- Trausti Kristjánsson, Aron Culotta, Paul Viola, and Andrew McCallum. Interactive information extraction with constrained conditional random fields. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 412–418, 2004.
- John Lafferty, Andrew McCallum, and Fernando CN Pereira. Conditional random fields: Probabilistic models for segmenting and labeling sequence data. In *Proceedings of the Eighteenth International Conference on Machine Learning*, page 282–289, San Francisco, CA, USA, 2001. Morgan Kaufmann Publishers Inc.
- Guillaume Lample, Miguel Ballesteros, Sandeep Subramanian, Kazuya Kawakami, and Chris Dyer. Neural architectures for named entity recognition. In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 260–270, San Diego, California, June 2016. Association for Computational Linguistics.
- Su-in Lee, Varun Ganapathi, and Daphne Koller. Efficient structure learning of markov networks using l_1 -regularization. In B. Schölkopf, J. Platt, and T. Hoffman, editors, *Advances in Neural Information Processing Systems*, volume 19. MIT Press, 2007.
- Zuchao Li, Shexia He, Hai Zhao, Yiqing Zhang, Zhuosheng Zhang, Xi Zhou, and Xiang Zhou. Dependency or span, end-to-end uniform semantic role labeling. *Proceedings of the AAAI Conference on Artificial Intelligence*, 33(01):6730–6737, Jul. 2019.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. RoBERTa: A robustly optimized BERT pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019.
- Mehryar Mohri. A disambiguation algorithm for finite automata and functional transducers. In *International Conference on Implementation and Application of Automata*, pages 265–277. Springer, 2012.

- Mehryar Mohri and Mark-Jan Nederhof. Regular approximation of context-free grammars through transformation. In *Robustness in language and speech technology*, pages 153–163. Springer, 2001.
- Kevin P. Murphy, Yair Weiss, and Michael I. Jordan. Loopy belief propagation for approximate inference: An empirical study. In *Proceedings of the Fifteenth Conference on Uncertainty in Artificial Intelligence*, page 467–475, Stockholm, Sweden, 1999. Morgan Kaufmann Publishers Inc.
- Vlad Niculae, Andre Martins, Mathieu Blondel, and Claire Cardie. Sparsemap: Differentiable sparse structured inference. In *International Conference on Machine Learning*, pages 3799–3808. PMLR, 2018.
- Hiroki Ouchi, Hiroyuki Shindo, and Yuji Matsumoto. A span selection model for semantic role labeling. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 1630–1642, Brussels, Belgium, October–November 2018. Association for Computational Linguistics.
- Martha Palmer, Daniel Gildea, and Paul Kingsbury. The Proposition Bank: An annotated corpus of semantic roles. *Computational Linguistics*, 31(1):71–106, 2005.
- Matthew Peters, Mark Neumann, Mohit Iyyer, Matt Gardner, Christopher Clark, Kenton Lee, and Luke Zettlemoyer. Deep contextualized word representations. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 2227–2237, New Orleans, Louisiana, June 2018. Association for Computational Linguistics.
- Sameer Pradhan, Alessandro Moschitti, Nianwen Xue, Olga Uryupina, and Yuchen Zhang. CoNLL-2012 shared task: Modeling multilingual unrestricted coreference in OntoNotes. In *Joint Conference on EMNLP and CoNLL - Shared Task*, pages 1–40, Jeju Island, Korea, July 2012. Association for Computational Linguistics.
- Lance Ramshaw and Mitchell Marcus. Text chunking using transformation-based learning. In *Natural Language Processing Using Very Large Corpora*, pages 157–176. Springer Netherlands, Dordrecht, 1999.
- Dan Roth and Wen-tau Yih. A linear programming formulation for global inference in natural language tasks. In *Proceedings of the Eighth Conference on Computational Natural Language Learning (CoNLL-2004) at HLT-NAACL 2004*, pages 1–8, Boston, Massachusetts, USA, May 6–May 7 2004. Association for Computational Linguistics.
- Sunita Sarawagi and William W Cohen. Semi-markov conditional random fields for information extraction. *Advances in neural information processing systems*, 17:1185–1192, 2004.
- Christian Scheible, Roman Klinger, and Sebastian Padó. Model architectures for quotation detection. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1736–1745, 2016.
- M. Schmidt, K. Murphy, Glenn Fung, and Rómer Rosales. Structure learning in random fields for heart motion abnormality detection. *2008 IEEE Conference on Computer Vision and Pattern Recognition*, pages 1–8, 2008.
- Charles Sutton and Andrew McCallum. Collective segmentation and labeling of distant entities in information extraction. In *Proceedings of the ICML 2004 Workshop on Statistical Relational Learning*, 2004.
- Andrew Viterbi. Error bounds for convolutional codes and an asymptotically optimum decoding algorithm. *IEEE Transactions on Information Theory*, 13(2):260–269, 1967.
- Ralph Weischedel, Eduard Hovy, Mitchell Marcus, Martha Palmer, Robert Belvin, Sameer Pradhan, Lance Ramshaw, and Nianwen Xue. Ontonotes: A large training corpus for enhanced processing. In *Handbook of Natural Language Processing and Machine Translation: DARPA Global Autonomous Language Exploitation*. Springer, 2011.

Table 3: Summary of hyperparameters for our models and experiments.

CRFs	Transition score initialization	$\mathcal{N}(0, 0.1)$
	Emission score initialization	PyTorch default
	Optimizer	SGD
Synthetic data experiments	Training iterations	5000
	Batch size	50
	Initial learning rate	1.0
	Learning rate decay	10% every 100 steps
	RoBERTa weights	roberta-base
	Projection weight and bias initialization	PyTorch default
SRL experiments	Optimizer	Adam
	Learning rate	10^{-5}
	Batch size	2
	Gradient accumulation	4 batches

Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander M. Rush. Transformers: State-of-the-art natural language processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45, Online, October 2020. Association for Computational Linguistics.

A Experimental Design

This appendix details the training procedures and hyperparameter choices for our experiments. These are summarized in Table 3. Full code for all experiments, along with training logs, are also included in the supplementary materials.

A.1 CRFs

For all CRFs and RegCCRFs, transition potentials were initialized randomly from a normal distribution with mean zero and standard deviation 0.1. No CRFs or RegCCRFs employed special start- or end-transitions – that is, we did not insert any additional beginning-of-sequence or end-of-sequence tags for the Viterbi or forward algorithms.

A.2 Synthetic data experiments – training procedure

For both synthetic data experiments, the emission potentials were represented explicitly for each position as trainable parameters – since the observation sequence was constant in all experiments, these did not depend on x .

Parameters were initialized randomly using PyTorch default initialization, and optimized using stochastic gradient descent. To ensure fast convergence to a stable distribution, we employed learning rate decay – learning rate was initially set to 1.0, and reduced by 10% every 100 training steps.

We trained all models for a total of 5000 steps with a batch size of 50. All models were trained on CPUs. For the experiment described in Section 6.1, we trained separate models for each k – the total training time for this experiment was approximately 35 minutes. The experiment described in Section 6.2 completed training in approximately 30 seconds.

A.3 Semantic role labeling – training procedure

In the semantic role labeling (SRL) experiments, we incorporated a pretrained RoBERTa network (Liu et al., 2019) – the implementation and weights for this model were obtained using the roberta-base model from the Hugging Face transformers library (Wolf et al., 2020). RoBERTa

embeddings were projected down to transmission scores using a linear layer with a bias – projection weights and biases were initialized using the PyTorch default initialization.

Input tokens were sub-tokenized using RoBERTa’s tokenizer. The marked predicate in each sentence was prefixed by a special <unk> token. During training, for efficiency reasons, we excluded all sentences with 120 or more subtokens – this amounted to 0.23% of all training instances. We nonetheless predicted on all instances, regardless of length.

We optimized models using the Adam optimizer (Kingma and Ba, 2015) with a learning rate of 10^{-5} . We fine-tune RoBERTa parameters and learn the projection and RegCCRF weights jointly. For performance reasons, batch size was set to 2, but we utilized gradient accumulation over groups of 4 batches to simulate a batch size of 8.

We utilized early stopping to avoid overfitting. Every 5000 training steps, we approximated our model’s F_1 score against a subset of the provided development partition, using a simplified reimplementation of the official evaluation script. Each time we exceeded the previous best F_1 score for a model, we saved all model weights to disk. After 50 such evaluations with no improvement, we terminated training, and used the last saved copy of model weights for final evaluation.

We performed all SRL experiments on GeForce GTX 1080 Ti GPUs. Each experiment used a single GPU. Training took an average of 88 hours for RegCCRF models, and 24 hours for CRF baseline models. All training logs with timestamps are included in the supplementary materials.