

Mapping flows on weighted and directed networks with incomplete observations

Jelena Smiljanić,^{1,2,*} Christopher Blöcker,¹ Daniel Edler,^{1,3,4} and Martin Rosvall¹

¹*Integrated Science Lab, Department of Physics, Umeå University, SE-901 87 Umeå, Sweden*

²*Scientific Computing Laboratory, Center for the Study of Complex Systems, Institute of Physics Belgrade, University of Belgrade, Pregrevica 118, 11080 Belgrade, Serbia.*

³*Gothenburg Global Biodiversity Centre, Box 461, SE-405 30 Gothenburg, Sweden.*

⁴*Department of Biological and Environmental Sciences, University of Gothenburg, Carl Skottsbergs gata 22B, Gothenburg 41319, Sweden.*

(Dated: November 7, 2021)

Detecting significant community structure in networks with incomplete observations is challenging because the evidence for specific solutions fades away with missing data. For example, recent research shows that flow-based community detection methods can highlight spurious communities in sparse undirected and unweighted networks with missing links. Current Bayesian approaches developed to overcome this problem do not work for incomplete observations in weighted and directed networks that describe network flows. To address this gap, we extend the idea behind the Bayesian estimate of the map equation for unweighted and undirected networks to enable more robust community detection in weighted and directed networks. We derive a weighted and directed prior network that can incorporate metadata information and show how an efficient implementation in the community-detection method Infomap provides more reliable communities even with a significant fraction of data missing.

I. INTRODUCTION

Simple network models gain explainable power with additional information about node labels or link directions and weights [1, 2]. But these data can also introduce uncertainties such as mislabeled nodes or noisy link measurements that network methods must address for reliable further analysis [3]. For example, when community-detection methods disregard uncertainties in network data, they can overfit and generate inaccurate node classifications that affect downstream analyses such as link prediction [4–6].

To assess the significance of detected communities, we can statistically compare them with expected results under a null model [7, 8] or test how robust they are under random perturbations of the network [9]. However, both approaches are computationally expensive and impractical for large networks. Instead, we can integrate regularization mechanisms in the community-detection methods themselves to prevent them from capitalizing on spurious communities. Several community detection methods take this approach for undirected and unweighted networks. For example, community-detection methods based on statistical inference can incorporate assumptions about unreliable measurements into the generative network models [10, 11]. For the flow-based community-detection method known as the map equation, which identifies modular structure by searching for sets of nodes with long flow persistence [12, 13], we have derived a Bayesian estimate that copes with missing unweighted and undirected links [6]. However, dealing with incomplete observations for robust flow-based community de-

tection in directed and weighted networks remains unresolved.

Since link weights and directions naturally describe network flows, the map equation works effectively for directed and weighted networks. But the Bayesian estimate of the map equation for unweighted and undirected links requires an analytical expression for the network-flow distribution. For directed networks, no such analytical solution exists. Because the Bayesian estimate of the map equation also assumes a binary network to derive link probabilities, it cannot be applied directly to weighted and directed networks.

Instead, we start from the basic idea behind the Bayesian estimate of the map equation and derive weighted network priors by modifying the random surfer required to obtain an ergodic stationary flow distribution in directed networks. A conventional random surfer follows links proportional to their weights from node to node and teleports uniformly to nodes or links at a fixed rate. However, teleporting at a fixed rate disregards basic network structure and can wash out significant communities, underfitting the data [14]. Other approaches that reduce the teleportation rate’s influence on the community assignments can instead lead to overfitting in networks with missing data. By modifying these standard teleportation schemes using the continuous configuration model [15] and adjusting it for unipartite and bipartite weighted, directed networks with and without metadata, we obtain the map equation with weighted network priors (Fig. 1). The weighted network priors exploit random surfers for robust community detection.

We use synthetic networks with planted community structures and real-world networks with varying link observations to evaluate the map equation with weighted network priors. We find that the map equation with and without weighted network priors detect similar and ro-

* jelena.smiljanic@umu.se

bust communities when enough observations are available. But for incomplete networks with many missing observations, the map equation with weighted network priors outperforms the standard map equation and prevents spurious communities.

II. METHODOLOGY

The map equation is an information-theoretic objective function for detecting flow-based communities [12, 13]. Conceptually, it models network flows as random walks, encodes random walker movements between nodes using codewords, and estimates the theoretical lower limit of the average per-step codelength for a given partition of the nodes into modules. In line with the minimum description length principle, finding the partition that maximizes flow compression is equivalent to identifying regularities in the network data. The Infomap software package [16] implements a fast and greedy search algorithm that maximizes flow compression by minimizing the map equation.

The basic idea behind the map equation is a communication game where a sender uses codewords to update a receiver about the location of the random walker in the network. In a one-level partition without modular structure, we assign unique codewords to nodes, and the sender communicates one codeword per random-walker step to the receiver. The lower limit for the codelength is the Shannon entropy over the nodes' stationary visit rates as per Shannon's source coding theorem [17]. When partitioning nodes into more than one module, we can re-use codewords across modules and achieve shorter average codelengths. We introduce an index-level codebook to encode transitions between modules and one exit codeword per module for a uniquely decodable code. The sender uses one codeword to describe transitions within modules and three codewords between modules. In the same fashion, we can extend the coding scheme to hierarchies with three or more levels. The partition that compresses the flows on the network the most reflects the network's community structure regarding that flow the best.

When sufficiently many observations are available, Infomap returns reliable communities [18, 19]. But because the map equation describes the network as-is, it is sensitive to missing observations. The actual stationary flow distribution cannot be determined accurately from incomplete data, leading to errors when estimating the modular description length. More specifically, incomplete link measurements distort the balance between module and index-level codebooks. As a consequence, the map equation capitalizes on the noise and detects spurious partitions with more and smaller communities than actually present in the complete network [4, 6].

A Bayesian estimate that incorporates prior network assumptions into the map equation overcomes this overfitting problem, and can be derived in closed form for

unweighted undirected networks where the stationary visit rate for node i is determined by its degree, k_i , as $p_i = \frac{k_i}{\sum_{i=1}^N k_i}$ [6, 20]. However, we cannot directly apply this approach to directed or weighted networks for two reasons. First, we cannot express a corresponding Bayesian estimate of the map equation analytically because no closed-form solution exists for node visit rates in directed networks. Second, the prior for weighted networks must incorporate link weights absent in previous work [6].

For directed networks, the node visit rates can be calculated from a set of recursive equations $p_i = \sum_j p_j T_{ji}$, where T is the network's transition matrix and T_{ij} is the transition probability from node i to j . In strongly connected networks, the Perron-Frobenius theorem guarantees a unique ergodic solution. However, random walks on weakly connected networks are not ergodic. Turning the random walker into a random surfer who teleports to any node at a small probability α effectively connects the network and guarantees ergodicity [21]. But this approach has been considered a necessary evil because it disregards the network structure and turns the flow distribution dependent on the teleportation parameter α [14]. To ease this problem in complete networks, we can use unrecorded teleportation: The sender updates the receiver when the random surfer teleports, without counting the corresponding codewords towards the codelength. But unrecorded teleportation is not a viable option for incomplete networks because recording only regular steps along links enables compact descriptions of spurious communities [Fig. 1(a) and (b)]. To guarantee ergodicity and address the noise problem, we define a refined recorded teleportation scheme based on the network topology that incorporates uncertainties.

A. The map equation with weighted network prior

In current teleportation schemes for the map equation, a random surfer teleports at a fixed teleportation rate independent of the visited source node (Fig. 1). But a fixed teleportation rate cannot handle incomplete link observations [Fig. 1(c)]: For small teleportation rates, the network structure dominates such that the map equation can overfit to noise. Conversely, for high teleportation rates, random jumps dominate over the network structure such that the map equation can underfit and fail to detect relevant community structures. We evade this dilemma by deriving a teleportation strategy with node-dependent source and target teleportation probabilities, forming a weighted network prior [Fig. 1(d)].

Consider a weighted directed network with N nodes where k_i^{in} and k_i^{out} denote observed in- and out-degrees, w_{ij} denotes the observed weight on the link from node i to j , and $s_i^{\text{in}} = \sum_j w_{ji}$ and $s_i^{\text{out}} = \sum_j w_{ij}$ denote in- and out-strengths for node i . To derive link weights for a prior network, we adapt the so-called continuous configuration model [15] which estimates the weight on the link from

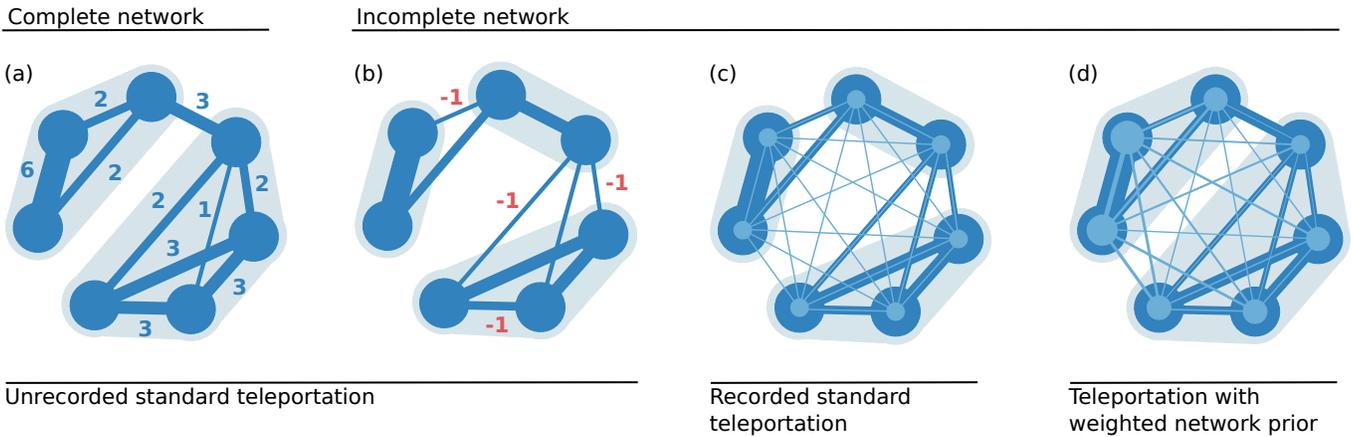


FIG. 1. A schematic weighted network with complete and missing link observations. (a) A complete network with accurate network flows and inferred communities. (b) Missing link observations introduce inaccuracies. (c) A standard teleportation scheme cannot overcome the inaccuracies. (d) Teleportation based on a weighted prior network derived from the relaxed continuous configuration model recovers the complete network's communities. Light background areas indicate optimal community assignments. The width of the light blue lines represents teleportation weight. The size of the light blue node centers indicates teleportation probability. We omit link directions in this example for simplicity.

node i to j as

$$\hat{\gamma}_{ij} = \frac{\sum_{n=1}^N k_n^{\text{in}} + k_n^{\text{out}}}{\sum_{n=1}^N s_n^{\text{in}} + s_n^{\text{out}}} \frac{s_i^{\text{out}} s_j^{\text{in}}}{k_i^{\text{out}} k_j^{\text{in}}}, \quad (1)$$

and the probability that i and j are connected as $p_{ij} = \frac{k_i^{\text{out}} k_j^{\text{in}}}{\sum_{n=1}^N k_n^{\text{out}} + k_n^{\text{in}}}$. The continuous configuration model preserves both node degree and strength. However, a prior solely based on this model would not prevent overfitting when the available information about node degree and strength is unreliable from incomplete link observations to the extent that nodes miss links. Instead, we also assume that any pair of nodes (i, j) is connected according to some connectivity parameter λ [6]. Combining both ideas, we define prior link weights as an average over the ensemble of random networks, and obtain the relaxed continuous configuration model,

$$\gamma_{ij} = \lambda \frac{\sum_{n=1}^N k_n^{\text{in}} + k_n^{\text{out}}}{\sum_{n=1}^N s_n^{\text{in}} + s_n^{\text{out}}} \frac{s_i^{\text{out}} s_j^{\text{in}}}{k_i^{\text{out}} k_j^{\text{in}}}. \quad (2)$$

When nodes without incoming or outgoing links are present, we need a different approach. For example, consider some node j without incoming links. Since both in-degree and in-strength of node j are zero, $k_j^{\text{in}} = s_j^{\text{in}} = 0$, the ratio $\frac{s_j^{\text{in}}}{k_j^{\text{in}}}$ in the last factor of Eq. 2 becomes undefined. In this case, we assign the minimum observed strength-to-degree ratio, $\frac{s_n^{\text{in}}}{k_n^{\text{in}}}$, to node j .

To prevent overfitting induced by incomplete measurements, we incorporate the prior assumption about network structure when modeling random walks on the network. The probability that, at time point $t + 1$, the random walker visits node j is given by the sum of probabilities that, at time point t , the random walker is located

at node i and follows link (i, j) ,

$$p_j(t+1) = \sum_i p_i(t) \alpha_i T_{ij} + \sum_i p_i(t) (1 - \alpha_i) T'_{ij} \quad (3)$$

$$= \sum_i p_i(t) (\alpha_i T_{ij} + (1 - \alpha_i) T'_{ij}), \quad (4)$$

where the random walker chooses an observed link with probability $\alpha_i = \frac{s_i^{\text{out}}}{s_i^{\text{out}} + \sigma_i^{\text{out}}}$, or a link in the prior network with probability $1 - \alpha_i = \frac{\sigma_i^{\text{out}}}{s_i^{\text{out}} + \sigma_i^{\text{out}}}$. Here, $s_i^{\text{out}} = \sum_j w_{ij}$ is the observed strength of node i , and $\sigma_i^{\text{out}} = \sum_j \gamma_{ij}$ is the prior link strength of i following from Eq. 2. In both cases, the probability $T_{ij} = \frac{w_{ij}}{s_i^{\text{out}}}$ and $T'_{ij} = \frac{\gamma_{ij}}{\sigma_i^{\text{out}}}$ to follow a link (i, j) is proportional to its observed weight w_{ij} and prior weight γ_{ij} , respectively. After simplification, we have

$$p_j(t+1) = \sum_i \frac{w_{ij} + \gamma_{ij}}{s_i^{\text{out}} + \sigma_i^{\text{out}}} p_i(t). \quad (5)$$

The stationary distribution of node visits rates from Eq. 5 can be obtained with the power-iteration method [22]. However, constructing the fully connected prior network according to Eq. 2 to determine the node visit rates is constraining even for moderately-sized networks. We have instead implemented the random-walker dynamics efficiently such that Infomap never constructs the prior network explicitly [16].

Our method also works for unweighted and undirected networks. Undirected networks can be considered as a special case of directed networks where $k_i^{\text{out}} = k_i^{\text{in}} = k_i$ and $s_i^{\text{out}} = s_i^{\text{in}} = s_i$ for all i . For unweighted networks, the relaxed continuous configuration model assigns weight $\gamma_{ij} = 1$ to each link. Therefore, in unweighted and undirected networks, our method and the method proposed in [6] provide identical results.

B. Connectivity parameter

We use the connectivity parameter $\lambda = \frac{\ln N}{N}$, which corresponds to the connectivity threshold of random networks [6]. This λ -value is the theoretical lower bound on density that guarantees almost surely a giant connected component in the network [23, 24]. When no further node attributes are known, we assume that the connectivity between each pair of nodes is $\lambda = \frac{\ln N}{N}$. This choice creates a prior network strong enough to prevent overfitting but permissive enough to detect well-supported communities. When more information about nodes is available, such as types, classes, or similar, the connectivity parameter, λ , should be adjusted to reflect this information. We consider two concrete cases, bipartite networks and nodes annotated with metadata.

1. Bipartite networks

Bipartite networks model interactions between different kinds of entities and comprise two node types, A and B , where only nodes with different types interact directly. A connectivity of $\lambda = \frac{\ln N}{N}$ between all pairs of nodes violates the bipartite structure of the network. To preserve the bipartite nature of the network, we set the connectivity parameter for links between same-type nodes to zero and adjust it for links between different-type nodes.

We assume a bipartite network with N_A nodes of type A , N_B nodes of type B , and uniform distribution of links between different-type nodes. As before, we pick the smallest connectivity parameter λ_{AB} such that the resulting network is almost surely connected, $\lambda_{AB} = \frac{\ln(N_A+N_B)}{\min(N_A, N_B)}$ [25]. The resulting bipartite prior weight between nodes i and j , using the relaxed continuous configuration model and bipartite connectivity λ_{AB} , is

$$\gamma_{ij}^{\text{bi}} = (1 - \delta_{t_i t_j}) \lambda_{AB} \frac{\sum_{n=1}^N k_n^{\text{in}} + k_n^{\text{out}}}{\sum_{n=1}^N s_n^{\text{in}} + s_n^{\text{out}}} \frac{s_i^{\text{out}} s_j^{\text{in}}}{k_i^{\text{out}} k_j^{\text{in}}}, \quad (6)$$

where t_i and t_j are the types of nodes i and j , respectively, and δ is the Kronecker delta.

2. Metadata

Real-world networks often contain more information than links. For example, nodes can have additional attributes, so-called metadata. Metadata have primarily aided in interpreting detected communities. However, recent studies suggest that complementing network data with metadata for community detection can help overcome limitations and uncertainties in the network structure [26–29].

We use discrete metadata to adjust the connectivity parameter for the relaxed continuous configuration

model. As before, we connect each pair of nodes uniformly with connectivity $\lambda = \frac{\ln N}{N}$. In addition, we use the metadata and reinforce connections between nodes with the same label m by $\lambda_m = \frac{\ln N_m}{N_m}$, where N_m is the number of nodes with label m . With metadata labels m_i and m_j for nodes i and j , respectively, the adjusted prior link weight is

$$\gamma_{ij}^{\text{meta}} = (\lambda + \delta_{m_i m_j} \lambda_{m_i}) \frac{\sum_{n=1}^N k_n^{\text{in}} + k_n^{\text{out}}}{\sum_{n=1}^N s_n^{\text{in}} + s_n^{\text{out}}} \frac{s_i^{\text{out}} s_j^{\text{in}}}{k_i^{\text{out}} k_j^{\text{in}}}. \quad (7)$$

III. RESULTS

We evaluate the performance of the map equation with weighted network prior in networks with missing observations. Our focus is on weighted, directed networks with unweighted and undirected networks as special cases. For simplicity, we restrict our analyses to networks with integer weights and interpret them as multigraphs, such that link weights w_{ij} denote the number of observed edges between nodes i and j . To create networks with missing observations, we sample from synthetic and empirical multigraphs by removing an r -fraction of their multiedges uniformly at random, resulting in reduced edge weights. For robust results, we average over 100 repetitions for each r -value. As a baseline, we use the performance of the standard map equation and compare the number of detected communities, partition similarity, and predictive accuracy. We measure partition similarity with adjusted mutual information (AMI) [30] between detected and planted partition and predictive accuracy with cross-validation.

A. Synthetic network

We use the Lancichinetti-Fortunato-Radicchi (LFR) method [18] to generate a weighted directed network with $N = 1000$ nodes, average node degree $k = 7$, and mixing parameter $\eta = 0.4$. The resulting network has $M = 31$ communities and an average link weight of 4.9 with integer link weights. We have included results for synthetic networks with different parameters in Appendix A.

To construct synthetic networks with metadata, we first assign metadata labels in perfect alignment with the community assignments of the LFR networks. Because metadata labels and network community structure are not always aligned [31], we assign one of the existing $M = 31$ metadata labels to a μ -fraction of the nodes at random to evaluate the performance for different metadata and community structure correlations. In this way, we can use the same network to test both uninformative prior link probabilities and prior link probabilities specified by metadata.

With uniform connectivity and as long as we remove up to half of the edges, corresponding to $r \leq 0.5$, the standard map equation and the map equation with weighted

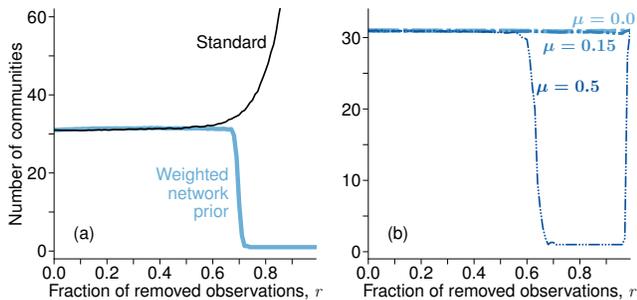


FIG. 2. Mean number of communities in synthetic weighted and directed networks with and without weighted network prior. Without metadata in (a) and with metadata in (b), where a fraction μ of the nodes have randomly assigned metadata. Results are averages over 100 network samplings.

network prior detect virtually the same number of communities [Fig. 2(a)]. When we remove more than half of the data and move beyond $r = 0.5$, the standard map equation begins to detect more and smaller communities. In contrast, the map equation with weighted network prior does not detect community structure anymore. The teleportation rate increases as we remove more data and the remaining evidence is not strong enough to support communities.

With a metadata-based prior, the fraction of removed links, r , does not affect the number of detected communities if the correlation between metadata and planted partition, μ , is high [Fig. 2(b)]. When we randomize half of the metadata labels, corresponding to $\mu = 0.5$, and move beyond the detectability point at $r \approx 0.65$, we find two regimes. First, two by construction opposing forces are at work, the noisy network structure and the metadata, and we detect no community structure. Then, as we approach $r = 1$ and almost no link observations remain in the network, we detect the partition corresponding to the metadata labels.

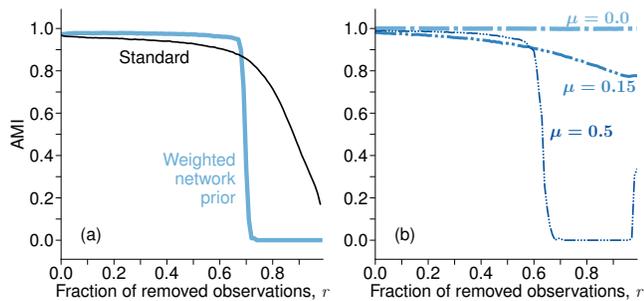


FIG. 3. Adjusted mutual information in synthetic weighted and directed networks with and without weighted network prior. Without metadata in (a) and with metadata in (b), where a fraction μ of the nodes have randomly assigned metadata. Results are averages over 100 network samplings.

Although the standard map equation detects the correct number of $M = 31$ communities when we remove less than half of the observations, the AMI scores show

that Infomap assigns some nodes to incorrect communities [Fig. 3(a)]. The map equation with weighted network prior detects communities that better match the planted communities. When we remove more than half of the observations, $r > 0.5$, the standard map equation detects more communities and the AMI score decreases. In contrast, the map equation with weighted network prior detects only one community with an AMI score of zero, indicating that the available data is insufficient to infer community structure.

When using a metadata-based prior, our method detects the planted partition reliably if the metadata and the planted partition match perfectly, corresponding to $\mu = 0$ [Fig. 3(b)]. The method assigns some nodes incorrectly for weaker correlation with less aligned structural and metadata-based priors when $\mu > 0$. When many observations are missing, the performance depends on how well the metadata align with the planted community structure.

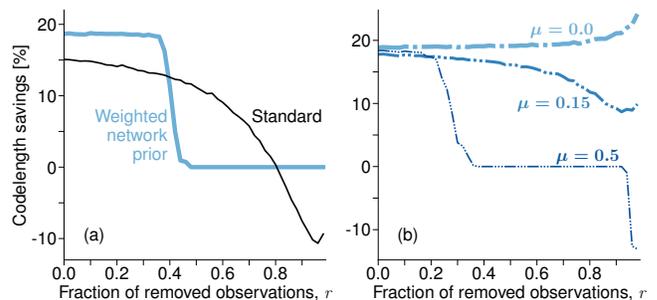


FIG. 4. Codelength savings in synthetic weighted and directed networks with and without weighted network prior. Without metadata in (a) and with metadata in (b), where a fraction μ of the nodes have randomly assigned metadata. Results are averages over 100 network samplings.

Many communities and low AMI scores in the under-sampled regime indicate that the standard map equation returns spurious communities. To understand better how this affects the system characterization, we use a cross-validation approach where we first split the multiedge counts of a network into training and test multiedges such that the same edge (i, j) can occur in the training and validation data, and their counts sum to the original observed count. Then, we infer the partition that maximizes compression in the training network with Infomap and calculate the test network's description length using that partition. If the partition captures the structure of the training network well, we expect that it also compresses the description length in the test network. However, if insufficient data are available in the training network, Infomap overfits and returns a partition that inaccurately describes the structure of the test network, resulting in low compression. Since the modular description length depends on the number of link observations [6], we construct balanced two-fold splits. For a multigraph with m observed edges, we choose $\frac{m}{2}$ edges uniformly at random and without replacement for the train-

ing network and place the remaining $\frac{m}{2}$ edges in the test network. Because this split induces further undersampling, we cannot compare the link-removal performance with the previous analysis that started with a complete network. Nevertheless, we can use the results to provide more insights into how each method performs in the undersampled regime.

To quantify the level of compression that a partition M achieves in the test network, we consider the relative codelength savings, that is the codelength under M compared to the one-module solution M_1 that assigns all nodes to the same module, $l = 1 - \frac{L(M)}{L(M_1)}$. The results indicate that, even though the standard map equation does not find the optimal partition under incomplete observations, it captures some regularities and achieves positive codelength savings [Fig. 4(a)]. However, when the codelength savings are negative, a correct delineation of the network structure is likely infeasible. The map equation with weighted network prior and uniform connectivity achieves better compression up until $r \approx 0.4$, indicating that it better captures the network structure. Beyond this point, and in the regime where the standard map equation detects partitions with negative compression, the map equation with teleportation assigns all nodes to the same community, resulting in no compression and codelength savings of zero [Fig. 4(a)].

The map equation with metadata-based prior detects partitions that capture the network regularities well and provide positive codelength savings, even when the metadata labels do not match the planted community assignments for a moderate fraction of the nodes, for example, $\mu = 0.15$. [Fig. 4(b)]. However, when the correlation between metadata and planted partition is weak ($\mu = 0.5$), and many observations are missing, the method cannot identify significant communities anymore.

B. Empirical networks

We analyze the performance of the map equation with and without weighted network prior on six empirical networks from different domains where four of the networks are weighted, and three are directed.

Sociopatterns: The social network of recorded interactions between female and male students in a high school in Marseille organized as bipartite network [32]. The students are assigned to one of 9 classes which we use as metadata.

CoRA: The network covers citations between computer science research papers [33]. The papers are classified into nine different research topics that we use as metadata.

Industry: The network contains companies that are connected if they appeared together in a business story [33]. We use Yahoo!’s 12 industry sectors as metadata.

cit-HepTh: The network contains citations from within arXiv’s HEP-TH section [34]. We consider only published articles and use information about the journals as metadata.

Pokémon: Using information from all seven generations of Pokémon, we create a network by connecting two Pokémon who share the same abilities [35]. The primary type of the Pokémon is used as metadata.

Openflights: The network contains links between non-USA airports [36]. We use countries as metadata.

Table I provides summary information of topological properties of the networks and their metadata.

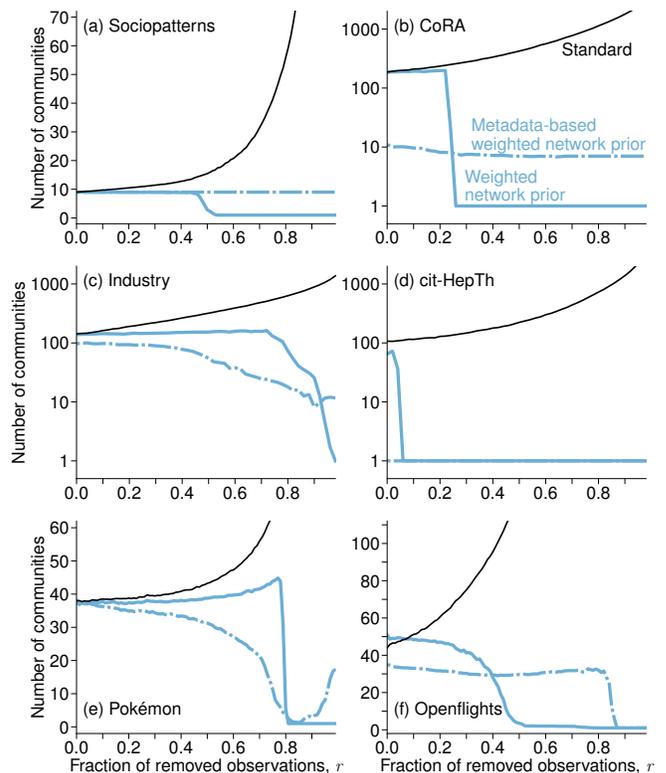


FIG. 5. Mean number of communities in empirical networks obtained by the standard map equation, the map equation with teleportation and uniform connectivity, and the map equation with metadata-based prior. Results are averages over 100 network samplings.

We analyze each of the six empirical networks and report the number of communities (Fig. 5) and relative codelength savings (Fig. 6). However, because there is no ground truth partition for empirical data, we cannot use AMI to evaluate our results.

The empirical networks behave like the synthetic networks when analyzed with the standard map equation and the map equation with weighted network prior. In the complete networks and when we remove only a small fraction of the observations, the methods detect partitions with a similar number of communities. When we

TABLE I. Summary of network data. The column Kind denotes if the network is directed (D) or undirected (U). The notations w and M refer to the average link weight and the number of metadata categories in the network, respectively. The last column reports the AMI between metadata and partition detected by the standard map equation in the complete network.

Network	Nodes	Links	Kind	w	M	AMI
Sociopatterns [32]	143+175	2265	U	1.33	9	0.9
CoRA [33]	3385	22092	D	1.00	9	0.3
Industry [33]	1778	14154	U	2.79	12	0.2
cit-HepTh [34]	4378	55186	D	1.00	9	0.0
Pokémon [35]	743	18184	U	1.10	18	0.3
Opeflights [36]	964	8850	D	1.48	97	0.4

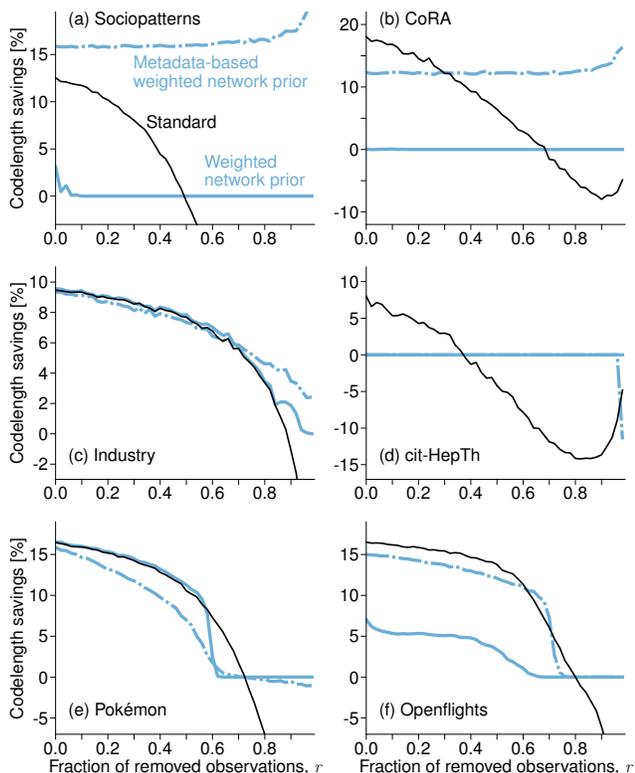


FIG. 6. Codelength savings in test networks obtained by the standard map equation, the map equation with teleportation and uniform connectivity, and the map equation with metadata-based prior. Results are averages over 100 network samplings.

remove more observations and enter the undersampled regime, the standard map equation detects more and smaller communities. In contrast, the map equation with teleportation and uniform connectivity detects no community structure (Fig. 5).

The empirical networks enter the undersampled regime at different points. In the Pokémon and Industry networks, the map equation with weighted network prior detects communities even after removing 70% of the ob-

servations. Further, in the Pokémon network, the number of communities detected by the map equation with weighted network prior increases slightly with the fraction of removed observations before it drops sharply to 1 at $r = 0.8$ and no community structure is detected anymore. However, the community structure in the cit-HepTh network is sensitive to undersampling, and the map equation with weighted network prior cannot detect communities if we remove more than 5% of the observations.

The cross-validation results show that partitions with noisy substructures detected by the standard map equation sometimes compress flows on the test network better than the one-level partition. With more data missing, eventually, the detected partitions lead to negative codelength savings, and the one-level partition offers a better description of the network flows (Fig. 6). The map equation with teleportation does not suffer from this issue. The mechanism we have implemented prevents overfitting and instead returns the one-level partition when not enough data is available to support community structure in the network.

How well metadata labels align with the network structure determines the performance for the map equation with weighted network prior using metadata. We use the partitions detected by the standard map equation on the complete networks as a proxy for the network structures and report the AMI with the metadata labels in Table I. For example, in the Sociopatterns network, the metadata contains useful information and improves the performance in the undersampled regime. The number of communities remains the same for all r -values [Fig. 5(a)] and, as the cross-validation results show, we achieve high compression in the test network [Fig. 6(a)]. In contrast, in the cit-HepTh network, where journals do not support citation patterns between articles, the metadata does not reveal significant communities in the network structure [Fig. 5(d)]. Similarly, in the Pokémon network where metadata labels align only weakly with community structure, we observe lower performance than for the map equation with weighted network prior without employing metadata. Further, when we remove almost all link observations, using uncorrelated metadata can lead to

negative codelength savings [Fig. 6(d) and (e)].

In the remaining three networks, even though the correlation between metadata and community structure is low, we find that the map equation with weighted network prior benefits from employing the metadata in the undersampled regime. The map equation with metadata-based weighted network prior detects fewer communities than the other two methods. The higher codelength savings indicate that the detected partitions better capture the structural patterns in the networks by avoiding overfitting to weakly-supported substructures [Fig. 6(b),(c), and(f)].

Our analyses show that using weighted network prior with or without metadata prevents overfitting in the undersampled regime. Instead of returning spurious partitions from sparse observations, the map equation with weighted network prior returns the one-level partition, indicating insufficient evidence to support any community structure. To detect more regularities with better compression, the metadata-based weighted network prior detects more regularities and achieves better compression when correlations between metadata and the network structure are moderate or higher. Otherwise, the metadata-based prior can underfit, and the weighted network prior without employing metadata performs better.

IV. CONCLUSION

We have equipped the map equation framework with a regulatory mechanism to deal with missing link observations in weighted and directed networks. By modifying the random surfer required for mathematically

sound flow modeling on directed networks with the relaxed continuous configuration model, we have designed a teleportation-based weighted network prior that accounts for the uncertainty of observed node degrees and strengths. The weighted network prior can incorporate additional information about node types and attributes, enabling extensions to bipartite networks and networks with metadata. Our adaptable solution turns teleportation into a principled asset for flow-based community detection.

We have implemented the map equation with weighted network priors in Infomap and analyzed synthetic and real-world networks to evaluate the performance. Our results show that the map equation with weighted network priors prevents overfitting in undersampled networks, even when a substantial fraction of the data are missing. Incorporating metadata to reflect prior knowledge about the network can compensate for missing link observations when the metadata correlate with the network structure. With a fast implementation in Infomap, our results suggest that the map equation with weighted network priors provides an effective way to identify robust communities in weighted and directed networks with incomplete observations.

ACKNOWLEDGMENTS

This work was partially supported by the Wallenberg AI, Autonomous Systems and Software Program (WASP) funded by the Knut and Alice Wallenberg Foundation. Martin Rosvall was supported by the Swedish Research Council, Grant No. 2016-00796.

-
- [1] A. Barrat, M. Barthelemy, R. Pastor-Satorras, and A. Vespignani, The architecture of complex weighted networks, *Proc. Natl. Acad. Sci. USA* **101**, 3747 (2004).
 - [2] M. E. Newman, Analysis of weighted networks, *Phys. Rev. E* **70**, 056131 (2004).
 - [3] M. E. Newman, Network structure from rich but noisy data, *Nature Physics* **14**, 542 (2018).
 - [4] A. Ghasemian, H. Hosseinmardi, and A. Clauset, Evaluating overfit and underfit in models of network community structure, *IEEE Trans. Knowl. Data Eng.*, 1–1 (2019).
 - [5] A. Ghasemian, H. Hosseinmardi, A. Galstyan, E. M. Airolidi, and A. Clauset, Stacking models for nearly optimal link prediction in complex networks, *Proc. Natl. Acad. Sci. USA* **117**, 23393 (2020).
 - [6] J. Smiljanić, D. Edler, and M. Rosvall, Mapping flows on sparse networks with missing links, *Phys. Rev. E* **102**, 012302 (2020).
 - [7] A. Lancichinetti, F. Radicchi, and J. J. Ramasco, Statistical significance of communities in networks, *Phys. Rev. E* **81**, 046110 (2010).
 - [8] A. Lancichinetti, F. Radicchi, J. J. Ramasco, and S. Fortunato, Finding statistically significant communities in networks, *PLOS ONE* **6**, 1 (2011).
 - [9] M. Rosvall and C. T. Bergstrom, Mapping change in large networks, *PLOS ONE* **5**, 1 (2010).
 - [10] T. Martin, B. Ball, and M. E. J. Newman, Structural inference for uncertain networks, *Phys. Rev. E* **93**, 012306 (2016).
 - [11] T. P. Peixoto, Reconstructing Networks with Unknown and Heterogeneous Errors, *Phys. Rev. X* **8**, 041011 (2018).
 - [12] M. Rosvall and C. T. Bergstrom, Maps of random walks on complex networks reveal community structure, *Proc. Natl. Acad. Sci. USA* **105**, 1118 (2008).
 - [13] D. Edler, L. Bohlin, and M. Rosvall, Mapping Higher-Order Network Flows in Memory and Multilayer Networks with Infomap, *Algorithms* **10**, 112 (2017).
 - [14] R. Lambiotte and M. Rosvall, Ranking and clustering of nodes in networks with smart teleportation, *Phys. Rev. E* **85**, 056107 (2012).
 - [15] J. Palowitch, S. Bhamidi, and A. B. Nobel, Significance-based community detection in weighted networks, *J. Mach. Learn. Res.* **18**, 1 (2018).
 - [16] D. Edler, A. Eriksson, and M. Rosvall, *The Infomap Software Package* (2020).

- [17] C. E. Shannon, A mathematical theory of communication, *Bell Syst. Tech. J.* **27**, 379 (1948).
- [18] A. Lancichinetti and S. Fortunato, Benchmarks for testing community detection algorithms on directed and weighted graphs with overlapping communities, *Phys. Rev. E* **80**, 016118 (2009).
- [19] D. Hric, R. K. Darst, and S. Fortunato, Community detection in networks: Structural communities versus ground truth, *Phys. Rev. E* **90**, 062805 (2014).
- [20] M. Mitzenmacher and E. Upfal, *Probability and Computing: Randomized Algorithms and Probabilistic Analysis* (Cambridge University Press, New York, NY, 2005).
- [21] S. Brin and L. Page, The anatomy of a large-scale hypertextual web search engine, *Comput. Networks ISDN* **30**, 107 (1998).
- [22] G. H. Golub and C. F. van Loan, *Matrix Computations*, 4th ed. (JHU Press, 2013).
- [23] P. Erdős and A. Rényi, On Random Graphs, *Publ. Math. Debrecen* **6**, 290 (1959).
- [24] I. Palásti, On the strong connectedness of directed random graphs, *Studia Sci. Math. Hungar* **1**, 205 (1966).
- [25] A. I. Saltykov, The number of components in a random bipartite graph, *Discrete Math. Appl.* **5**, 515 (1995).
- [26] J. Yang, J. McAuley, and J. Leskovec, Community detection in networks with node attributes, in *2013 IEEE 13th International Conference on Data Mining* (2013) pp. 1151–1156.
- [27] M. Newman and A. Clauset, Structure and inference in annotated networks, *Nat. Commun.* **7** (2015).
- [28] D. Hric, T. P. Peixoto, and S. Fortunato, Network structure, metadata, and the prediction of missing nodes and annotations, *Phys. Rev. X* **6**, 031038 (2016).
- [29] S. Emmons and P. J. Mucha, Map equation with metadata: Varying the role of attributes in community detection, *Phys. Rev. E* **100**, 022301 (2019).
- [30] N. X. Vinh, J. Epps, and J. Bailey, *J. Mach. Learn. Res.* **11**, 2837 (2010).
- [31] L. Peel, D. B. Larremore, and A. Clauset, The ground truth about metadata and community detection in networks, *Sci. Adv.* **3**, e1602548 (2017).
- [32] R. Mastrandrea, J. Fournet, and A. Barrat, Contact patterns in a high school: A comparison between data collected using wearable sensors, contact diaries and friendship surveys, *PLOS ONE* **10**, 1 (2015).
- [33] S. A. Macskassy and F. Provost, Classification in networked data: A toolkit and a univariate case study, *J. Mach. Learn. Res.* **8**, 935 (2007).
- [34] J. Leskovec, J. Kleinberg, and C. Faloutsos, Graphs over time: Densification laws, shrinking diameters and possible explanations, in *Proceedings of the Eleventh ACM SIGKDD International Conference on Knowledge Discovery in Data Mining* (2005) p. 177–187.
- [35] R. Banik, The complete pokemon dataset, <https://www.kaggle.com> (2018).
- [36] T. Opsahl, Why anchorage is not (that) important: Binary ties and sample selection (2011).

Appendix A: Results for different configurations of synthetic networks

To understand how the weighted network prior affects community detection in networks with different struc-

tures, we test the performance on synthetic networks with various sizes, densities, and community strengths. We create six weighted directed LFR networks with various number of nodes, N , average degree, k , and mixing parameter, η , then randomly remove an r -fraction of the link observations and detect communities with the standard map equation and the map equation with weighted network prior.

Our results show similar trends in terms of robustness to noise in all six networks (Figs. 7 and 8). In the undersampled regime, the performance of the standard map equation decreases fast as the number of missing observations increases. The map equation with weighted network prior undergoes a sharp transition from detecting robust communities to not detecting any community structure. The uninformative assumption that a network has no modular structure prevents the map equation with weighted network prior from detecting modular regularities in networks with weak community structure [Fig. 8(f)]. However, in sparse networks with stronger support for community structure, we find that our weighted network prior can improve detection accuracy significantly [Fig. 8(c)].

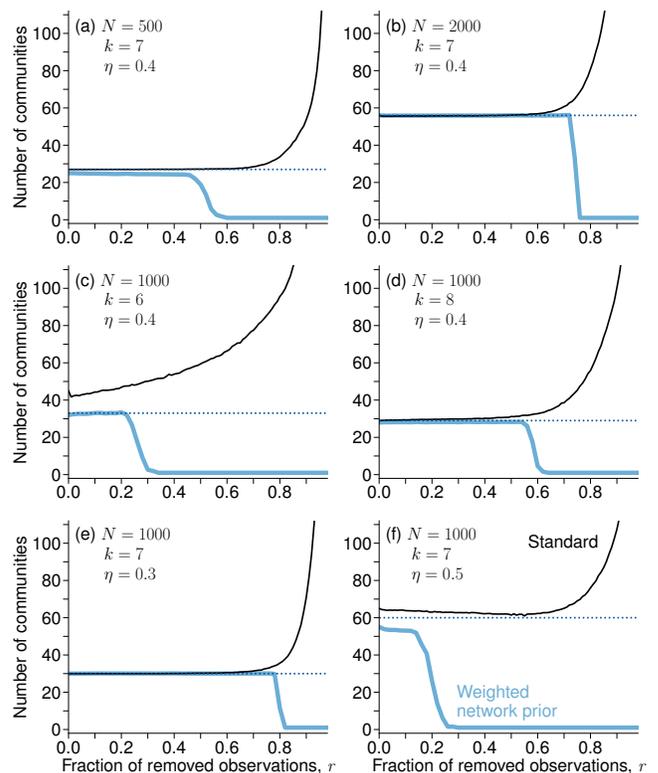


FIG. 7. Mean number of communities in synthetic weighted and directed networks with and without weighted network prior. Dotted line indicates number of planted communities.

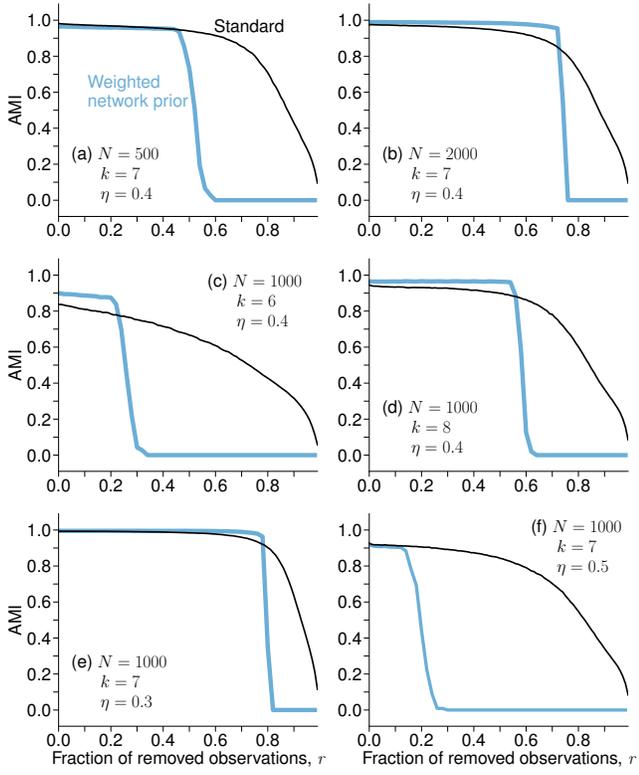


FIG. 8. Adjusted mutual information in synthetic weighted and directed networks with and without weighted network prior.