

Scientia Potentia Est – On the Role of Knowledge in Computational Argumentation

Anne Lauscher,^{*1} Henning Wachsmuth,^{*2} Iryna Gurevych,³ and Goran Glavaš¹

¹Data and Web Science Research Group, University of Mannheim

²Department of Computer Science, Paderborn University

³Ubiquitous Knowledge Processing Lab, TU Darmstadt

{anne,goran}@informatik.uni-mannheim.de, henningw@upb.de,
gurevych@ukp.informatik.tu-darmstadt.de

Abstract

Despite extensive research efforts in the recent years, computational modeling of argumentation remains one of the most challenging areas of natural language processing (NLP). This is primarily due to inherent complexity of the cognitive processes behind human argumentation, which commonly combine and integrate plethora of different types of knowledge, requiring from computational models capabilities that are far beyond what is needed for most other (i.e., simpler) natural language understanding tasks. The existing large body of work on mining, assessing, generating, and reasoning over arguments largely acknowledges that much more common sense and world knowledge needs to be integrated into computational models that would accurately model argumentation. A systematic overview and organization of the types of knowledge introduced in existing models of computational argumentation (CA) is, however, missing and this hinders targeted progress in the field. In this survey paper, we fill this gap by (1) proposing a pyramid of types of knowledge required in CA tasks, (2) analysing the state of the art with respect to the reliance and exploitation of these types of knowledge, for each of the for main research areas in CA, and (3) outlining and discussing directions for future research efforts in CA.

1 Introduction

The phenomenon of argumentation, a direct reflection of human reasoning in natural language, has fascinated scholars and researchers across societies and cultures since ancient times (Aristotle, ca. 350 B.C.E./ translated 2007; Lloyd, 2007). Computational modeling of human argumentation, commonly referred to as *computational argumentation* (CA), has evolved into one of the most

prominent and at the same time most challenging research areas in natural language processing (NLP) (Lippi and Torroni, 2015). The research in CA encompasses several groups of tasks and research directions, such as argument *mining*, *assessment*, *reasoning*, and *generation*. Although CA bears some resemblance to other NLP tasks and subfields, e.g., opinion mining or natural language inference (NLI), it is generally acknowledged to encompass more challenging tasks and reasoning scenarios (Habernal et al., 2014). While opinion mining (Liu, 2012) assesses stances towards entities or controversies by asking *what* their opinions are, CA aims to provide answers to a more difficult question: *why* is the stance of an opinion holder the way it is. In a similar vein, while NLI focuses on detecting simple entailments between pairs of statements (Bowman et al., 2015; Dagan et al., 2013), CA addresses more complex reasoning scenarios that commonly involve multiple entailment steps, often over implicit premises (Boltužić and Šnajder, 2016). The mastery of CA (i.e., providing answers to the *why* question), which targets reasoning processes that are only partially explicated in text, requires advanced natural language understanding capabilities and a substantial amount of background knowledge (Moens, 2018; Paul et al., 2020). For example, the assessment of argument quality not only depends on the actual content of an argumentative text or speech but also on the social and cultural context, such as speaker and audience characteristics, including their individual backgrounds, values, ideologies, and relationships (Wachsmuth et al., 2017a): these types of contextual information are, in turn, most often implicit, i.e., rarely explicated in text.

Although there is ample awareness of the need for combining various types of knowledge in CA models in the research community, there is no systematic overview of the types of knowledge that existing models and solutions for various CA tasks

* Equal contribution.

rely on. This impedes targeted progress in subareas of CA (e.g., argument generation). While general surveys on CA (e.g., Cabrio and Villata, 2018; Lawrence and Reed, 2020) and its subareas (e.g., Al Khatib et al., 2021; Schaefer and Stede, 2021) represent good starting points for targeted research along these lines, they lack a systematic analysis of the roles that different types of knowledge play in different CA tasks.

Contributions. In this work, we aim to systematically inform the research community in CA about the types of knowledge that are (not) being integrated in computational models for different areas and tasks. To this end, we (1) propose a pyramid-like taxonomy systematizing the types of knowledge relevant for CA tasks; the knowledge pyramid is organized along the dimension of generality-specificity of knowledge types: from linguistic and general (world and commonsense knowledge) to argumentation-specific and task-specific knowledge. Starting from 162 CA publications, we (2) survey the existing body of work w.r.t. the level of integration of the various types of knowledge and respective methodology by which a type of knowledge is integrated into the model; to this effect, we carry out an expert annotation study in which we manually label individual approaches (i.e., papers) with categories from our knowledge pyramid. Finally, we (3) identify trends and challenges in four most prominent CA subareas (*mining*, *assessment*, *reasoning*, and *generation*), summarizing them into three key recommendations for future CA research:

1. *All CA areas and tasks are likely to benefit from modeling world and commonsense knowledge.* Although several studies report empirical gains from incorporating these types of knowledge, their inclusion is still more of an exception than a rule across the landscape of all CA tasks.
2. *Argument mining tasks could benefit from modeling argumentation- and task-specific knowledge.* Such specialized knowledge has been proven effective in assessment, reasoning, and generation tasks, yet it has thus far been exploited only sporadically in argument mining approaches.
3. *All CA tasks could benefit from applying key techniques to other types of knowledge/data.* As an example, representation learning methods that map symbolic input into a seman-

tic vector space (e.g., pretrained word embeddings or language models) are used for representing text, yet rarely applied to represent other types of CA knowledge sources (e.g., knowledge bases). The bottleneck to wider application of general-purpose techniques such as representation learning in CA is the lack of (structured) knowledge resources. We thus believe that any significant progress in CA critically hinges on larger-scale creation of knowledge resources (e.g., knowledge-enriched corpora). Accordingly, based on the results of this surveying effort, we strongly encourage the CA community to foster creation of knowledge-rich argumentative corpora.

Structure. We first provide an overview of the field of CA, introducing its four most prominent subareas: argument mining, argument assessment, argument reasoning, and argument generation (Section 2). In Section 3 we then introduce the knowledge pyramid and survey the existing body of work in CA w.r.t. the types of knowledge from the pyramid. Finally, on the basis of this analysis, we summarize emerging trends and offer recommendations for future progress in CA (Section 4).

2 Computational Argumentation: Background

The study of argumentation in Western societies can be traced all the way back to the fifth century BC and Ancient Greece. With the development of democracy, and, thereby, the need to influence public decisions, the art of convincing others became an essential skill for successful participation in the democratic process (Aristotle, ca. 350 B.C.E./translated 2007). In that period, rhetorical theories also started appearing in Eastern societies and cultures such as *Nyaya Sutra* (Lloyd, 2007). Since then, a plethora of phenomena in the realm of rhetorics and argumentation, such as fallacies (Hamblin, 1970) or argumentation schemes (Walton et al., 2008), have been extensively studied, commonly within specific domains, such as science (Gilbert, 1977) and law (Toulmin, 2003). With the growing amount of argumentative publicly available data from web debates, scientific publications, and other internet sources, the computational analysis of argumentation, *computational argumentation (CA)*, gradually gained prominence and popularity in the NLP community. As depicted in Figure 1, the area of computational argumenta-

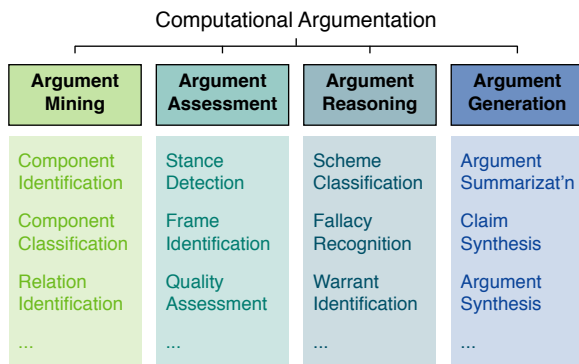


Figure 1: The four subareas of computational argumentation (argument mining, argument assessment, argument reasoning, and argument generation) with their most prominent respective tasks.

tion can be divided into four main subareas that represent the main high-level types of tasks being tackled with computational models: (i) argument mining, (ii) argument assessment, (iii) argument reasoning, and (iv) argument generation.

Argument Mining. Argument mining deals with the extraction of argumentative structures from natural language text (e.g., [Stab and Gurevych, 2017a](#)). Traditionally, it has been addressed with a pipeline of models each tackling one analysis task, most commonly *argument component segmentation*, *argument component identification*, and *argumentative relation extraction* ([Lippi and Torroni, 2015](#)). The set of argument components and argumentative relations is commonly defined by the selected underlying argumentative model which reflects the rhetorical, dialogical, or monological structure of argumentation ([Bentahar et al., 2010b](#)). For instance, the argumentation model of [Toulmin \(2003\)](#), designed for the legal domain, encompasses six types of argumentative components: a *claim* with an optional *qualifier*, *data* (background fact needed for the claim) connected to the claim via a *warrant* (i.e., a condition under which the *data* supports the *claim*) and its *backing*; additionally, a *rebuttal* specifies some counterindication for the claim.

Argument Assessment. Computational models that address tasks in the area of argument assessment typically focus on particular properties that often relate to argument quality and aim to automatically assign to arguments discrete or numeric labels for these properties. This includes the classification of stance towards some target ([Bar-Haim et al., 2017a](#)) as well as the identification of frames (or aspects) covered by the argument ([Ajjour et al.,](#)

2019). Arguably the most popular set of tasks belongs to argument *quality assessment*, which has been studied under a variety of conceptualizations, such as clarity ([Persing and Ng, 2013](#)) or convincingness ([Habernal and Gurevych, 2016b](#)). [Wachsmuth et al. \(2017a\)](#) propose a taxonomy that divides the overall quality of an argument into three complementary aspects: *logic*, *rhetoric*, and *dialectic*. Each of these three aspects further consists of several quality dimensions, e.g., the dimension of *global acceptability* for the *dialectic* aspect.

Argument Reasoning. In argument reasoning, the task is to understand the reasoning process behind an argument. In NLP, it has, for instance, been studied as predicting the entailment relationship between a *premise* and a *hypothesis* in the popular natural language inference ([Williams et al., 2017](#)) task, or as the more complex task of identifying or even reconstructing the missing warrant underpinning the inference relationship ([Tian et al., 2018](#)). Others have tried to classify the inference scheme of an argument ([Feng and Hirst, 2011](#)) or recognize certain types of reasoning fallacies in arguments, e.g., the common *ad-hominem* fallacy ([Habernal et al., 2018c](#); [Delobelle et al., 2019](#)).

Argument Generation. With conversational AI (i.e., dialog systems) arguably becoming the most prominent application in modern NLP and AI, the research efforts on generating argumentative language have also been gaining traction. Main sub-tasks in argument generation include summarization of existing arguments ([Wang and Ling, 2016](#)), generation of new claims and other argument components ([Bilu and Slonim, 2016](#)), and synthesis of entire arguments, possibly conforming to some rhetorical strategy ([El Baff et al., 2019](#)). The Project Debater ([Slonim, 2018](#)), a well-known argumentation system from IBM, combines individual models for several generation tasks.

3 Knowledge in Argumentation

In this section, we first explain the methodology that we devised and pursued in order to organize the types of knowledge that computational argumentation approaches and models utilize. We first present our *knowledge pyramid*, encompassing four coarse-grained types of knowledge identified in CA approaches. We then profile CA papers (from each of the four CA subareas introduced in the previous Section) through the lense of the four knowledge

types from the pyramid.

3.1 Methodology

We survey the state of the art in computational argumentation through the prism of the types of knowledge leveraged in existing approaches. For each of the four CA subareas, we conducted our literature research in two steps: (1) in a *pre-study* step, we collected *all* papers from that particular subarea that we could find; to this end, we combined our expert knowledge of the CA field with extensive search for relevant papers via scientific search engines and by thoroughly sweeping relevant conferences and workshops; (2) in the second step, we select the 10 most representative papers (according to scientometric parameters and our expert judgment) for each area and annotate them with the types of knowledge from the pyramid (§3.2). Next, we specify the scope of the survey more precisely and provide more details on each of these two steps.

Scope. Our survey covers the four areas of CA introduced in §2, with the following restrictions:

In *argument mining*, we do not analyse methods and approaches that have been strictly designed for a very specific genre or domain and are not applicable elsewhere. *Argumentative zoning* (e.g., Teufel et al., 1999, 2009; Mo et al., 2020) and *citation analysis* approaches (e.g., Athar, 2011; Jurgens et al., 2018), designed for and applicable only to scientific publications, exemplify the lines of work excluded from our analysis. In contrast, we do include methods that focus on general mining of argumentative structures, even if evaluated only in specific domains (e.g., Lauscher et al., 2018).

In *argument assessment*, we exclude the work on sentiment analysis (e.g., Socher et al., 2013; Wachsmuth et al., 2014). Similarly, we exclude work on general-purpose natural language inference and common-sense reasoning (Bowman et al., 2015; Rajani et al., 2019; Ponti et al., 2020) in *argument reasoning*. Also, we do not cover the large body of work on leveraging external structured knowledge for improved reasoning (e.g., Forbes et al., 2020; Lauscher et al., 2020a): we view these methods as more generic reasoning approaches that can, among other, also support argumentative reasoning (e.g., Habernal et al., 2018b), which we do cover in this survey. Finally, our overview of *argument generation* is limited strictly to argumentative text generation, as in argument summarization (e.g.,

Syed et al., 2020) and claim synthesis (e.g., Bilu and Slonim, 2016). The enormous body of work on (non-argumentative) natural language generation (Gatt and Krahmer, 2018) is out of our scope.

Pre-Study. In the pre-study, our aim was to collect as many relevant publications as we could for each of the four CA subareas in our focus. We first compiled a list of publications that we were personally aware of (i.e., leveraging “expert knowledge”). We then augmented that list by firing queries with relevant keywords (again, compiled based on our expert knowledge) against ACL Anthology¹ and Google Scholar.² For example, we fired the following search queries for argument mining: “*argument mining*”, “*argumentation mining*”, “*argument(ative) component*”, “*argument(ative) relation*”, and “*argument structure*”; and the following for argument generation: “*argument generation*”, “*argument synthesis*”, “*claim generation*”, “*claim synthesis*”, and “*argument summarization*”. Additionally, we manually examined all publications from the proceedings of all seven editions (2014-2020) of the *Argument Mining* workshop series.

In each subarea, we only included publications that propose a computational approach for solving (at least) one CA task; in contrast, we did not consider publications describing shared tasks (Habernal et al., 2018b) or external knowledge resources for CA (Al Khatib et al., 2020a). With these rules in place, we ultimately collected a total of 161 CA papers, listed in the Appendix. By analysing the types of knowledge used by approaches from collected publications, we induced the taxonomy of knowledge types (the so-called *knowledge pyramid*, illustrated in Figure 2) with four coarse-grained knowledge types (§3.2), which was then the basis for our second, in-depth analysis step (§3.3-§3.6).

In-Depth Study. In the second step, we use the knowledge pyramid, constructed based on the analysis of the full set of 163 publications, as the basis for the in-depth analysis of a subset of 40 publications (10 per research area). Our selection of *prominent* papers for the in-depth analysis was guided by the following set of (sometimes mutually conflicting) criteria: (1) maximize the scientific impact of the publications in the sample, measured as a combination of the number of publication citations and our expert judgment of publication’s overall

¹<https://aclanthology.org/>

²<https://scholar.google.com/>

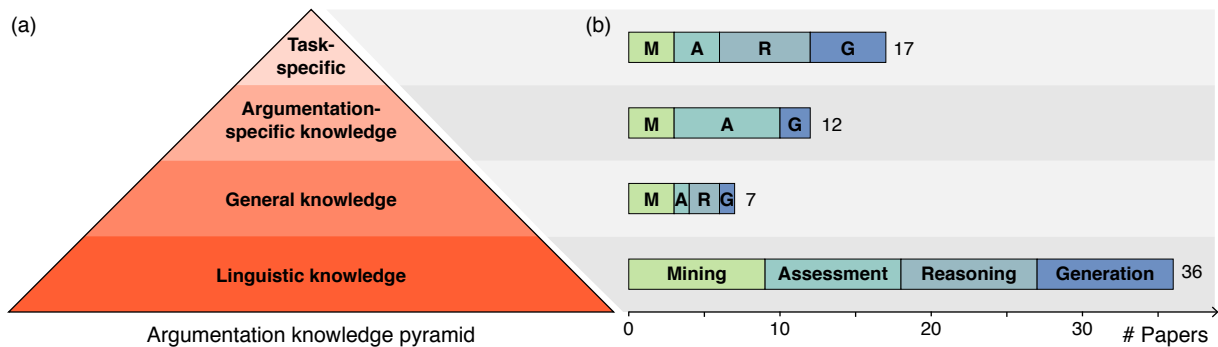


Figure 2: (a) Our proposed *argumentation knowledge pyramid*, encompassing four coarse-grained types of knowledge leveraged in CA research: the pyramid is organized according to increasing specificity of the knowledge types, from the bottom to the top. (b) Relative frequencies of presence of knowledge types in the 40 representative papers (10 per CA subarea: mining, assessment, reasoning, and generation) selected for our in-depth analysis.

impact on the CA field or subarea; (2) maximize the number of different methodological approaches in the sample;³ (3) maximize the representation of different researchers and research groups.

Once we selected the papers for the in-depth analysis, three of the authors of this manuscript independently labeled all of the selected 40 articles with the knowledge types from the knowledge pyramid. This allowed us to measure the (expert) inter-annotator agreement and test this way the extent of shared understanding of the knowledge types captured by the pyramid and their usage in individual methodological approaches in CA. While we are aware that we cannot draw statistically significant conclusions based on a sample of such limited size, we believe that our findings and this in-depth knowledge-type perspective will still be quite informative for the CA community.

3.2 Knowledge Pyramid

Based on the findings of our large-scale pre-study, we identify four coarse-grained types of knowledge being leveraged in computational argumentation research, which we organize into a pyramid model depicted in Figure 2. We chose to visualize our organization of CA knowledge types as a pyramid because it allows us to express a hierarchical generality-specificity relationship between the different types of knowledge.

³Note that diversifying the sample w.r.t. the methods is not the same as diversifying it according to knowledge types: two approaches may use the same type(s) of knowledge (e.g., linguistic knowledge) while adopting very different methods (e.g., one may depend on syntactic features and the other may leverage neural language models). Conversely, the same methodology implies reliance on the same type(s) of knowledge. Our aim was to reduce the methodological redundancy of the sample.

Linguistic Knowledge. At the bottom of our knowledge pyramid is the linguistic knowledge, leveraged by virtually all CA models and needed in practically all NLP tasks. In our pyramid, linguistic knowledge is a broad category that includes features derived from word n -grams, information about linguistic structure (e.g., part-of-speech tags, dependency parses), as well features based on models of distributional semantics, such as (pre-trained) word embedding spaces (e.g., Mikolov et al., 2013; Pennington et al., 2014; Bojanowski et al., 2017) or representation spaces spanned by neural language models (LMs) (e.g., Clark et al., 2020; Devlin et al., 2019). We also consider leveraging distributional spaces (word embeddings or pretrained LMs) built for specific (argumentative) tasks and domains to represent linguistic knowledge, as such representation spaces are induced purely from textual corpora without any external supervision signal.

General Knowledge. Above the linguistic knowledge, we place the category of *general knowledge* in which we bundle all types of knowledge that are generally considered useful for various natural language understanding tasks, but are not (or even cannot be) directly derived from textual corpora. This includes all types of common-sense knowledge, task-independent world knowledge,⁴ general-purpose logical axioms and rules, and similar. In most cases, such knowledge is collected from external structured or semi-structured resources (Sap et al., 2020; Lauscher et al., 2020a; Ji et al., 2021).

Argumentation-specific Knowledge. The third category in our knowledge pyramid encompasses

⁴Sometimes referred to as factual knowledge.

the types of knowledge that are likely to be beneficial for the vast majority of tasks in computational argumentation, but are of lesser relevance for other language understanding tasks. This includes models of argumentation and argumentative structures (Toulmin, 2003; Bentahar et al., 2010a), models of cultural aspects and moral values (Haidt and Joseph, 2004; Graham et al., 2013), lexicons with terms indicating subjective, psychological and moral categories (Hu and Liu, 2004; Tausczik and Pennebaker, 2010; Graham et al., 2009), predictions of subjectivity and sentiment classification models (Socher et al., 2013), etc.

Task-specific Knowledge. As the most specific type of knowledge, this category covers the types of knowledge that are relevant only for a specific computational argumentation task or a small set of tasks. For instance, leveraging discourse structure is considered beneficial for argumentative relation identification (Stab and Gurevych, 2014; Persing and Ng, 2016a; Opitz and Frank, 2019), a common argument mining task. We provide further concrete examples of task-specific knowledge in the following subsections.

Annotation Agreement. Each of the three expert annotators assigned all applicable knowledge type categories from the pyramid to each of the 40 sampled papers (10 per CA subarea): for each of the papers, we can thus also determine the most specific type of knowledge that it exploits (i.e., the one that is highest in the pyramid). We measured the inter-annotator agreement between the three annotators with pairwise-averaged Cohen’s κ score and have observed moderate agreement, $\kappa = 0.54$. All cases of disagreement were thoroughly discussed and resolved jointly. The final distribution of knowledge types identified in papers (i.e., after the resolution of disagreements), for each CA subarea is shown in Figure 2b. Expectedly, almost all works (36 out of 40) leverage linguistic knowledge in one form or the other. On the other hand, general knowledge (e.g., commonsense and factual knowledge, logic and rules) seem to be least leveraged across the board.

3.3 Knowledge in Argument Mining

Pre-Study. From the 162 papers we surveyed, 56 belong to the subarea of argument mining, which is the second largest subarea after argument assessment (see the Appendix). The publications that we analyzed were published in the period between

2012 and 2020. Of these 56 publications, 18 relied purely on linguistic knowledge, three exploited general knowledge as the most specific knowledge type, 29 leveraged argumentation-specific knowledge, and six task-specific knowledge. We next describe the detailed findings of our in-depth analysis of 10 selected argument mining publications.

In-Depth Study. Table 1 shows the results of our in-depth analysis in which we assigned all applicable knowledge type categories to 10 sampled argument mining papers. All but one of the publications, spanning the period from 2012 to 2018, rely on linguistic knowledge, with earlier approaches exploiting traditional linguistic features (e.g., n-grams and syntactic features) (e.g., Peldszus and Stede, 2015; Lugini and Litman, 2018), and embeddings being more prominent input representation in later work (e.g., Eger et al., 2017; Nicolae et al., 2017; Daxenberger et al., 2017; Galassi et al., 2018).

In contrast, we identify fewer papers that exploit the other types of knowledge. For instance, Cabrio and Villata (2012) leverage a pretrained model for natural language inference (i.e., textual entailment) to analyze online debate interactions.⁵ While Cabrio and Villata (2012) do resort to a theoretical argumentative framework of Dung (1995), they do so only for the purposes of the evaluation of their approach, which is why we do not judge their approach as reliant on argumentation-specific knowledge. Lawrence and Reed (2017b) use, in addition to word embeddings, general knowledge from WordNet and argumentation-specific knowledge in the form of structural assumptions for mining large-scale debates. Ajour et al. (2017) combine linguistic knowledge in the form of GloVe embeddings (Pennington et al., 2014) and other linguistic features with an argumentation-specific lexicon of discourse markers. Task-specific mining knowledge is mostly leveraged in multi-task learning scenarios (Lugini and Litman, 2018) or when aiming to extract arguments of more complex structures (i.e., with multiple components and/or chains of claims) (Eger et al., 2017; Peldszus and Stede, 2015). For instance, Peldszus and Stede (2015) jointly predict different aspects of the argument

⁵Note that our judgments only reflect the types of knowledge that the approach presented in the paper directly exploits: this is why, for example, we judge the reliance of the approach of Cabrio and Villata (2012) on a pretrained NLI model as exploitation of general knowledge only, even though the NLI model itself (Kouylekov and Negri, 2010) had been trained using a range of linguistic features.

Task	Approach	Linguistic	General	Arg.-specific	Task-specific
Mining	Cabrio and Villata (2012)	X	✓	X	X
	Peldszus and Stede (2015)	✓	X	✓	✓
	Daxenberger et al. (2017)	✓	X	X	X
	Eger et al. (2017)	✓	X	X	✓
	Niculae et al. (2017)	✓	X	X	X
	Lawrence and Reed (2017b)	✓	✓	✓	X
	Levy et al. (2017)	✓	✓	X	X
	Ajjour et al. (2017)	✓	X	✓	X
	Galassi et al. (2018)	✓	X	X	X
	Lugini and Litman (2018)	✓	X	X	✓
Assessment	Persing and Ng (2015)	✓	X	✓	X
	Habernal and Gurevych (2016b)	✓	X	✓	X
	Wachsmuth et al. (2017b)	X	X	✓	X
	Bar-Haim et al. (2017a)	✓	✓	✓	X
	Durmus and Cardie (2018)	✓	X	✓	✓
	Trautmann (2020)	✓	X	X	X
	Kobbe et al. (2020b)	✓	X	✓	X
	El Baff et al. (2020)	✓	X	✓	✓
	Al Khatib et al. (2020b)	✓	X	X	✓
	Gretz et al. (2020b)	✓	X	X	X
Reasoning	Feng and Hirst (2011)	X	X	X	✓
	Lawrence and Reed (2015)	✓	X	X	✓
	Boltužić and Šnajder (2016)	✓	X	X	X
	Habernal et al. (2018c)	✓	X	X	X
	Choi and Lee (2018)	✓	✓	X	X
	Tian et al. (2018)	✓	X	X	X
	Botschen et al. (2018)	✓	✓	X	X
	Delobelle et al. (2019)	✓	X	X	X
	Niven and Kao (2019)	✓	X	X	X
	Liga (2019)	✓	X	X	X
Generation	Zukerman et al. (2000)	X	X	✓	✓
	Sato et al. (2015)	✓	X	✓	X
	Bilu and Slonim (2016)	✓	X	✓	✓
	Wang and Ling (2016)	✓	X	X	X
	El Baff et al. (2019)	✓	X	X	✓
	Hua et al. (2019b)	✓	✓	X	X
	Bar-Haim et al. (2020)	✓	X	✓	X
	Gretz et al. (2020a)	✓	X	X	X
	Alshomary et al. (2021)	✓	X	X	✓
	Schiller et al. (2021)	✓	X	✓	✓

Table 1: The types of knowledge involved in the approaches of all publications that we included in the second stage of our literature survey (in-depth study) ordered by the high-level task they tackle and the year.

structure and then apply standard minimum spanning tree decoding, exploiting the fact that mining of complex argument structure bears similarities with discourse parsing. The only template-based approach we cover is that of [Levy et al. \(2017\)](#), who construct queries using templates and use ground sentences in Wikipedia concepts (i.e., general knowledge) for unsupervised claim detection.

3.4 Knowledge in *Argument Assessment*

Pre-Study. The largest portion of the initial 162 publications included in our pre-study, 68 in total, belong to the area of argument assessment, spanning the time period between 2008 and 2021. Of those 68 publications, 30 leverage only linguistic knowledge, but almost 20 of them rely on task-specific knowledge as the most specific knowledge type. Interestingly, none of the surveyed papers

use general knowledge as the most specific knowledge type, i.e., if they rely on general knowledge, they also leverage argumentation-specific and/or task-specific knowledge.

In-Depth Study. The in-depth study of 10 sampled argument assessment papers (time period: from 2015 to 2020) reveals that, much like in argument mining, most of the work models linguistic knowledge (e.g., Trautmann, 2020; Kobbe et al., 2020b). For example, Gretz et al. (2020b) assess argument quality based on the argument representation that combines bag-of-words (i.e., sparse symbolic text representation) with latent embeddings, both derived from static GloVe word embeddings (Pennington et al., 2014) and produced by a pre-trained BERT model (Devlin et al., 2019). Most of the papers, at this level of the pyramid (i.e., linguistic knowledge), however, predominantly rely on sparse symbolic (i.e., word-based) linguistic features (e.g., Persing and Ng, 2015; Bar-Haim et al., 2017b; Durmus and Cardie, 2018; Al Khatib et al., 2020b; El Baff et al., 2020).

Only one of the 10 selected publications resorts to general knowledge: Bar-Haim et al. (2017a) map the content of claims to Wikipedia concepts for stance classification. A common technique in argument assessment is to include argumentation-specific knowledge about sentiment or subjectivity: this is motivated by the intuition that these features directly affect argumentation quality and correlate with stances. For instance, Wachsmuth et al. (2017a) note that *emotional appeal*, which is clearly correlated with the sentiment of the text, may affect the rhetorical effectiveness of arguments. Technically, the information on subjectivity is introduced either by means of subjective lexica (e.g., Bar-Haim et al., 2017a; Durmus and Cardie, 2018; El Baff et al., 2020) or via predictions of pretrained sentiment classifiers (Habernal and Gurevych, 2016b). In a different example of use of argumentation-specific knowledge, (Wachsmuth et al., 2017b) exploit reuses between arguments (e.g., a premise of one argument uses the claim of another) to determine argument relevance by means of graph-based propagation with PageRank.

A notable task-specific knowledge category is the use of *user information* for argument quality assessment. According to the theory of argument quality assessment proposed by Wachsmuth et al. (2017a), argument quality does not only depend on the text utterance itself but also on the speaker and

the audience, for example, on their prior beliefs and their cultural context. To model this, Durmus and Cardie (2018) include information about users' prior beliefs as predictors of arguments' persuasiveness, Al Khatib et al. (2020b) predict persuasiveness using user-specific feature vectors, and El Baff et al. (2020) train audience-specific classifiers.

3.5 Knowledge in Argument Reasoning

Pre-Study. According to our pre-study, argument reasoning seems to be the smallest subarea of CA, with only 15 (out of 162) papers published (in the period between 2011 and 2019). The tasks in this subarea include argumentation scheme classification (Feng and Hirst, 2011; Lawrence and Reed, 2015), warrant identification and exploitation (Habernal et al., 2018b; Boltužić and Šnajder, 2016), and fallacy recognition (Habernal et al., 2018c; Delobelle et al., 2019). Linguistic knowledge is the most commonly used type of knowledge in reasoning as well (10 out of 15 papers rely on some type of linguistic knowledge), and three papers in this subarea exploit general knowledge.

In-Depth Study. In our selected subset of 10 publications from argument reasoning, general-domain word embeddings are by far the most frequently employed type of knowledge injection approach (Boltužić and Šnajder, 2016; Habernal et al., 2018c; Choi and Lee, 2018; Tian et al., 2018; Botschen et al., 2018; Delobelle et al., 2019; Niven and Kao, 2019). In contrast, Lawrence and Reed (2015) use traditional linguistic features in their approach, and Liga (2019) models syntactic features with tree kernels, in order to recognize specific reasoning structures in arguments. Task-specific knowledge is modeled by Feng and Hirst (2011), who design scheme-specific features for classifying argumentation schemes. In a similar vein, Lawrence and Reed (2015) utilize features that are specific to individual types of premises and conclusions. Choi and Lee (2018) use a pretrained natural language inference model⁶ to select the correct warrant in argument reasoning comprehension. For the same task, Botschen et al. (2018) leverage event knowledge about common situations (from FrameNet) as well as factual knowledge about entities (from Wikidata).

⁶Like in the case of (Cabrio and Villata, 2012) in argument mining, we consider a pretrained NLI model to represent *general knowledge*.

3.6 Knowledge in Argument Generation

Pre-Study. Finally, we surveyed 23 argument generation papers, ranging from 2000 to 2021. Argumentation-specific knowledge is the most specific knowledge type in most (10) publications. Six publications have task-specific knowledge as the most specific knowledge type category and four publications do not employ anything more concrete than general knowledge. Unlike in other subareas, only the minority (three publications) of work in argument generation relies purely on linguistic knowledge. Common argument generation tasks include argument summarization (Egan et al., 2016; Bar-Haim et al., 2020), claim synthesis (Bilu et al., 2019; Alshomary et al., 2021), and argument synthesis (Zukerman et al., 2000; Sato et al., 2015).

In-Depth Study. As in the case of argument reasoning, many generation approaches employ linguistic knowledge in the form of general-purpose embeddings (Wang and Ling, 2016; Hua et al., 2019a; Bar-Haim et al., 2020; Gretz et al., 2020a; Schiller et al., 2021). In contrast, Alshomary et al. (2021) capture argumentative language by fine-tuning a pretrained LM on argumentative text. Only Sato et al. (2015) report using traditional (i.e., sparse, symbolic) linguistic features; Bilu and Slonim (2016), however, used traditional linguistic features for classifiers that predict suitability of candidate claims.

General knowledge is utilized by Hua et al. (2019a) who retrieve Wikipedia passages as claim candidates. As argumentation-specific knowledge, Bar-Haim et al. (2020) use an external quality classifier. In a similar vein, Schiller et al. (2021) incorporate the output from external argument and stance classifiers from the ArgumenText API (Stab et al., 2018a) and condition the generation model on control codes encoding topic, stance, and aspect of the argument. Alshomary et al. (2021) condition their model on a user belief-based bag-of-words representation. Sato et al. (2015) model (argumentation-specific) knowledge about values. Predicate and sentiment lexica are employed by Bilu and Slonim (2016), whereas El Baff et al. (2019) learn likely sequences of argumentative units from features computed from argumentation-specific knowledge. They additionally include task-specific knowledge by using a knowledge base with components of claims. A pioneering work that stands out is the approach of Zukerman et al. (2000) which uses argumentation-specific knowl-

edge about the micro-structure of arguments in combination with task-specific discourse templates.

4 Emerging Trends and Discussion

We now summarize the emerging trends and open challenges in the four CA areas, abstracted from our analyses of the use of knowledge types. These, in turn, lend themselves to recommendations on modeling knowledge for CA tasks.

General Observations. Most of the 162 publications that we reviewed aim to capture some type of “advanced” knowledge, that is, knowledge beyond what can be inferred from the text data alone: 61 publications rely purely on linguistic knowledge, whereas the remaining 101 model at least one of the other three higher knowledge types. This empirically confirms the intuition that success in CA crucially depends on complex knowledge that is external to the text. Also unsurprisingly, argumentation-specific knowledge is overall the most common type of external knowledge used in CA approaches. In comparison, world and common-sense knowledge are fairly underrepresented: only nine of the 40 publications in our in-depth study rely on some variant of it. This is surprising, given that the approaches that do leverage such knowledge report substantial performance gains.

Comparison across CA Areas. We also note substantial differences across the four high-level CA subareas. The predominant most specific knowledge types vary across the areas: in argument mining and argument assessment, linguistic and argumentation-specific knowledge are most commonly employed, whereas in argument reasoning approaches, general knowledge (e.g., knowledge about reasoning mechanisms) represents the most common top-level category from the pyramid. In argument generation, argumentation-specific and task-specific knowledge were the most common top-level categories. We believe that this variance is due to the nature of the tasks in each area: predicting argumentative structures in argument mining is strongly driven by lexical cues (linguistic knowledge) and structural aspects (argumentation-specific knowledge). Despite being studied most extensively, argument mining rarely exploits general knowledge (e.g., from knowledge bases or lexico-semantic resources): there is possibly room for progress in argument mining from more extensive exploitation of structured knowledge sources.

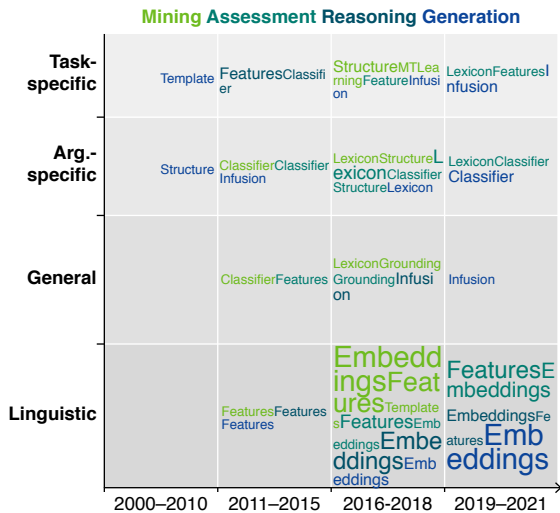


Figure 3: Techniques of employing knowledge in CA organized by defined time periods (x-axis), knowledge category (y-axis), and area (color). The size of the term indicates the number of occurrences of the techniques (between 1 and 7) in our sample of 40 papers.

As previously suggested by Wachsmuth et al. (2017a), we find that argument assessment relies on a combination of linguistic features and higher-level argumentation-related text properties that can be independently assessed, such as sentiment. In contrast, argumentative reasoning strongly relies on basic rules of inference and general knowledge about the world. Finally, the knowledge used in argument generation seems to be highly task- and domain-dependent.

Not only the types of knowledge, but also the methodological approaches for injecting that knowledge into CA models substantially differ across the subareas. Considering linguistic knowledge, for example, argument assessment approaches predominantly use lexical cues and traditional symbolic text representations, whereas the body of work on argument reasoning primarily relies on latent semantic representations (i.e., embeddings). Most variation in terms of knowledge modeling techniques is found in the argument generation area. Here, the techniques range from template- and structure-based approaches to external lexical and classifiers to embeddings and infusion.

Diachronic Analysis. In Figure 3, we depict, via word clouds, temporal development of knowledge modeling techniques in CA, with year, CA subarea, and knowledge type as dimensions. We analyse four time periods, corresponding to: pioneering work (2000–2010), the rise of CA in NLP (2011–

2015), the shift to distributional methods (2016–2018), and the most recent trends (2019–2021).

This diachronic analysis reveals that CA is roughly aligned with trends observed in other NLP areas: in the pre-neural era before 2016, knowledge has traditionally been modeled via features, sometimes using knowledge from external resources and outputs or previously trained classifiers (i.e., the pipelined approaches). Later, more advanced techniques such as grounding, infusion, and above all embeddings became more popular.

However, we note that, in part, distinct techniques are used for the different types of knowledge; embeddings, in particular, have nearly exclusively been used to encode linguistic knowledge. Although representation learning can be applied to other types of argumentative resources, CA efforts in this direction have been few and far between (e.g., Toledo-Ronen et al., 2016; Al Khatib et al., 2020a). This warrants more efforts in embedding structured argumentative knowledge and would be a step forward towards an unified argumentative representation space that could support the whole spectrum of CA tasks.

5 Conclusion

Motivated by the theoretical importance of knowledge in argumentation and by previous work pointing to the need for more research on incorporating advanced types of knowledge in computational argumentation, we have studied the role of knowledge in the body of research works in the field. In total, we surveyed 162 publications spanning the subareas of argument mining, assessment, reasoning, and generation. To organize the approaches described in the publications, we proposed a pyramid-like knowledge taxonomy systematizing the types of knowledge according to their specificity, from linguistic knowledge to task-specific argumentative knowledge. Our survey yields several important findings. Most existing approaches that do employ advanced types of knowledge (commonsense and world knowledge, argumentation- and task-specific knowledge) do demonstrate the effectiveness of this external knowledge. The reliance on more complex knowledge types is, however, not uniform across CA areas: while exploitation of such knowledge is pervasive in argument reasoning and generation, it is far less present in argument mining. We hope that our findings lead to more systematic consideration of different knowledge sources for CA tasks.

References

- Pablo Accuosto and Horacio Sagghion. 2019. [Transferring knowledge from discourse to arguments: A case study with scientific abstracts](#). In *Proceedings of the 6th Workshop on Argument Mining*, pages 41–51, Florence, Italy. Association for Computational Linguistics.
- Yamen Ajjour, Milad Alshomary, Henning Wachsmuth, and Benno Stein. 2019. [Modeling frames in argumentation](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 2922–2932, Hong Kong, China. Association for Computational Linguistics.
- Yamen Ajjour, Wei-Fan Chen, Johannes Kiesel, Henning Wachsmuth, and Benno Stein. 2017. [Unit segmentation of argumentative texts](#). In *Proceedings of the 4th Workshop on Argument Mining*, pages 118–128, Copenhagen, Denmark. Association for Computational Linguistics.
- Ahmet Aker, Alfred Sliwa, Yuan Ma, Ruishen Lui, Niravkumar Borad, Seyedeh Ziyaei, and Mina Ghobadi. 2017. [What works and what does not: Classifier and feature analysis for argument mining](#). In *Proceedings of the 4th Workshop on Argument Mining*, pages 91–96, Copenhagen, Denmark. Association for Computational Linguistics.
- Khalid Al Khatib, Tirthankar Ghosal, Yufang Hou, Anita de Waard, and Dayne Freitag. 2021. [Argument mining for scholarly document processing: Taking stock and looking ahead](#). In *Proceedings of the Second Workshop on Scholarly Document Processing*, pages 56–65, Online. Association for Computational Linguistics.
- Khalid Al Khatib, Yufang Hou, Henning Wachsmuth, Charles Jochim, Francesca Bonin, and Benno Stein. 2020a. End-to-end argumentation knowledge graph construction. In *Proceedings of the Thirty-Fourth AAAI Conference on Artificial Intelligence*, pages 7367–7374. AAAI.
- Khalid Al Khatib, Michael Völske, Shahbaz Syed, Nikolay Kolyada, and Benno Stein. 2020b. [Exploiting personal characteristics of debaters for predicting persuasiveness](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7067–7072, Online. Association for Computational Linguistics.
- Khalid Al Khatib, Henning Wachsmuth, Matthias Hagen, Jonas Köhler, and Benno Stein. 2016. [Cross-domain mining of argumentative text through distant supervision](#). In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1395–1404, San Diego, California. Association for Computational Linguistics.
- Milad Alshomary, Wei-Fan Chen, Timon Gurcke, and Henning Wachsmuth. 2021. [Belief-based generation of argumentative claims](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 224–233, Online. Association for Computational Linguistics.
- Milad Alshomary, Nick Düsterhus, and Henning Wachsmuth. 2020a. [Extractive snippet generation for arguments](#). In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR '20*, page 1969–1972, New York, NY, USA. Association for Computing Machinery.
- Milad Alshomary, Shahbaz Syed, Martin Potthast, and Henning Wachsmuth. 2020b. [Target inference in argument conclusion generation](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4334–4345, Online. Association for Computational Linguistics.
- Aristotle. ca. 350 B.C.E./ translated 2007. *On Rhetoric: A Theory of Civic Discourse*. Oxford University Press, Oxford, UK. Translated by George A. Kennedy.
- Awais Athar. 2011. Sentiment Analysis of Citations Using Sentence Structure-based Features. In *Proceedings of the ACL 2011 Student Session, HLT-SS '11*, pages 81–87, Stroudsburg, PA, USA. Association for Computational Linguistics.
- Roy Bar-Haim, Indrajit Bhattacharya, Francesco Dinuzzo, Amrita Saha, and Noam Slonim.

- 2017a. [Stance classification of context-dependent claims](#). In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 1, Long Papers*, pages 251–261, Valencia, Spain. Association for Computational Linguistics.
- Roy Bar-Haim, Lilach Edelstein, Charles Jochim, and Noam Slonim. 2017b. [Improving claim stance classification with lexical knowledge expansion and context utilization](#). In *Proceedings of the 4th Workshop on Argument Mining*, pages 32–38, Copenhagen, Denmark. Association for Computational Linguistics.
- Roy Bar-Haim, Yoav Kantor, Lilach Eden, Roni Friedman, Dan Lahav, and Noam Slonim. 2020. [Quantitative argument summarization and beyond: Cross-domain key point analysis](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 39–49, Online. Association for Computational Linguistics.
- Jamal Bentahar, Bernard Moulin, and Micheline B elanger. 2010a. A taxonomy of argumentation models used for knowledge representation. *Artificial Intelligence Review*, 33(3):211–259.
- Jamal Bentahar, Bernard Moulin, and Micheline B elanger. 2010b. [A taxonomy of argumentation models used for knowledge representation](#). *Artificial Intelligence Review*, 33(3):211–259.
- Yonatan Bilu, Ariel Gera, Daniel Herscovich, Benjamin Sznajder, Dan Lahav, Guy Moshkovich, Anael Malet, Assaf Gavron, and Noam Slonim. 2019. [Argument invention from first principles](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 1013–1026, Florence, Italy. Association for Computational Linguistics.
- Yonatan Bilu and Noam Slonim. 2016. [Claim synthesis via predicate recycling](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 525–530, Berlin, Germany. Association for Computational Linguistics.
- Piotr Bojanowski, Edouard Grave, Armand Joulin, and Tomas Mikolov. 2017. Enriching word vectors with subword information. *Transactions of the Association for Computational Linguistics*, 5:135–146.
- Filip Boltu i c and Jan  najder. 2014. [Back up your stance: Recognizing arguments in online discussions](#). In *Proceedings of the First Workshop on Argumentation Mining*, pages 49–58, Baltimore, Maryland. Association for Computational Linguistics.
- Filip Boltu i c and Jan  najder. 2016. [Fill the gap! Analyzing implicit premises between claims from online debates](#). In *Proceedings of the Third Workshop on Argument Mining (ArgMining2016)*, pages 124–133, Berlin, Germany. Association for Computational Linguistics.
- Filip Boltu i c and Jan  najder. 2017. [Toward stance classification based on claim microstructures](#). In *Proceedings of the 8th Workshop on Computational Approaches to Subjectivity, Sentiment and Social Media Analysis*, pages 74–80, Copenhagen, Denmark. Association for Computational Linguistics.
- Teresa Botschen, Daniil Sorokin, and Iryna Gurevych. 2018. [Frame- and entity-based knowledge for common-sense argumentative reasoning](#). In *Proceedings of the 5th Workshop on Argument Mining*, pages 90–96, Brussels, Belgium. Association for Computational Linguistics.
- Samuel Bowman, Gabor Angeli, Christopher Potts, and Christopher D Manning. 2015. A large annotated corpus for learning natural language inference. In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, pages 632–642.
- Ana Brassard, Tin Kuculo, Filip Boltu i c, and Jan  najder. 2018. [TakeLab at SemEval-2018 task12: Argument reasoning comprehension with skip-thought vectors](#). In *Proceedings of The 12th International Workshop on Semantic Evaluation*, pages 1133–1136, New Orleans, Louisiana. Association for Computational Linguistics.
- Elena Cabrio and Serena Villata. 2012. [Combining textual entailment and argumentation theory for supporting online debates interactions](#). In *Proceedings of the 50th Annual Meeting of the Association for Computational Linguistics*

- (*Volume 2: Short Papers*), pages 208–212, Jeju Island, Korea. Association for Computational Linguistics.
- Elena Cabrio and Serena Villata. 2018. Five years of argument mining: a data-driven analysis. In *IJCAI*, volume 18, pages 5427–5433.
- Giuseppe Carenini and Johanna D. Moore. 2006. [Generating and evaluating evaluative arguments](#). *Artificial Intelligence*, 170(11):925–952.
- Lucas Carstens and Francesca Toni. 2015. [Towards relation based argumentation mining](#). In *Proceedings of the 2nd Workshop on Argumentation Mining*, pages 29–34, Denver, CO. Association for Computational Linguistics.
- Tuhin Chakrabarty, Christopher Hidey, Smaranda Muresan, Kathy McKeown, and Alyssa Hwang. 2019. [AMPERSAND: Argument mining for PERSuAsive oNline discussions](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 2933–2943, Hong Kong, China. Association for Computational Linguistics.
- Lisa Andreevna Chalaguine and Claudia Schulz. 2017. [Assessing convincingsness of arguments in online debates with limited number of features](#). In *Proceedings of the Student Research Workshop at the 15th Conference of the European Chapter of the Association for Computational Linguistics*, pages 75–83, Valencia, Spain. Association for Computational Linguistics.
- Wei-Fan Chen, Henning Wachsmuth, Khalid Al-Khatib, and Benno Stein. 2018. [Learning to flip the bias of news headlines](#). In *Proceedings of the 11th International Conference on Natural Language Generation*, pages 79–88, Tilburg University, The Netherlands. Association for Computational Linguistics.
- HongSeok Choi and Hyunju Lee. 2018. [GIST at SemEval-2018 task 12: A network transferring inference knowledge to argument reasoning comprehension task](#). In *Proceedings of The 12th International Workshop on Semantic Evaluation*, pages 773–777, New Orleans, Louisiana. Association for Computational Linguistics.
- Kevin Clark, Minh-Thang Luong, Quoc V Le, and Christopher D Manning. 2020. [Electra: Pre-training text encoders as discriminators rather than generators](#). In *International Conference on Learning Representations*.
- Oana Cocarascu and Francesca Toni. 2017. [Identifying attack and support argumentative relations using deep learning](#). In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 1374–1379, Copenhagen, Denmark. Association for Computational Linguistics.
- Ido Dagan, Dan Roth, Mark Sammons, and Fabio Massimo Zanzotto. 2013. [Recognizing textual entailment: Models and applications](#). *Synthesis Lectures on Human Language Technologies*, 6(4):1–220.
- Johannes Daxenberger, Steffen Eger, Ivan Habernal, Christian Stab, and Iryna Gurevych. 2017. [What is the essence of a claim? Cross-domain claim identification](#). In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 2055–2066, Copenhagen, Denmark. Association for Computational Linguistics.
- Pieter Delobelle, Murilo Cunha, Eric Massip Cano, Jeroen Peperkamp, and Bettina Berendt. 2019. [Computational ad hominem detection](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics: Student Research Workshop*, pages 203–209, Florence, Italy. Association for Computational Linguistics.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Lorik Dumani and Ralf Schenkel. 2019. [A systematic comparison of methods for finding good premises for claims](#). In *Proceedings of the 42nd International ACM SIGIR Conference on Research and Development in Information Re-*

- trieval, SIGIR'19, page 957–960, New York, NY, USA. Association for Computing Machinery.
- Phan Minh Dung. 1995. On the acceptability of arguments and its fundamental role in non-monotonic reasoning, logic programming and n-person games. *Artificial intelligence*, 77(2):321–357.
- Esin Durmus and Claire Cardie. 2018. [Exploring the role of prior beliefs for argument persuasion](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 1035–1045, New Orleans, Louisiana. Association for Computational Linguistics.
- Esin Durmus and Claire Cardie. 2019. [A corpus for modeling user and language effects in argumentation on online debating](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 602–607, Florence, Italy. Association for Computational Linguistics.
- Esin Durmus, Faisal Ladhak, and Claire Cardie. 2019. [Determining relative argument specificity and stance for complex argumentative structures](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 4630–4641, Florence, Italy. Association for Computational Linguistics.
- Mihai Dusmanu, Elena Cabrio, and Serena Villata. 2017. [Argument mining on Twitter: Arguments, facts and sources](#). In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 2317–2322, Copenhagen, Denmark. Association for Computational Linguistics.
- Charlie Egan, Advait Siddharthan, and Adam Wyner. 2016. [Summarising the points made in online political debates](#). In *Proceedings of the Third Workshop on Argument Mining (ArgMining2016)*, pages 134–143, Berlin, Germany. Association for Computational Linguistics.
- Steffen Eger, Johannes Daxenberger, and Iryna Gurevych. 2017. [Neural end-to-end learning for computational argumentation mining](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 11–22, Vancouver, Canada. Association for Computational Linguistics.
- Steffen Eger, Johannes Daxenberger, Christian Stab, and Iryna Gurevych. 2018. [Cross-lingual argumentation mining: Machine translation \(and a bit of projection\) is all you need!](#) In *Proceedings of the 27th International Conference on Computational Linguistics*, pages 831–844, Santa Fe, New Mexico, USA. Association for Computational Linguistics.
- Stian Rødven Eide. 2019. [The Swedish Poli-Graph: A semantic graph for argument mining of Swedish parliamentary data](#). In *Proceedings of the 6th Workshop on Argument Mining*, pages 52–57, Florence, Italy. Association for Computational Linguistics.
- Roxanne El Baff, Henning Wachsmuth, Khalid Al Khatib, Manfred Stede, and Benno Stein. 2019. [Computational argumentation synthesis as a language modeling task](#). In *Proceedings of the 12th International Conference on Natural Language Generation*, pages 54–64, Tokyo, Japan. Association for Computational Linguistics.
- Roxanne El Baff, Henning Wachsmuth, Khalid Al-Khatib, and Benno Stein. 2018. [Challenge or empower: Revisiting argumentation quality in a news editorial corpus](#). In *Proceedings of the 22nd Conference on Computational Natural Language Learning*, pages 454–464, Brussels, Belgium. Association for Computational Linguistics.
- Roxanne El Baff, Henning Wachsmuth, Khalid Al Khatib, and Benno Stein. 2020. [Analyzing the Persuasive Effect of Style in News Editorial Argumentation](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 3154–3160, Online. Association for Computational Linguistics.
- Vanessa Wei Feng and Graeme Hirst. 2011. [Classifying arguments by scheme](#). In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*, pages 987–996, Portland, Oregon, USA. Association for Computational Linguistics.
- Maxwell Forbes, Jena D. Hwang, Vered Shwartz, Maarten Sap, and Yejin Choi. 2020. [Social](#)

- chemistry 101: Learning to reason about social and moral norms. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 653–670, Online. Association for Computational Linguistics.
- Andrea Galassi, Marco Lippi, and Paolo Torrioni. 2018. [Argumentative link prediction using residual networks and multi-objective learning](#). In *Proceedings of the 5th Workshop on Argument Mining*, pages 1–10, Brussels, Belgium. Association for Computational Linguistics.
- Albert Gatt and Emiel Krahmer. 2018. Survey of the state of the art in natural language generation: Core tasks, applications and evaluation. *Journal of Artificial Intelligence Research*, 61:65–170.
- Debela Gemechu and Chris Reed. 2019. [Decompositional argument mining: A general purpose approach for argument graph construction](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 516–526, Florence, Italy. Association for Computational Linguistics.
- Debanjan Ghosh, Aquila Khanam, Yubo Han, and Smaranda Muresan. 2016. [Coarse-grained argumentation features for scoring persuasive essays](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 549–554, Berlin, Germany. Association for Computational Linguistics.
- G Nigel Gilbert. 1977. Referencing as persuasion. *Social Studies of Science*, 7(1):113–122.
- Martin Gleize, Eyal Shnarch, Leshem Choshen, Lena Dankin, Guy Moshkovich, Ranit Aharonov, and Noam Slonim. 2019. [Are you convinced? choosing the more convincing evidence with a Siamese network](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 967–976, Florence, Italy. Association for Computational Linguistics.
- Jesse Graham, Jonathan Haidt, Sena Koleva, Matt Motyl, Ravi Iyer, Sean P Wojcik, and Peter H Ditto. 2013. Moral foundations theory: The pragmatic validity of moral pluralism. In *Advances in experimental social psychology*, volume 47, pages 55–130. Elsevier.
- Jesse Graham, Jonathan Haidt, and Brian A Nosek. 2009. Liberals and conservatives rely on different sets of moral foundations. *Journal of personality and social psychology*, 96(5):1029.
- Shai Gretz, Yonatan Bilu, Edo Cohen-Karlik, and Noam Slonim. 2020a. [The workweek is the best time to start a family – a study of GPT-2 based claim generation](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 528–544, Online. Association for Computational Linguistics.
- Shai Gretz, Roni Friedman, Edo Cohen-Karlik, Asaf Toledo, Dan Lahav, Ranit Aharonov, and Noam Slonim. 2020b. A large-scale dataset for argument quality ranking: Construction and analysis. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 7805–7813.
- Yunfan Gu, Zhongyu Wei, Maoran Xu, Hao Fu, Yang Liu, and Xuanjing Huang. 2018. [Incorporating topic aspects for online comment convincingness evaluation](#). In *Proceedings of the 5th Workshop on Argument Mining*, pages 97–104, Brussels, Belgium. Association for Computational Linguistics.
- Ivan Habernal, Judith Eckle-Kohler, and Iryna Gurevych. 2014. [Argumentation Mining on the Web from Information Seeking Perspective](#). In *Proceedings of the Workshop on Frontiers and Connections between Argumentation Theory and Natural Language Processing*, Forlì-Cesena, Italy.
- Ivan Habernal and Iryna Gurevych. 2016a. [What makes a convincing argument? Empirical analysis and detecting attributes of convincingness in web argumentation](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 1214–1223, Austin, Texas. Association for Computational Linguistics.
- Ivan Habernal and Iryna Gurevych. 2016b. [Which argument is more convincing? Analyzing and predicting convincingness of web arguments using bidirectional LSTM](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, page 11–22, Berlin, Germany. Association for Computational Linguistics.

- Ivan Habernal and Iryna Gurevych. 2017. [Argumentation mining in user-generated web discourse](#). *Computational Linguistics*, 43(1):125–179.
- Ivan Habernal, Patrick Pauli, and Iryna Gurevych. 2018a. Adapting Serious Game for Fallacious Argumentation to German: Pitfalls, Insights, and Best Practices. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*, Miyazaki, Japan. European Language Resources Association (ELRA).
- Ivan Habernal, Henning Wachsmuth, Iryna Gurevych, and Benno Stein. 2018b. [The argument reasoning comprehension task: Identification and reconstruction of implicit warrants](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 1930–1940, New Orleans, Louisiana. Association for Computational Linguistics.
- Ivan Habernal, Henning Wachsmuth, Iryna Gurevych, and Benno Stein. 2018c. [Before name-calling: Dynamics and triggers of ad hominem fallacies in web argumentation](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 386–396, New Orleans, Louisiana. Association for Computational Linguistics.
- Shohreh Haddadan, Elena Cabrio, and Serena Villata. 2019. [Yes, we can! Mining arguments in 50 years of US presidential campaign debates](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 4684–4690, Florence, Italy. Association for Computational Linguistics.
- Jonathan Haidt and Craig Joseph. 2004. Intuitive ethics: How innately prepared intuitions generate culturally variable virtues. *Daedalus*, 133(4):55–66.
- Charles L. Hamblin. 1970. *Fallacies*. Methuen, London, UK.
- Kazi Saidul Hasan and Vincent Ng. 2014. [Why are you taking this stance? Identifying and classifying reasons in ideological debates](#). In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 751–762, Doha, Qatar. Association for Computational Linguistics.
- Freyja Hewett, Roshan Prakash Rane, Nina Harlacher, and Manfred Stede. 2019. [The utility of discourse parsing features for predicting argumentation structure](#). In *Proceedings of the 6th Workshop on Argument Mining*, pages 98–103, Florence, Italy. Association for Computational Linguistics.
- Christopher Hidey and Kathy McKeown. 2019. [Fixed that for you: Generating contrastive claims with semantic edits](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 1756–1767, Minneapolis, Minnesota. Association for Computational Linguistics.
- Yufang Hou and Charles Jochim. 2017. [Argument relation classification using a joint inference model](#). In *Proceedings of the 4th Workshop on Argument Mining*, pages 60–66, Copenhagen, Denmark. Association for Computational Linguistics.
- Minqing Hu and Bing Liu. 2004. Mining opinion features in customer reviews. In *AAAI*, volume 4, pages 755–760.
- Xinyu Hua, Zhe Hu, and Lu Wang. 2019a. [Argument generation with retrieval, planning, and realization](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2661–2672, Florence, Italy. Association for Computational Linguistics.
- Xinyu Hua, Mitko Nikolov, Nikhil Badugu, and Lu Wang. 2019b. [Argument mining for understanding peer reviews](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 2131–2137, Minneapolis, Minnesota. Association for Computational Linguistics.
- Xinyu Hua and Lu Wang. 2018. [Neural argument generation augmented with externally retrieved](#)

- evidence. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 219–230, Melbourne, Australia. Association for Computational Linguistics.
- Xinyu Hua and Lu Wang. 2019. [Sentence-level content planning and style specification for neural text generation](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 591–602, Hong Kong, China. Association for Computational Linguistics.
- Laurine Huber, Yannick Toussaint, Charlotte Roze, Mathilde Dargnat, and Chloé Braud. 2019. [Aligning discourse and argumentation structures using subtrees and redescription mining](#). In *Proceedings of the 6th Workshop on Argument Mining*, pages 35–40, Florence, Italy. Association for Computational Linguistics.
- Lu Ji, Zhongyu Wei, Xiangkun Hu, Yang Liu, Qi Zhang, and Xuanjing Huang. 2018. [Incorporating argument-level interactions for persuasion comments evaluation using co-attention model](#). In *Proceedings of the 27th International Conference on Computational Linguistics*, pages 3703–3714, Santa Fe, New Mexico, USA. Association for Computational Linguistics.
- Shaoxiong Ji, Shirui Pan, Erik Cambria, Pekka Marttinen, and S Yu Philip. 2021. A survey on knowledge graphs: Representation, acquisition, and applications. *IEEE Transactions on Neural Networks and Learning Systems*.
- Yohan Jo, Jacky Visser, Chris Reed, and Eduard Hovy. 2019. [A cascade model for proposition extraction in argumentation](#). In *Proceedings of the 6th Workshop on Argument Mining*, pages 11–24, Florence, Italy. Association for Computational Linguistics.
- David Jurgens, Srijan Kumar, Raine Hoover, Dan McFarland, and Dan Jurafsky. 2018. [Measuring the evolution of a scientific field through citation frames](#). *Transactions of the Association for Computational Linguistics*, 6:391–406.
- Jonathan Kobbe, Ioana Hulpuş, and Heiner Stuckenschmidt. 2020a. [Unsupervised stance detection for arguments from consequences](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 50–60, Online. Association for Computational Linguistics.
- Jonathan Kobbe, Ines Rehbein, Ioana Hulpuş, and Heiner Stuckenschmidt. 2020b. [Exploring morality in argumentation](#). In *Proceedings of the 7th Workshop on Argument Mining*, pages 30–40, Online. Association for Computational Linguistics.
- Neema Kotonya and Francesca Toni. 2019. [Gradual argumentation evaluation for stance aggregation in automated fake news detection](#). In *Proceedings of the 6th Workshop on Argument Mining*, pages 156–166, Florence, Italy. Association for Computational Linguistics.
- Milen Kouylekov and Matteo Negri. 2010. An open-source package for recognizing textual entailment. In *Proceedings of the ACL 2010 System Demonstrations*, pages 42–47.
- Anne Lauscher, Goran Glavaš, Simone Paolo Ponzetto, and Kai Eckert. 2018. [Investigating the role of argumentation in the rhetorical analysis of scientific publications with neural multi-task learning models](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 3326–3338, Brussels, Belgium. Association for Computational Linguistics.
- Anne Lauscher, Olga Majewska, Leonardo F. R. Ribeiro, Iryna Gurevych, Nikolai Rozanov, and Goran Glavaš. 2020a. [Common sense or world knowledge? Investigating adapter-based knowledge injection into pretrained transformers](#). In *Proceedings of Deep Learning Inside Out (DeeLIO): The First Workshop on Knowledge Extraction and Integration for Deep Learning Architectures*, pages 43–49, Online. Association for Computational Linguistics.
- Anne Lauscher, Lily Ng, Courtney Napoles, and Joel Tetreault. 2020b. [Rhetoric, logic, and dialectic: Advancing theory-based argument quality assessment in natural language processing](#). In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 4563–4574, Barcelona, Spain (Online). International Committee on Computational Linguistics.

- John Lawrence and Chris Reed. 2015. [Combining argument mining techniques](#). In *Proceedings of the 2nd Workshop on Argumentation Mining*, pages 127–136, Denver, CO. Association for Computational Linguistics.
- John Lawrence and Chris Reed. 2017a. [Mining argumentative structure from natural language text using automatically generated premise-conclusion topic models](#). In *Proceedings of the 4th Workshop on Argument Mining*, pages 39–48, Copenhagen, Denmark. Association for Computational Linguistics.
- John Lawrence and Chris Reed. 2017b. [Using complex argumentative interactions to reconstruct the argumentative structure of large-scale debates](#). In *Proceedings of the 4th Workshop on Argument Mining*, pages 108–117, Copenhagen, Denmark. Association for Computational Linguistics.
- John Lawrence and Chris Reed. 2020. [Argument mining: A survey](#). *Computational Linguistics*, 45(4):765–818.
- Dieu Thu Le, Cam-Tu Nguyen, and Kim Anh Nguyen. 2018. [Dave the debater: a retrieval-based and generative argumentative dialogue agent](#). In *Proceedings of the 5th Workshop on Argument Mining*, pages 121–130, Brussels, Belgium. Association for Computational Linguistics.
- Ran Levy, Shai Gretz, Benjamin Sznajder, Shay Hummel, Ranit Aharonov, and Noam Slonim. 2017. [Unsupervised corpus-wide claim detection](#). In *Proceedings of the 4th Workshop on Argument Mining*, pages 79–84, Copenhagen, Denmark. Association for Computational Linguistics.
- Jialu Li, Esin Durmus, and Claire Cardie. 2020. [Exploring the role of argument structure in online debate persuasion](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 8905–8912, Online. Association for Computational Linguistics.
- Matthias Liebeck, Katharina Esau, and Stefan Conrad. 2016. [What to do with an airport? mining arguments in the German online participation project tempelhofer feld](#). In *Proceedings of the Third Workshop on Argument Mining (ArgMining2016)*, pages 144–153, Berlin, Germany. Association for Computational Linguistics.
- Matthias Liebeck, Andreas Funke, and Stefan Conrad. 2018. [HHU at SemEval-2018 task 12: Analyzing an ensemble-based deep learning approach for the argument mining task of choosing the correct warrant](#). In *Proceedings of The 12th International Workshop on Semantic Evaluation*, pages 1114–1119, New Orleans, Louisiana. Association for Computational Linguistics.
- Davide Liga. 2019. [Argumentative evidences classification and argument scheme detection using tree kernels](#). In *Proceedings of the 6th Workshop on Argument Mining*, pages 92–97, Florence, Italy. Association for Computational Linguistics.
- Jian-Fu Lin, Kuo Yu Huang, Hen-Hsen Huang, and Hsin-Hsi Chen. 2019. [Lexicon guided attentive neural network model for argument mining](#). In *Proceedings of the 6th Workshop on Argument Mining*, pages 67–73, Florence, Italy. Association for Computational Linguistics.
- Marco Lippi and Paolo Torrioni. 2015. [Argument mining: A machine learning perspective](#). In *International Workshop on Theory and Applications of Formal Argumentation*, pages 163–176. Springer.
- Bing Liu. 2012. [Sentiment analysis and opinion mining](#). *Synthesis lectures on human language technologies*, 5(1):1–167.
- Yang Liu, Xiangji Huang, Aijun An, and Xiaohui Yu. 2008. [Modeling and predicting the helpfulness of online reviews](#). In *2008 Eighth IEEE International Conference on Data Mining*, pages 443–452.
- Keith Lloyd. 2007. [Rethinking rhetoric from an indian perspective: Implications in the “nyaya sutra”](#). *Rhetoric Review*, 26(4):365–384.
- Luca Lugini and Diane Litman. 2018. [Argument component classification for classroom discussions](#). In *Proceedings of the 5th Workshop on Argument Mining*, pages 57–67, Brussels, Belgium. Association for Computational Linguistics.
- Stephanie Lukin, Pranav Anand, Marilyn Walker, and Steve Whittaker. 2017. [Argument strength is in the eye of the beholder: Audience effects in](#)

- persuasion. In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 1, Long Papers*, pages 742–753, Valencia, Spain. Association for Computational Linguistics.
- Jean-Christophe Menonides, Sébastien Harispe, Jacky Montmain, and Véronique Thireau. 2019. [Automatic detection and classification of argument components using multi-task deep neural network](#). In *Proceedings of the 3rd International Conference on Natural Language and Speech Processing*, pages 25–33, Trento, Italy. Association for Computational Linguistics.
- Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg S Corrado, and Jeff Dean. 2013. Distributed representations of words and phrases and their compositionality. In *Advances in neural information processing systems*, pages 3111–3119.
- Wang Mo, Cui Yunpeng, Chen Li, and Li Huan. 2020. A deep learning-based method of argumentative zoning for research articles. *Data Analysis and Knowledge Discovery*, 4(6):60–68.
- Marie-Francine Moens. 2018. [Argumentation mining: How can a machine acquire common sense and world knowledge?](#) *Argument & Computation*, 9(1):1–14.
- Gaku Morio and Katsuhide Fujita. 2018. [End-to-end argument mining for discussion threads based on parallel constrained pointer architecture](#). In *Proceedings of the 5th Workshop on Argument Mining*, pages 11–21, Brussels, Belgium. Association for Computational Linguistics.
- Gaku Morio, Hiroaki Ozaki, Terufumi Morishita, Yuta Koreeda, and Kohsuke Yanai. 2020. [Towards better non-tree argument mining: Proposition-level biaffine parsing with task-specific parameterization](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 3259–3266, Online. Association for Computational Linguistics.
- Vlad Niculae, Joonsuk Park, and Claire Cardie. 2017. [Argument mining with structured SVMs and RNNs](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 985–995, Vancouver, Canada. Association for Computational Linguistics.
- Timothy Niven and Hung-Yu Kao. 2019. [Probing neural network comprehension of natural language arguments](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 4658–4664, Florence, Italy. Association for Computational Linguistics.
- Nathan Ong, Diane Litman, and Alexandra Brusilovsky. 2014. [Ontology-based argument mining and automatic essay scoring](#). In *Proceedings of the First Workshop on Argumentation Mining*, pages 24–28, Baltimore, Maryland. Association for Computational Linguistics.
- Juri Opitz and Anette Frank. 2019. [Dissecting content and context in argumentative relation analysis](#). In *Proceedings of the 6th Workshop on Argument Mining*, pages 25–34, Florence, Italy. Association for Computational Linguistics.
- Marco Passon, Marco Lippi, Giuseppe Serra, and Carlo Tasso. 2018. [Predicting the usefulness of Amazon reviews using off-the-shelf argumentation mining](#). In *Proceedings of the 5th Workshop on Argument Mining*, pages 35–39, Brussels, Belgium. Association for Computational Linguistics.
- Debjit Paul, Juri Opitz, Maria Becker, Jonathan Kobbe, Graeme Hirst, and Anette Frank. 2020. Argumentative relation classification with background knowledge. In *Computational Models of Argument*, pages 319–330. IOS Press.
- Andreas Peldszus and Manfred Stede. 2015. [Joint prediction in MST-style discourse parsing for argumentation mining](#). In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, pages 938–948, Lisbon, Portugal. Association for Computational Linguistics.
- Jeffrey Pennington, Richard Socher, and Christopher Manning. 2014. [GloVe: Global vectors for word representation](#). In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 1532–1543, Doha, Qatar. Association for Computational Linguistics.
- Isaac Persing, Alan Davis, and Vincent Ng. 2010. [Modeling organization in student essays](#). In *Proceedings of the 2010 Conference on Empirical Methods in Natural Language Processing*, pages

- 229–239, Cambridge, MA. Association for Computational Linguistics.
- Isaac Persing and Vincent Ng. 2013. [Modeling thesis clarity in student essays](#). In *Proceedings of the 51st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 260–269, Sofia, Bulgaria. Association for Computational Linguistics.
- Isaac Persing and Vincent Ng. 2014. [Modeling prompt adherence in student essays](#). In *Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1534–1543, Baltimore, Maryland. Association for Computational Linguistics.
- Isaac Persing and Vincent Ng. 2015. [Modeling argument strength in student essays](#). In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 543–552, Beijing, China. Association for Computational Linguistics.
- Isaac Persing and Vincent Ng. 2016a. [End-to-end argumentation mining in student essays](#). In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1384–1394, San Diego, California. Association for Computational Linguistics.
- Isaac Persing and Vincent Ng. 2016b. [Modeling stance in student essays](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2174–2184, Berlin, Germany. Association for Computational Linguistics.
- Isaac Persing and Vincent Ng. 2017. [Why can't you convince me? Modeling weaknesses in un-persuasive arguments](#). In *Proceedings of the Twenty-Sixth International Joint Conference on Artificial Intelligence, IJCAI-17*, pages 4082–4088.
- Isaac Persing and Vincent Ng. 2020. [Unsupervised argumentation mining in student essays](#). In *Proceedings of the 12th Language Resources and Evaluation Conference*, pages 6795–6803, Marseille, France. European Language Resources Association.
- Georgios Petasis. 2019. [Segmentation of argumentative texts with contextualised word representations](#). In *Proceedings of the 6th Workshop on Argument Mining*, pages 1–10, Florence, Italy. Association for Computational Linguistics.
- Edoardo Maria Ponti, Goran Glavaš, Olga Majewska, Qianchu Liu, Ivan Vulić, and Anna Korhonen. 2020. Xcopa: A multilingual dataset for causal commonsense reasoning. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 2362–2376.
- Aldo Porco and Dan Goldwasser. 2020. [Predicting stance change using modular architectures](#). In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 396–406, Barcelona, Spain (Online). International Committee on Computational Linguistics.
- Peter Potash, Robin Bhattacharya, and Anna Rumshisky. 2017a. [Length, interchangeability, and external knowledge: Observations from predicting argument convincingness](#). In *Proceedings of the Eighth International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 342–351, Taipei, Taiwan. Asian Federation of Natural Language Processing.
- Peter Potash, Adam Ferguson, and Timothy J. Hazen. 2019. [Ranking passages for argument convincingness](#). In *Proceedings of the 6th Workshop on Argument Mining*, pages 146–155, Florence, Italy. Association for Computational Linguistics.
- Peter Potash, Alexey Romanov, and Anna Rumshisky. 2017b. [Here's my point: Joint pointer architecture for argument mining](#). In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 1364–1373, Copenhagen, Denmark. Association for Computational Linguistics.
- Martin Potthast, Lukas Gienapp, Florian Euchner, Nick Heilenkötter, Nico Weidmann, Henning Wachsmuth, Benno Stein, and Matthias Hagen. 2019. [Argument search: Assessing argument relevance](#). In *Proceedings of the 42nd International ACM SIGIR Conference on Research and Development in Information Retrieval, SI-*

- GIR'19, page 1117–1120, New York, NY, USA. Association for Computing Machinery.
- Nazneen Fatema Rajani, Bryan McCann, Caiming Xiong, and Richard Socher. 2019. Explain yourself! leveraging language models for commonsense reasoning. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 4932–4942.
- Pavithra Rajendran, Danushka Bollegala, and Simon Parsons. 2018a. Is something better than nothing? Automatically predicting stance-based arguments using deep learning and small labelled dataset. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 28–34, New Orleans, Louisiana. Association for Computational Linguistics.
- Pavithra Rajendran, Danushka Bollegala, and Simon Parsons. 2018b. Sentiment-stance-specificity (SSS) dataset: Identifying support-based entailment among opinions. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*, Miyazaki, Japan. European Language Resources Association (ELRA).
- Sarvesh Ranade, Rajeev Sangal, and Radhika Mamidi. 2013. Stance classification in online debates by recognizing users' intentions. In *Proceedings of the SIGDIAL 2013 Conference*, pages 61–69, Metz, France. Association for Computational Linguistics.
- Nils Reimers, Benjamin Schiller, Tilman Beck, Johannes Daxenberger, Christian Stab, and Iryna Gurevych. 2019. Classification and clustering of arguments with contextualized word embeddings. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 567–578, Florence, Italy. Association for Computational Linguistics.
- Paul Reisert, Naoya Inoue, Naoaki Okazaki, and Kentaro Inui. 2015. A computational approach for generating toulmin model argumentation. In *Proceedings of the 2nd Workshop on Argumentation Mining*, pages 45–55, Denver, CO. Association for Computational Linguistics.
- Ruty Rinott, Lena Dankin, Carlos Alzate Perez, Mitesh M. Khapra, Ehud Aharoni, and Noam Slonim. 2015. Show me your evidence - an automatic method for context dependent evidence detection. In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, pages 440–450, Lisbon, Portugal. Association for Computational Linguistics.
- Patrick Saint-Dizier. 2017. Using question-answering techniques to implement a knowledge-driven argument mining approach. In *Proceedings of the 4th Workshop on Argument Mining*, pages 85–90, Copenhagen, Denmark. Association for Computational Linguistics.
- Maarten Sap, Vered Shwartz, Antoine Bosselut, Yejin Choi, and Dan Roth. 2020. Commonsense reasoning for natural language processing. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics: Tutorial Abstracts*, pages 27–33.
- Misa Sato, Kohsuke Yanai, Toshinori Miyoshi, Toshihiko Yanase, Makoto Iwayama, Qinghua Sun, and Yoshiki Niwa. 2015. End-to-end argument generation system in debating. In *Proceedings of ACL-IJCNLP 2015 System Demonstrations*, pages 109–114, Beijing, China. Association for Computational Linguistics and The Asian Federation of Natural Language Processing.
- Robin Schaefer and Manfred Stede. 2021. Argument mining on twitter: A survey. *it-Information Technology*, 63(1):45–58.
- Benjamin Schiller, Johannes Daxenberger, and Iryna Gurevych. 2021. Aspect-controlled neural argument generation. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 380–396, Online. Association for Computational Linguistics.
- Claudia Schulz, Steffen Eger, Johannes Daxenberger, Tobias Kahse, and Iryna Gurevych. 2018. Multi-task learning for argumentation mining in low-resource settings. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 35–41, New Orleans, Louisiana. Association for Computational Linguistics.

- Thomas Scialom, Serra Sinem Tekiroğlu, Jacopo Staiano, and Marco Guerini. 2020. [Toward stance-based personas for opinionated dialogues](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 2625–2635, Online. Association for Computational Linguistics.
- Eyal Shnarch, Carlos Alzate, Lena Dankin, Martin Gleize, Yufang Hou, Leshem Choshen, Ranit Aharonov, and Noam Slonim. 2018. [Will it blend? blending weak and strong labeled data in a neural network for argumentation mining](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 599–605, Melbourne, Australia. Association for Computational Linguistics.
- Eyal Shnarch, Ran Levy, Vikas Raykar, and Noam Slonim. 2017. [GRASP: Rich patterns for argumentation mining](#). In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 1345–1350, Copenhagen, Denmark. Association for Computational Linguistics.
- Edwin Simpson and Iryna Gurevych. 2018. [Finding convincing arguments using scalable Bayesian preference learning](#). *Transactions of the Association for Computational Linguistics*, 6:357–371.
- Joseph Sirrianni, Xiaoqing Liu, and Douglas Adams. 2020. [Agreement prediction of arguments in cyber argumentation for detecting stance polarity and intensity](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5746–5758, Online. Association for Computational Linguistics.
- Gabriella Skitalinskaya, Jonas Klaff, and Henning Wachsmuth. 2021. [Learning from revisions: Quality assessment of claims in argumentation at scale](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 1718–1729, Online. Association for Computational Linguistics.
- Noam Slonim. 2018. Project debater. In *COMMA*, page 4.
- Parinaz Sobhani, Diana Inkpen, and Stan Matwin. 2015. [From argumentation mining to stance classification](#). In *Proceedings of the 2nd Workshop on Argumentation Mining*, pages 67–77, Denver, CO. Association for Computational Linguistics.
- Parinaz Sobhani, Diana Inkpen, and Xiaodan Zhu. 2017. [A dataset for multi-target stance detection](#). In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 2, Short Papers*, pages 551–557, Valencia, Spain. Association for Computational Linguistics.
- Richard Socher, Alex Perelygin, Jean Wu, Jason Chuang, Christopher D. Manning, Andrew Ng, and Christopher Potts. 2013. [Recursive deep models for semantic compositionality over a sentiment treebank](#). In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing*, pages 1631–1642, Seattle, Washington, USA. Association for Computational Linguistics.
- Swapna Somasundaran and Janyce Wiebe. 2010. [Recognizing stances in ideological on-line debates](#). In *Proceedings of the NAACL HLT 2010 Workshop on Computational Approaches to Analysis and Generation of Emotion in Text*, pages 116–124, Los Angeles, CA. Association for Computational Linguistics.
- Yi Song, Michael Heilman, Beata Beigman Klebanov, and Paul Deane. 2014. [Applying argumentation schemes for essay scoring](#). In *Proceedings of the First Workshop on Argumentation Mining*, pages 69–78, Baltimore, Maryland. Association for Computational Linguistics.
- Maximilian Spliethöver, Jonas Klaff, and Hendrik Heuer. 2019. [Is it worth the attention? A comparative evaluation of attention layers for argument unit segmentation](#). In *Proceedings of the 6th Workshop on Argument Mining*, pages 74–82, Florence, Italy. Association for Computational Linguistics.
- Christian Stab, Johannes Daxenberger, Chris Stahlhut, Tristan Miller, Benjamin Schiller, Christopher Tauchmann, Steffen Eger, and Iryna Gurevych. 2018a. Argumentext: Searching for arguments in heterogeneous sources. In *Proceedings of the 2018 conference of the North Ameri-*

- can chapter of the association for computational linguistics: demonstrations, pages 21–25.
- Christian Stab and Iryna Gurevych. 2014. [Identifying argumentative discourse structures in persuasive essays](#). In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 46–56, Doha, Qatar. Association for Computational Linguistics.
- Christian Stab and Iryna Gurevych. 2016. [Recognizing the absence of opposing arguments in persuasive essays](#). In *Proceedings of the Third Workshop on Argument Mining (ArgMining2016)*, pages 113–118, Berlin, Germany. Association for Computational Linguistics.
- Christian Stab and Iryna Gurevych. 2017a. Parsing argumentation structures in persuasive essays. *Computational Linguistics*, 43(3):619–659.
- Christian Stab and Iryna Gurevych. 2017b. [Recognizing insufficiently supported arguments in argumentative essays](#). In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 1, Long Papers*, pages 980–990, Valencia, Spain. Association for Computational Linguistics.
- Christian Stab, Tristan Miller, Benjamin Schiller, Pranav Rai, and Iryna Gurevych. 2018b. [Cross-topic argument mining from heterogeneous sources](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 3664–3674, Brussels, Belgium. Association for Computational Linguistics.
- Guobin Sui, Wenhan Chao, and Zhunchen Luo. 2018. [Joker at SemEval-2018 task 12: The argument reasoning comprehension with neural attention](#). In *Proceedings of The 12th International Workshop on Semantic Evaluation*, pages 1129–1132, New Orleans, Louisiana. Association for Computational Linguistics.
- Qingying Sun, Zhongqing Wang, Qiaoming Zhu, and Guodong Zhou. 2018. [Stance detection with hierarchical attention network](#). In *Proceedings of the 27th International Conference on Computational Linguistics*, pages 2399–2409, Santa Fe, New Mexico, USA. Association for Computational Linguistics.
- Shahbaz Syed, Roxanne El Baff, Johannes Kiesel, Khalid Al Khatib, Benno Stein, and Martin Potthast. 2020. [News editorials: Towards summarizing long argumentative texts](#). In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 5384–5396, Barcelona, Spain (Online). International Committee on Computational Linguistics.
- Chenhao Tan, Vlad Niculae, Cristian Danescu-Niculescu-Mizil, and Lillian Lee. 2016. [Winning arguments: Interaction dynamics and persuasion strategies in good-faith online discussions](#). In *Proceedings of the 25th International Conference on World Wide Web, WWW '16*, page 613–624, Republic and Canton of Geneva, CHE. International World Wide Web Conferences Steering Committee.
- Yla R Tausczik and James W Pennebaker. 2010. The psychological meaning of words: Liwc and computerized text analysis methods. *Journal of language and social psychology*, 29(1):24–54.
- Simone Teufel, Jean Carletta, and Marc Moens. 1999. [An annotation scheme for discourse-level argumentation in research articles](#). In *Ninth Conference of the European Chapter of the Association for Computational Linguistics*, pages 110–117, Bergen, Norway. Association for Computational Linguistics.
- Simone Teufel, Advait Siddharthan, and Colin Batchelor. 2009. Towards domain-independent argumentative zoning: Evidence from chemistry and computational linguistics. In *Proceedings of the 2009 conference on empirical methods in natural language processing*, pages 1493–1502.
- Junfeng Tian, Man Lan, and Yuanbin Wu. 2018. [ECNU at SemEval-2018 task 12: An end-to-end attention-based neural network for the argument reasoning comprehension task](#). In *Proceedings of The 12th International Workshop on Semantic Evaluation*, pages 1094–1098, New Orleans, Louisiana. Association for Computational Linguistics.
- Assaf Toledo, Shai Gretz, Edo Cohen-Karlik, Roni Friedman, Elad Venezian, Dan Lahav, Michal Jacovi, Ranit Aharonov, and Noam Slonim. 2019. [Automatic argument quality assessment - new datasets and methods](#). In *Proceedings*

- of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), pages 5625–5635, Hong Kong, China. Association for Computational Linguistics.
- Orith Toledo-Ronen, Roy Bar-Haim, and Noam Slonim. 2016. [Expert stance graphs for computational argumentation](#). In *Proceedings of the Third Workshop on Argument Mining (ArgMining2016)*, pages 119–123, Berlin, Germany. Association for Computational Linguistics.
- Orith Toledo-Ronen, Matan Orbach, Yonatan Bilu, Artem Spector, and Noam Slonim. 2020. [Multilingual argument mining: Datasets and analysis](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 303–317, Online. Association for Computational Linguistics.
- Stephen E. Toulmin. 2003. *The Uses of Argument*, updated edition. Cambridge University Press.
- Dietrich Trautmann. 2020. [Aspect-based argument mining](#). In *Proceedings of the 7th Workshop on Argument Mining*, pages 41–52, Online. Association for Computational Linguistics.
- Dietrich Trautmann, Johannes Daxenberger, Christian Stab, Hinrich Schütze, and Iryna Gurevych. 2020. [Fine-grained argument unit recognition and classification](#). *Proceedings of the AAAI Conference on Artificial Intelligence*, 34(05):9048–9056.
- Henning Wachsmuth, Khalid Al-Khatib, and Benno Stein. 2016. [Using argument mining to assess the argumentation quality of essays](#). In *Proceedings of COLING 2016, the 26th International Conference on Computational Linguistics: Technical Papers*, pages 1680–1691, Osaka, Japan. The COLING 2016 Organizing Committee.
- Henning Wachsmuth, Nona Naderi, Yufang Hou, Yonatan Bilu, Vinodkumar Prabhakaran, Tim Alberdingk Thijm, Graeme Hirst, and Benno Stein. 2017a. [Computational argumentation quality assessment in natural language](#). In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 1, Long Papers*, pages 176–187, Valencia, Spain. Association for Computational Linguistics.
- Henning Wachsmuth, Manfred Stede, Roxanne El Baff, Khalid Al-Khatib, Maria Skeppstedt, and Benno Stein. 2018. [Argumentation synthesis following rhetorical strategies](#). In *Proceedings of the 27th International Conference on Computational Linguistics*, pages 3753–3765, Santa Fe, New Mexico, USA. Association for Computational Linguistics.
- Henning Wachsmuth, Benno Stein, and Yamen Ajjour. 2017b. [“PageRank” for argument relevance](#). In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 1, Long Papers*, pages 1117–1127, Valencia, Spain. Association for Computational Linguistics.
- Henning Wachsmuth, Martin Trenkmann, Benno Stein, and Gregor Engels. 2014. Modeling review argumentation for robust sentiment analysis. In *Proceedings of COLING 2014, the 25th International Conference on Computational Linguistics: Technical Papers*, pages 553–564.
- Henning Wachsmuth and Till Werner. 2020. [Intrinsic quality assessment of arguments](#). In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 6739–6745, Barcelona, Spain (Online). International Committee on Computational Linguistics.
- Douglas Walton, Chris Reed, and Fabrizio Macagno. 2008. *Argumentation Schemes*. Cambridge University Press.
- Hao Wang, Zhen Huang, Yong Dou, and Yu Hong. 2020. [Argumentation mining on essays at multi scales](#). In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 5480–5493, Barcelona, Spain (Online). International Committee on Computational Linguistics.
- Lu Wang and Wang Ling. 2016. [Neural network-based abstract generation for opinions and arguments](#). In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 47–57, San Diego, California. Association for Computational Linguistics.
- Zhongyu Wei, Yang Liu, and Yi Li. 2016. [Is this post persuasive? Ranking argumentative comments in online forum](#). In *Proceedings of the*

54th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers), pages 195–200, Berlin, Germany. Association for Computational Linguistics.

Adina Williams, Nikita Nangia, and Samuel R. Bowman. 2017. [A broad-coverage challenge corpus for sentence understanding through inference](#). *CoRR*, abs/1704.05426.

Diyi Yang, Jiaao Chen, Zichao Yang, Dan Jurafsky, and Eduard Hovy. 2019. [Let's make your request more persuasive: Modeling persuasive strategies via semi-supervised neural nets on crowdfunding platforms](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 3620–3630, Minneapolis, Minnesota. Association for Computational Linguistics.

Ingrid Zukerman, Richard McConachy, and Sarah George. 2000. [Using argumentation strategies in automated argument generation](#). In *INLG'2000 Proceedings of the First International Conference on Natural Language Generation*, pages 55–62, Mitzpe Ramon, Israel. Association for Computational Linguistics.

Appendix

We list the full set of publications considered in this survey for each of the computational argumentation areas in Tables 2–5 along with the task tackled in the publication and the most specific category of knowledge modeled according to our pyramid.

	Task	Level
Cabrio and Villata (2012)	Relation Identification	General
Stab and Gurevych (2014)	Structure Prediction	Argumentation-specific
Boltužić and Šnajder (2014)	Argument Recognition	General
Ong et al. (2014)	Component Identification	Linguistic
Sobhani et al. (2015)	Component Identification	Argumentation-specific
Peldszus and Stede (2015)	Structure Prediction	Task-specific
Rinott et al. (2015)	Component Identification	Task-specific
Carstens and Toni (2015)	Structure Prediction	Argumentation-specific
Lawrence and Reed (2015)	Structure Prediction	Argumentation-specific
Sobhani et al. (2015)	Structure Prediction	Argumentation-specific
Persing and Ng (2016a)	Structure Prediction	Argumentation-specific
Al Khatib et al. (2016)	Component Identification	Linguistic
Liebeck et al. (2016)	Component Identification	Linguistic
Hou and Jochim (2017)	Relation Identification	Task-specific
Lawrence and Reed (2017a)	Structure Prediction	Argumentation-specific
Saint-Dizier (2017)	Structure Prediction	Task-specific
Potash et al. (2017b)	Structure Prediction	Argumentation-specific
Lawrence and Reed (2017b)	Structure Prediction	Argumentation-specific
Aker et al. (2017)	Structure Prediction	Argumentation-specific
Niculae et al. (2017)	Structure Prediction	Argumentation-specific
Stab and Gurevych (2017a)	Structure Prediction	Argumentation-specific
Shnarch et al. (2017)	Component Identification	Argumentation-specific
Cocarascu and Toni (2017)	Relation Identification	Linguistic
Habernal and Gurevych (2017)	Component Identification	Argumentation-specific
Dusmanu et al. (2017)	Component Identification	Argumentation-specific
Eger et al. (2017)	Structure Prediction	Linguistic
Daxenberger et al. (2017)	Component Identification	Linguistic
Levy et al. (2017)	Component Identification	Linguistic
Ajjour et al. (2017)	Unit Segmentation	Linguistic
Lauscher et al. (2018)	Component Identification	Argumentation-specific
Galassi et al. (2018)	Relation Identification	Linguistic
Lugini and Litman (2018)	Component Identification	Argumentation-specific
Eger et al. (2018)	Structure Prediction	Linguistic
Stab et al. (2018b)	Component Identification	Argumentation-specific
Shnarch et al. (2018)	Structure Prediction	Linguistic
Schulz et al. (2018)	Structure Prediction	Linguistic
Morio and Fujita (2018)	Structure Prediction	Argumentation-specific
Hua et al. (2019b)	Component Identification	Argumentation-specific
Lin et al. (2019)	Structure Prediction	Argumentation-specific
Jo et al. (2019)	Component Identification	Linguistic
Accuosto and Saggion (2019)	Structure Prediction	Task-specific
Chakrabarty et al. (2019)	Structure Prediction	Argumentation-specific
Hewett et al. (2019)	Structure Prediction	Argumentation-specific
Haddadan et al. (2019)	Structure Prediction	Argumentation-specific
Mensonides et al. (2019)	Component Identification	Argumentation-specific
Gemechu and Reed (2019)	Structure Prediction	Linguistic
Eide (2019)	Structure Prediction	Argumentation-specific
Huber et al. (2019)	Structure Prediction	Argumentation-specific
Splithöfer et al. (2019)	Unit Segmentation	Linguistic
Petasis (2019)	Unit Segmentation	Linguistic
Reimers et al. (2019)	Component Identification	Argumentation-specific
Morio et al. (2020)	Structure Prediction	Linguistic
Wang et al. (2020)	Structure Prediction	Argumentation-specific
Persing and Ng (2020)	Structure Prediction	Task-specific
Paul et al. (2020)	Relation Identification	General
Trautmann et al. (2020)	Unit Segmentation	Linguistic

Table 2: List of all publications surveyed in this study in the area *Argument Mining* sorted by year of publication with the most specific level of knowledge employed in the approach.

	Task	Level
Liu et al. (2008)	Quality	Task-specific
Persing et al. (2010)	Quality	Linguistic
Somasundaran and Wiebe (2010)	Stance Detection	Argumentation-specific
Persing and Ng (2013)	Quality	Linguistic
Song et al. (2014)	Quality	Argumentation-specific
Ong et al. (2014)	Quality	Linguistic
Persing and Ng (2014)	Quality	Linguistic
Hasan and Ng (2014)	Stance Detection	Linguistic
Persing and Ng (2015)	Quality	Argumentation-specific
Sobhani et al. (2015)	Stance Detection	Argumentation-specific
Wachsmuth et al. (2016)	Quality	Argumentation-specific
Stab and Gurevych (2016)	Quality	Linguistic
Wachsmuth et al. (2016)	Quality	Argumentation-specific
Wei et al. (2016)	Quality	Task-specific
Tan et al. (2016)	Quality	Task-specific
Toledo-Ronen et al. (2016)	Stance Detection	Task-specific
Habernal and Gurevych (2016a)	Quality	Linguistic
Habernal and Gurevych (2016b)	Quality	Linguistic
Ghosh et al. (2016)	Quality	Argumentation-specific
Persing and Ng (2016b)	Stance Detection	Argumentation-specific
Chalaguine and Schulz (2017)	Quality	Linguistic
Chalaguine and Schulz (2017)	Quality	Argumentation-specific
Stab and Gurevych (2017b)	Quality	Linguistic
Bar-Haim et al. (2017a)	Stance Detection	Argumentation-specific
Bar-Haim et al. (2017b)	Stance Detection	Task-specific
Wachsmuth et al. (2017b)	Quality	Task-specific
Wachsmuth et al. (2017b)	Quality	Argumentation-specific
Boltužić and Šnajder (2017)	Stance Detection	Task-specific
Potash et al. (2017a)	Quality	Linguistic
Persing and Ng (2017)	Quality	Task-specific
Sobhani et al. (2017)	Stance Detection	Linguistic
Lukin et al. (2017)	Quality	Task-specific
Wachsmuth et al. (2017a)	Quality	Task-specific
Durmus and Cardie (2018)	Quality	Task-specific
Simpson and Gurevych (2018)	Quality	Linguistic
El Baff et al. (2018)	Quality	Task-specific
Ranade et al. (2013)	Stance Detection	Argumentation-specific
Passon et al. (2018)	Quality	Argumentation-specific
Gu et al. (2018)	Quality	Linguistic
Gu et al. (2018)	Quality	Linguistic
Rajendran et al. (2018a)	Stance Detection	Linguistic
Sun et al. (2018)	Stance Detection	Argumentation-specific
Ji et al. (2018)	Quality	Task-specific
Rajendran et al. (2018b)	Stance Detection	Argumentation-specific
Kotonya and Toni (2019)	Stance Detection	Linguistic
Dumani and Schenkel (2019)	Quality	Linguistic
Potthast et al. (2019)	Quality	Linguistic
Durmus and Cardie (2019)	Stance Detection	Task-specific
Gleize et al. (2019)	Quality	Linguistic
Ajjour et al. (2019)	Stance Detection	Task-specific
Toledo et al. (2019)	Quality	Linguistic
Potash et al. (2019)	Quality	Linguistic
Yang et al. (2019)	Persuasion Strategies	Linguistic
Durmus et al. (2019)	Stance Detection	Linguistic
Gretz et al. (2020b)	Quality	Linguistic
Kobbe et al. (2020b)	Moral Sentiment	Task-specific
Kobbe et al. (2020a)	Stance Detection	Argumentation-specific
Trautmann (2020)	Stance Detection	Linguistic
Porco and Goldwasser (2020)	Stance Detection	Task-specific
Toledo-Ronen et al. (2020)	Stance Detection	Linguistic
Scialom et al. (2020)	Stance Detection	Task-specific
Li et al. (2020)	Quality	Argumentation-specific
Al Khatib et al. (2020b)	Quality	Task-specific
Lauscher et al. (2020b)	Quality	Task-specific
El Baff et al. (2020)	Quality	Linguistic
Sirrianni et al. (2020)	Stance Detection	Argumentation-specific
Wachsmuth and Werner (2020)	Quality	Linguistic
Skitalinskaya et al. (2021)	Quality	Linguistic

Table 3: List of all publications surveyed in this study in the area *Argument Assessment* sorted by year of publication with the most specific level of knowledge employed in the approach.

	Task	Level
Feng and Hirst (2011)	Argument Scheme Classification	Task-specific
Song et al. (2014)	Argument Scheme Classification	Task-specific
Lawrence and Reed (2015)	Argument Scheme Classification	Linguistic
Boltužić and Šnajder (2016)	Warrant identification	Linguistic
Botschen et al. (2018)	Warrant identification	General
Liebeck et al. (2018)	Warrant identification	Linguistic
Habernal et al. (2018c)	Fallacy Recognition	Linguistic
Habernal et al. (2018a)	Fallacy Recognition	Linguistic
Tian et al. (2018)	Warrant identification	Linguistic
Brassard et al. (2018)	Warrant identification	Linguistic
Sui et al. (2018)	Warrant identification	Linguistic
Choi and Lee (2018)	Warrant identification	General
Liga (2019)	Argument Scheme Classification	Linguistic
Niven and Kao (2019)	Warrant identification	General
Delobelle et al. (2019)	Fallacy Recognition	Linguistic

Table 4: List of all publications surveyed in this study in the area *Argument Reasoning* sorted by year of publication with the most specific level of knowledge employed in the approach.

	Task	Level
Zukerman et al. (2000)	Argument synthesis	Task-specific
Carenini and Moore (2006)	Argument synthesis	Task-specific
Sato et al. (2015)	Argument synthesis	Linguistic
Reisert et al. (2015)	Argument synthesis	Argumentation-specific
Bilu and Slonim (2016)	Claim synthesis	Task-specific
Egan et al. (2016)	Summarization	Linguistic
Wang and Ling (2016)	Summarization	Linguistic
Wachsmuth et al. (2018)	Argument synthesis	Argumentation-specific
Chen et al. (2018)	Claim synthesis	General
Hua and Wang (2018)	Argument synthesis	General
Le et al. (2018)	Argument synthesis	Argumentation-specific
Hidey and McKeown (2019)	Claim synthesis	Argumentation-specific
Hua et al. (2019a)	Argument synthesis	General
Bilu et al. (2019)	Argument synthesis	Task-specific
El Baff et al. (2019)	Argument synthesis	Argumentation-specific
Hua and Wang (2019)	Argument synthesis	General
Alshomary et al. (2020b)	Claim synthesis	Argumentation-specific
Syed et al. (2020)	Summarization	Argumentation-specific
Alshomary et al. (2020a)	Summarization	Argumentation-specific
Bar-Haim et al. (2020)	Summarization	Argumentation-specific
Gretz et al. (2020a)	Claim synthesis	Argumentation-specific
Alshomary et al. (2021)	Claim synthesis	Task-specific
Schiller et al. (2021)	Argument synthesis	Task-specific

Table 5: List of all publications surveyed in this study in the area *Argument Generation* sorted by year of publication with the most specific level of knowledge employed in the approach.