

Directed Percolation in Temporal Networks

Arash Badie-Modiri,¹ Abbas K. Rizi,¹ Márton Karsai,^{2,3} and Mikko Kivelä¹

¹*Department of Computer Science, School of Science, Aalto University, FI-0007, Finland*

²*Department of Network and Data Science Central European University, 1100 Vienna, Austria*

³*Alfréd Rényi Institute of Mathematics, 1053 Budapest, Hungary*

(Dated: November 2, 2021)

Percolation theory describes connectivity transitions in static networks well, yet the corresponding description is not developed for temporal networks. We map the connectivity problem of temporal networks to directed percolation and show that the reachability phase transition in random temporal network models, as induced by any limited-waiting-time process, appears with the mean-field exponents of directed percolation. Furthermore, we measure the central thermodynamic quantities adapted to large-scale real temporal networks to uncover reachability transitions in their global connectedness.

Many dynamical processes evolving on networks are related to the problem of reachability. Reachability changes radically if one considers the time-varying nature of connections between network nodes [1] instead of deeming them static. Time induces an inherent direction of connectivity, as it restricts the direction of influence or information flow. This in turn has an impact on dynamical processes evolving on such networks, such as spreading [2–4], social contagion [5, 6] ad-hoc message passing by mobile agents [7] or routing dynamics [8]. In these processes, interacting entities may have limited memory, thereby only use paths constrained by limited waiting-times, further restricting the eligible temporal structure for their global emergence.

Directed percolation (DP) is a paradigmatic example to characterize connectivity in temporal systems. This process exhibits dynamical phase transitions into absorbing states with a well-defined set of universal critical exponents [9–12]. During its introduction [13] and further development [14], directed percolation attracted considerable amount of attention in the literature. It has applications in reaction-diffusion systems [15], star formation in galaxies [16], conduction in strong electric fields in semiconductors [17], and biological evolution [18]. While it is straightforward to define idealized models governed by directed percolation, such as lattice models [19–25], its features are more difficult to realize in nature [12, 26], allowing only a few recent experimental realizations of directed percolation [27, 28]. Nevertheless, this description is advantageous in providing an understanding of the connectivity of temporal structures to describe ongoing dynamical processes [29–39].

There is a thorough theoretical understanding of static network connectivity with several concepts borrowed from percolation theory, such as phase transitions, giant components and susceptibility. These concepts, originally developed for lattices and random networks, are routinely used to analyze real-world networks and processes, e.g., disease spreading [40–43]. Connectivity is also a central property of temporal networks, with several recent techniques to characterize it, e.g., using limited-

waiting-time reachability [44–48]. However, previous works on temporal connectivity [39, 49, 50] fundamentally rely on different notions of connectivity of structure, such as static connectivity, deterministic walks, or networks consisting of discrete temporal layers. Here we take a step back to study this problem as a directed percolation process, which is a natural choice that accounts for the time induced inherent directionality.

A temporal network $G = (\mathcal{V}, \mathcal{E}, \mathcal{T})$ is defined as a set of nodes \mathcal{V} connected through events $e = (\mathbf{u}, \mathbf{v}, t_{\text{start}}, t_{\text{end}}) \in \mathcal{E}$, each of which represents an interaction of two subsets of nodes $\mathbf{u}, \mathbf{v} \subseteq \mathcal{V}$ between times of $t_{\text{start}}, t_{\text{end}} \in \mathcal{T}$ ($t_{\text{start}} < t_{\text{end}}$) during an observation period \mathcal{T} . The connectivity of events is characterized by time-respecting paths [33, 51], defined as sequences of adjacent events $e \rightarrow e'$. Here we call two events $e, e' \in \mathcal{E}$ adjacent if they follow each other in time ($t'_{\text{start}} > t_{\text{end}}$) and share at least one ending node in common ($\mathbf{v} \cap \mathbf{u}' \neq \emptyset$) as schematically demonstrated in Fig. 1a. For simplicity, we assume that temporal network events are instantaneous ($t_{\text{start}} = t_{\text{end}}$) and represent undirected interactions between single nodes ($\mathbf{u} = \mathbf{v} = \{i, j\}$ where $i, j \in \mathcal{V}$ and $i \neq j$). All of our notations can be easily extended for directed events with duration.

While time-respecting paths encode the possible routes of information, some dynamical processes have further restrictions on the time during which they can propagate further after reaching a node. An example of such limited local lifetime processes is disease spreading, where infected nodes may recover after some time, becoming unable to infect other nodes unless re-infected. In our definition, we define limited-waiting-times in temporal paths by allowing adjacent events $e = (\mathbf{u}, \mathbf{v}, t_{\text{start}}, t_{\text{end}})$ and $e' = (\mathbf{u}', \mathbf{v}', t'_{\text{start}}, t'_{\text{end}})$ to be connected (δt -adjacent) if $t'_{\text{start}} - t_{\text{end}} < \delta t$. In contrast to the control parameters based on node or event occupation probabilities, which could be used to adjust the overall activity level of the network, changing δt modifies the behavior of the spreading itself. A compact way of describing this problem is provided by weighted event graphs $D = (\mathcal{E}, E_D, \Delta t(e, e'))$, a higher-order static directed

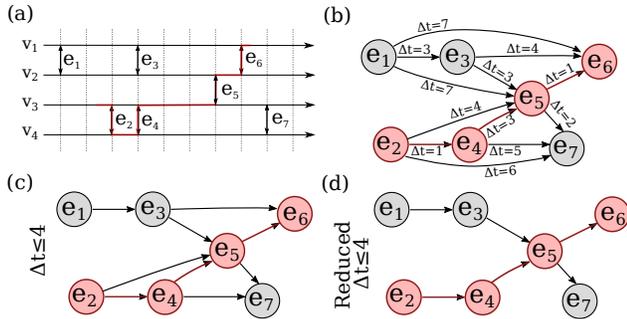


FIG. 1. Different representations of an instantaneous, undirected temporal network. (a) Vertices v_i are connected via dyadic instantaneous events e_j . (b) In weighted temporal event graph adjacent events are connected via links directed by time, and weighted with the time difference Δt between them. Paths in an event graph are equivalent to time-respecting paths [52]. (c) Waiting-time constrained event graphs with links of weights $\Delta t \leq \delta t$ removed contain all δt -limited paths. (d) Reduced event graph in which locally redundant links are removed (see main text). The highlighted line represents a time respecting path (a) and its equivalent path over event graph (b,c) and reduced event graph (d).

acyclic graph representation of temporal networks [50]. In this description events act as nodes and two events e and e' are connected through a directed, weighted link if they are adjacent with weights defined as $\Delta t(e, e') = t'_{\text{start}} - t_{\text{end}}$. The event graph contains a superposition of all temporal paths [52] and retains the arrow of time even after turning the temporal structure into a static, directed one (Fig. 1b). Superposition of all δt limited-time temporal paths ($D(\delta t)$) can be achieved by constructing the event graph of a temporal network and removing all the event graph links with weights larger than δt (see Fig. 1c).

Furthermore, we define the reduced temporal event graph \hat{D} , where only the first adjacency relationships per temporal network node for each event are retained. \hat{D} nodes have a maximum in- and out-degree of two, yet \hat{D} contains all the reachability relationships of the original temporal network [53]. That is, the reduced event graph exactly retains the reachability of the temporal network by removing redundant adjacency relationships (feed-forward loops) between events. The reduction allows one to interpret the three possible out-degrees using the terminology of directed percolation as annihilation (0), diffusion (1), and decoagulation (2) in the case the out-neighbors are not already reachable through some longer loop. Note that this upper bound on in- and out-degrees is valid if the probability of adjacent events happening exactly simultaneously is negligible. See Supplementary Materials (SM) for more details.

Order parameters and other characteristics. Compared to static structures, temporal networks incorporate time as an additional degree of freedom, which in-

roduces an extra dimension to the characterization of their structural phase-transition of connectivity around a critical point. This is similar to directed percolation where dimensions are related to space and time with associated independent critical exponents [54, 55]. We measure the expected δt -limited waiting-time reachability starting from a random event. Of interest is the number of unique nodes $V \subseteq \mathcal{V}$ that are reachable from the source of spreading, the time duration of the longest path (i.e., its lifetime [50]) $T \subseteq \mathcal{T}$, and the total number of reachable events $M \subseteq \mathcal{E}$ in the component. These are analogous to mean spatial volume, mean survival time, and mean cluster mass in the directed percolation formalism (respectively) [9, 12]. Further, in parallel to directed percolation, we define the survival probability $P(t)$ as the probability that there is a path from a randomly selected initial source event at t_0 to an event after time $t_0 + t$. The ultimate survival probability $P_\infty = \lim_{t \rightarrow \infty} P(t)$ is then the survival probability at large values of t . Note that when defining these quantities we opted for simplicity (see SM for discussion).

Using the maximum waiting-time δt as a control parameter is a natural choice as it has a clear physical interpretation. However, unlike occupation probabilities that are typically used as control parameters in directed percolation, the scale of δt depends on the timescales of the system. Further, although it is related to the local connectivity, this relationship is indirect and might depend on e.g., the temporal inhomogeneities in interaction sequences. For this reason, we define another control parameter that directly measures the local connectivity of the system. We use the local effective connectivity $\hat{q}^{\text{out}}(\delta t)$, which is the average excess out-degree of the reduced event graph $\hat{D}(\delta t)$. This is a monotonically increasing function of δt , which normalizes the changes in connectivity given by the changes in the maximum allowed waiting-time δt . We then centralise this quantity by subtracting its value from its phase-transition critical point \hat{q}_c^{out} , and denote the resulting control parameter as $\tau = \hat{q}^{\text{out}} - \hat{q}_c^{\text{out}}$.

In addition to the single-source scenario, where the component start from a single node in D , we investigated the fully-occupied homogeneous initial condition, where we compute paths starting from all nodes in D with time $t < t_0$. Analogous to directed percolation, we define particle density $\rho(t)$ as the fraction of infected nodes in D at time t , while stationary density $\rho_{\text{stat}}(\tau)$, the order parameter, is defined as the particle density after the system reached a stationary state. We can incorporate the effects of an external field h to this scenario: in continuous-time, this would be equivalent to the spontaneous emergence of sources of infection, i.e. occupation, of nodes in D (events in G) through an independent Poisson point process with rate h . Susceptibility $\chi(\tau, h) = \frac{\partial}{\partial h} \rho_{\text{stat}}(\tau, h)$ can then be measured through observing the effect of changing the

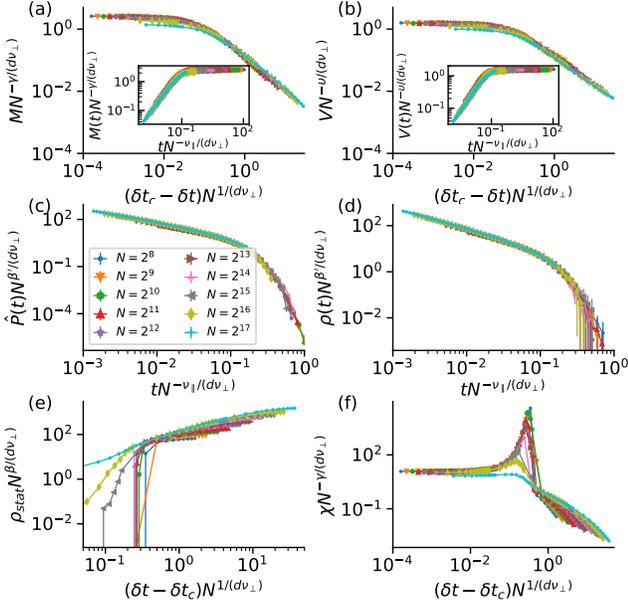


FIG. 2. finite-size scaled (a) Mean cluster mass M , (b) volume V and (c) survival probability $\hat{P}(t)$ for single-source spreading scenarios. (a inset) Mean cluster mass and (b inset) volume as a function of time from beginning of the spreading process after finite-size scaling. (d) Particle density $\rho(t)$, (e) static density ρ_{stat} and (f) susceptibility $\chi(\delta t, 0)$ as a function of δt for the homogeneous initial condition. Measurements are averaged over at least 256 (up to 4096) realisations of temporal network constructed from random 9-regular networks ($N \in \{2^8, 2^9, \dots, 2^{17}\}$) and Poisson point process activations $\lambda = 1$ of links. All functions of time (a and b insets and panels c and d) are measured at $\delta t = \delta t_c = 0.08808$. d is set to directed percolation upper critical dimension $d_c = 4$.

external field [12].

Critical behavior in random systems. Next, we derive a mean-field approximation for the above-defined measures and identify the critical point. We model temporal networks with an underlying static structure, where events are induced via links activating by independent and identical continuous-time stochastic processes. Given the excess degrees l and r of the two temporal network nodes in G incident to the link corresponding to the event $e \in \mathcal{E}$, we can compute the probability of a zero out-degree for a node in $\hat{D}(\delta t)$ (i.e., an event in original temporal network G) as $\hat{p}_0^{\text{out}} = \Pi_{\delta t} \hat{\Pi}_{\delta t}^{l+r}$. Here $\Pi_{\delta t}$ is the cumulative inter-event time distribution induced by a link activation process for a given δt , and $\hat{\Pi}_{\delta t}$ is the corresponding cumulative residual inter-event time distribution. Similarly, for out-degree 2, we can compute $\hat{p}_2^{\text{out}} = \int_0^\infty (1 - \hat{\Pi}_{\min \delta t, t}^l)(1 - \hat{\Pi}_{\min \delta t, t}^r) \pi_t dt$, where π_t is the inter-event time distribution. Given that the maximum out-degree of events in the reduced event graph is 2, the \hat{p}_1^{out} can be derived as $\hat{p}_1^{\text{out}} = 1 - \hat{p}_0^{\text{out}} - \hat{p}_2^{\text{out}}$. In-degree probabilities can be derived similarly.

The joint in- and out-degree distribution of the event

graph can be computed from the excess degree distribution q_k of the underlying static network. If the degrees are independent, this becomes $\hat{p}_{i,o}^{\text{in,out}} = \sum_{l,r} \hat{p}_i^{\text{in}} \hat{p}_o^{\text{out}} q_l q_r$. We will denote the generating function of the joint degree distribution as $\mathcal{G}_0(z_{\text{in}}, z_{\text{out}})$ and the corresponding out excess degree distribution as $\mathcal{G}_1^{\text{out}}(z_{\text{out}})$. We construct the mean-field equation for occupation density $\rho(t)$ in homogeneous occupation initial condition using the excess out-degree distribution of the event graph $\hat{q}_k^{\text{out}} = \frac{d^k}{k! dz^k} \mathcal{G}_1^{\text{out}}(z)|_{z=0}$. The excess out-degree of nodes in the event graph \hat{D} gives the change in the number of further nodes we can reach from an already reached node: nodes with out-degree 2 increase the number of reached nodes by one, nodes with out-degree 1 do not affect on the number of reached nodes, and out-degree 0 nodes reduces by one the number of reached nodes. The total change, therefore, is $\hat{q}_2^{\text{out}} - \hat{q}_0^{\text{out}}$. In addition, some nodes we can reach are already reachable through other paths. In total we reach on expectation $\hat{q}_1^{\text{out}} + 2\hat{q}_2^{\text{out}}$ nodes where each node is already reached with probability $\rho(t)$. The rate equation becomes

$$\partial_t \rho(t) = [\hat{q}_2^{\text{out}} - \hat{q}_0^{\text{out}}] \rho(t) - [\hat{q}_1^{\text{out}} + 2\hat{q}_2^{\text{out}}] \rho^2(t). \quad (1)$$

In this equation the values of \hat{q}_k^{out} are constants in time. Noting the critical point for this equation as $\hat{q}_2^{\text{out}} - \hat{q}_0^{\text{out}} = 0$, and that the expected value is by definition $\hat{q}_0^{\text{out}} = \hat{q}_1^{\text{out}} + 2\hat{q}_2^{\text{out}}$, and that $\hat{q}_2^{\text{out}} - \hat{q}_0^{\text{out}} = \hat{q}^{\text{out}} - 1$, we can write Eq. (1) as $\partial_t \rho(t) = \tau \rho(t) - \hat{q}^{\text{out}} \rho^2(t)$.

Equation (1) follows the same form as the directed percolation mean-field equation for a $d+1$ -dimensional lattice [12] and can be solved explicitly (see SM). It has the critical point at $\tau = 0$, while it indicates that $\rho \rightarrow \tau/\hat{q}^{\text{out}}$ for $\tau > 0$. Asymptotically it provides the critical exponents as $\rho(t) \sim t^{-\alpha}$ at $\tau = 0$ and $\rho_{\text{stat}}(\tau) \sim \tau^\beta$ when $\tau > 0$ and $t \rightarrow \infty$ with values $\alpha = \beta = 1$, where $\alpha = \beta/\nu_{\parallel}$ and ν_{\parallel} is the temporal correlation length exponent, in accordance with the corresponding mean-field directed percolation critical exponents [12].

The expected out-component size, i.e. mean cluster mass M , can be computed from the joint degree distribution of the event graph $\hat{D}(\delta t)$ by assuming that it is a random directed graph with the same joint in- and out-degree distribution as $\hat{D}(\delta t)$. The out-component size distribution can be derived from $H_0(z_{\text{out}}) = z_{\text{out}} \mathcal{G}_0(1, H_1(z_{\text{out}}))$, $H_1(z_{\text{out}}) = z_{\text{out}} \mathcal{G}_1^{\text{out}}(H_1(z_{\text{out}}))$, and the mean out-component size can be written as $M = \frac{\partial H_0(z_{\text{out}})}{\partial z_{\text{out}}}|_{z_{\text{out}}=1}$ [56]. These equations, when $\tau \rightarrow 0^-$, lead to $M \sim -\tau^{-\gamma}$ with $\gamma = 1$ (see SM). Here $\gamma = \nu_{\parallel} + d\nu_{\perp} - \beta - \beta'$, matching the mean-field exponent of mean cluster mass in directed percolation [12]. Here, ν_{\perp} indicates the spatial temporal correlation exponent.

The component survival probability, $P(t)$, is measured by the out-component time-span of nodes in the event graph and the occupation density, $\rho(t)$, is calculated by the in-component sizes of all possibly reachable nodes,

implying that these two quantities are equal $\rho(t) = P(t)$ (see SM). Consequently, given the control parameter τ , $\rho_{\text{stat}}(\tau) = P_{\infty}(\tau)$ as long as the time-reversed event graph has the same probability of being generated as the original one (e.g., if $\forall_{i,o} p_{i,o}^{\text{in,out}} = p_{o,i}^{\text{in,out}}$). This leads us to the rapidity-reversal symmetry for event graphs similarly characterizing directed percolation [57] where $\beta = \beta'$ and $P_{\infty}(\tau) \sim \tau^{\beta'}$.

Finite-size scaling in random systems. The critical exponents can be empirically verified through finite-size scaling of the system close to its percolation critical point, where its large-scale properties become invariant under scale transformations. To do so, we simulate random temporal networks of varying size and perform computationally efficient reachability estimations [45] from single-source and homogeneous fully-occupied initial conditions. We expect that curves of macroscopic quantities collapse when using the correct critical exponents of β , ν_{\parallel} and ν_{\perp} corresponding to the mean-field values of directed percolation. The results confirm that the directed percolation mean-field exponents characterize the percolation phase transition of random temporal networks. This is demonstrated in Fig. 2a-f for temporal networks induced on a 9-regular network with links activated via independent Poisson processes. These results are robust in the presence of several types of temporal and spatial heterogeneities [58].

directed percolation measures in real-world temporal networks. We measure the same macroscopic quantities as before for four different real-world systems, concentrating on temporal networks describing air transportation, public transportation, Twitter mentions, and mobile phone calls (Fig. 3a-d respectively). For details on the data sets, see SM. In each system, there is clear evidence of an absorbing to active phase transition in terms of M , V , and ρ_{stat} . Note that the scales of these quantities are not directly comparable, highlighting the fact that distinguishing between the different notions of connectivity is important in practical terms. Further, multiple peaks in susceptibility indicate multiple connectivity time scales.

The reachability phase transition can be better understood by investigating temporal connectivity profiles represented by cluster volumes of individual events. Structures similar to those of random networks (see SM) can be observed for Air Transport and Twitter (Fig. 3e,g). However, in Air Transport, the structure is regular, following the diurnal pattern of flights. In Twitter, the components do not reach most nodes due to the greater separation of temporal components, and their structure reflects the rare emergence of possible macroscopic cascades. Public Transport (one day) and Mobile networks display a single wing-like structure (Fig. 3f,h). This is induced by early components that can reach a significant fraction of nodes, which are then joined by other components reaching smaller subsets. This is also indicated by

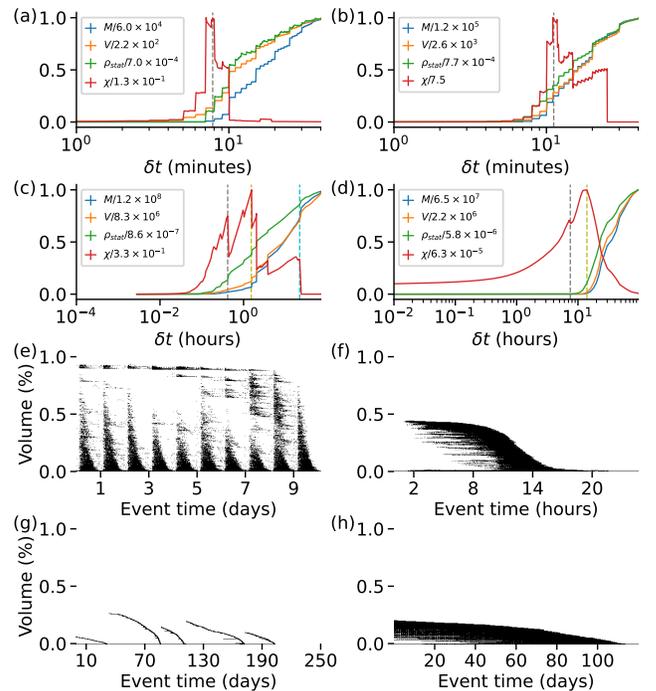


FIG. 3. Mean cluster mass M , mean cluster volume V , static density ρ_{stat} and susceptibility $\chi(\delta t, 0)$ as a function of δt for four real-world networks: (a) Air transport [59], (b) Helsinki public transportation [60], (c) Twitter mentions [61] and (d) mobile phone calls [62] display an absorbing to active phase transition around 470 seconds, 670 seconds, 25 minutes and 7.5 hours respectively, as indicated by change from very small values for M , V and ρ_{stat} to values comparable to the size of the system and a peak in susceptibility $\chi(\delta t, 0)$. Mobile and Twitter networks show a second peak in susceptibility around 1.5 hours and 22 hours, respectively, and Twitter data shows a third peak around 14 hours. The temporal reachability profiles display relative cluster volumes for each event as a function of the event time for $\delta t \approx \delta t_c$ for (e) air transport, (f) Helsinki public transportation, (g) Twitter mentions and (h) mobile phone call networks.

the horizontal structures under the wings.

Conclusion. The connectivity of complex networks is one of their most important global properties as it codes the possible routes of information and determines disease spreading, transportation routes, and information diffusion in real settings. This is a major challenge as time-varying interactions induce time-dependent connectivity and can have dramatic effects on the speed and volume of any ongoing dynamical process [2–4]. A concise theory of temporal connectivity is a necessary step forward from the limited description that static networks provide. Our results map the temporal network connectivity problem to directed percolation, this way opening the door for detailed and well-established descriptions of the critical phase transitions characterizing limited-waiting-time processes on temporal networks. Further, our framework

provides a crucial tool for characterizing and more precise modeling of spreading and diffusion phenomena, even in real-world settings.

Acknowledgements. We would like to thank János Kertész and Géza Ódor for their helpful comments and suggestions. The authors wish to acknowledge CSC – IT Center for Science, Finland, and Aalto University “Science-IT” project for generous computational resources. Márton Karsai acknowledges support from the DataRedux ANR project (ANR-19-CE46-0008) and the SoBigData++ H2020 project (H2020-871042).

-
- [1] P. Holme and J. Saramäki, *Temporal Network Theory*, Computational Social Sciences (Springer International Publishing, 2019).
- [2] R. Lambiotte and N. Masuda, *A guide to temporal networks*, Vol. 4 (World Scientific, 2016).
- [3] P. Holme and J. Saramäki, Temporal networks, *Physics reports* **519**, 97 (2012).
- [4] P. Holme, Modern temporal network theory: a colloquium, *The European Physical Journal B* **88**, 234 (2015).
- [5] D. J. Daley and D. G. Kendall, Epidemics and rumours, *Nature* **204**, 1118 (1964).
- [6] C. Castellano, S. Fortunato, and V. Loreto, Statistical physics of social dynamics, *Reviews of modern physics* **81**, 591 (2009).
- [7] C. Tripp-Barba, C. Alcaraz, and M. A. Igartua, Special issue on “modeling and performance evaluation of wireless ad-hoc networks”, *Ad Hoc Networks* **52**, 1 (2016).
- [8] N. Nassir, M. Hickman, A. Malekzadeh, and E. Iranzhad, A utility-based travel impedance measure for public transit network accessibility, *Transportation Research Part A: Policy and Practice* **88**, 26 (2016).
- [9] H. Hinrichsen, Non-equilibrium critical phenomena and phase transitions into absorbing states, *Advances in physics* **49**, 815 (2000).
- [10] G. Ódor, Universality classes in nonequilibrium lattice systems, *Reviews of modern physics* **76**, 663 (2004).
- [11] H. Hinrichsen, Non-equilibrium phase transitions, *Physica A: Statistical Mechanics and its Applications* **369**, 1 (2006).
- [12] M. Henkel, H. Hinrichsen, S. Lübeck, and M. Pleimling, *Non-equilibrium phase transitions*, Vol. 1 (Springer, 2008).
- [13] S. R. Broadbent and J. M. Hammersley, Percolation processes: I. crystals and mazes, in *Mathematical Proceedings of the Cambridge Philosophical Society*, Vol. 53 (Cambridge University Press, 1957) pp. 629–641.
- [14] J. Blease, Directed-bond percolation on hypercubic lattices, *Journal of Physics C: Solid State Physics* **10**, 925 (1977).
- [15] F. Schlögl, Chemical reaction models for non-equilibrium phase transitions, *Zeitschrift für physik* **253**, 147 (1972).
- [16] H. Gerola, P. Seiden, and L. Schulman, Theory of dwarf galaxies, *The Astrophysical Journal* **242**, 517 (1980).
- [17] N. Van Lien and B. Shklovskii, Hopping conduction in strong electric fields and directed percolation, *Solid State Communications* **38**, 99 (1981).
- [18] P. Bak and K. Sneppen, Punctuated equilibrium and criticality in a simple model of evolution, *Physical review letters* **71**, 4083 (1993).
- [19] E. Domany and W. Kinzel, Equivalence of cellular automata to ising models and directed percolation, *Physical review letters* **53**, 311 (1984).
- [20] W. Kinzel, Phase transitions of cellular automata, *Zeitschrift für Physik B Condensed Matter* **58**, 229 (1985).
- [21] T. E. Harris, Contact interactions on a lattice, *The Annals of Probability*, 969 (1974).
- [22] I. Jensen, Critical behavior of the pair contact process, *Physical review letters* **70**, 1465 (1993).
- [23] J. Mendes, R. Dickman, M. Henkel, and M. C. Marques, Generalized scaling for models with multiple absorbing states, *Journal of Physics A: Mathematical and General* **27**, 3019 (1994).
- [24] R. M. Ziff, E. Gulari, and Y. Barshad, Kinetic phase transitions in an irreversible surface-reaction model, *Physical review letters* **56**, 2553 (1986).
- [25] D. Dhar, The collapse of directed animals, *Journal of Physics A: Mathematical and General* **20**, L847 (1987).
- [26] H. Hinrichsen, On possible experimental realizations of directed percolation, *Brazilian Journal of Physics* **30**, 69 (2000).
- [27] K. A. Takeuchi, M. Kuroda, H. Chaté, and M. Sano, Directed percolation criticality in turbulent liquid crystals, *Physical review letters* **99**, 234503 (2007).
- [28] G. Lemoult, L. Shi, K. Avila, S. V. Jalikop, M. Avila, and B. Hof, Directed percolation phase transition to sustained turbulence in couette flow, *Nature Physics* **12**, 254 (2016).
- [29] A. Barrat, M. Barthelemy, and A. Vespignani, *Dynamical processes on complex networks* (Cambridge university press, 2008).
- [30] R. Pastor-Satorras, C. Castellano, P. Van Mieghem, and A. Vespignani, Epidemic processes in complex networks, *Reviews of modern physics* **87**, 925 (2015).
- [31] D. Kempe, J. Kleinberg, and A. Kumar, Connectivity and inference problems for temporal networks, *Journal of Computer and System Sciences* **64**, 820 (2002).
- [32] J. Moody, The importance of relationship timing for diffusion, *Social forces* **81**, 25 (2002).
- [33] P. Holme, Network reachability of real-world contact sequences, *Physical Review E* **71**, 046119 (2005).
- [34] R. K. Pan and J. Saramäki, Path lengths, correlations, and centrality in temporal networks, *Physical Review E* **84**, 016105 (2011).
- [35] I. Scholtes, N. Wider, R. Pfitzner, A. Garas, C. J. Tesse, and F. Schweitzer, Causality-driven slow-down and speed-up of diffusion in non-markovian temporal networks, *Nature communications* **5**, 1 (2014).
- [36] J. Stehlé, N. Voirin, A. Barrat, C. Cattuto, L. Isella, J.-F. Pinton, M. Quaggiotto, W. Van den Broeck, C. Régis, B. Lina, *et al.*, High-resolution measurements of face-to-face contact patterns in a primary school, *PLoS one* **6**, e23176 (2011).
- [37] S. Dai, H. Bouchet, A. Nardy, E. Fleury, J.-P. Chevrot, and M. Karsai, Temporal social network reconstruction using wireless proximity sensors: model selection and consequences, *EPJ Data Science* **9**, 19 (2020).
- [38] A. Aleta, G. F. de Arruda, and Y. Moreno, Data-driven contact structures: from homogeneous mixing to multilayer networks, *PLOS Computational Biology* **16**, 1

- (2020).
- [39] R. Parshani, M. Dickison, R. Cohen, H. E. Stanley, and S. Havlin, Dynamic networks and directed percolation, *EPL (Europhysics Letters)* **90**, 38004 (2010).
- [40] M. E. J. Newman, Spread of epidemic disease on networks, *Physical review E* **66**, 016128 (2002).
- [41] E. Kenah and J. M. Robins, Second look at the spread of epidemics on networks, *Physical Review E* **76**, 036113 (2007).
- [42] E. Kenah and J. C. Miller, Epidemic percolation networks, epidemic outcomes, and interventions, *Interdisciplinary perspectives on infectious diseases* **2011**, 10.1155/2011/543520 (2011).
- [43] A. K. Rizi, A. Faqeeh, A. Badie-Modiri, and M. Kivelä, Epidemic spreading and digital contact tracing: Effects of heterogeneous mixing and quarantine failures, arXiv:2103.12634 (2021).
- [44] P. Crescenzi, C. Magnien, and A. Marino, Approximating the temporal neighbourhood function of large temporal graphs, *Algorithms* **12**, 211 (2019).
- [45] A. Badie-Modiri, M. Karsai, and M. Kivelä, Efficient limited-time reachability estimation in temporal networks, *Phys. Rev. E* **101**, 052303 (2020).
- [46] A. Casteigts, A.-S. Himmel, H. Molter, and P. Zschoche, The computational complexity of finding temporal paths under waiting time constraints, arXiv:1909.06437 (2019).
- [47] S. Thejaswi, J. Lauri, and A. Gionis, Restless reachability problems in temporal graphs, arXiv:2010.08423 <https://arxiv.org/abs/2010.08423> (2020).
- [48] A.-S. Himmel, M. Bentert, A. Nichterlein, and R. Niedermeier, Efficient computation of optimal temporal walks under waiting-time constraints, in *International Conference on Complex Networks and Their Applications* (Springer, 2019) pp. 494–506.
- [49] M. Starnini and R. Pastor-Satorras, Temporal percolation in activity-driven networks, *Physical Review E* **89**, 032807 (2014).
- [50] M. Kivelä, J. Cambe, J. Saramäki, and M. Karsai, Mapping temporal-network percolation to weighted, static event graphs, *Scientific reports* **8**, 1 (2018).
- [51] H. H. K. Lentz, T. Selhorst, and I. M. Sokolov, Unfolding accessibility provides a macroscopic approach to temporal networks, *Physical review letters* **110**, 118701 (2013).
- [52] J. Saramäki, M. Kivelä, and M. Karsai, Weighted temporal event graphs, in *Temporal Network Theory* (Springer, 2019) pp. 107–128.
- [53] A. Mellor, The temporal event graph, *Journal of Complex Networks* **6**, 639 (2017).
- [54] P. Grassberger, On phase transitions in Schlögl’s second model, *Zeitschrift fur Physik B Condensed Matter* **47**, 365 (1982).
- [55] H. K. Janssen, On the nonequilibrium phase transition in reaction-diffusion systems with an absorbing stationary state, *Zeitschrift fur Physik B Condensed Matter* **42**, 151 (1981).
- [56] M. E. J. Newman, S. H. Strogatz, and D. J. Watts, Random graphs with arbitrary degree distributions and their applications, *Physical review E* **64**, 026118 (2001).
- [57] P. Grassberger and A. De La Torre, Reggeon field theory (schlögl’s first model) on a lattice: Monte carlo calculations of critical behaviour, *Annals of Physics* **122**, 373 (1979).
- [58] A. Badie-Modiri, A. K. Rizi, M. Karsai, and M. Kiveä, Directed percolation in random temporal network models with heterogeneities, arXiv:2110.07698 (2021).
- [59] Bureau of Transportation Statistics, Bureau of transportation statistics website (2017).
- [60] R. Kujala, C. Weckström, R. K. Darst, M. N. Mladenović, and J. Saramäki, A collection of public transport network data sets for 25 cities, *Scientific data* **5**, 180089 (2018).
- [61] J. Yang and J. Leskovec, Patterns of temporal variation in online media, in *Proceedings of the fourth ACM international conference on Web search and data mining* (ACM, 2011) pp. 177–186.
- [62] M. Karsai, M. Kivelä, R. K. Pan, K. Kaski, J. Kertész, A.-L. Barabási, and J. Saramäki, Small but slow world: How network topology and burstiness slow down spreading, *Physical Review E* **83**, 025102(R) (2011).

Supplementary Material for Directed Percolation in Temporal Networks

Arash Badie-Modiri,¹ Abbas K. Rizi,¹ Márton Karsai,^{2,3} and Mikko Kivela¹

¹Department of Computer Science, School of Science, Aalto University, FI-0007, Finland

²Department of Network and Data Science Central European University, 1100 Vienna, Austria

³Alfréd Rényi Institute of Mathematics, 1053 Budapest, Hungary

(Dated: November 2, 2021)

IMPLEMENTATION

The implementation, along with two of the real-world temporal networks used, namely US air transport and Helsinki public transport, are made available online [1]. Please refer to Supplementary Material for [2] for a more detailed usage information.

GENERATING SYNTHETIC TEMPORAL NETWORKS AND THE EVENT GRAPH

The synthetic temporal networks are created with some continuous-time stochastic process based on an underlying static network with a degree distribution of p_k and excess degree distribution of q_k . The event graph, directed acyclic graph of adjacency relationships between pairs events e and connecting it to all other events when e happens less than δt time before that event and they share at least one node.

Reachability on the event graph will be preserved by removing some of the links so that the in/out-degree varies between 0 to 2 for every node [3] as long as the probability of adjacent events happening at exactly the same time is negligible. Practically, for every event e in the event graph, we can remove directed links to all but the very first events for each of the two nodes involved in e . This preserves connectivity in the event graph since all the events on the other end of the removed adjacency relationships would still be connected through one of the remaining links out-bound from e as they share at least one node and the time difference is less than or equal to the original event. Note that if more than one adjacent events are happening at the same time and no other adjacent events happen before them, we would have to keep all of them to preserve connectivity.

Note that in practice it is often not necessary to explicitly generate the event graph to measure the quantities. It is possible to store the list of associated events for each node in the network sorted by time and generate adjacency relationships on the fly. This can also be combined with other techniques such as using probabilistic data structures for estimating out-component sizes to allow processing of temporal networks much larger than what is possible with the explicit solution [4].

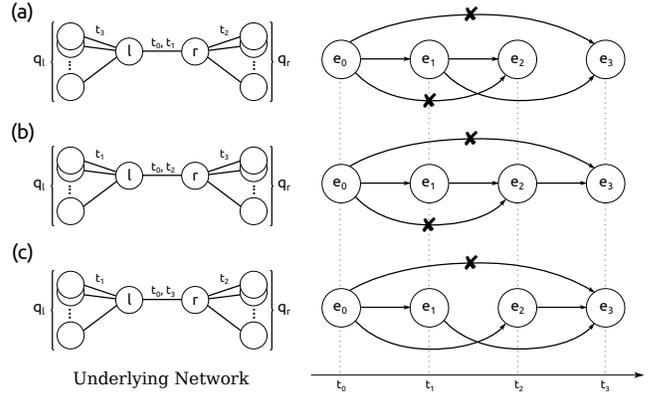


FIG. 1. Considering the case of an event between nodes l and r happening at time t_0 , where each node has q_l and q_r neighbours other than each other respectively. Assuming link $l-r$ was selected uniformly at random from the set of all the links in the base network, the values q_l and q_r are both realisations of the excess degree distribution of the base network P_q . Out-degree of the event $e_0 = (l, r, t_0)$ is between zero and two depending on the order and timing of events between l , r and their neighbours. If the $l-r$ link activates before any of the other links incident to l and r (panel a) or only links incident to l (or only r) other than $l-r$ fire before $l-r$ (panel b) at a time $t_1 > t_0$, event e_0 would have an out degree of zero if $t_1 - t_0 \geq \delta t$ or one if $t_1 - t_0 < \delta t$. All other edges coming out of e_0 would necessarily get pruned out as shown by the crossed-out links. The only case for e_0 having a degree two happens when at least one event at $t_1 < \delta t$ only involving l and not r and one at $t_2 < \delta t$ only involving r and not l both happen before $l-r$ fires again.

Degree distribution of the reduced event graph

Let's assume a vertex on the event graph, an event e , that involves two nodes called l and r which just activated at time t_0 (Fig 1). The two nodes l and r have respectively q_l and q_r neighbor nodes, other than each other, over the static network.

Let's also define $Pr(t_{res} < \delta t)$ as the probability that a process with inter-event time distribution \mathcal{T} can activate at least once in time δt after a random point in time. This can correspond to probability of one of the links in the underlying network activating within a time period of δt . Random variable t_{res} is distributed according to the residual inter-event time distribution \mathcal{R} . Similarly, $Pr(t_{iet} < \delta t)$ is the probability that a process with inter-

event time distribution \mathcal{T} can activate at least once in time δt right after activation.

Probability of an event having out-degree of zero in the event graph can be calculated as:

$$P_{out}(0|q_l, q_r) = Pr(t_{res} > \delta t)^{q_l + q_r} Pr(t_{iet} > \delta t) \quad (1)$$

where q_l and q_r are the number of neighbours each of the nodes participating in the event has except for the connection between two nodes of the event in question, t_{iet} is a realisation of the inter-event time distribution of the network \mathcal{T} and t_{res} is a realisation of the residual inter-event time distribution \mathcal{R} . Out-degree of an event is zero if and only if none of the $q_l + q_r$ adjacent links on the underlying network have an event within δt and the two nodes participating in the original event also don't have any events between them within δt . The second term corresponds to the probability of the same link not activating and the first is the probability of all of the other incident links except for the original link not activating in δt .

The only case that an event on the event graph can have an out-degree equal to 2 (as shown on Fig. 1c) is that at least one of the q_l neighbours of l and one of the q_r neighbours of r activate before δt and before reactivation of the link between l and r . Activation of the link between l and r before at least one of the links on each side is activated (Fig. 1a and 1b) would result in out-degree equal to zero or one depending on the value of δt and timing of the events.

Probability of having an out-degree equal to 2 can be calculated this way:

$$P_{out}(2|q_l, q_r) = \int_0^\infty (1 - Pr(t_{res} > \delta t \vee t_{res} > t))^{q_l} (1 - Pr(t_{res} > \delta t \vee t_{res} > t))^{q_r} Pr(t \sim \mathcal{T}) dt \quad (2)$$

where t_{res} , \mathcal{T} , q_l and q_r are defined as above. An event has an out-degree equal to 2 if and only if two mutually non-adjacent links adjacent to the link corresponding to the original event activated within δt and before the link corresponding to the original event is activated.

$$P_{out}(1|q_l, q_r) = 1 - (P_{out}(0|q_l, q_r) + P_{out}(2|q_l, q_r)) \quad (3)$$

Based on these equations, it is trivial to construct joint in- and out-degree distribution

$$P(in, out) = \sum_{q_l, q_r=1}^\infty P_{in}(in|q_l, q_r) P_{out}(out|q_l, q_r) P_q(q_l) P_q(q_r) \quad (4)$$

where $P_q(i)$ is the probability mass function of excess degree for the static aggregate base network.

It is possible to construct the joint degree distribution generating function \mathcal{G} using the joint degree distribution itself

$$\mathcal{G}(x, y) = \sum_{in, out=0}^2 P(in, out) x^{in} y^{out} \quad (5)$$

and in- and out-degree and excess degree distribution generating functions

$$\begin{aligned} \mathcal{G}_0^{in}(x) &= \mathcal{G}(x, 1) \\ \mathcal{G}_0^{out}(y) &= \mathcal{G}(1, y) \\ \mathcal{G}_1^{in}(x) &= \frac{1}{z} \frac{\partial \mathcal{G}(x, y)}{\partial y} \Big|_{y=1} \\ \mathcal{G}_1^{out}(y) &= \frac{1}{z} \frac{\partial \mathcal{G}(x, y)}{\partial x} \Big|_{x=1} \end{aligned} \quad (6)$$

where z is the mean in- and out-degree derived from

$$z = \frac{\partial \mathcal{G}(x, y)}{\partial x} \Big|_{x=y=1} = \frac{\partial \mathcal{G}(x, y)}{\partial y} \Big|_{x=y=1}. \quad (7)$$

Note that the in- and out-excess degree distribution generating functions we just derived ($\mathcal{G}_1^{in}(x)$ and $\mathcal{G}_1^{out}(x)$) refer to excess in- and out-degree distribution of a random event in the event graph.

DETAILS OF ANALYTICAL DERIVATION OF CRITICAL EXPONENTS

To study properties of the event graph, we approximate it by a random directed graph with the same in- and out-degree distribution. The following sections are all based on this assumption. The validity of this assumption and the following results can be verified explicitly by empirically constructing temporal networks of different topologies and temporal dynamics and measuring scaling of quantities such as $\rho(t)$, $P(t)$, M , V or $\rho_{stat}(\tau)$ [2].

Control Parameter τ

The mean-field rate equation for occupation density in homogeneous occupation initial condition can be constructed as

$$\partial_t \rho(t) = [Q_{out}(2) - Q_{out}(0)] \rho(t) - [Q_{out}(1) + 2Q_{out}(2)] \rho^2(t) \quad (8)$$

where $Q_{out}(i) = \frac{\partial^i}{i! \partial y^i} \mathcal{G}_1^{out}(y)$ is the excess out-degree distribution of events in the event graph. Using excess degree distribution captures the fact that in the random temporal model we are using, in- and out-degrees of events in the event graph are correlated and both are a function of degree of the event's constituting nodes in the static base network. By defining $\tau = Q_{out}(2) - Q_{out}(0)$

and $g = Q_{out}(1) + 2Q_{out}(2)$, Eq. 8 turns into $\partial_t \rho(t) = \tau \rho(t) - g \rho^2(t)$ with stationary solutions at $\rho = 0$, which represents the absorbing phase, and $\tau = 0$, which corresponds to the mean-field critical point.

An event graph can be presented, without any change in reachability of any event, so that no event has an in- or out-degree larger than two (as discussed in the beginning of this section) τ and g can be written as $\tau = \langle Q_{out} \rangle - 1$ and $g = \langle Q_{out} \rangle$.

The phase transition at $\tau = 0$ also complies with the previously known result of phase transition in random directed graphs with arbitrary degree distribution at $\frac{\partial}{\partial y} \mathcal{G}_1^{out}(y)|_{y=1} = 1$ [5].

Density scaling exponents $\alpha = \beta = 1$

For large t , Eq. 8 has one solution for active and absorbing phases and the critical threshold $\tau = 0$

$$\rho(t) = \begin{cases} -\tau \left(g - \frac{\tau}{\rho_0} \right)^{-1} e^{\tau t}, & \text{if } \tau < 0 \\ (\rho_0^{-1} + gt)^{-1}, & \text{if } \tau = 0 \\ \frac{\tau}{g} + \frac{\tau}{g^2} \left(g - \frac{\tau}{\rho_0} \right) e^{-\tau t}, & \text{if } \tau > 0 \end{cases} \quad (9)$$

where as t grows, ρ approaches zero for $\tau \leq 0$ and $\rho \rightarrow \tau/g$ for the $\tau > 0$, i.e. asymptotically

$$\rho(t) \propto t^{-1}, \text{ if } \tau = 0 \quad (10)$$

and

$$\rho_{stat}(\tau) \propto \tau^1, \text{ if } \tau > 0. \quad (11)$$

which leads to

$$\alpha = \beta = 1. \quad (12)$$

Rapidity-reversal symmetry $\beta' = \beta$

The fact that survival of a component is measured using out-component of events in the event graph while occupation density is calculated by measuring in-component of all possibly infected nodes, hints at a symmetry in the system under time reversal. Consider δt -constrained event graph representation of temporal network $T(\mathcal{V}, \mathcal{E})$ and two sets events in bands of time δt units of time wide, namely $E_0 = \{e \in \mathcal{E} \mid 0 \leq t_e < \delta t\}$ and $E_t = \{e \in \mathcal{E} \mid t \leq t_e < t + \delta t\}$ where t_e is time of activation of event e . Assuming $S_t \subseteq E_t$ where each member of S_t appears in the out-component of at least one of the members of E_0 and $S_0 \subseteq E_0$ where each member of S_0 appears in the in-component of at least one of the members of E_t (which is to say, one of the members

of S_t). Probability of survival at time t can be estimated as the fraction of nodes in E_0 that can reach at least a node in E_t , $P(t) \approx |S_0|/|E_0|$. Similarly, since in the homogeneous fully occupied case all the events in E_0 are occupied, the occupation density at time t can be estimated as $\rho(t) \approx |S_t|/|E_t|$.

Under reversal of time $t_e \rightarrow (t + \delta t) - t_e$ the direction of the links in the event graph will revert which in turn causes switching of in- and out-component set of each node. In this scenario, occupation density is estimated by $\rho(t) \approx |S_0|/|E_0|$ which is the same as probability of survival in the original case. Conversely, probability of survival is estimated by $P(t) \approx |S_t|/|E_t|$ which is the same as occupation density in the original case. If the time-reverted event graph has the same likelihood as the original event graph, e.g. if $\mathcal{G}_0^{out} = \mathcal{G}_0^{in}$, this leads to the identity

$$P(t) = \rho(t), \quad (13)$$

which in turn, for models belonging to the DP class, leads to the celebrated rapidity-reversal symmetry:

$$\beta = \beta'. \quad (14)$$

Mean component mass exponent $\gamma = 1$

The generating function for distribution of out-component sizes $H_0(y)$ is the solution to the system

$$\begin{aligned} H_0(y) &= y \mathcal{G}_0^{out}(H_1(y)) \\ H_1(y) &= y \mathcal{G}_1^{out}(H_1(y)) \end{aligned} \quad (15)$$

and mean out-component size can be calculated as

$$M = \left. \frac{\partial H_0(y)}{\partial y} \right|_{y=1} = 1 + \mathcal{G}_0^{\prime out}(1) H_1'(1). \quad (16)$$

For $\tau < 0$ where $H_1(1) = 1$ this results in a solution in form of

$$\begin{aligned} H_1'(1) &= 1 + \mathcal{G}_1^{\prime out}(1) H_1'(1) = (1 - \mathcal{G}_1^{\prime out}(1))^{-1} \\ \rightarrow M &= 1 + \mathcal{G}_0^{\prime out}(1) (1 - \mathcal{G}_1^{\prime out}(1))^{-1}. \end{aligned} \quad (17)$$

Keeping in mind the definition of control parameter $\tau = \langle Q_{out} \rangle - 1 = \mathcal{G}_1^{\prime out}(1) - 1$ and that $\frac{\partial}{\partial y} \mathcal{G}_0^{out}(y)|_{y=1} = z$ (see Eq. 7), we can re-write M as

$$M = 1 + z(-\tau)^{-1} = \frac{z - \tau}{-\tau}, \quad (18)$$

For the special case of random k -regular networks we can prove that $z - \tau = 1$ which give the result $M = (-\tau)^{-1}$. More generally, to find exponent of a power-law asymptote of the form $(-\tau)^{-\gamma}$ as $\tau \rightarrow 0^-$ for any random graph we can find the solution to

$$\begin{aligned} -\gamma &= \lim_{\tau \rightarrow 0^-} \frac{\ln M}{\ln -\tau} = \lim_{\tau \rightarrow 0^-} \frac{\ln(z - \tau) - \ln -\tau}{\ln -\tau} \\ &= \lim_{\tau \rightarrow 0^-} \frac{\ln(z - \tau)}{-\tau} - 1 = -1 \text{ if } 0 < z < \infty. \end{aligned} \quad (19)$$

Under the condition that $0 < z < \infty$, the limit term is equal to zero, resulting in $\gamma = 1$. Given the fact that, assuming probability of co-occurrence of adjacent events is negligible, the maximum out-degree of the event graph is 2, if the mean out-degree is above zero at $\tau = 0$, a power relation with exponent $\gamma = 1$ estimates mean component mass.

ALTERNATIVE ANALOGUE FOR MEAN CLUSTER MASS

In classic DP, mean cluster mass M is defined as the integration of the pair-connectedness function across all nodes and time. Based on how we established parallels between spatial dimensions and the base networks and a the possibility of defining pair-connectedness function as existence of a δt -limited time-respecting path between a pair of nodes at different times, this might translates more directly to the sum of time-length of all infections started from a random event, or in other words total duration of sickness for all people. This would also imply that the spreading processes start at random nodes and times, as opposed to starting at random events as we use in the manuscript. Values for mean cluster mass M , as well as mean cluster volume V and mean cluster lifetime T for random 9-regular networks with Poisson lik activations are plotted in Fig. 2 for different values of δt .

DESCRIPTION OF THE REAL-WORLD TEMPORAL NETWORK DATA SETS

Four real-world temporal networks were used for demonstrating the measurement of the quantities and phase transition. These are the same datasets used previously for developing the algorithmic method which form the backbone of the more empirical parts of the current manuscript [4].

The air transportation network dataset is a recording of 180 112 flights between 279 airports in the United States, gathered from the website of the The Department of Transportation's Bureau of Transportation Statistics website in 2017 [6]. The public transportation network is the set of all 664 138 trips during a typical Monday in Helsinki in 2018, where a trip is one public transportation vehicle moving from one of the 6 858 bus, metro and ferry stations to the next [7]. The twitter dataset is a set of 258 million mentions (counting replies) of 12 million user handles [8]. Finally, the mobile phone call dataset is set of 325 million phone calls between over 5 million mobile phone subscribers [9]. A few thousand events were removed from the beginning of the twitter dataset to eliminate a weeks-wide gap in the gathered data.

The first two networks, air and public transportation networks, were processed as directed, delayed temporal networks where each event has a duration as well as a starting time $e = (v_1, v_2, t, d)$ where two events are adjacent if the second event starts after the duration of the event is finished and the tail node of the second event is the same as the head node of the first event, e.g. the first plane lands in the destination airport before the second one takes off from that airport. The waiting time δt then refers to the time between end of the first event to the beginning of the second one.

There is an argument for measuring waiting time in delayed temporal networks from the beginning of the first event for some processes such as disease spreading. For example, a disease that gets healed less than an hour after infecting someone has a very low chance of spreading through air travel where most trips take longer than that. That method was not used in this manuscript. The second pair of networks, twitter and mobile networks, were treated like undirected, instantaneous temporal networks.

The real-world networks show high degrees of temporal heterogeneity, daily/weekly patterns, peaks at special hours of the day or at special days of the year or local or global outages. Measuring representative values for static density ρ_{stat} and susceptibility χ for real-world networks would need special consideration. Our current method for measuring these quantities in the homogeneous, fully-occupied initial condition is dependent on the level of activity of the initial time t_0 of the dataset as well as existence of unlikely periods of very low or very high activity as a result of natural disasters, real-world happenings or simply failure of the measurement apparatus or the measured system. To average out any such outliers we split the original data into 64 equal time windows of time $T/2$ (for air and public transport) and $T/16$ (for mobile and twitter) where T is the time window of the original dataset, each starting at a random point in time.

Distribution of mass, volume and lifetime for each event in the event graph can be seen Figs. 3, 4, 5 and 6 for Helsinki public transport, Air transport, Twitter and Mobile datasets respectively.

-
- [1] A. Badie-Modiri, A. K. Rizi, M. Karsai, and M. Kivelä, Source code and for "Directed Percolation in Temporal Networks" and "Directed Percolation in Random Temporal Network Models with Heterogeneities" (2021), available at <https://doi.org/10.5281/zenodo.5570746>.
 - [2] A. Badie-Modiri, A. K. Rizi, M. Karsai, and M. Kiveä, Directed percolation in random temporal network models with heterogeneities, arXiv:2110.07698 (2021).
 - [3] A. Mellor, The temporal event graph, Journal of Complex Networks **6**, 639 (2017).

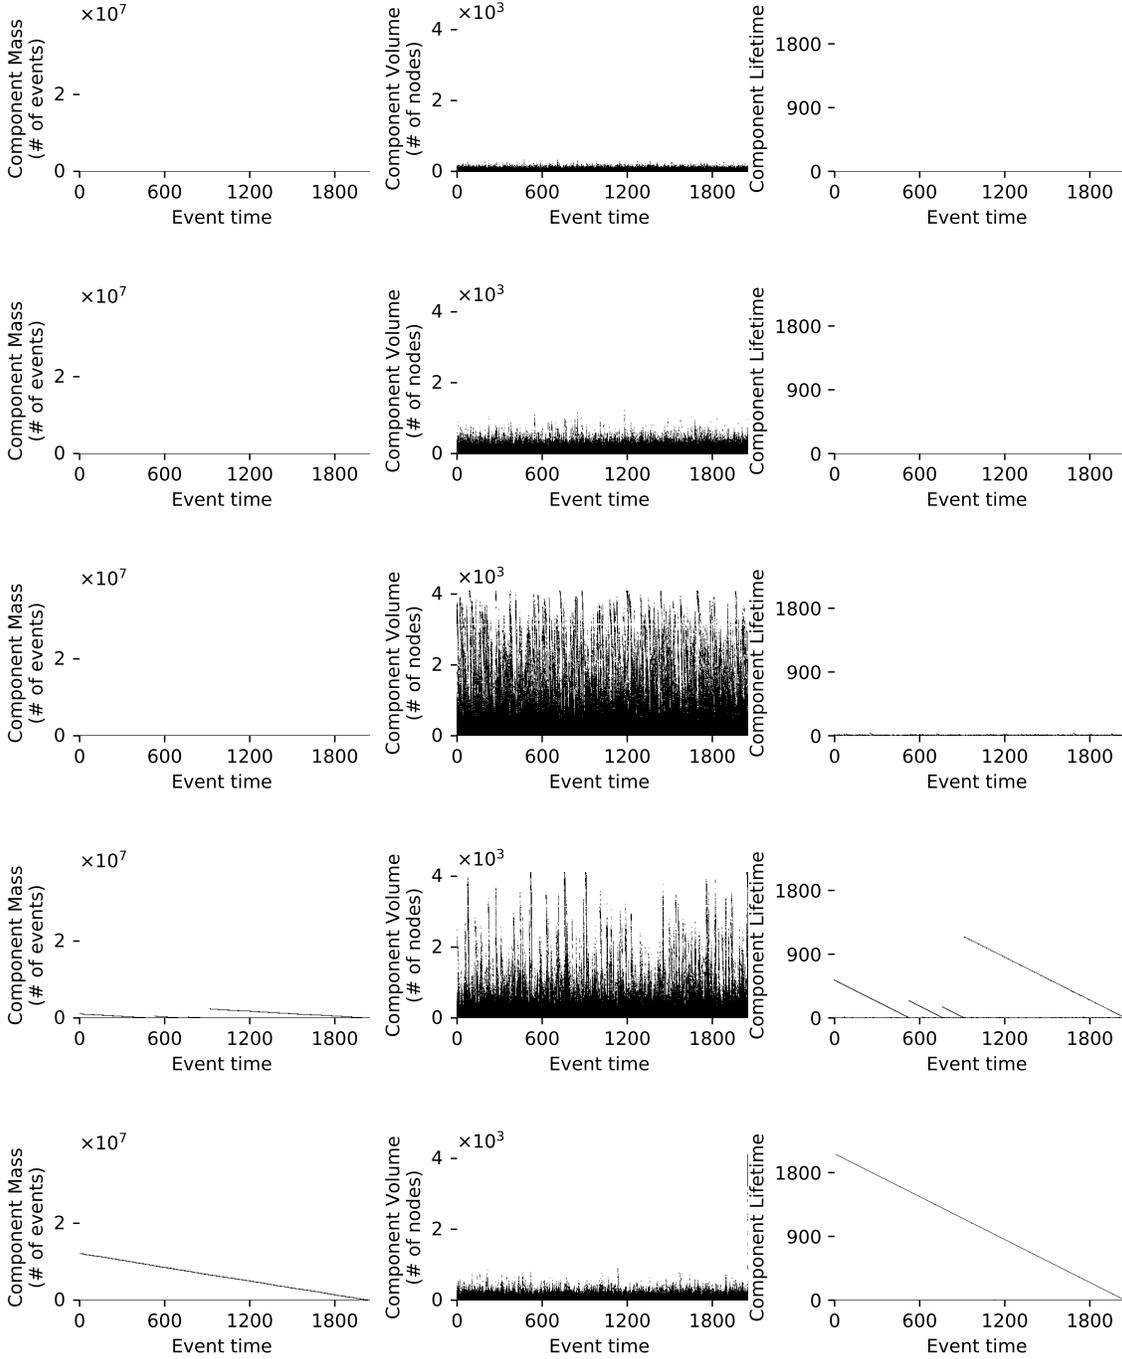


FIG. 2. Out-component size estimates of all events of a 9-regular network with Poisson process link activations $\lambda = 1$ for (a) $\delta t = 0.07$, (b) $\delta t = 0.08$, (c) $\delta t = 0.08802$, (d) $\delta t = 0.092$ and (e) $\delta t = 0.1$.

- [4] A. Badie-Modiri, M. Karsai, and M. Kivelä, Efficient limited-time reachability estimation in temporal networks, *Phys. Rev. E* **101**, 052303 (2020).
- [5] M. E. J. Newman, S. H. Strogatz, and D. J. Watts, Random graphs with arbitrary degree distributions and their applications, *Physical review E* **64**, 026118 (2001).
- [6] Bureau of Transportation Statistics, Bureau of transportation statistics website (2017).
- [7] R. Kujala, C. Weckström, R. K. Darst, M. N. Mladenović, and J. Saramäki, A collection of public transport network data sets for 25 cities, *Scientific data* **5**, 180089 (2018).
- [8] J. Yang and J. Leskovec, Patterns of temporal variation in online media, in *Proceedings of the fourth ACM international conference on Web search and data mining (ACM, 2011)* pp. 177–186.
- [9] M. Karsai, M. Kivelä, R. K. Pan, K. Kaski, J. Kertész,

A.-L. Barabási, and J. Saramäki, Small but slow world:

How network topology and burstiness slow down spreading, *Physical Review E* **83**, 025102(R) (2011).

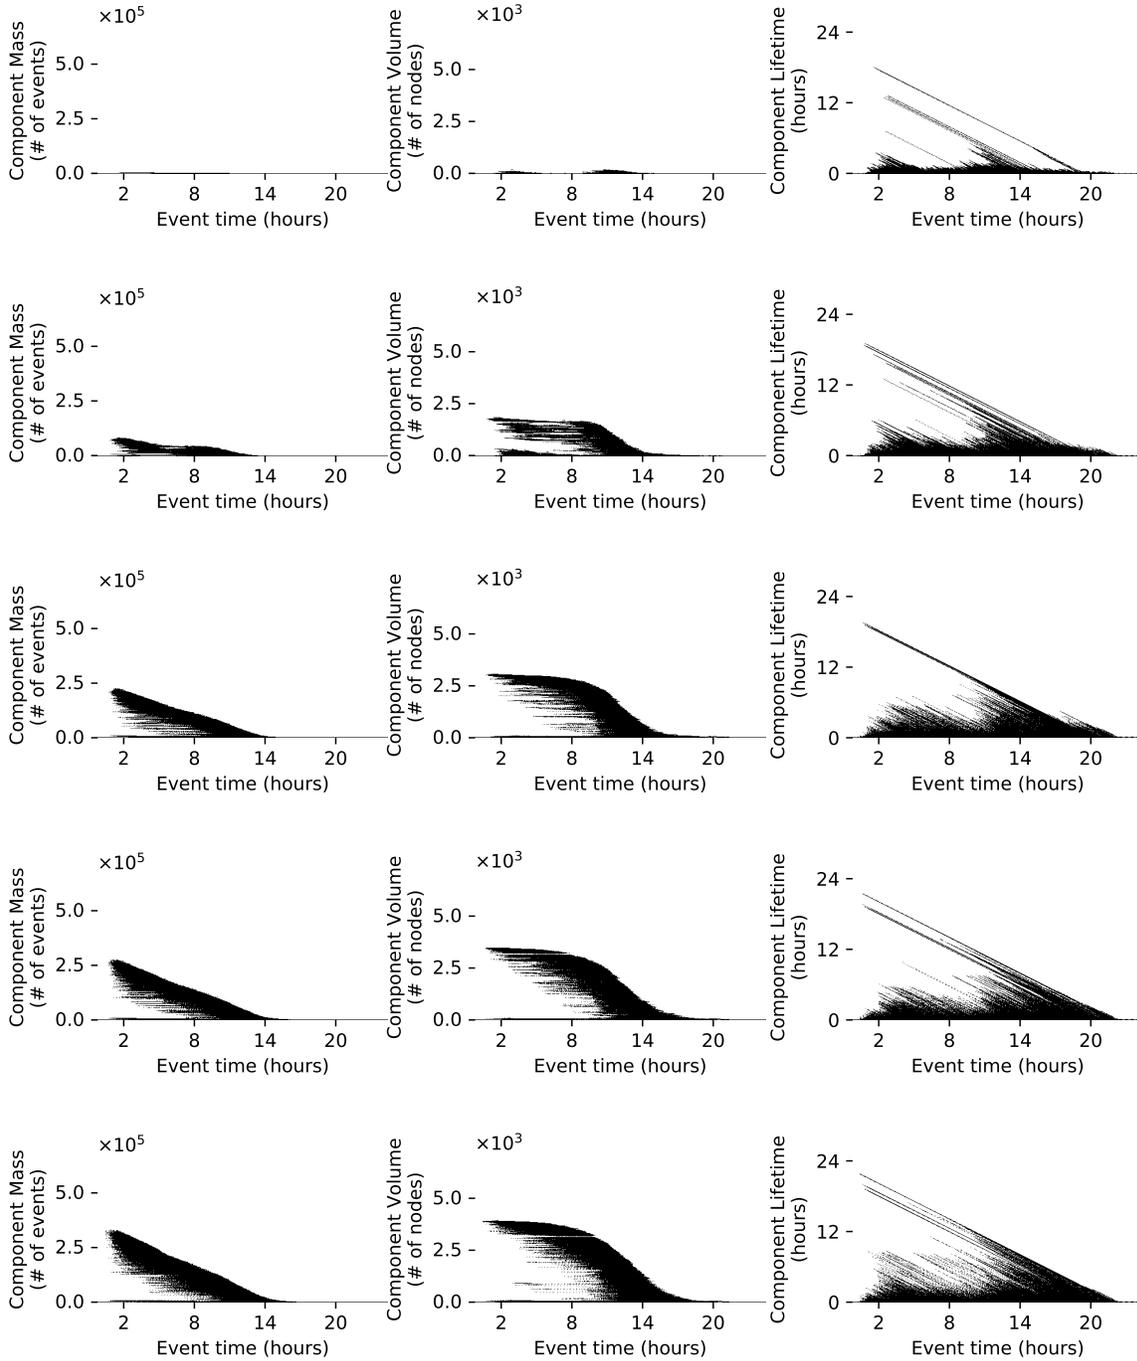


FIG. 3. Helsinki public transport network out-component size estimates for (a) $\delta t = 300$, (b) $\delta t = 500$, (c) $\delta t = \delta t_c = 670$, (d) $\delta t = 800$ and (e) $\delta t = 1000$ seconds.

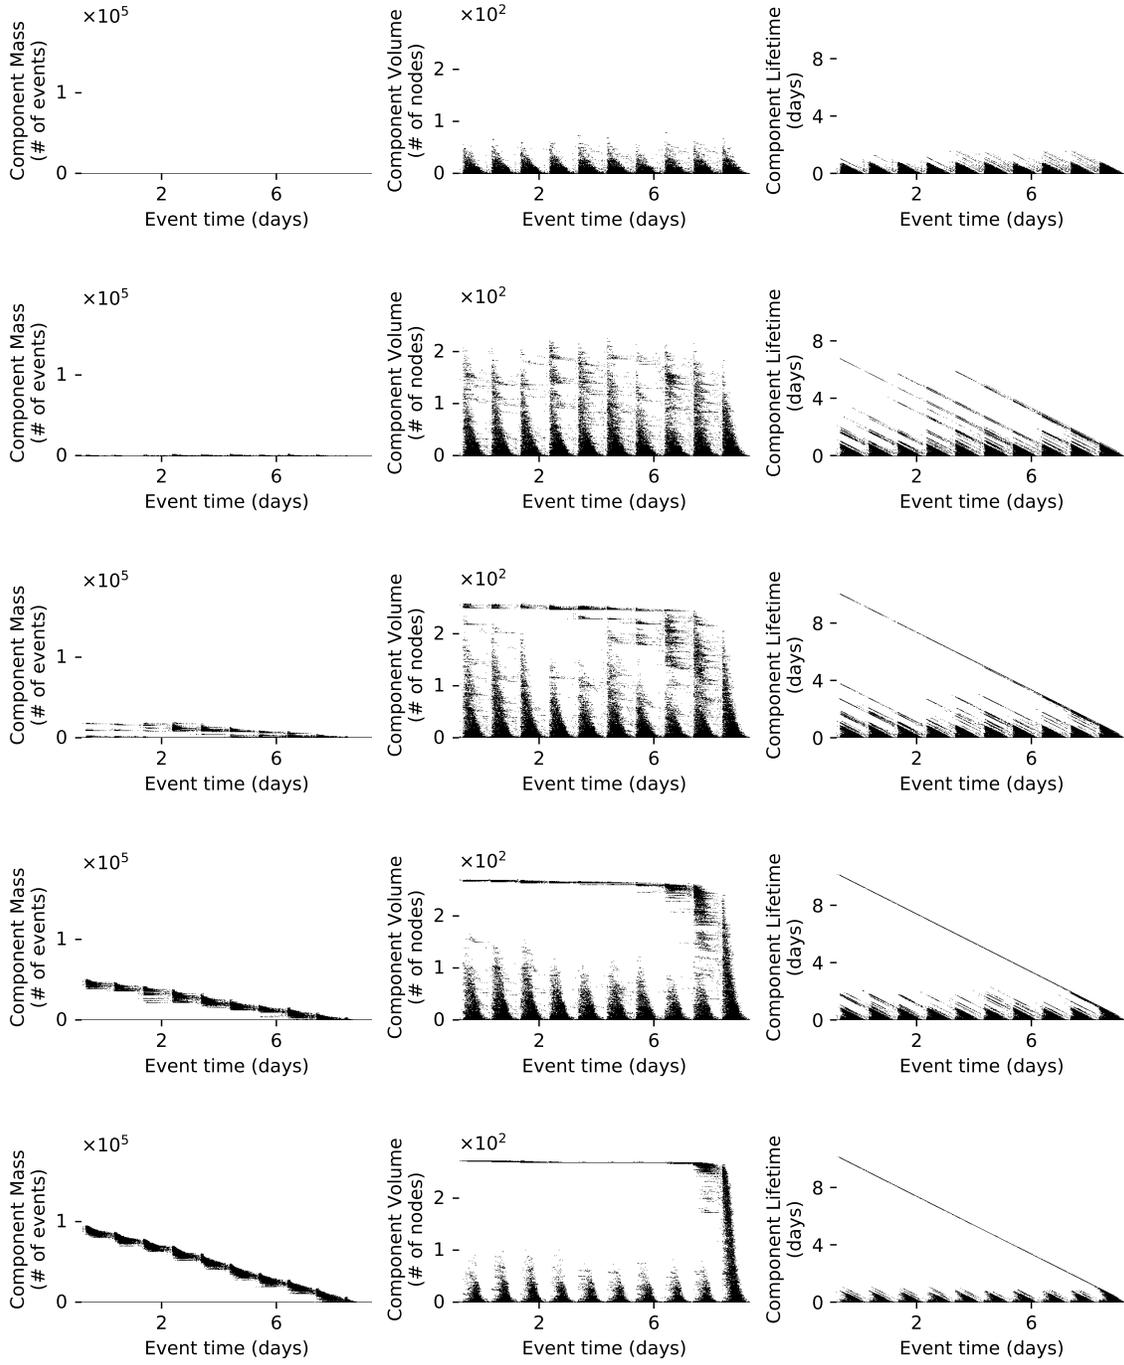


FIG. 4. Air transport network out-component size estimates for (a) $\delta t = 300$, (b) $\delta t = 400$, (c) $\delta t = \delta t_c = 470$, (d) $\delta t = 600$ and (e) $\delta t = 800$ seconds.

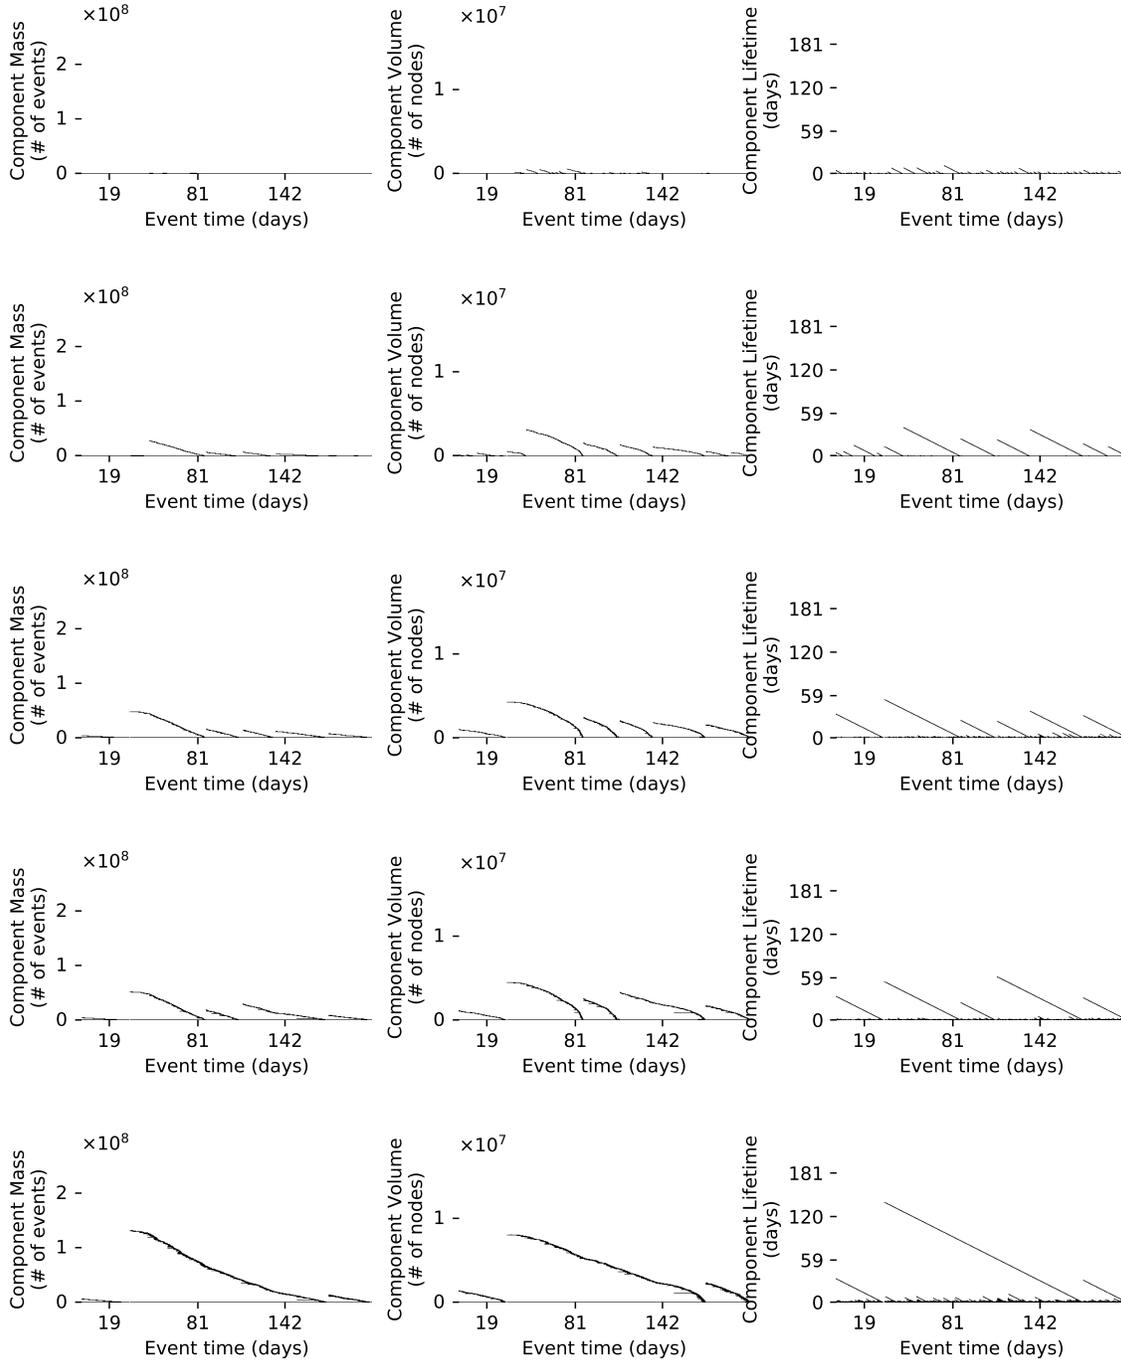


FIG. 5. Twitter mention network out-component size estimates for (a) $\delta t = 200$, (b) $\delta t = 1200$, (c) $\delta t = 3600$, (d) $\delta t = \delta t_c = 4800$ and (e) $\delta t = 12000$ seconds.

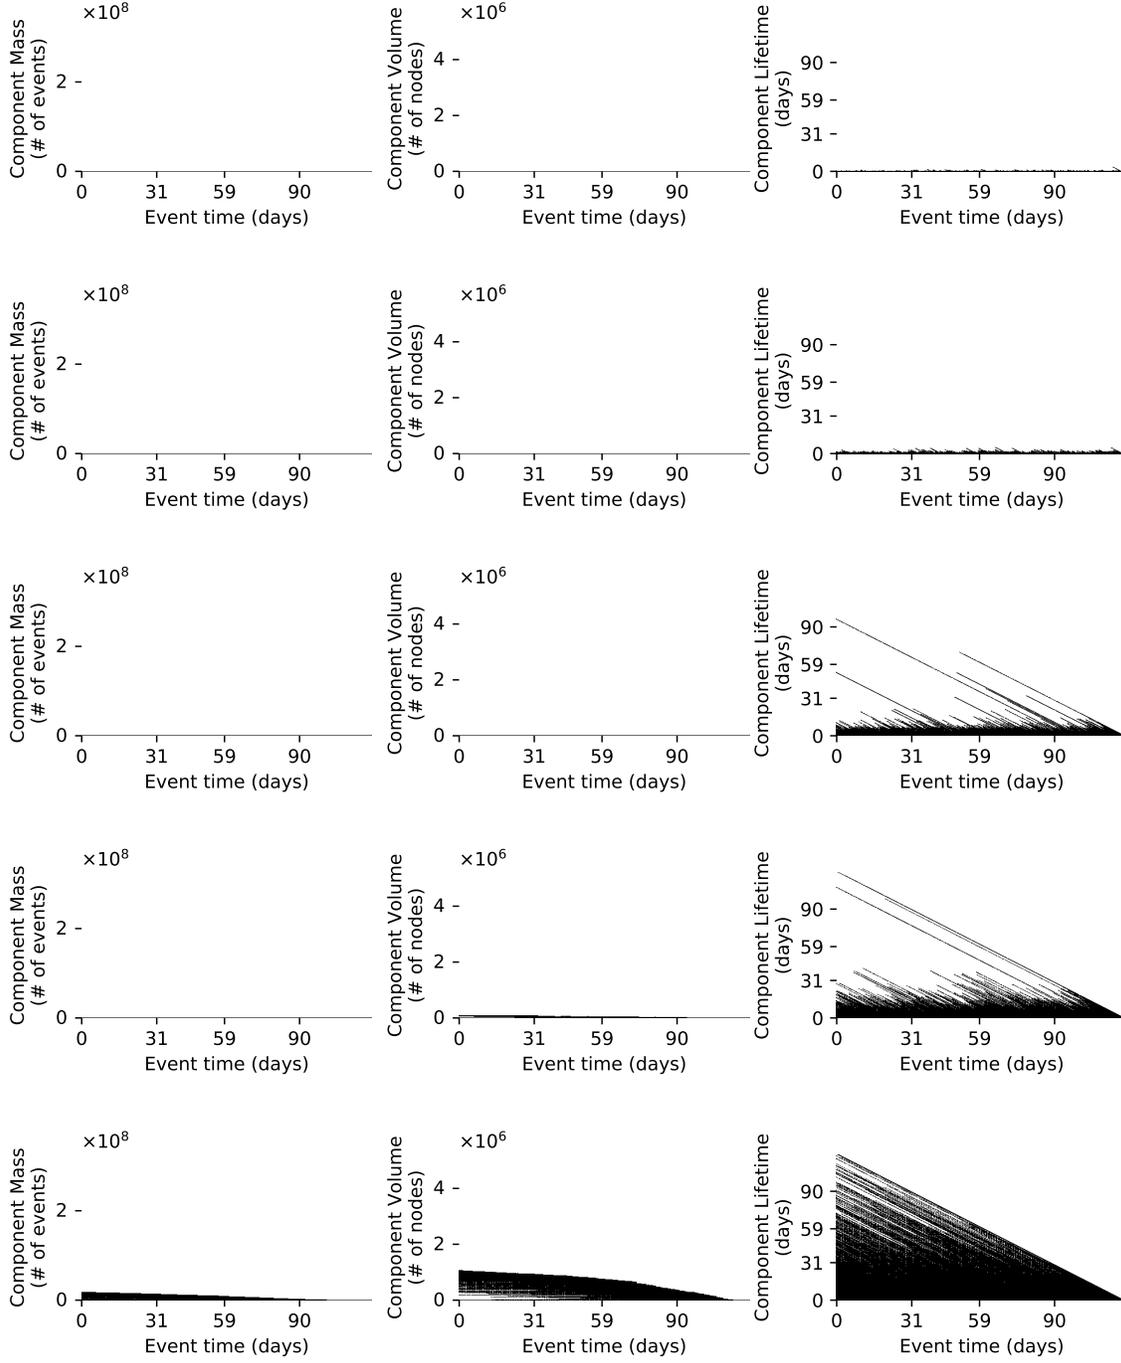


FIG. 6. Mobile call network out-component size estimates for (a) $\delta t = 2$, (b) $\delta t = 4$, (c) $\delta t = \delta t_c = 7.5$, (d) $\delta t = 9$ and (e) $\delta t = 14$ hours.