

gaBERT — an Irish Language Model

James Barry¹ and Joachim Wagner² and Lauren Cassidy¹ and Alan Cowap³ and Teresa Lynn¹ and Abigail Walsh¹ and Mícheál J. Ó Meachair⁴ and Jennifer Foster²

^{1,2,3}School of Computing, Dublin City University

¹ADAPT Centre

³SFI Centre for Research Training in Machine Learning at Dublin City University

⁴Fiontar & Scoil na Gaeilge, Dublin City University

¹ {firstname.lastname}@adaptcentre.ie

² {firstname.lastname}@dcu.ie

³ alan.cowap2@mail.dcu.ie

⁴ micheal.omeachair@dcu.ie

Abstract

The BERT family of neural language models have become highly popular due to their ability to provide sequences of text with rich context-sensitive token encodings which are able to generalise well to many Natural Language Processing tasks. Over 120 monolingual BERT models covering over 50 languages have been released, as well as a multilingual model trained on 104 languages. We introduce, gaBERT, a monolingual BERT model for the Irish language. We compare our gaBERT model to multilingual BERT and show that gaBERT provides better representations for a downstream parsing task. We also show how different filtering criteria, vocabulary size and the choice of subword tokenisation model affect downstream performance. We release gaBERT and related code to the community.

1 Introduction

The technique of fine-tuning a self-supervised language model has become ubiquitous in Natural Language Processing, because models trained in this way have advanced evaluation scores on many tasks (Radford et al., 2018; Peters et al., 2018; Devlin et al., 2019). Arguably the most successful architecture has been BERT (Devlin et al., 2019) which uses stacks of transformers to predict the identity of a masked token and to predict whether two sequences are contiguous. It has spawned many variants (Liu et al., 2019; Lan et al., 2019) and the nascent field of BERTology (Jawahar et al., 2019; Chi et al., 2020; Rogers et al., 2020). Initially, BERT models were released for English and Chinese as well as a multilingual model (mBERT), trained on Wikipedia text from 104 languages.

Since then, a number of monolingual BERT models have been released (Nozza et al., 2020). In this paper, we describe gaBERT, a monolingual BERT model for the Irish language.

Although Irish is the first official language of the Republic of Ireland, a minority, 1.5% of the population or 73,803 people (CSO, 2016) use it in their everyday lives outside of the education system. As the less dominant language in a bilingual community, the availability of Irish language technology is important since it makes it easier for Irish speakers, and those who wish to be Irish speakers, to use the language in practice. Building on recent progress in Irish NLP (Uí Dhonnchadha and Van Genabith, 2006; Lynn et al., 2012, 2015; Walsh et al., 2019) we release gaBERT, an Irish BERT model, trained on approximately 7.9 million sentences. There are many downstream applications where we envision gaBERT will be useful, including grammar checking, computer-aided language learning, predictive text, search and translation.

While there is evidence to suggest that dedicated monolingual models can be superior to a single multilingual model for within-language downstream tasks (de Vries et al., 2019; Virtanen et al., 2019; Farahani et al., 2020), other studies (Wu and Dredze, 2020; Rust et al., 2020; Chau et al., 2020) suggest that mBERT is a good choice for low-resourced languages. We compare gaBERT to mBERT and to the monolingual Irish WikiBERT, trained on Irish language Wikipedia, on the task of universal dependency parsing. We find that parsing accuracy improves when using gaBERT – by over 4 LAS points over mBERT and WikiBERT. We then use the gaBERT training data for continued

pretraining of mBERT, resulting in a recovery of 2.6 LAS points over the off-the-shelf version. We also compile a small test set which compares the models on their ability to predict a masked token. We abstract away from vocabulary differences between the models by masking pronouns, which are in all the models’ vocabularies. This evaluation clearly reveals the benefit of using our Irish data.

When training gaBERT, we examine the effect of vocabulary size, corpus filtering type and tokenisation model, finding that document-level filtering, with a SentencePiece tokeniser (Kudo and Richardson, 2018) and a vocabulary size of 30k is the best configuration. We release the code used to run our experiments through GitHub¹ and our models through the Hugging Face (Wolf et al., 2020) model repository.²

2 Data

We use the following to train gaBERT:

CoNLL17 The Irish data from the CoNLL17 raw text collection (Ginter et al., 2017) released as part of the 2017 CoNLL Shared Task on UD Parsing (Zeman et al., 2017).

IMT A wide collection of Irish texts used in Irish machine translation experiments (Dowling et al., 2018, 2020); including legal text, general administration and data crawled from public body websites.

NCI The New Corpus for Ireland (Kilgarriff et al., 2006), which contains a wide range of texts in Irish, including fiction, news reports, informative texts, and official documents.

OSCAR The unshuffled Irish portion of the OSCAR Corpus (Ortiz Suárez et al., 2019) which is a collection of documents from CommonCrawl and sorted by language ID.

ParaCrawl The Irish portion of ParaCrawl v7 (*ga-en* bitext pair) (Bañón et al., 2020), which is a collection of parallel corpora crawled from multilingual websites, with the sentences aligned and then filtered.

Wikipedia Text from Irish Wikipedia, an online encyclopedia with articles covering a wide variety of topics. We use the slightly older articles from <https://dumps.wikimedia.org/gawiki/20210520/> (27.7 MB).

¹<https://github.com/jbrry/Irish-BERT>

²<https://huggingface.co/DCU-NLP>

Corpus	Num. Sents	Size (MB)
CoNLL17	1,686,526	138
IMT	1,352,989	124
NCI	1,621,031	174
OSCAR	793,573	89
ParaCrawl	3,056,198	380
Wikipedia	685,827	38
Overall	9,196,144	941

Table 1: Sentence counts and plain text file size in megabytes for each corpus after tokenisation and segmentation but before applying sentence filtering.

The sentence counts in each corpus are listed in Table 1 after tokenisation and segmentation but before filtering described below. Some of these corpora overlap with others, e. g. the CoNLL17 corpus contains CommonCrawl data that is also used in the OSCAR corpus, and Irish Wikipedia data that is also used in the Wikipedia corpus. See Appendix A for more information on the content of these corpora, including license information.

3 Corpus Pre-processing

Described in this section are the relevant pre-processing steps required by each of the various corpora included in the training data.

CoNLL17 The CoNLL17 corpus is already tokenised, as the files are converted from CoNLL-U format to plain text where each row in the text column of a CoNLL-U sentence is treated as a token.

IMT, OSCAR and ParaCrawl The text files from the IMT, OSCAR and ParaCrawl contain raw sentences requiring tokenisation. We describe the tokenisation process for these corpora in 3.1.

Wikipedia For the Wikipedia articles, the Irish Wikipedia dump is downloaded and the WikiExtractor tool³ is then used to extract the Wikipedia articles to plain text. Article headers are included in the extracted text files. Once the articles have been converted to plain text, they are tokenised using the tokeniser described in 3.1.

NCI As many of the NCI segments marked up with $\langle s \rangle$ tags contain multiple sentences, we treat each segment boundary as a sentence boundary and

³<https://github.com/attardi/wikiextractor>

further split segments into sentences recursively, finding the best split point according to a set of heuristics described in Appendix B.2, splitting the segment in half and applying the same procedure to each half until no suitable split point is found.

3.1 Tokenisation and Segmentation

Raw texts from the IMT, OSCAR, ParaCrawl and Wikipedia corpora are tokenised and segmented with UDPipe (Straka and Straková, 2017) trained on a combination of the Irish-IDT and English-EWT corpora from version 2.7 of the Universal Dependencies (UD) treebanks (Zeman et al., 2020). We include the English-EWT treebank in the training data to expose the tokeniser to more incidences of punctuation symbols which are prevalent in our pre-training data. This also comes with the benefit of supporting the tokenisation of code-mixed data. We upsample the Irish-IDT treebank by ten times to offset the larger English-EWT treebank size. This tokeniser is applied to all corpora apart from the NCI, which is already tokenised by Kilgarriff et al. (2006), and the CoNLL17 corpus as this corpus is already tokenised in CoNLL-U format.

4 Experimental Setup

After initial corpus pre-processing, all corpora are merged and we use the WikiBERT pipeline (Pyysalo et al., 2020) to create pretraining data for BERT. We experiment with four corpus filter settings and seven subword unit vocabularies. We perform a greedy search for the optimal parameters, first choosing the filter settings, then the size of the BERT vocabulary and finally considering a WordPiece vocabulary instead of a SentencePiece vocabulary and the union of the two vocabularies.

4.1 Corpus Filtering

The WikiBERT pipeline contains a number of filters for document-level filtering. As we are working with data sources where there may not be clear document boundaries, or where there are no line breaks over a large number of sentences, document-level filtering may be inadequate for such texts. Consequently, we also experiment with using the OpusFilter library (Aulamo et al., 2020), which filters out individual sentences, thereby giving us the flexibility of filtering noisy sentences while not discarding full documents.

We train different BERT models with varying levels of filtering:

- **No-filter:** all collected texts are included in the pre-training data.
- **Document-filter:** the default document-level filtering used in the WikiBERT pipeline.
- **OpusFilter-basic:** we use OpusFilter with basic filtering described in Appendix B.3.
- **OpusFilter-basic-char-lang** we use OpusFilter with basic filtering as well as character-script and language ID filters described in Appendix B.3.

For each of these filtering configurations, we train a BERT model for 500,000 pre-training steps using all of the sentences which remain after filtering.

4.2 Vocabulary Creation

To create the vocabulary for our models, we experiment with using the SentencePiece tokeniser and the WordPiece tokeniser. We take the highest-performing model from the filtering experiments in Section 4.1 and use that filtering setting for our vocabulary experiments. For the SentencePiece tokeniser, we use vocabulary sizes of 15K, 20K, 30K, 40K and 50K and train a BERT model on the data produced by those vocabularies.

We then train a WordPiece tokeniser, keeping the vocabulary size that works best for the SentencePiece tokeniser, and train a respective BERT model. Furthermore, we train a BERT model using the union of the two vocabularies, i.e. our best-performing SentencePiece vocabulary and the WordPiece vocabulary.

4.3 BERT Pretraining Parameters

We use the original BERT implementation of Devlin et al. (2019). For the development experiments, we train our BERT model for 500,000 steps with a sequence length of 128. We use whole word masking and the default hyperparameters and model architecture of BERT_{BASE} (Devlin et al., 2019) except a lower batch size of 32 in order to train on NVIDIA RTX 6000 GPUs with 24 GB RAM. This corresponds to a bidirectional transformer (Vaswani et al., 2017) with 12 layers, 12 attention heads, a hidden layer size of 768, and GELU activations (Hendrycks and Gimpel, 2016).

4.4 Final Models

For the final gaBERT model, we train for 900k steps with sequence length 128 and a further 100k steps with sequence length 512. We train on a TPU-

v2-8 with 128GB of memory on Google Compute Engine⁴ and increase the batch size to 128.

Furthermore, we train ELECTRA (Clark et al., 2020) on the same data on a TPU-v3-8. ELECTRA replaces the MLM pre-training objective of BERT with a binary classification task discriminating between authentic tokens and alternative tokens generated by a smaller model for higher training efficiency. We use the default settings of the “Base” configuration of their implementation.⁵ As with BERT, we train for 1M steps and evaluate every 100k steps. However, we train on more data per step as the batch size is increased to 256 and a sequence length of 512 is used throughout.

5 Evaluation Measures

This section describes the evaluation measures we use to assess the BERT models in our experiments.

5.1 Dependency Parsing

The evaluation measure we use to make development decisions is dependency parsing LAS. To obtain this measure, we fine-tune a given BERT model in the task of dependency parsing and measure LAS on the development set of the Irish-IDT treebank (Lynn and Foster, 2016; McGuinness et al., 2020) in version 2.8 of UD. As parser performance also depends on the initialisation of the additional layers added by the parser, we report the median of five runs with different random initialisation, and in figures, we show a box plot.⁶

The Irish-IDT consists of 4,005 training sentences, 451 sentences in the development set and 454 test sentences. For the dependency parser, we use a multitask model which uses a graph-based parser with biaffine attention (Dozat and Manning, 2016) as well as additional classifiers for predicting POS tags and morphological features. We use the AllenNLP (Gardner et al., 2018) library to develop our multitask model. The trained BERT model is used as an encoder where the BERT representations are passed to the appropriate multitask components.

⁴TPU access was kindly provided to us through the Google Research TPU Research Cloud.

⁵<https://github.com/google-research/electra>

⁶The box plots do *not* show the variation to be expected when pre-training BERT with different random initialisation multiple times as obtaining multiple BERT models for each setting would be too computationally expensive.

5.2 Cloze Test

To compile a test set for a cloze task, 100 strings of Irish text (4–77 words in length) containing the pronouns ‘é’, ‘í’ or ‘iad’ are selected from Irish corpora and online publications. One of these pronouns is masked in each string, providing a context cue for the cloze test. The pronouns ‘é’ (‘him/it’), ‘í’ (‘her/it’) and ‘iad’ (‘them’) usually appear as single words, bound by whitespace or punctuation. Less commonly, they appear with an initial mutation e.g. ‘hí’ or suffix e.g. ‘iadsan’. Where such constructions occur in the cloze test, the language models must predict a subword unit in order to form a plausible string. Each language model is evaluated on the token it predicts for each masked token.⁷

Following Rönnqvist et al. (2019), the models are evaluated on their ability to generate the original masked token, and a manual evaluation of the models is performed wherein predictions are classified in the following exclusive categories:

- **Match:** The predicted token fits the context grammatically and semantically. This may occur when the model predicts the original token or another token which also fits the context cue. In order for a predicted pronoun to render the given cue grammatically correct, it must agree with regard to the number and gender of the noun phrase it refers to.
- **Mismatch** The predicted token is a valid Irish word but is unsuitable given the context.
- **Copy** The predicted token is an implausible repetition of another token in the context.
- **Gibberish** The predicted token is not a valid Irish word.

6 Results

6.1 Development Results

This section reports the results of our parameter search for corpus filtering and BERT vocabulary, as well as the effect of restricting the training data to publicly available data.

Filter Settings The overall number of sentences which remain after applying each filter

⁷Due to limitations of Hugging Face’s “fill-mask” pipeline module, we can only have a single mask per input sequence and only a single subword unit can be predicted for each mask. All the masked tokens exist in the vocabularies of the candidate BERT models and are therefore possible predictions.

Filter	Num. Sents
No-filter	9,192,060
Document-filter	7,947,664
OpusFilter-basic	8,974,681
OpusFilter-basic-char-lang	7,696,428

Table 2: The number of sentences which remain after applying the specific filter.

are shown in Table 2. If no filtering is applied, we have 9,192,060 sentences.⁸ The Document-filter removes about 1.2 million sentences, while OpusFilter-basic only removes about 200,000 sentences. OpusFilter-basic-char-lang removes the most number of sentences.

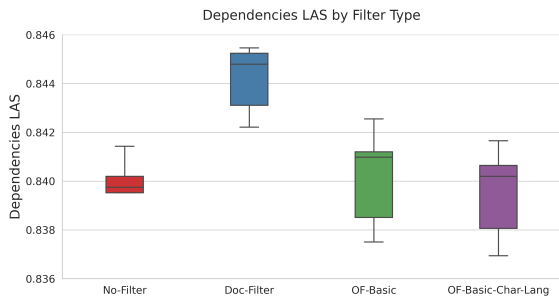


Figure 1: Dependency parsing LAS for each filter type. Each box-plot shows five LAS scores obtained by fine-tuning the respective BERT model five times with different initialisation to obtain five different parsers.

The results of training a dependency parser with the gaBERT model produced by each setting are shown in Figure 1. Document-Filter, which keeps all Paracrawl articles and discards more Wikipedia articles than the other filters, has the highest LAS score. As the BERT model requires contiguous text for its next-sentence-prediction task, filtering out full documents may be more appropriate than filtering individual sentences. The two OpusFilter configurations perform marginally worse than the Document-Filter. In the case of OpusFilter-basic-char-lang, perhaps the lower number of sentences overall translates to lower LAS scores. Finally, No-Filter performs in the same range as the two OpusFilter

⁸This number differs slightly to the number in Table 1 due to using an earlier Wikipedia dump (20/04/2021) for the filtering experiment.

configurations but has the lowest median score, suggesting that some level of filtering is beneficial.

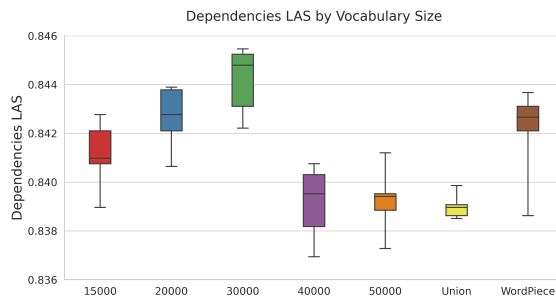


Figure 2: Dependency parsing LAS for each vocabulary type. Each box-plot shows five LAS scores obtained by fine-tuning the respective BERT model five times with different initialisation to obtain five different parsers.

Vocabulary Settings The results of the five runs testing different vocabulary sizes are shown in Figure 2. A vocabulary size of 30K performs best for the SentencePiece tokeniser, which outperforms the WordPiece tokeniser with the same vocabulary size. The union of the two vocabularies results in 32,314 entries, and does not perform as well as the two vocabularies on their own.

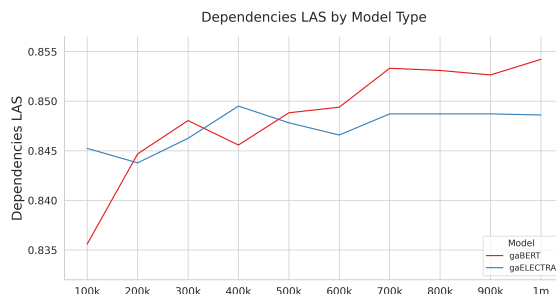


Figure 3: Dependency parsing LAS for each model type. Every 100k steps, we show the median of five LAS scores obtained from fine-tuning the respective model five times with different initialisation.

Final Training Runs Figure 3 shows the development LAS of training gaBERT and gaELECTRA in their final configuration (§4.4). The best gaBERT checkpoint is reached at step 1 million, which may indicate that there are still gains to be made from training for more steps. The highest median LAS for gaELECTRA is reached at step 400k. It is worth noting that although the two models are compared at the same number of steps, gaBERT is trained with a sequence length of 128 for the

Model	LAS		
	UD	Dev	Test
mBERT	2.8	81.5	79.8
WikiBERT	2.8	81.5	79.7
mBERT-cp	2.8	84.1	82.4
gaBERT	2.8	85.5	83.9
gaELECTRA	2.8	85.0	83.3
Chau et al. (2020)	2.5	-	76.2
gaBERT	2.5	-	77.5

Table 3: LAS in dependency parsing (UD v2.8) for selected models. Median of five fine-tuning runs.

first 900k steps and 512 for the remaining 100k, whereas gaELECTRA uses a sequence length of 512 throughout. We also use a larger batch size of 256 for gaELECTRA than the 128 used for gaBERT, thus the two models have been exposed to differing numbers of training tokens at each step.

6.2 Model Comparison

We compare our two final models (gaBERT and gaELECTRA) with off-the-shelf mBERT and WikiBERT-ga, as well as an mBERT model obtained with continued pre-training on our corpora.

Dependency Parsing Table 3 shows the results for dependency parsing.⁹ Using mBERT off-the-shelf results in a test set LAS of 79.8. The WikiBERT-ga model performs at a similar level. By training mBERT for more steps on our corpora, LAS can be improved by 2.6 points. Our gaBERT model has the highest LAS of 83.9 and our gaELECTRA model follows closely behind with a score of 83.3. It is interesting to note that the gaBERT model performs better than gaELECTRA, despite seeing less training data per step. The last two rows compare gaBERT, on v2.5 of the treebank, with the system of [Chau et al. \(2020\)](#) who augment the mBERT vocabulary with the 99 most frequent Irish tokens and fine-tune on Irish Wikipedia.

Cloze Test Table 4 shows the accuracy of each model with regard to predicting the original masked token. mBERT-cp is the most accurate, with gaBERT and gaELECTRA close behind.

The prediction of subword units proved to be a challenge for most of the models. mBERT was

⁹A competitive parser, UDPipe, trained on the Irish-IDT Treebank 2.8 without external embeddings achieves 72.59 LAS on the test set.

Model	Original Token Prediction
mBERT	16
WikiBERT	53
mBERT-cp	78
gaBERT	75
gaELECTRA	75

Table 4: The number of times the original masked token was predicted.

Model	Match	Mism.	Copy	Gib
mBERT	41	42	4	13
WikiBERT	62	31	1	6
mBERT-cp	85	12	1	2
gaBERT	83	14	2	1
gaELECTRA	82	8	1	9

Table 5: The number of matches, mismatches, copies and gibberish predicted by each model.

the most likely to predict subword units, while gaBERT was the least likely. With regard to the pronouns selected for this task, ‘é’ tends to occur approximately 3 times more frequently in Irish text than both ‘í’ and ‘iad’, so language models can be expected to predict ‘é’ more often. mBERT was most heavily biased towards the token ‘é’, rarely predicting ‘í’ or ‘iad’, while gaBERT was the most likely of the models to predict ‘í’ and ‘iad’.

Table 5 shows the manual evaluation of the tokens generated by each model. Given that many of the context cues in the test could have several plausible answers and that there is variation with regard to the quality and quantity of context clues provided, the manual classification of predictions as either match, mismatch, copy or gibberish provides further clarity on the language models’ capabilities. These results echo those of the original masked token prediction evaluation in so far as they rank the models in the same order.

Further detail, examples and analysis of the cloze test can be found in Appendix C.

7 Conclusions

We release gaBERT, a BERT model trained on over 7.9 million Irish sentences. We plan to further explore the space of possible gaBERT models by experimenting with other fine-tuning tasks and examining the contribution of each corpus.

8 Ethical Considerations

No dataset is released with this paper, however most of the corpora are publicly available as described in our Data Availability Statement (Appendix A). Furthermore, where an anonymised version of a dataset was available it was used. We release the gaBERT and gaELECTRA language models based on the BERT_{BASE} (Devlin et al., 2019) and ELECTRA-Base (Clark et al., 2020) autoencoder architectures respectively. We note that an autoregressive architecture may be susceptible to training data extraction, and that larger language models may be more susceptible (Carlini et al., 2021). However, gaBERT and gaELECTRA are autoencoder architectures and smaller language models which may help mitigate this potential vulnerability.

We now address specific Ethics Questions¹⁰.

1. *Does the paper describe the characteristics of the dataset in enough detail for a reader to understand which speaker populations the technology could be expected to work for?* Yes, §2 "Data" describes each of the six datasets used to train gaBERT and gaELECTRA. Furthermore, the use of 'ga', the ISO 639-1:2002¹¹ Language Code for Gaeilge (Irish), in the language model names *gaBERT* and *gaELECTRA* emphasises that Irish speakers, those who wish to be Irish speakers, and those with an interest in languages (particularly low resource languages) are populations that we hope these language models will benefit.
2. *Do the claims in the paper match the experimental results, in terms of how far the results can be expected to generalize?* Yes, we specify the downstream tasks on which we have trained gaBERT and gaELECTRA and presented the results. We note that many other downstream tasks can be performed which we hope will benefit from these models.
3. *Does the paper describe the steps taken to evaluate the quality of the dataset?* Yes, §2 "Data", §3 "Corpus Pre-processing", the filtering experiments, and Appendix B all speak to the quality of the datasets used. In addition, the following caveat (or similar) will be specified with the released code on GitHub, and

the released model card on Hugging Face: We note that some data used to pretrain gaBERT and gaELECTRA was scraped from the web which potentially contains ethically problematic text (bias, hate, adult content, etc.). Consequently, downstream tasks/applications using gaBERT or gaELECTRA should be thoroughly tested with respect to ethical considerations.

4. *Does the paper describe how the technology would be deployed in actual use cases?* There are many downstream tasks which can use gaBERT and gaELECTRA; including Machine Translation, educational applications, predictive text, search ("information retrieval"), and games. The authors hope gaBERT and gaELECTRA will contribute to the ongoing effort to preserve the Irish language as a living language in the technological age. Supporting a low resource language like Irish in a bilingual community will make it easier for Irish speakers, and those who wish to be Irish speakers, to use the language in practice.
5. *Does the task carried out by the computer match how it would be deployed?* The fine-tuning tasks used to evaluate gaBERT and gaELECTRA are used as a proxy for other NLP downstream tasks. We release the gaBERT and gaELECTRA models and code publicly, and look forward to seeing what the development community creates.
6. *Does the paper address possible harms when the technology is being used as intended and functioning correctly?* The model could produce unsuitable text outputs when used to generate text and this could be particularly problematic if deployed in particular settings such as a school. To combat this possibility, we will include a caveat as stated in Ethical Consideration 3 above.
7. *Does the paper address possible harms when the technology is being used as intended but giving incorrect results?* As stated in the previous answer, a caveat will be included.
8. *Does the paper address possible harms following from potential misuse of the technology?* The possible harms due to potential misuse are

¹⁰<https://2021.emnlp.org/call-for-papers/ethics-faq>

¹¹<https://www.iso.org/iso-639-language-codes.html>

no different to those from any small language model released publicly; we anticipate no new expected misuse potential with the release of gaBERT and gaELECTRA.

9. *If the system learns from user input once deployed, does the paper describe checks and limitations to the learning?* gaBERT and gaELECTRA are static models and do not learn from user input when deployed.
10. *Are any of the possible harms you've identified likely to fall disproportionately on populations that already experience marginalization or are otherwise vulnerable?* Nothing above and beyond those already there. It could be argued the Irish language is marginalized and vulnerable so we are opening it up to both benefits and potential harms. But, as with every language model released, we release it in the hope it will be used for good; while acknowledging the potential for misuse. It might be reasonable to characterize Irish speakers, and those who wish to be, as one example of “populations that already experience marginalization or are otherwise vulnerable” and that gaBERT and gaELECTRA are intended to support them and the Irish language. Go n-éirí an bóthar libh.

Acknowledgements

This research is supported by Science Foundation Ireland (SFI) through the ADAPT Centre for Digital Content Technology, which is funded under the SFI Research Centres Programme (Grant 13/RC/2106) and is co-funded under the European Regional Development Fund. This research is also supported through the SFI Frontiers for the Future programme (19/FFP/6942) and SFI Grant 18/CRT/6183 as well as by the Irish Government Department of Culture, Heritage and the Gaeltacht under the GaelTech Project. For the purpose of Open Access, the authors have applied a CC BY public copyright licence to any Author Accepted Manuscript version arising from this submission.

References

Mikko Aulamo, Sami Virpioja, and Jörg Tiedemann. 2020. [OpusFilter: A configurable parallel corpus filtering toolbox](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Lin-*

guistics: System Demonstrations, pages 150–156, Online. Association for Computational Linguistics.

Marta Bañón, Pinzhen Chen, Barry Haddow, Kenneth Heafield, Hieu Hoang, Miquel Esplà-Gomis, Mikel L. Forcada, Amir Kamran, Faheem Kirefu, Philipp Koehn, Sergio Ortiz Rojas, Leopoldo Pla Sempere, Gema Ramírez-Sánchez, Elsa Sarriás, Marek Strelec, Brian Thompson, William Waites, Dion Wiggins, and Jaume Zaragoza. 2020. [ParaCrawl: Web-scale acquisition of parallel corpora](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4555–4567, Online. Association for Computational Linguistics.

Nicholas Carlini, Florian Tramer, Eric Wallace, Matthew Jagielski, Ariel Herbert-Voss, Katherine Lee, Adam Roberts, Tom Brown, Dawn Song, Ulfar Erlingsson, Alina Oprea, and Colin Raffel. 2021. [Extracting training data from large language models](#).

Ethan C. Chau, Lucy H. Lin, and Noah A. Smith. 2020. [Parsing with multilingual BERT, a small corpus, and a small treebank](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 1324–1334, Online. Association for Computational Linguistics.

Ethan A. Chi, John Hewitt, and Christopher D. Manning. 2020. [Finding universal grammatical relations in multilingual BERT](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5564–5577, Online. Association for Computational Linguistics.

Kevin Clark, Minh-Thang Luong, Quoc V. Le, and Christopher D. Manning. 2020. [ELECTRA: Pre-training text encoders as discriminators rather than generators](#). In *Proceedings of The Eighth International Conference on Learning Representations (ICLR)*.

CSO. 2016. [Census of Population 2016 – Profile 10 Education, Skills and the Irish Language](#). Publisher: Central Statistics Office.

Wietse de Vries, Andreas van Cranenburgh, Arianna Bisazza, Tommaso Caselli, Gertjan van Noord, and Malvina Nissim. 2019. [BERTje: A Dutch BERT model](#). ArXiv 1912.09582v1.

Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.

Meghan Dowling, Sheila Castilho, Joss Moorkens, Teresa Lynn, and Andy Way. 2020. [A human evaluation of English-Irish statistical and neural machine](#)

- translation. In *Proceedings of the 22nd Annual Conference of the European Association for Machine Translation*, pages 431–440, Lisboa, Portugal. European Association for Machine Translation.
- Meghan Dowling, Teresa Lynn, Alberto Poncelas, and Andy Way. 2018. *SMT versus NMT: Preliminary comparisons for Irish*. In *Proceedings of the AMTA 2018 Workshop on Technologies for MT of Low Resource Languages (LoResMT 2018)*, pages 12–20, Boston, MA. Association for Machine Translation in the Americas.
- Timothy Dozat and Christopher D. Manning. 2016. *Deep biaffine attention for neural dependency parsing*. *CoRR*, abs/1611.01734.
- Mehrdad Farahani, Mohammad Gharachorloo, Marzieh Farahani, and Mohammad Manthouri. 2020. *ParsBERT: Transformer-based model for Persian language understanding*. ArXiv 2005.12515v1.
- Matt Gardner, Joel Grus, Mark Neumann, Oyvind Tafjord, Pradeep Dasigi, Nelson F. Liu, Matthew Peters, Michael Schmitz, and Luke Zettlemoyer. 2018. *AllenNLP: A deep semantic natural language processing platform*. In *Proceedings of Workshop for NLP Open Source Software (NLP-OSS)*, pages 1–6, Melbourne, Australia. Association for Computational Linguistics.
- Filip Ginter, Jan Hajič, Juhani Luotolahti, Milan Straka, and Daniel Zeman. 2017. *CoNLL 2017 shared task - automatically annotated raw texts and word embeddings*. LINDAT/CLARIAH-CZ digital library at the Institute of Formal and Applied Linguistics (ÚFAL), Faculty of Mathematics and Physics, Charles University.
- Dan Hendrycks and Kevin Gimpel. 2016. *Gaussian error linear units (GELUs)*. ArXiv 1606.08415v1.
- Ganesh Jawahar, Benoît Sagot, and Djamé Seddah. 2019. *What does BERT learn about the structure of language?* In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3651–3657, Florence, Italy. Association for Computational Linguistics.
- Adam Kilgarriff, Michael Rundell, and Elaine Uí Dhonnchadha. 2006. *Efficient corpus development for lexicography: building the New Corpus for Ireland*. *Language Resources and Evaluation*, 40:127–152.
- Taku Kudo and John Richardson. 2018. *SentencePiece: A simple and language independent subword tokenizer and detokenizer for neural text processing*. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 66–71, Brussels, Belgium. Association for Computational Linguistics.
- Zhenzhong Lan, Mingda Chen, Sebastian Goodman, Kevin Gimpel, Piyush Sharma, and Radu Soricut. 2019. *ALBERT: A lite BERT for self-supervised learning of language representations*. ArXiv 1909.11942v6.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. *Roberta: A robustly optimized BERT pretraining approach*. ArXiv 1907.11692v1.
- Teresa Lynn, Ozlem Cetinoglu, Jennifer Foster, Elaine Uí Dhonnchadha, Mark Dras, and Josef van Genabith. 2012. *Irish treebanking and parsing: A preliminary evaluation*. In *Proceedings of the Eight International Conference on Language Resources and Evaluation (LREC-2012)*, pages 1939–1946, Istanbul, Turkey. European Language Resources Association (ELRA).
- Teresa Lynn and Jennifer Foster. 2016. *Universal Dependencies for Irish*. In *Proceedings of the Second Celtic Language Technology Workshop (CLTW 2016)*, pages 79–92, Paris, France.
- Teresa Lynn, Kevin Scannell, and Eimear Maguire. 2015. *Minority Language Twitter: Part-of-Speech Tagging and Analysis of Irish Tweets*. In *Proceedings of the Workshop on Noisy User-generated Text*, pages 1–8, Beijing, China. Association for Computational Linguistics.
- Sarah McGuinness, Jason Phelan, Abigail Walsh, and Teresa Lynn. 2020. *Annotating MWEs in the Irish UD treebank*. In *Proceedings of the Fourth Workshop on Universal Dependencies (UDW 2020)*, pages 126–139, Barcelona, Spain (Online). Association for Computational Linguistics.
- Debora Nozza, Federico Bianchi, and Dirk Hovy. 2020. *What the [MASK]? making sense of language-specific BERT models*. ArXiv 2003.02912v1.
- Pedro Javier Ortiz Suárez, Benoît Sagot, and Laurent Romary. 2019. *Asynchronous pipeline for processing huge corpora on medium to low resource infrastructures*. In *7th Workshop on the Challenges in the Management of Large Corpora (CMLC-7)*, pages 9 – 16, Cardiff, United Kingdom. Leibniz-Institut für Deutsche Sprache.
- Matthew Peters, Mark Neumann, Mohit Iyyer, Matt Gardner, Christopher Clark, Kenton Lee, and Luke Zettlemoyer. 2018. *Deep contextualized word representations*. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 2227–2237, New Orleans, Louisiana, USA. Association for Computational Linguistics.
- Sampo Pyysalo, Jenna Kanerva, Antti Virtanen, and Filip Ginter. 2020. *WikiBERT models: deep transfer learning for many languages*. ArXiv 2006.01538v1.

- Alec Radford, Karthik Narasimhan, Tim Salimans, and Ilya Sutskever. 2018. [Improving language understanding by generative pre-training](#). OpenAI.
- Anna Rogers, Olga Kovaleva, and Anna Rumshisky. 2020. [A primer in BERTology: What we know about how BERT works](#). *Transactions of the Association for Computational Linguistics*, 8:842–866.
- Samuel Rönqvist, Jenna Kanerva, Tapio Salakoski, and Filip Ginter. 2019. [Is multilingual BERT fluent in language generation?](#) In *Proceedings of the First NLP Workshop on Deep Learning for Natural Language Processing*, pages 29–36, Turku, Finland. Linköping University Electronic Press.
- Phillip Rust, Jonas Pfeiffer, Ivan Vulić, Sebastian Ruder, and Iryna Gurevych. 2020. [How good is your tokenizer? on the monolingual performance of multilingual language models](#).
- Milan Straka and Jana Straková. 2017. [Tokenizing, POS tagging, lemmatizing and parsing UD 2.0 with UDPipe](#). In *Proceedings of the CoNLL 2017 Shared Task: Multilingual Parsing from Raw Text to Universal Dependencies*, pages 88–99, Vancouver, Canada. Association for Computational Linguistics.
- E. Uí Dhonnchadha and J. Van Genabith. 2006. [A part-of-speech tagger for Irish using finite-state morphology and constraint grammar disambiguation](#). In *Proceedings of the Fifth International Conference on Language Resources and Evaluation (LREC'06)*, Genoa, Italy. European Language Resources Association (ELRA).
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. [Attention is all you need](#). In *Proceedings of the 31st International Conference on Neural Information Processing Systems (NIPS'17)*, NIPS'17, pages 6000–6010, Red Hook, NY, USA. Curran Associates Inc.
- Antti Virtanen, Jenna Kanerva, Rami Ilo, Jouni Luoma, Juhani Luotolahti, Tapio Salakoski, Filip Ginter, and Sampo Pyysalo. 2019. [Multilingual is not enough: BERT for Finnish](#). ArXiv 1912.07076v1.
- Abigail Walsh, Teresa Lynn, and Jennifer Foster. 2019. [Ilfhocail: A lexicon of Irish MWEs](#). In *Proceedings of the Joint Workshop on Multiword Expressions and WordNet (MWE-WN 2019)*, pages 162–168, Florence, Italy. Association for Computational Linguistics.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. 2020. [Transformers: State-of-the-art natural language processing](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45, Online. Association for Computational Linguistics.
- Shijie Wu and Mark Dredze. 2020. [Are all languages created equal in multilingual BERT?](#) In *Proceedings of the 5th Workshop on Representation Learning for NLP*, pages 120–130, Online. Association for Computational Linguistics.
- Daniel Zeman, Joakim Nivre, Mitchell Abrams, Elia Ackermann, Noëmi Aepli, Hamid Aghaei, Željko Agić, Amir Ahmadi, Lars Ahrenberg, Chika Kennedy Ajede, Gabrielè Aleksandravičiūtė, Ika Alfina, Lene Antonsen, Katya Aplonova, Angelina Aquino, Carolina Aragon, Maria Jesus Aranzabe, Hórunn Arnardóttir, Gashaw Arutie, Jessica Naraiswari Arwidarasti, Masayuki Asahara, Luma Ateyah, Furkan Atmaca, Mohammed Attia, Aitziber Atutxa, Liesbeth Augustinus, Elena Badmaeva, Keerthana Balasubramani, Miguel Ballesteros, Esha Banerjee, Sebastian Bank, Verginica Barbu Mititelu, Victoria Basmov, Colin Batchelor, John Bauer, Seyyit Talha Bedir, Kepa Bengoetxea, Gözde Berk, Yevgeni Berzak, Irshad Ahmad Bhat, Riyaz Ahmad Bhat, Erica Biagetti, Eckhard Bick, Agnè Bielinskienė, Kristín Bjarnadóttir, Rogier Blokland, Victoria Bobicev, Loïc Boizou, Emanuel Borges Völker, Carl Börstell, Cristina Bosco, Gosse Bouma, Sam Bowman, Adriane Boyd, Kristina Brokaitė, Aljoscha Burchardt, Marie Candito, Bernard Caron, Gauthier Caron, Tatiana Cavalcanti, Gülşen Cebiroğlu Eryiğit, Flavio Massimiliano Cecchini, Giuseppe G. A. Celano, Slavomír Čéplö, Savas Cetin, Özlem Çetinoğlu, Fabricio Chalub, Ethan Chi, Yongseok Cho, Jinho Choi, Jayeol Chun, Alessandra T. Cignarella, Silvie Cinková, Aurélie Collomb, Çağrı Çöltekin, Miriam Connor, Marine Courtin, Elizabeth Davidson, Marie-Catherine de Marneffe, Valeria de Paiva, Mehmet Oguz Derin, Elvis de Souza, Arantza Diaz de Ilaraza, Carly Dickerson, Arawinda Dinakaramani, Bamba Dione, Peter Dirix, Kaja Dobrovoljc, Timothy Dozat, Kira Droганova, Puneet Dwivedi, Hanne Eckhoff, Marhaba Eli, Ali Elkahky, Binyam Ephrem, Olga Erina, Tomaž Erjavec, Aline Etienne, Wograine Evelyn, Sidney Facundes, Richárd Farkas, Marília Fernanda, Hector Fernandez Alcalde, Jennifer Foster, Cláudia Freitas, Kazunori Fujita, Katarína Gajdošová, Daniel Galbraith, Marcos Garcia, Moa Gärdenfors, Sebastian Garza, Fabrício Ferraz Gerardi, Kim Gerdes, Filip Ginter, Iakes Goenaga, Koldo Gojenola, Memduh Gökırmak, Yoav Goldberg, Xavier Gómez Guinovart, Berta González Saavedra, Bernadeta Griciūtė, Matias Gironi, Loïc Grobol, Normunds Grūzītis, Bruno Guillaume, Céline Guillot-Barbance, Tunga Güngör, Nizar Habash, Hinrik Hafsteinsson, Jan Hajič, Jan Hajič jr., Mika Hämäläinen, Linh Hà Mỹ, Na-Rae Han, Muhammad Yudistira Hanifmuti, Sam Hardwick, Kim Harris, Dag Haug, Johannes Heinecke, Oliver Hellwig, Felix Hennig, Barbora Hladká, Jaroslava Hlaváčová, Florinel Hociung, Petter Hohle, Eva Huber, Jena Hwang, Takumi Ikeda, Anton Karl Ingason, Radu Ion,

Elena Irimia, Olájídé Ishola, Tomáš Jelínek, Anders Johannsen, Hildur Jónsdóttir, Fredrik Jørgensen, Markus Juutinen, Sarveswaran K, Hüner Kaşıkara, Andre Kaasen, Nadezhda Kabaeva, Sylvain Kahane, Hiroshi Kanayama, Jenna Kanerva, Boris Katz, Tolga Kayadelen, Jessica Kenney, Václava Kettnerová, Jesse Kirchner, Elena Klementieva, Arne Köhn, Abdullatif Köksal, Kamil Kopacewicz, Timo Korikiakangas, Natalia Kotsyba, Jolanta Kovalevskaitė, Simon Krek, Parameswari Krishnamurthy, Sookyong Kwak, Veronika Laippala, Lucia Lam, Lorenzo Lambertino, Tatiana Lando, Septina Dian Larasati, Alexei Lavrentiev, John Lee, Phùòng Lê Hồng, Alessandro Lenci, Saran Lertpradit, Herman Leung, Maria Levina, Cheuk Ying Li, Josie Li, Keying Li, Yuan Li, KyungTae Lim, Krister Lindén, Nikola Ljubešić, Olga Loginova, Andry Luthfi, Mikko Luukko, Olga Lyashevskaya, Teresa Lynn, Vivien Macketanz, Aibek Makazhanov, Michael Mandl, Christopher Manning, Ruli Manurung, Cătălina Mărănduc, David Mareček, Katrin Marheinecke, Héctor Martínez Alonso, André Martins, Jan Mašek, Hiroshi Matsuda, Yuji Matsumoto, Ryan McDonald, Sarah McGuinness, Gustavo Mendonça, Niko Miekka, Karina Mischenkova, Margarita Misirpashayeva, Anna Missilä, Cătălin Mititelu, Maria Mitrofan, Yusuke Miyao, AmirHossein Mojiri Foroushani, Amirsaeid Moloodi, Simonetta Montemagni, Amir More, Laura Moreno Romero, Keiko Sophie Mori, Shinsuke Mori, Tomohiko Morioka, Shigeki Moro, Bjartur Mortensen, Bohdan Moskalevskiy, Kadri Muischnek, Robert Munro, Yugo Murawaki, Kaili Müürisep, Pinkey Nainwani, Mariam Nakhlé, Juan Ignacio Navarro Horñiacek, Anna Nedoluzhko, Gunta Nešpore-Bērzkalne, Lùòng Nguyễn Thị, Huyề̀n Nguyễn Thị Minh, Yoshihiro Nikaido, Vitaly Nikolaev, Rattima Nitisaroj, Alireza Nourian, Hanna Nurmi, Stina Ojala, Atul Kr. Ojha, Adédayò Olúòkun, Mai Omura, Emeka Onwuegbuzia, Petya Osenova, Robert Östling, Lilja Øvrelid, Şaziye Betül Özateş, Arzucan Özgür, Balkız Öztürk Başaran, Niko Partanen, Elena Pascual, Marco Passarotti, Agnieszka Patejuk, Guilherme Paulino-Passos, Angelika Peljak-Łapińska, Siyao Peng, Cene-Augusto Perez, Natalia Perkova, Guy Perrier, Slav Petrov, Daria Petrova, Jason Pheilan, Jussi Piitulainen, Tommi A Pirinen, Emily Pitler, Barbara Plank, Thierry Poibeau, Larisa Ponomareva, Martin Popel, Lauma Pretkalniņa, Sophie Prévost, Prokopis Prokopidis, Adam Przepiórkowski, Tiina Puolakainen, Sampo Pyysalo, Peng Qi, Andriela Rääbis, Alexandre Rademaker, Taraka Rama, Loganathan Ramasamy, Carlos Ramisch, Fam Rashel, Mohammad Sadegh Rasooli, Vinit Ravishankar, Livy Real, Petru Rebeja, Siva Reddy, Georg Rehm, Ivan Riabov, Michael Riebler, Erika Rimkutė, Larissa Rinaldi, Laura Rituma, Luisa Rocha, Eiríkur Rögnvaldsson, Mykhailo Romanenko, Rudolf Rosa, Valentin Roşca, Davide Rovati, Olga Rudina, Jack Rueter, Kristján Rúnarsson, Shoval Sadde, Pegah Safari, Benoît Sagot, Aleksí Sahala, Shadi Saleh, Alessio Salomoni, Tanja Samardžić, Stephanie Samson, Manuela Sanguinetti, Dage Särög, Baiba Saulīte,

Yanin Sawanakunanon, Kevin Scannell, Salvatore Scarlata, Nathan Schneider, Sebastian Schuster, Djamé Seddah, Wolfgang Seeker, Mojgan Seraji, Mo Shen, Atsuko Shimada, Hiroyuki Shirasu, Muh Shohibussirri, Dmitry Sichinava, Einar Freyr Sigurðsson, Aline Silveira, Natalia Silveira, Maria Simi, Radu Simionescu, Katalin Simkó, Mária Šimková, Kiril Simov, Maria Skachodubova, Aaron Smith, Isabela Soares-Bastos, Carolyn Spadine, Steinhórf Steingrímsson, Antonio Stella, Milan Straka, Emmett Strickland, Jana Strnadová, Alane Suhr, Yogi Lesmana Sulestio, Umut Sulubacak, Shingo Suzuki, Zsolt Szántó, Dima Taji, Yuta Takahashi, Fabio Tamburini, Mary Ann C. Tan, Takaaki Tanaka, Samson Tella, Isabelle Tellier, Guillaume Thomas, Lisi Torga, Marsida Toska, Trond Trosterud, Anna Trukhina, Reut Tsarfaty, Utku Türk, Francis Tyers, Sumire Uematsu, Roman Untilov, Zdeňka Urešová, Larraitz Uria, Hans Uszkoreit, Andrius Utkā, Sowmya Vajjala, Daniel van Niekerk, Gertjan van Noord, Viktor Varga, Eric Villemonte de la Clergerie, Veronika Vincze, Aya Wakasa, Joel C. Wallenberg, Lars Wallin, Abigail Walsh, Jing Xian Wang, Jonathan North Washington, Maximilian Wendt, Paul Widmer, Seyi Williams, Mats Wirén, Christian Wittern, Tsegay Woldemariam, Tak-sum Wong, Alina Wróblewska, Mary Yako, Kayo Yamashita, Naoki Yamazaki, Chunxiao Yan, Koichi Yasuoka, Marat M. Yavrumyan, Zhuoran Yu, Zdeněk Žabokrtský, Shorouq Zahra, Amir Zeldes, Hanzhi Zhu, and Anna Zhuravleva. 2020. [Universal dependencies 2.7](#). LINDAT/CLARIAH-CZ digital library at the Institute of Formal and Applied Linguistics (ÚFAL), Faculty of Mathematics and Physics, Charles University.

Daniel Zeman, Martin Popel, Milan Straka, Jan Hajič, Joakim Nivre, Filip Ginter, Juhani Luotolahti, Sampo Pyysalo, Slav Petrov, Martin Potthast, Francis Tyers, Elena Badmaeva, Memduh Gokirmak, Anna Nedoluzhko, Silvie Cinková, Jan Hajič jr., Jaroslava Hlaváčová, Václava Kettnerová, Zdeňka Urešová, Jenna Kanerva, Stina Ojala, Anna Missilä, Christopher D. Manning, Sebastian Schuster, Siva Reddy, Dima Taji, Nizar Habash, Herman Leung, Marie-Catherine de Marneffe, Manuela Sanguinetti, Maria Simi, Hiroshi Kanayama, Valeria de Paiva, Kira Drogonova, Héctor Martínez Alonso, Çağrı Çöltekin, Umut Sulubacak, Hans Uszkoreit, Vivien Macketanz, Aljoscha Burchardt, Kim Harris, Katrin Marheinecke, Georg Rehm, Tolga Kayadelen, Mohammed Attia, Ali Elkahky, Zhuoran Yu, Emily Pitler, Saran Lertpradit, Michael Mandl, Jesse Kirchner, Hector Fernandez Alcalde, Jana Strnadová, Esha Banerjee, Ruli Manurung, Antonio Stella, Atsuko Shimada, Sookyong Kwak, Gustavo Mendonça, Tatiana Lando, Rattima Nitisaroj, and Josie Li. 2017. [CoNLL 2017 shared task: Multilingual parsing from raw text to Universal Dependencies](#). In *Proceedings of the CoNLL 2017 Shared Task: Multilingual Parsing from Raw Text to Universal Dependencies*, pages 1–19, Vancouver, Canada. Association for Computational Linguistics.

A Data Licenses

This Appendix provides specific details of the licence for each of the datasets used in the experiments.

A.1 CoNLL17

The Irish annotated CoNLL17 corpus can be found here: <https://lindat.mff.cuni.cz/repository/xmlui/handle/11234/1-1989> (Ginter et al., 2017).

The automatically generated annotations on the raw text data are available under the CC BY-SA-NC 4.0 licence. Wikipedia texts are available under the CC BY-SA 3.0 licence. Texts from Common Crawl are subject to Common Crawl Terms of Use, the full details of which can be found here: <https://commoncrawl.org/terms-of-use/full/>.

A.2 IMT

The Irish Machine Translation datasets contains text from the following sources:

- Text crawled from the Citizen’s Information website, contains Irish Public Sector Data licensed under a Creative Commons Attribution 4.0 International (CC BY 4.0) licence: <https://www.citizensinformation.ie/ga/>.
- Text crawled from Comhairle na Gaelscolaíochta website: <https://www.comhairle.org/gaeilge/>.
- Text crawled from the FÁS website (<http://www.fas.ie/>), accessed in 2017. The website has since been dissolved.
- Text crawled from the Galway County Council website: <http://www.galway.ie/ga/>.
- Text crawled from <https://www.gov.ie/ga/>, the central portal for government services and information.
- Text crawled from articles on the Irish Times website.
- Text crawled from the Kerry County Council website: <https://ciarrai.ie/>.
- Text crawled from the Oideas Gael website: <http://www.oideas-gael.com/ga/>.
- Text crawled from articles generated by Teagasc, available under PSI licence.
- Text generated by Conradh na Gaeilge, shared with us for research purposes.
- The Irish text from a parallel English–Irish corpus of legal texts from the Department of Justice. This dataset is available for reuse on the ELRC-SHARE repository under a PSI license: <https://elrc-share.eu>
- Text from the Directorate-General for Translation (DGT), available for download from the European Commission website. Reuse of the texts are subject to Terms of Use, found on the website: <https://ec.europa.eu/jrc/en/language-technologies/dgt-translation-memory>.
- Text reports and notices generated by Dublin City Council, shared with us for research purposes.
- Text uploaded to ELRC-share via the National Relay Station, shared with us for research purposes.
- Text reports and reference files generated by the Language Commissioner, available on ELRC-share under PSI license: <https://elrc-share.eu/>.
- Text generated by the magazine Nós, shared with us for research purposes.
- Irish texts available for download on OPUS, under various licenses: <https://opus.nlpl.eu/>
- Text generated from in-house translation provided by the then titled Department of Culture, Heritage and Gaeltacht (DCHG), provided for research purposes. The anonymised dataset is available on ELRC-share, under a CC-BY 4.0 license: <https://elrc-share.eu/>.
- Text reports created by Údarás na Gaeilge, uploaded to ELRC-share available under PSI license: <https://elrc-share.eu/>.
- Text generated by the University Times, shared with us for research purposes.

A.3 NCI

The corpus is compiled and owned by Foras na Gaeilge, and is provided to us for research purposes.

A.4 OSCAR

The unshuffled version of the Irish part of the OSCAR corpus was provided to us by the authors for research purposes.

A.5 ParaCrawl

Text from ParaCrawl v7, available here: <https://www.paracrawl.eu/v7>. The texts themselves are not owned by ParaCrawl, the actual packaging of these parallel data are under the Creative Commons CC0 licence ("no rights reserved").

A.6 Wikipedia

The texts used are available under a CC BY-SA 3.0 licence and/or a GNU Free Documentation License.

B Corpus Pre-processing

This Appendix provides specific details on Corpus Pre-processing, and Opus Filter filters used.

B.1 NCI

Foras na Gaeilge provided us with a `.vert` file¹² containing 33,088,532 tokens in 3,485 documents. We extract the raw text from the first tab-separated column and carry out the following conversions (number of events):

- Replace `"` with a neutral double quote (4408).
- Replace the standard xml/html entities `quot`, `lt`, `gt` and `amp` tokenised into three tokens, e.g. `“`; with the appropriate characters (128).
- Replace the numeric html entities 38, 60, 147, 148, 205, 218, 225, 233, 237, 243 and 250, again spanning three tokens, e.g. `8`; with the appropriate Unicode characters (3679).
- Repeat from the start until the text does not change.

We do not modify the seven occurrences of `\x13` as it is not clear from their contexts how they should be replaced. After pre-processing and treating all whitespace as token separators, e.g. in the NCI token "go leor", we obtain 33,472,496 tokens from the NCI.

B.2 Sentence Boundary Detection

Many of the NCI segments marked up with `<s>` tags contain multiple sentences. We treat each segment boundary as a sentence boundary and further split segments into sentences recursively, finding the best split point according to the following heuristics, splitting the segment into two halves and applying the same procedure to each half until no suitable split point is found.

- Reject if the left half contains no letters and is short. This covers cases where the left half is only a decimal number.
- Reject if the right half has no letters and is short or is an ellipsis.
- Reject if the right half's first letter, skipping enumerations, is lowercase.
- Reject if the left half only contains a Roman number (in addition to the full-stop).
- Reject if inside round, square, curly or angle brackets and the brackets not far away from the candidate split point.
- If sentence-ending punctuation is followed by two quote tokens we also consider splitting between the quotes and prefer this split point if not rejected by above rules.
- If sentence-ending punctuation is followed by a closing bracket we also consider splitting between the quotes and prefer this split point if not rejected by above rules.
- If a question mark is followed by more question marks we also consider splitting after the end of the sequence of question marks and prefer this split point if not rejected by above rules.
- If an exclamation mark is followed by more exclamation marks we also consider splitting after the end of the sequence of exclamations marks and prefer this split point if not rejected by above rules.

¹²MD5 7be5c0e9bc473fb83af13541b1cd8d20

- If a full-stop is the first full-stop in the overall segment, the preceding token is “1”, there are more tokens before this “1” and the token directly before “1” is not a comma or semi-colon we assume that this is an enumeration following a heading and prefer splitting before the “1”.
- We do not insert new sentence boundaries at a full-stop after “DR”, “Prof” and “nDr”, and, if followed by a decimal number, after “No”, “Vol” and “Iml”.
- Splitting after a full-stop following decimal numbers in all other cases is dispreferred, giving the largest penalty to small numbers as these are most likely to be part of enumerations. An exception is “Airteagal” followed by a token ending with a full-stop, a number, a full-stop, another number and another full-stop. Here, we implemented a preference for splitting after the first separated full-stop, assuming the last number is part of an enumeration.
- Prefer a split point balancing the lengths of the halves in characters.

B.3 OpusFilter Filters

For **OpusFilter-basic**, we include the following filters:

- **LengthFilter**: Filter sentences containing more than 512 words.
- **LongWordFilter**: Filter sentences containing words longer than 40 characters.
- **HTMLTagFilter**: Filter sentences containing HTML tags.
- **PunctuationFilter**: Filter sentences which are over 60% punctuation.
- **DigitsFilter**: Filter sentences which are over 60% numeric symbols.

For **OpusFilter-basic-char-lang**, we use the same filters as in **OpusFilter-basic** but include the following character script and language ID filters:

- **CharacterScoreFilter**: Filter sentences which are below a ratio r of Latin characters, where $r \in \{1.0\}$.
- **LanguageIDFilter**: Filter sentences where the language ID tools have a lower confidence score than c , where $c \in \{0.8\}$.

C Cloze Test Examples

C.1 Prediction Classification

Table 6 provides one example per classification category of masked token predictions generated by the language models during our cloze test evaluation.

In the *match* example in Table 6, the original meaning (‘What are those radical roots?’) differs to the meaning of the resulting string (‘What about those radical roots?’) in which the masked token is replaced by the predicted by mBERT-cp. However, the latter construction is grammatically and semantically acceptable.

In the *mismatch* example in Table 6, the predicted token is a valid Irish word, however the resulting generated text is nonsensical.

Though technically grammatical, the predicted token in the *copy* example in Table 6 results in a string with an unnatural repetition of a noun phrase where a pronoun would be highly preferable (‘Seán bought a book and he read a book.’).

In the *gibberish* example in Table 6, the predicted token does not form a valid Irish word and the resulting from the token prediction is ungrammatical and meaningless.

C.2 Effect of Length of Context on Accuracy of Prediction

In order to observe the effect that the amount of context provided has on the accuracy of the model, Table 7 shows the proportion of matches achieved by each language model when the results are segmented by the length of the context cues.

All the models tested are least accurate when tested on the group of short context cues. All except mBERT achieved the highest accuracy on the group of long sentences.

C.3 Easy and Difficult Context Cues

A context cue may be considered easy or difficult based on:

- Whether the tokens occur frequently in the training data
- The number of context clues
- The distance of the context clues from the masked token

Two Irish language context cues which vary in terms of difficulty are exemplified below.

Context Cue	Masked Word	Model	Prediction	Classification
<i>Céard [MASK] na préamhacha raidiciúla sin?</i> (‘What [MASK] those radical roots?’)	<i>iad</i> (‘them’)	mBERT-cp	<i>faoi</i> (‘about’)	match
<i>Agus seo [MASK] an fhadhb mhór leis an bhfógra seo.</i> (‘And this [MASK] the big problem with this advert.’)	<i>í</i> (‘it’)	WikiBERT	<i>thaitin</i> (‘liked’)	mismatch
<i>Cheannaigh Seán leabhar agus léigh sé [MASK].</i> (‘Seán bought a book and he read [MASK].’)	<i>é</i> (‘it’)	gaBERT	<i>leabhar</i> (‘a book’)	copy
<i>Ní h[MASK] sin aidhm an chláir.</i> (‘[MASK] is not the aim of the programme.’)	<i>##é</i> (‘it’)	mBERT	- (minus sign)	gibberish

Table 6: Examples of cloze test predictions and classifications.

Model	Short	Medium	Long
mBERT	20.69%	55.56%	41.67%
wikibert	51.72%	58.33%	74.29%
mBERT-cp	75.86%	83.33%	94.29%
gaBERT	79.31%	83.33%	85.71%
gaELECTRA	79.31%	77.78%	88.57%

Table 7: Accuracy of language models segmented by length of context cue where short: 4–10 tokens, medium: 11–20 tokens, and long: 21–77 tokens.

Bean, agus í cromtha thar thralaí bia agus [MASK] ag ithe a sáithe.
‘A woman, bent over a food trolley while eating her fill.’

We can consider the above sentence to be easy for the task of token prediction due to the following context clues:

- ‘Bean’ is a frequent feminine singular noun.
- ‘í’ is a repetition of the feminine singular pronoun to be predicted.
- The lack of lenition on ‘sáithe’ further indicates that the noun it refers to may not be masculine.

These clues indicate that the missing pronoun will be feminine and singular.

Seo béile aoibhinn fuirist nach dtógann ach timpeall leathuair a chloig chun [MASK] a ullmhú.
‘This is an easy, delicious meal that only takes about half an hour to prepare.’

None of the language models tested predicted a plausible token for the above sentence. This example is more challenging as the only context clue

is the feminine singular noun ‘béile’ which is 11 tokens in distance from the masked token.

D More Future Work Ideas

The following list of future work ideas has been collected from our GitHub repository.

- Effect of switching to v8 of Paracrawl
- Effect of random initialisation (using the same model type and settings as in the development phase; purpose is to find out whether the observed differences between settings are meaningful; differences that can be explained with model instability and that contradict expectations can then be disregarded)
- For each corpus, effect of removing it
- For each pair of corpora, effect of removing them
- Start with the NCI and add corpora in order of cleanliness (or data value estimate from above corpus ablation)
- More on filter thresholds and/or corpus-specific filter settings
- Effect of filtering (near) duplicates
- Effect of increasing the weight of clean corpora
- Restrict vocabulary building to clean corpora
- Partition the corpus, create a vocabulary for each partition and join the vocabularies
- Effect of ## glue on prefixes
- Effect of adding our in-house Irish Twitter corpora, in particular on tasks involving social media content

- Add a copy of the data with accents removed and/or other normalisations
- Add synthetic Irish, e. g. MT output
- Add Hiberno-English corpora and English side of parallel corpora to training data
- The role of sentence-splitting, e. g. does BERT need to see properly formed sentences or are snippets of text sufficient?