

Arabic aspect based sentiment analysis using BERT.

Mohammed M. Abdelgwad^a, Taysir Hassan A Soliman^a, Ahmed I. Taloba^a,
Mohamed Fawzy Farghaly^a

^a *Information system department
Faculty of computer and information
Assiut university
Egypt*

Abstract

Aspect-based sentiment analysis (ABSA) is a textual analysis methodology that defines the polarity of opinions on certain aspects related to specific targets. The majority of research on ABSA is in English, with a small amount of work available in Arabic. Most previous Arabic research has relied on deep learning models that depend primarily on context-independent word embeddings (e.g. word2vec), where each word has a fixed representation independent of its context. This article explores the modeling capabilities of contextual embeddings from pre-trained language models, such as BERT, and making use of sentence pair input on Arabic ABSA tasks. In particular, we are building a simple but effective BERT-based neural baseline to handle this task. Our BERT architecture with a simple linear classification layer surpassed the state-of-the-art works, according to the experimental results on the benchmarked Arabic hotel reviews dataset.

Keywords: Arabic aspect-based sentiment analysis, Deep learning, Aspect-sentiment classification, and BERT model.

1. Introduction

ABSA is not a conventional sentiment analysis but a more difficult task, it is concerned with defining the aspect terms listed in a document, as well

Email addresses: mohammed.mustafa@aun.edu.eg (Mohammed M. Abdelgwad),
taysirhs@aun.edu.eg (Taysir Hassan A Soliman), Taloba@aun.edu.eg (Ahmed I. Taloba), mfseddik@aun.edu.eg (Mohamed Fawzy Farghaly)

as the sentiments expressed against each aspect.

As demonstrated by (Hu and Liu, 2004), Sentiment Analysis (SA) can be studied at three levels: the document level where the task is to identify sentiment polarities (positive, neutral, or negative) that is indicated throughout the entire document. The sentence level is concerned with classifying sentiments relevant to a single sentence. But the document contains many sentences and each sentence may contain multiple aspects with different sentiments, so the document and sentence level sentiment analysis may not be accurate and need another suitable type that makes this fine-grained analysis called ABSA.

ABSA was first launched on SemEval-2014 (Pontiki et al., 2014), with the introduction of datasets containing annotated restaurant and laptop reviews. ABSA’s work was largely replicated at SemEval over the next two years (Pontiki et al., 2015, 2016) as the task has extended into various domains, languages, and challenges. SemEval-2016 provided 39 datasets in 7 domains and 8 languages for the ABSA task, additionally, the datasets were provided with Support Vector Machine (SVM) as a baseline evaluation procedure.

There are three primary tasks common to ABSA, as mentioned in (Pontiki et al., 2016): aspect category identification (Task 1), aspect opinion target extraction (Task 2), and aspect polarity detection (Task 3). In this paper, we concentrate only on Task 3.

Neural Network (NN) variations have been applied to many Arabic Natural language processing (NLP) applications, such as Sentiment Analysis (Kwaik et al., 2019), machine translation (Ameur et al., 2017), named entity recognition (Khalifa and Shaalan, 2019), and speech recognition (Algihab et al., 2019) and the highest results were obtained.

Using word embedding or distributed representations enhances neural network efficiency and improves the performance of Deep Learning (DL) models, therefore, it has been applied as a preliminary layer in various DL models.

Two types of word embeddings are available: contextualized and non contextualized word embeddings. Most of the research available on Arabic ABSA is based on non-contextualized word embedding, such as (word2vec and fast-Text). The main drawback of non-contextualized word embeddings is the presentation of a set of static word embeddings that do not take into account the various contexts in which they may appear.

In contrast, pre-trained language models based on transformers, such as BERT can provide dynamic embedding vectors which change by changing the context of words in the sentences. This made it more encouraging to use

BERT in many tasks via fine-tuning on the downstream dataset related to the task.

Despite the fact that Arabic has a significant number of speakers (estimated to be around 422 million ([Alsharhan and Ramsay, 2020](#))) and is a morphologically rich language, the number of studies in Arabic aspect-based sentiment analysis is still restricted.

The following are the paper’s key contributions:

- This paper examines the modeling competence of contextual embedding from pre-trained language models, such as BERT with sentence pair input on Arabic aspect sentiment classification task.
- A simple BERT based model with a linear classification layer was proposed to solve aspect sentiment polarity classification task. Experiments conducted on the Arabic hotel reviews dataset demonstrated that, despite the simplicity of our model, it surpassed the state-of-the-art works.

The rest of the paper is organized as follows. Section 2 addresses the related work; Section 3 illustrates the proposed model; Section 4 explains the dataset and the obtained results; finally, section 5 concludes the paper.

2. related work

ABSA is an area of SA with research methodologies divided into two approaches: standard machine learning techniques and DL-based techniques. ABSA’s earliest efforts depended mainly on machine learning methods that focus on handcrafted features like lexicons to train sentiment classifiers ([Jiang et al., 2011](#))([Kiritchenko et al., 2014](#)). These methods are effective but rely heavily on the efficiency of handcrafted features.

Subsequently, a set of methods based on neural networks consisting of a word embedding layer followed by a neural architecture were developed for the ABSA task and pretty results were achieved ([Tang et al., 2015](#); [Zhang et al., 2016](#); [Poria et al., 2016](#)).

Several attention-based models have been applied to the ABSA task for its ability to focus on important parts of the sentence related to aspects ([Wang et al., 2016](#)) ([Yang et al., 2017](#)). But a single attention network maybe not enough at capturing key dependency attributes between context and targets especially when the sentence is long, so multiple attention networks were

proposed to solve this problem (Chen et al., 2017; Ma et al., 2017).

In order to resolve the question-answering problem, the authors of (Weston et al., 2014) have developed the memory network concept (MemNN), which was later adopted in several NLP challenges including ABSA (Tang et al., 2016; Tay et al., 2018, 2017).

Pre-trained language models have recently played a vital role in many NLP applications, as they can take advantage of the vast volume of unlabeled data to learn general language representations; Elmo (Peters et al., 2018), GPT (Radford et al., 2018), and BERT (Devlin et al., 2018) are among the most well-known examples. The authors of (Li et al., 2019) studied the use of BERT embeddings with several neural models, such as a linear layer, GRU model, self-attention network, and conditional random field to deal with the ABSA task. In (Sun et al., 2019), the authors have demonstrated that treating ABSA as a sentence pair classification task by building auxiliary sentence as input to the BERT, significantly improved the results. The strength of BERT embeddings in ABSA was further investigated by (Hoang et al., 2019; Bhoi and Joshi, 2018; Xu et al., 2019; Nurifan et al., 2019).

In general, Arabic ABSA research development is slower than English.

(Ruder et al., 2016b) combined aspect embedding with each word embedding and sent the mixture to CNN model to address aspect polarity and category identification tasks. Subsequently, (Ruder et al., 2016a) took advantage of modeling internal information related to the hierarchical review structure in solving the ABSA task.

Two supervised machine learning-based techniques, RNN and SVM supplemented with a set of handcrafted features, were suggested by (Al-Smadi et al., 2018) and excellent results were achieved using SVM but RNN was faster in terms of training execution time.

To stimulate learning the connection between context words and targets, (Al-Smadi et al., 2019) combined aspect embedding with each word embedding and sent the mixture to LSTM. Then, the attention mechanism was applied to focus on context words related to certain aspects.

(Abdelgwad et al., 2021) proposed applying IAN network supported with Bi-GRU for extracting target and context representations in a better manner.

(Al-Dabet et al., 2021) proposed applying deep memory network based on a stack of IndyLSTM supplemented with recurrent attention network to solve aspect sentiment classification task.

In this paper, a simple BERT-based model with sentence pair input and a linear classification layer was proposed to handle the Arabic ABSA task, and

state-of-the-art results are achieved on the Arabic hotel reviews dataset.

3. BERT-based-model

BERT (Bidirectional Encoder Representations from Transformers) is a deep learning technique for NLP in which deep neural networks use unsupervised language representation and bidirectional models built on Transformers (a deep learning algorithm in which each output element is linked to each input element and the weightings between them are dynamically determined based on their relation using the attention mechanism). BERT is pre-trained on two separate but related NLP tasks using the bidirectional capability: Masked Language Modeling and Next Sentence Prediction. BERT effectively handles ambiguity, which is the most difficult aspect of understanding natural language, and can reach high degree of accuracy in analyzing languages close to human beings. We first use the BERT portion with L transformer layers to measure the corresponding contextualized representations for the T-length input token sequence. These contextual representations are then fed to the task-specific layer to predict sentiment polarity labels. The overall architecture of the proposed model is depicted in Fig. 1.

3.1. Auxiliary Sentence

Since the BERT model accepts a single or pair of sentences as input, and due to the ability and effectiveness of the BERT model in dealing with sentence pair classification tasks, the ABSA task can be transformed into a sentence-pair classification task using the pre-trained BERT model, with the first sentence containing words that express sentiments within the sentence, and the second sentence containing information related to the aspect (the auxiliary sentence). In other words, the model receives the review sentence as the first sentence and the aspect terms as an auxiliary sentence, and the task would be to determine the sentiments towards each aspect.

3.2. BERT as Embedding layer

In comparison to the conventional word2vec embedding layer that offers static context-independent word vectors, the BERT layers offer dynamic context-dependent word embeddings by taking the entire sentence as input then calculating the representation of each word by extracting information from the entire sentence.

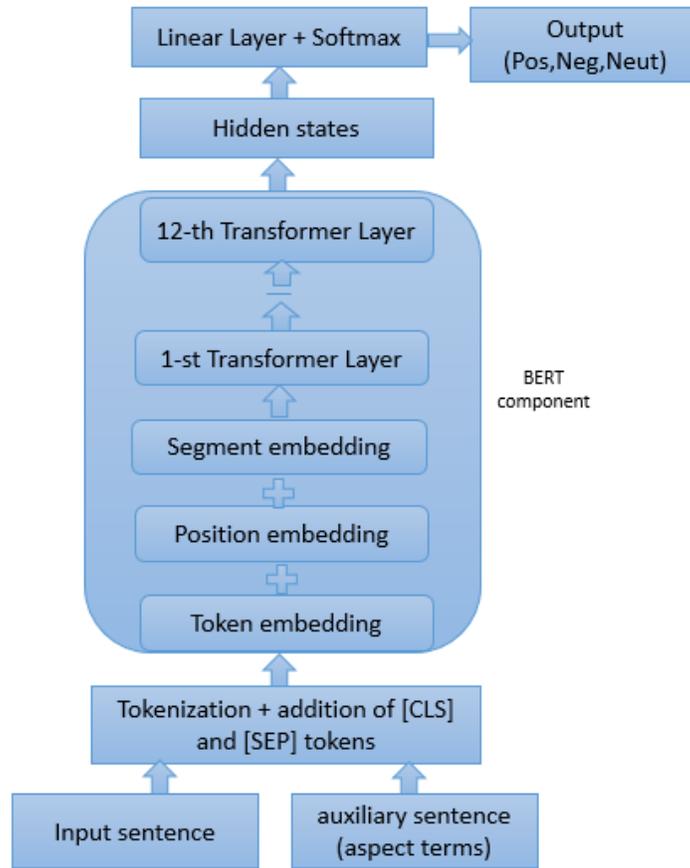


Fig. 1. Model overall architecture.

Inputs are processed in a special way by BERT, where sentences are tokenized first, as usual in every model, additionally, extra tokens are inserted at the start [CLS] and end [SEP] of the tokenized sentence. Then due to the utilization of self attention mechanism that enables BERT models to process tokens in parallel, and to deal with the next sentence prediction task, some special embedding tokens must be added to include all necessary information.

The tokenized sentence with [CLS] and [SEP] tokens are first fed into the embedding layer, which results in tokens embeddings. Those tokens embeddings don't include position information which added by means of position embeddings. Finally, it must be determined whether each token is associated

with sentence A or B, this is possible by creating a new fixed token known as a segment embedding.

Then, the token embeddings, segment embeddings, and position embeddings for each token are combined and feed the mixture into L transformer layers to optimize token level feature. The output representation H^{l-1} from the $l-1$ transformer layer is fed as input into the next layer l where $l \in [1, L]$. The representation $H^l = \{h_1^l, \dots, h_t^l\}$ at the l -th layer is calculated as follows :

$$H^l = Transformer(H^{l-1}) \quad (1)$$

where t refers to the number of input tokens. Outputs from the last transformer layer H^L are considered as full contextual representations for the input tokens and are used as input to the task specific layer.

3.3. Design of Downstream Model

In order to identify sentiment polarities toward aspects (i.e task 3), word embeddings extracted from the BERT model are fed into a task-specific layer, a simple linear layer in our case, where both the input h_t^l and the weight W (the learnable parameters) matrices are multiplied with the addition of the bias term b to transform their incoming features to output features in a linear manner. The softmax function is then used to determine the likelihood of each category P .

$$P = softmax(W^T h_t^l + b) \quad (2)$$

4. experiments

4.1. Data and baseline research

We conducted our experiments on 3 datasets: Human Annotated Arabic Dataset of Book Reviews (HAAD), the Arabic news dataset, and the Arabic Hotel Reviews Dataset.

For Arabic ABSA, the HAAD dataset (Al-Smadi et al., 2015) is regarded to be the first available dataset. There are 1513 Arabic book reviews in the HAAD dataset, each was annotated with aspect terms (T1), aspect term polarity (T2), aspect category (T3), and aspect category polarity (T4). This study focuses only on (T2). The SemEval-2014 framework was used to annotate the HAAD dataset. HAAD has a total of 2838 aspect terms, the distribution of which over the sentiment polarity classes (Positive, Negative,

Conflict, Neutral) in both training and testing datasets are summarized in Table 1. Fig. 2 depicts an XML snapshot that corresponds to an annotated HAAD sentence.

```

<sentence id="76">
  <text>أعجب من كون الكتاب لم يصلنا إلا توا كتاب رائع لموضوع مهم مسطرًا بلغة جميلة من كاتبة مبدعة</text>
  <aspectTerms>
    <aspectTerm term="كتاب" polarity="positive" from="14" to="18"/>
    <aspectTerm term="لغة" polarity="positive" from="66" to="69"/>
    <aspectTerm term="كاتبة" polarity="positive" from="79" to="84"/>
  </aspectTerms>
  <aspectCategories>
    <aspectCategory category="المزايا" polarity="positive"/>
  </aspectCategories>
</sentence>

```

Fig. 2. Example of the HAAD Dataset Schema.

The Arabic news dataset (Al-Sarhan et al., 2016) comprises Facebook posts about the 2014 Gaza attacks and their comments. The SemEval-2014 framework was used to annotate the news dataset. There are 2265 news posts and 13628 comments in the Arabic news dataset each classified into three sentiment classes: Positive, negative, and neutral. Each post was manually annotated with aspect terms (T1), aspect term polarity (T2), aspect category (T3), and aspect category polarity (T4). Each comment was annotated with comment category detection (T5), and comment category polarity estimation (T6). This study focuses only on (T2). There are 9655 different aspects each related to one of four categories: Plans, Results, Peace, and Parties. In order to provide baseline results, they applied simple sentiment classification methods on their corpus. Fig. 3 depicts an XML snapshot that corresponds to an annotated Arabic news sentence.

Table 1

Analysis of the HAAD dataset’s aspect terms and polarities.

Dataset	Polarity				Total
	Positive	Negative	Conflict	Neutral	
Train	1252	855	26	126	2259
Test	124	432	1	22	579
Overall Dataset	1376	1287	27	148	2838

It was found that several DL-based models overfitted downstream data when applied to both the HAAD and Arabic news datasets. The overfitting

```

<sentence id="Event4Post_0040">
  <text>عباس ... تكلمنا مع الجانب الامريكي وطلبنا ان يوقفوا العمليات العسكرية من جانب اسرائيل</text>
  <aspectTerms>
    <aspectTerm term="الجانب الامريكي" from="19" to="34" polarity="neutral"/>
    <aspectTerm term="العمليات العسكرية" from="52" to="69" polarity="positive"/>
    <aspectTerm term="اسرائيل" from="78" to="85" polarity="positive"/>
    <aspectTerm term="حركة حماس" from="106" to="115" polarity="negative"/>
    <aspectTerm term="وقف العمليات" from="117" to="129" polarity="negative"/>
  </aspectTerms>
  <aspectCategories>
    <aspectCategory polarity="negative" category="التهدئة"/>
  </aspectCategories>
</sentence>

```

Fig. 3. Example of the Arabic news dataset Schema.

is mostly due to the small sizes of the datasets, which caused the models to memorize patterns instead of learning them, and consequently severely affects models' performance on the new data.

So we experimented with another relatively larger dataset, such as the Arabic Hotel Reviews dataset.

The Arabic Hotel Reviews Dataset was presented in SemEval-2016 in support of ABSA's multilingual task involving work in 8 languages and 7 domains (Pontiki et al., 2016). There are 19,226 training tuples and 4802 testing tuples in the dataset. The XML schema was used to annotate the dataset. The dataset consists of a set of reviews, each review contains a number of sentences, with each sentence having three tuples: aspect-category, OTE, and aspect polarity. Fig. 4 depicts an XML snapshot that corresponds to an annotated Arabic hotel review.

The dataset supports both text-level annotations (2291 reviews) and sentence-level annotations (6029 sentences). This study focuses only on sentence-level tasks. The dataset's scale and distribution are explained in Table 2. Also, SVM classifier supported with N-gram features was applied to the Arabic hotel review dataset for various ABSA tasks and was considered as baseline research to compare with.

4.2. Evaluation method

In order to determine the effectiveness of the proposed model, the accuracy metric was adopted, which was defined as follows:

$$Accuracy = \frac{correct_predictions_number}{overall_samples_number} \quad (3)$$

```

<Review rid="566">
  <sentences>
    <sentence id="566:0">
      <text>فندق رائع جميل كل الغرف فيه عبارة عن استديو جميل وداخله مطبخ وجلسة صغيرة مع سعادة
      سيكر لايبود وجاكوزي رائع</text>
      <Opinions>
        <Opinion target="فندق" category="HOTEL#GENERAL" polarity="positive" from="0" to="4"/>
        <Opinion target="فندق" category="HOTEL#GENERAL" polarity="positive" from="10" to="14"/>
        <Opinion target="استديو" category="FACILITIES#GENERAL" polarity="positive" from="42" to="48"/>
        <Opinion target="جاكوزي" category="FACILITIES#GENERAL" polarity="positive" from="102" to="108"
        />
      </Opinions>
    </sentence>
    <sentence id="566:1">
      <text>والسعر مناسب لهذه الرفاهية .. الخدمة سريعة والاستقبال جميل جدا.. يوجد به عدد 2 بارات .. وهو
      على شارع البانقلا بشكل شبه مباشر خطوتين فقط وانت في الشارع ويعتبر موقعه افضل موقع</text>
      <Opinions>
        <Opinion target="السعر" category="HOTEL#PRICES" polarity="neutral" from="1" to="6"/>
        <Opinion target="الخدمة" category="SERVICE#GENERAL" polarity="positive" from="29" to="35"/>
        <Opinion target="الاستقبال" category="SERVICE#GENERAL" polarity="positive" from="43" to="52"/>
      </Opinions>
    </sentence>
  </sentences>
</Review>

```

Fig. 4. Example of the Arabic Hotels Dataset Schema.

Table 2

The scale and distribution of the Arabic hotels reviews dataset.

TASK	TRAIN			TEST		
	text	sentence	tuples	text	sentence	tuples
T1: Sentence-level ABSA	1839	4802	10.509	452	1227	2604
T2: Text-level ABSA	1839	4802	8757	452	1227	2158

Accuracy measures the number of correct samples to all samples, higher accuracy indicates better performance.

4.3. Hyperparameters Setting

The pretrained "Arabic BERT" (Safaya et al., 2020) was used, which was previously trained on about 8.2 billion words of MSA and dialectal Arabic. The BERT-Base model consisting of 12 hidden layers, 12 attention heads, and hidden size of 768 has been particularly used. Adam optimizer was used to fine-tune the model on the downstream task with a learning rate of 1e-5, dropout rate of 0.1, batch size of 24, and number of epochs equal to 10.

4.4. comparison models

Baseline trained SVM classifier enhanced with N-grams features (Pontiki et al., 2016).

INSIGHT-1 combined aspect embedding with each word embedding and fed the resulting mixture to CNN for Aspect sentiment analysis (Ruder et al., 2016b).

HB-LSTM developed hierarchical bidirectional LSTM for ABSA, that can take advantage of hierarchical modeling information of the review in improving performance (Ruder et al., 2016a).

AB-LSTM-PC combined aspect embedding with each word embeddings to motivate learning the connections between context words and targets, then applied the attention mechanism for focusing on context words related to specific aspects (Al-Smadi et al., 2019).

IAN-BGRU Used Bi-GRU to extract hidden representations from targets and context, then applied two associated attention networks on those representations to model targets and their context in an interactive manner (M.Abdelgwad et al., 2021).

MBRA made use of external memory network containing a stack of bidirectional lndy-lstms consisted of 3 layers, and a recurrent attention mechanism to deal with complex sentence structures (Al-Dabet et al., 2021).

4.5. *main results*

Table 3 shows that simply adding a basic linear layer on top of BERT, outperformed the baseline and achieved better results than many previous Arabic DL models. This is evidence of the effectiveness of Bert’s contextual representations at encoding associations between aspect terms and context words. Moreover, the use of the auxiliary sentence further improved the results of the BERT model, which is apparent in the higher results of the BERT-pair model compared to the BERT-single, achieving state-of-the-art results.

4.6. *Overfitting Issue*

Despite the use of Bert-base model ”the smallest pretrained version of Bert”, the number of parameters seemed to be large (110M) for this task, which made us wonder: Is our model overfitting the downstream data ? so, we trained the BERT-linear model on the Arabic hotel reviews dataset for 10 epochs and noticed the oscillating accuracy results on the development set after each epoch. As indicated in Fig. 5, the accuracy results of the development set are relatively stable and do not decrease significantly as the training progresses, which reveals that the BERT model is extremely robust to overfitting.

Table 3
Models Accuracy Results on T3

Model	Accuracy
Baseline	76.4
AB-LSTM-PC	82.60
INSIGHT-1 (CNN)	82.71
IAN-BGRU	83.98
MBRA	87.31
BERT-Linear-single	85.93
BERT-Linear-pair	89.51

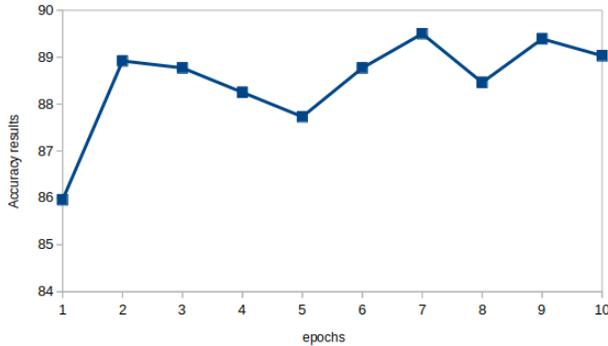


Fig. 5. Performances on the Dev set.

4.7. finetuning or not

We investigated the effect of fine-tuning on the final results by keeping the parameters of the BERT component fixed during the training phase. Fig. 6 shows a simple comparison between the performance of the model when fine-tuning and when setting the parameters fixed. The general purpose BERT representation is obviously far from acceptable for the downstream task, and task-specific fine-tuning is necessary to use BERT’s capabilities to increase performance.

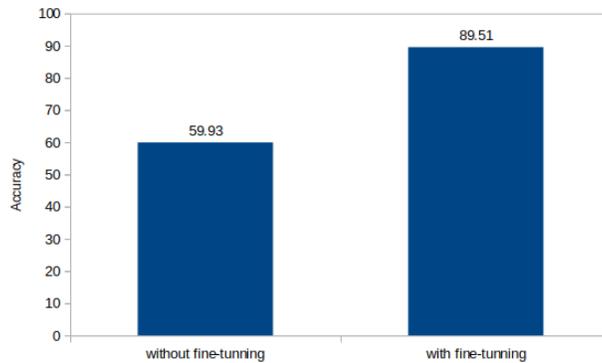


Fig. 6. Effect of fine-tuning BERT.

5. Conclusion

In this paper, we explored the modeling capabilities of contextual embeddings from the pre-trained BERT model with the benefit of sentence pair input on the Arabic ABSA task. Specifically, we examined the incorporation of the BERT embedding component with a simple linear classification layer and extensive experiments were performed on the Arabic hotel review dataset. The experimental results show that despite the simplicity of our model, it surpassed the state-of-the-art works, and is robust to overfitting.

References

- Abdelgwad, M. M., Soliman, T. H. A., Taloba, A. I., Farghaly, M. F., 2021. Arabic aspect based sentiment analysis using bidirectional gru based models. *arXiv preprint arXiv:2101.10539*.
- Al-Dabet, S., Tedmori, S., Mohammad, A.-S., 2021. Enhancing arabic aspect-based sentiment analysis using deep learning models. *Computer Speech & Language*. p. 101224.
- Al-Sarhan, H., Al-So'ud, M., Al-Smadi, M., Al-Ayyoub, M., Jararweh, Y., 2016. Framework for affective news analysis of arabic news: 2014 gaza attacks case study. In: *2016 7th International Conference on Information and Communication Systems (ICICS)*. IEEE. pp. 327–332.

- Al-Smadi, M., Qawasmeh, O., Al-Ayyoub, M., Jararweh, Y., Gupta, B., 2018. Deep recurrent neural network vs. support vector machine for aspect-based sentiment analysis of arabic hotels' reviews. *Journal of computational science*. 27, 386–393.
- Al-Smadi, M., Qawasmeh, O., Talafha, B., Quwaider, M., 2015. Human annotated arabic dataset of book reviews for aspect based sentiment analysis. In: *2015 3rd International Conference on Future Internet of Things and Cloud*. IEEE. pp. 726–730.
- Al-Smadi, M., Talafha, B., Al-Ayyoub, M., Jararweh, Y., 2019. Using long short-term memory deep neural networks for aspect-based sentiment analysis of arabic reviews. *International Journal of Machine Learning and Cybernetics*. 10(8), 2163–2175.
- Algihab, W., Alawwad, N., Aldawish, A., AlHumoud, S., 2019. Arabic speech recognition with deep learning: A review. In: *International Conference on Human-Computer Interaction*. Springer. pp. 15–31.
- Alsharhan, E. Ramsay, A., 2020. Investigating the effects of gender, dialect, and training size on the performance of arabic speech recognition. *Language Resources and Evaluation*. 54(4), 975–998.
- Ameur, M. S. H., Meziane, F., Guessoum, A., 2017. Arabic machine transliteration using an attention-based encoder-decoder model. *Procedia Computer Science*. 117, 287–297.
- Bhoi, A. Joshi, S., 2018. Various approaches to aspect-based sentiment analysis. *arXiv preprint arXiv:1805.01984*.
- Chen, P., Sun, Z., Bing, L., Yang, W., 2017. Recurrent attention network on memory for aspect sentiment analysis. In: *Proceedings of the 2017 conference on empirical methods in natural language processing*. pp. 452–461.
- Devlin, J., Chang, M.-W., Lee, K., Toutanova, K., 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.

- Hoang, M., Bihorac, O. A., Rouces, J., 2019. Aspect-based sentiment analysis using bert. In: *Proceedings of the 22nd Nordic Conference on Computational Linguistics*. pp. 187–196.
- Hu, M. Liu, B., 2004. Mining and summarizing customer reviews. In: *Proceedings of the tenth ACM SIGKDD international conference on Knowledge discovery and data mining*. pp. 168–177.
- Jiang, L., Yu, M., Zhou, M., Liu, X., Zhao, T., 2011. Target-dependent Twitter sentiment classification. In: *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*. Association for Computational Linguistics. Portland, Oregon, USA. pp. 151–160.
- Khalifa, M. Shaalan, K., 2019. Character convolutions for arabic named entity recognition with long short-term memory networks. *Computer Speech & Language*. 58, 335–346.
- Kiritchenko, S., Zhu, X., Cherry, C., Mohammad, S., 2014. Nrc-canada-2014: Detecting aspects and sentiment in customer reviews. In: *Proceedings of the 8th international workshop on semantic evaluation (SemEval 2014)*. pp. 437–442.
- Kwaik, K. A., Saad, M., Chatzikyriakidis, S., Dobnik, S., 2019. Lstm-cnn deep learning model for sentiment analysis of dialectal arabic. In: *International Conference on Arabic Language Processing*. Springer. pp. 108–121.
- Li, X., Bing, L., Zhang, W., Lam, W., 2019. Exploiting bert for end-to-end aspect-based sentiment analysis. *arXiv preprint arXiv:1910.00883*.
- Ma, D., Li, S., Zhang, X., Wang, H., 2017. Interactive attention networks for aspect-level sentiment classification. *arXiv preprint arXiv:1709.00893*.
- M.Abdelgwad, M., A Soliman, T. H., I.Taloba, A., Farghaly, M. F., 2021. Arabic aspect based sentiment analysis using bidirectional gru based models. *Journal of King Saud University - Computer and Information Sciences*.
- Nurifan, F., Sarno, R., Sungkono, K. R., 2019. Aspect based sentiment analysis for restaurant reviews using hybrid elmo-wikipedia and hybrid expanded opinion lexicon-senticircle. *International Journal of Intelligent Engineering and Systems*. 12(6), 47–58.

- Peters, M. E., Neumann, M., Iyyer, M., Gardner, M., Clark, C., Lee, K., Zettlemoyer, L., 2018. Deep contextualized word representations. *arXiv preprint arXiv:1802.05365*.
- Pontiki, M., Galanis, D., Papageorgiou, H., Androutsopoulos, I., Manandhar, S., Al-Smadi, M., Al-Ayyoub, M., Zhao, Y., Qin, B., De Clercq, O., et al., 2016. Semeval-2016 task 5: Aspect based sentiment analysis. In: *International workshop on semantic evaluation*. pp. 19–30.
- Pontiki, M., Galanis, D., Papageorgiou, H., Manandhar, S., Androutsopoulos, I., 2015. Semeval-2015 task 12: Aspect based sentiment analysis. In: *Proceedings of the 9th international workshop on semantic evaluation (SemEval 2015)*. pp. 486–495.
- Pontiki, M., Galanis, D., Pavlopoulos, J., Papageorgiou, H., Androutsopoulos, I., Manandhar, S., 2014. SemEval-2014 task 4: Aspect based sentiment analysis. In: *Proceedings of the 8th International Workshop on Semantic Evaluation (SemEval 2014)*. Association for Computational Linguistics. Dublin, Ireland. pp. 27–35.
- Poria, S., Cambria, E., Gelbukh, A., 2016. Aspect extraction for opinion mining with a deep convolutional neural network. *Knowledge-Based Systems*. 108, 42–49.
- Radford, A., Narasimhan, K., Salimans, T., Sutskever, I., 2018. Improving language understanding by generative pre-training.
- Ruder, S., Ghaffari, P., Breslin, J. G., 2016a. A hierarchical model of reviews for aspect-based sentiment analysis. *arXiv preprint arXiv:1609.02745*.
- Ruder, S., Ghaffari, P., Breslin, J. G., 2016b. Insight-1 at semeval-2016 task 5: Deep learning for multilingual aspect-based sentiment analysis. *arXiv preprint arXiv:1609.02748*.
- Safaya, A., Abdullatif, M., Yuret, D., 2020. KUISAIL at SemEval-2020 task 12: BERT-CNN for offensive speech identification in social media. In: *Proceedings of the Fourteenth Workshop on Semantic Evaluation*. International Committee for Computational Linguistics. Barcelona (online). pp. 2054–2059.

- Sun, C., Huang, L., Qiu, X., 2019. Utilizing bert for aspect-based sentiment analysis via constructing auxiliary sentence. *arXiv preprint arXiv:1903.09588*.
- Tang, D., Qin, B., Feng, X., Liu, T., 2015. Effective lstms for target-dependent sentiment classification. *arXiv preprint arXiv:1512.01100*.
- Tang, D., Qin, B., Liu, T., 2016. Aspect level sentiment classification with deep memory network. *arXiv preprint arXiv:1605.08900*.
- Tay, Y., Tuan, L. A., Hui, S. C., 2017. Dyadic memory networks for aspect-based sentiment analysis. In: *Proceedings of the 2017 ACM on Conference on Information and Knowledge Management*. pp. 107–116.
- Tay, Y., Tuan, L. A., Hui, S. C., 2018. Learning to attend via word-aspect associative fusion for aspect-based sentiment analysis. In: *Proceedings of the AAAI conference on artificial intelligence*. volume 32.
- Wang, Y., Huang, M., Zhu, X., Zhao, L., 2016. Attention-based lstm for aspect-level sentiment classification. In: *Proceedings of the 2016 conference on empirical methods in natural language processing*. pp. 606–615.
- Weston, J., Chopra, S., Bordes, A., 2014. Memory networks. *arXiv preprint arXiv:1410.3916*.
- Xu, H., Liu, B., Shu, L., Yu, P. S., 2019. Bert post-training for review reading comprehension and aspect-based sentiment analysis. *arXiv preprint arXiv:1904.02232*.
- Yang, M., Tu, W., Wang, J., Xu, F., Chen, X., 2017. Attention based lstm for target dependent sentiment classification. In: *Proceedings of the AAAI Conference on Artificial Intelligence*. volume 31.
- Zhang, M., Zhang, Y., Vo, D.-T., 2016. Gated neural networks for targeted sentiment analysis. In: *Proceedings of the AAAI Conference on Artificial Intelligence*. volume 30.