

Large N Limit of the Knapsack Problem

Mobolaji Williams*
Jellyfish, Boston, MA 02111
 (Dated: June 22, 2021)

Abstract

In the simplest formulation of the knapsack problem, one seeks to maximize the total value of a collection of objects such that the total weight remains below a certain limit. In this work, we move from computer science to physics and formulate the knapsack problem as a statistical physics system and compute the corresponding partition function. We approximate the result in the large number limit and from this approximation develop a new algorithm for the problem. We compare the performance of this algorithm to that of other approximation algorithms, finding that the new algorithm is faster than most of these approaches while still retaining high accuracy. From its speed and accuracy relationship, we argue that the algorithm is a manifestation of a greedy algorithm. We conclude by discussing ways to extend the formalism to make its underlying heuristics more rigorous or to apply the approach to other combinatorial optimization problems. In all, this work exists at the intersection between computer science and statistical physics and represents a new analytical approach to solving the problems in the former using methods of the latter.

Keywords: Knapsack Problem, Statistical Physics, Approximations

I. INTRODUCTION

One reason combinatorial optimization problems are so difficult is that they concern systems defined in a discrete space where the powerful, but intrinsically continuous, methods of analysis do not apply. But if we could transform the discrete spaces of these problems into continuous ones, and if we could infer a continuous potential landscape for the problem, we could apply optimization methods from calculus to find the minimum of that potential, and then transform back to the discrete space to find the answer to the original combinatorial optimization problem. Such a transformation might strike one as improbable if such methods did not already exist in statistical physics.

The Knapsack Problem (KP) is a classic problem from combinatorial optimization. In the 0-1 version of the problem [1], we begin with N objects labeled $i = 1, 2, \dots, N$ where each object can be included or excluded from a collection. When in the collection, the object i has a value v_i and a weight w_i , and our objective is to find the collection of objects that maximizes the total value while remaining under a given total weight W . If we define our collection of objects as $\{x_i\}$ with $x_i = 1$ for object i included in our collection and $x_i = 0$ otherwise, then our objective is to find $\{x_i\}$ that

$$\text{maximizes } \sum_{i=1}^N v_i x_i \quad \text{subject to the constraint } \sum_{i=1}^N w_i x_i \leq W. \quad (1)$$

For simplicity, we take v_i and w_i to be positive integers. Thus W is also an integer satisfying $W \geq N$.

Among the many standard algorithms for solving the KP [2, 3], there exists a stochastic approach motivated by the physical process of annealing. We say a physical system is “annealed” when its temperature has been gradually lowered to the point where all of the atoms (or, more generally, “degrees of freedom”) occupy their lowest energy microstate. In the simulated annealing approach to the KP, we take the negative of total value of the collection of knapsack objects to be the energy of the system, and as we stochastically

* mwilliams@jellyfish.co

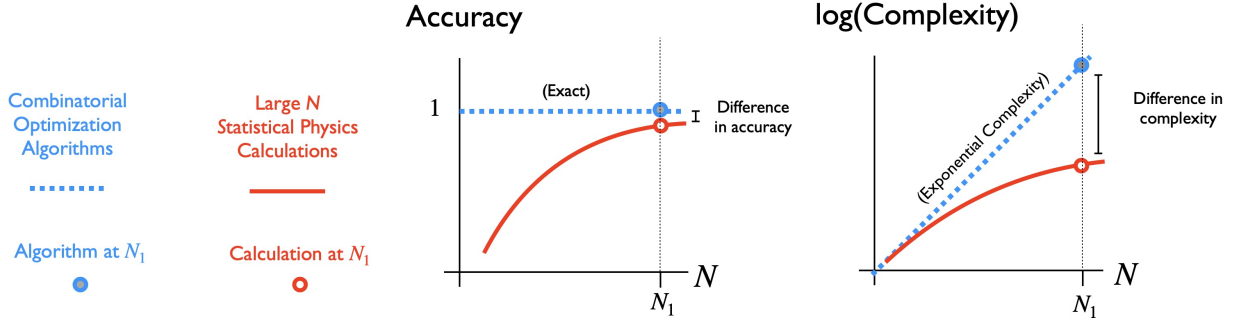


Figure 1: Schematic of accuracy-complexity tradeoff in combinatorial optimization and statistical physics. Combinatorial optimization algorithms are exact, but they often have exponential complexity and thus take a long time to run. Large N statistical physics “algorithms” are approximate but become more accurate as N gets larger and they have sub-exponential complexity since they are based on evaluating expressions rather than on enumerating an exponential number of states. By translating combinatorial optimization algorithms into analytical statistical physics problems, we can take advantage of the drastically reduced computational complexity of the latter without a significant sacrifice in accuracy compared to the former. In other words, the relatively quick large N limit physical analog of a combinatorial optimization problem should be most accurate in the same numerical regime where the exact optimization algorithm takes the longest time to compute.

sample the possible microstates of the knapsack, we slowly (i.e., logarithmically in time [4]) lower the temperature parameter until the system has settled into its maximum-value microstate subject to the weight constraint.

In this work, we analytically model the physical system at the heart of the simulated annealing solution to the KP. Specifically we compute the thermal partition function for the KP and derive expressions for the average occupancy of each object. By using contour integral identities, we represent an intuitive summation over a discrete state-space as an abstract integration over a continuous contour in the complex plane, and then, by taking the large N limit of the partition function, we translate our discrete-space optimization objective with a constraint into a continuous-space optimization objective with no constraint. The transformation allows us to optimize our problem using calculus, thereby simplifying an originally discrete space analysis.

This work exists at the intersection of computer science and statistical physics and reflects the theme of gaining insights into computational problems by representing them as physical ones [5–7]. Importantly, this particular intersection makes use of a convenient confluence between statistical physics and computer science: While problems in statistical physics tend to get easier as we increase the number of degrees of freedom N , due to the availability of approximation schemes, problems in computer science tend to get harder as we increase N , due to increased computation time (Fig. 1). Therefore, being able to translate a computationally hard computer science problem into a relatively simple statistical physics problem is an attractive approach to finding new algorithms or simply new representations to well-known computer science problems.

We work towards this translation by first deriving the general partition function for the KP in Section II. In Section III we apply the method of steepest descent to take the large N approximation of the previous section’s result and then define the conditions under which the approximation is valid. In Section IV we use these approximate results to present a statistical-physics based algorithm for the KP, and in Section V we compare the speed and accuracy of the algorithm to the speeds and accuracies other classic solutions to the KP. In Section VI we discuss how the large N algorithm is related to the greedy algorithm, and what this relationship suggests about the $N \gg 1$ behavior of the latter. In the final section, we outline some open questions resulting from this approach and present a possible problem that this approach can solve that other approaches cannot.

II. PARTITION FUNCTION FOR THE KNAPSACK PROBLEM

In this section, we compute the partition function for the KP. We will later use this partition function as the basis for an approximation, but in this section our results will be exact.

The partition function is a foundational theoretical construct in statistical physics [8]. It amounts to a probability-weighted sum over the microstates of the system, and if one can compute the partition function for a system, then all observables for the system can be computed in turn. For the 0-1 KP, the observable we will compute is the probability that object k is included in the maximum value collection.

We begin by representing the problem as a statistical physics system at temperature T . The temperature parameterizes how likely the system is to settle into its lowest energy microstate; higher temperatures make the lowest energy microstate just as likely as all other microstates, and lower temperatures make it more likely. Thus, T will be a hyperparameter that we make low enough to ensure that an optimal solution is found. For the KP, this optimal solution corresponds to the highest value collection of objects given the constraint.

To write the partition function for the KP, we need to place the objective function and the constraint in Eq.(1) in a sum over states. First, we introduce the Heaviside step function $\Theta(j)$ defined as

$$\Theta(j) \equiv \begin{cases} 1 & \text{for } j \geq 0 \\ 0 & \text{otherwise} \end{cases}, \quad (2)$$

where j is an integer. With Eq.(2) and taking the negative of the total value $\sum_{i=1}^N v_i x_i$ to be the "energy" of the system, the partition function for Eq.(1) is then

$$Z_N(\{\beta v_i\}, \{w_i\}, W) = \sum_{\{x_i\}} \Theta\left(W - \sum_{i=1}^N w_i x_i\right) \exp\left(\beta \sum_{i=1}^N v_i x_i\right), \quad (3)$$

where

$$\beta \equiv 1/T \quad (4)$$

is a dimensionless parameter, and our summation over $\{x_i\}$ is defined as

$$\sum_{\{x_i\}} = \prod_{i=1}^N \sum_{x_i=0}^1 \quad [\text{Summation for 0 - 1 problem}]. \quad (5)$$

Eq.(3) is the probability-weighted sum that defines our sum over states. With it, we find that the probability that a particular collection of objects $\{\bar{x}_i\}$ occurs in the system is

$$P_N(\{\bar{x}_i\}) = \frac{1}{Z_N} \Theta\left(W - \sum_{i=1}^N w_i \bar{x}_i\right) \exp\left(\beta \sum_{i=1}^N v_i \bar{x}_i\right). \quad (6)$$

Moreover, we can use this probability to express the average occupancy for object k . Denoting this average occupancy as $\langle x_k \rangle$ we have

$$\langle x_k \rangle = \sum_{\{x_i\}} x_k P_N(\{x_i\}) = \frac{\partial}{\partial(\beta v_k)} \ln Z_N(\{v_i\}, \{w_i\}, W). \quad (7)$$

As an average occupancy for this 0-1 problem, Eq.(7) also represents the probability that object k is included in the collection. For example, if $\langle x_k \rangle > 1/2$ then more than half of the Boltzmann-weighted microstates have placed object k in the knapsack. Therefore sampling these microstates would give us a greater than 50% chance of having object k included in the collection.

Theoretically the exact solution to the KP is found when $T \rightarrow 0$. Namely

$$X_k^{\text{soln}} = \lim_{T \rightarrow 0} \frac{\partial}{\partial(\beta v_k)} \ln Z_N(\{v_i\}, \{w_i\}, W). \quad (8)$$

More practically, we cannot compute the right hand side exactly, and thus need to approximate it and estimate X_k^{soln} by taking T to be low enough to yield a reasonable solution but not so low as to violate the approximation.

Therefore, our next goal is to find an approximate expression for Eq.(7) and to use this expression to formulate a new algorithm for the KP. To move forward, we first need to express Eq.(3) in a more mathematically useful form. We do so by moving from a discrete-space summation to a continuous-space integration. To this end, we first write the Heaviside step function Eq.(2) in terms of the Kronecker delta function. Recall that the Kronecker delta is defined as

$$\delta(j, i) \equiv \begin{cases} 1 & \text{for } i = j \\ 0 & \text{otherwise} \end{cases}. \quad (9)$$

We thus find that for integer arguments, the Heaviside step function Eq.(2) is

$$\Theta(j) = \sum_{m=0}^{\infty} \delta(j, m). \quad (10)$$

In order to move from a discrete space to a continuous one, we introduce the contour integral expression for the Kronecker delta:

$$\delta(j, m) = \frac{1}{2\pi i} \oint_{\Gamma} \frac{dz}{z^{j+1}} z^m, \quad (11)$$

where Γ is a closed contour with $|z| < 1$ encircling the origin in the complex plane [9]. Inserting Eq.(11) into Eq.(10), we obtain

$$\Theta(j) = \sum_{m=0}^{\infty} \delta(j, m) = \frac{1}{2\pi i} \oint_{\Gamma} \frac{dz}{z^{j+1}} \sum_{m=0}^{\infty} z^m = \frac{1}{2\pi i} \oint_{\Gamma} \frac{dz}{z^{j+1}} \frac{1}{1-z}, \quad (12)$$

where, in the final equality, we used the geometric series identity $\sum_{n=0}^{\infty} z^n = 1/(1-z)$ for $|z| < 1$. For what comes next, it will be more useful to express Eq.(12) with its argument as the difference between two integers j and ℓ , namely as

$$\Theta(j - \ell) = \frac{1}{2\pi i} \oint_{\Gamma} \frac{dz}{z^{j+1}} \frac{z^{\ell}}{1-z}. \quad (13)$$

Now, inserting Eq.(13) into Eq.(3), we obtain

$$\begin{aligned} Z_N(\{\beta v_i\}, \{w_i\}, W) &= \sum_{\{x_i\}} \frac{1}{2\pi i} \oint_{\Gamma} \frac{dz}{z^{W+1}} \frac{z^{\sum_{i=1}^N w_i x_i}}{1-z} e^{\beta \sum_{i=1}^N v_i x_i} \\ &= \frac{1}{2\pi i} \oint_{\Gamma} \frac{dz}{z^{W+1}} \frac{1}{1-z} \prod_{i=1}^N (1 + z^{w_i} e^{\beta v_i}), \end{aligned} \quad (14)$$

or

$$Z_N(\{\beta v_i\}, \{w_i\}, W) = \frac{1}{2\pi i} \oint_{\Gamma} \frac{dz}{z} \exp F_N(z; \{\beta v_i\}, \{w_i\}, W) \quad (15)$$

where we defined

$$F_N(z; \{\beta v_i\}, \{w_i\}, W) = -W \ln z - \ln(1-z) + \sum_{i=1}^N \ln(1 + z^{w_i} e^{\beta v_i}). \quad (16)$$

Eq.(3) and Eq.(15) are mathematically identical. However while the former defines the partition function as a summation over a discrete set of states $\{x_i\}$, the latter defines the partition function as an integral over a continuous set of abstract "states" z . The advantage of this latter representation is that there are large N approximation schemes available to integrals that allow us to estimate our partition function and the observables that depend on it. We turn to these approximations in the next section.

III. LARGE N LIMIT OF PARTITION FUNCTION

Eq.(15) is the partition function for the KP, but it appears to be just as computationally intractable as Eq.(3). We would like to use the partition function to compute Eq.(7) and thus obtain the probability of occupancy for each object, but in order to obtain a useful form for $\langle x_k \rangle$ we need a more useful form for Z_N .

We obtain this more useful form by considering this system in the large N limit. Specifically, we take $N \gg 1$ and since $w_i \geq 1$ for each i , we also have $W \gg 1$. With this limit, we can apply the method of steepest descent to Eq.(15) and obtain an approximate expression for the partition function.

First, a review of the method of steepest descent [9]:

For $\lim_{N \rightarrow \infty} f_N(x) = \infty$, the method of steepest descent allows us to approximate a contour integral as follows

$$I_N = \int_C dz g(z) e^{f_N(z)} \simeq e^{i\theta_1} \sqrt{\frac{2\pi}{|f_N''(z_0)|}} g(z_0) e^{f_N(z_0)}, \quad (17)$$

where C is a contour in the complex plane, z_0 is defined by $f_N'(z_0) = 0$, and $2\theta_1 + \theta_2 = \pi$ with θ_2 defined through $\frac{1}{2} f_N''(z_0) = r_2 e^{i\theta_2}$ for $r_2, \theta_2 \in \mathbb{R}$.

Thus, for $W \gg 1$, Eq.(15) can be approximated as

$$Z_N(\{\beta v_i\}, \{w_i\}, W) \simeq \frac{1}{\sqrt{2\pi z_0^2 F_N''(z_0)}} \exp F_N(z_0; \{\beta v_i\}, \{w_i\}, W), \quad (18)$$

where z_0 is the value of z at which $\partial_z F_N(z) \equiv F_N'(z) = 0$. Note that to obtain Eq.(18) from Eq.(17) and Eq.(15), we assumed $\partial_z^2 F_N(z_0)$ to be real, thus giving us $\theta_2 = 0$ and $\theta_1 = \pi/2$. We verify this assumption below.

Using Eq.(16), we find that the z derivative of F_N is

$$\partial_z F_N(z) = -\frac{W}{z} + \frac{1}{1-z} + \frac{1}{z} \sum_{i=1}^N \frac{w_i e^{\beta v_i}}{z^{-w_i} + e^{\beta v_i}}. \quad (19)$$

Therefore, the condition that defines z_0 in Eq.(18) is

$$W = \frac{z_0}{1-z_0} + \sum_{i=1}^N \frac{w_i e^{\beta v_i}}{z_0^{-w_i} + e^{\beta v_i}}. \quad (20)$$

To check that $\partial_z^2 F_N(z_0)$ is real, we differentiate Eq.(19), set $z = z_0$, and use Eq.(20) to obtain

$$\partial_z^2 F_N(z_0) = \frac{1}{z_0(1-z_0)} + \frac{1}{(1-z_0)^2} + \frac{1}{z_0^2} \sum_{i=1}^N \frac{w_i^2 z_0^{-w_i} e^{-\beta v_i}}{(z_0^{-w_i} e^{-\beta v_i} + 1)^2}, \quad (21)$$

which for $z_0 \in (0, 1)$ is not only a real number but also positive. Thus Eq.(18) is a real quantity.

Presuming we have solved for the z_0 that is defined by Eq.(20), we can use Eq.(7) and Eq.(18) to find a large N expression for $\langle x_\ell \rangle$. Writing $\langle x_\ell \rangle$ in terms of $F_N(z)$ we have

$$\langle x_\ell \rangle = \frac{\partial}{\partial(\beta v_\ell)} \ln Z_N(z_0; \{\beta v_i\}, \{w_i\}, W) \simeq \frac{\partial}{\partial(\beta v_\ell)} F_N(z_0; \{\beta v_i\}, \{w_i\}, W), \quad (22)$$

where we ignored derivatives with respect to the prefactors in the approximation because they are sub-leading in our large N limit. From Eq.(16), we finally obtain

$$\langle x_\ell \rangle \simeq \frac{z_0^{w_\ell} e^{\beta v_\ell}}{1 + z_0^{w_\ell} e^{\beta v_\ell}} = \frac{e^{\beta v_\ell}}{z_0^{-w_\ell} + e^{\beta v_\ell}}. \quad (23)$$

Eq.(23) is the large N solution to the KP. Provided we can find a z_0 that solves Eq.(20), we can use the value to compute $\langle x_\ell \rangle$ which represents the probability that object ℓ is in our collection at the given temperature T . If we take T to be small, then we are essentially enacting an analytical version of simulated annealing, and the set $\{\langle x_\ell \rangle\}$ thresholded by a probability limit should represent the solution to the KP.

IV. GENERAL ALGORITHM

Given the previous formalism, it is clear that any large N algorithm for the KP hinges on a solution to Eq.(20). However, because this equation does not have an analytical solution, we need to solve it numerically. For generality, we assume we have a black-box algorithm that can obtain the numerical solution to a nonlinear equation. Such algorithms are standard in most programming languages [10–12]. We denote this black-box algorithm as `NSolve` and notationally we write $x_0 = \text{NSolve}(x; F(x))$ when x_0 is the solution the algorithm finds to the equation $F(x) = 0$.

With our numerical solver `NSolve`, we can now propose a general algorithm for using Eq.(20) and Eq.(23) to obtain an approximate large N solution to the KP.

Large N Knapsack Problem Algorithm

1. Select the hyperparameter T for system temperature. The chosen T should be low in comparison to the values comprising $\{v_i\}$ but greater than zero (see Appendix A for a guide to selection.)
2. With a numerical solver `NSolve`, find

$$z_0 = \text{NSolve}(z, G_N(z)), \quad (24)$$

where

$$G_N(z) = -W + \frac{z_0}{1 - z_0} + \sum_{i=1}^N \frac{w_i e^{\beta v_i}}{z_0^{-w_i} + e^{\beta v_i}}. \quad (25)$$

Such numerical solvers typically require an initial estimate of the solution in which case select a random $z_0 \in (0, 1)$.

3. Compute $\langle x_\ell \rangle$ from

$$\langle x_\ell \rangle = \frac{e^{\beta v_\ell}}{z_0^{-w_\ell} + e^{\beta v_\ell}}. \quad (26)$$

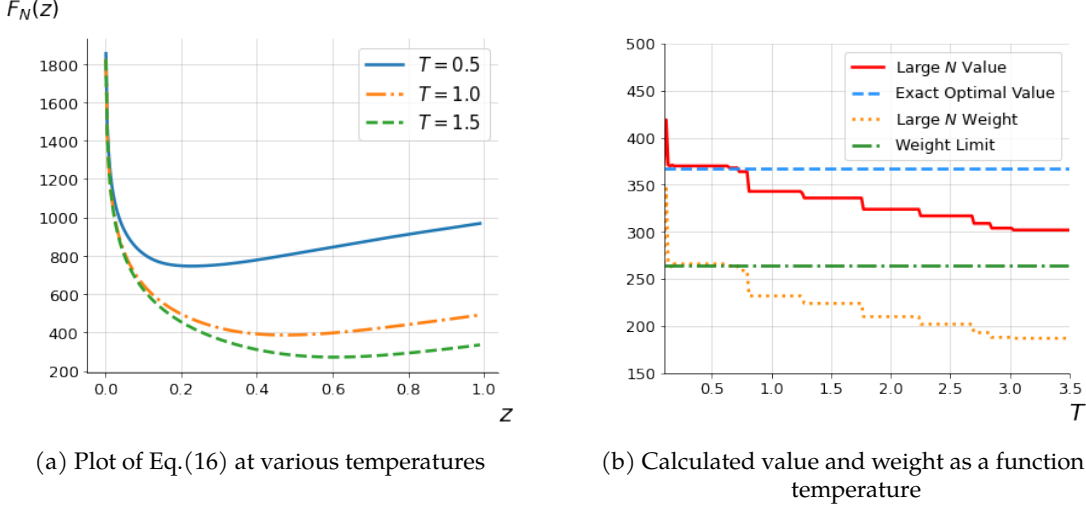


Figure 2: Temperature dependence of large N algorithm: Plots correspond to $N = 100$ and the sets $\{v_i\}$ and $\{w_i\}$ were randomly sampled from the set of integers from 1 to 10. The weight limit was set at $W = 264$. (a) In the algorithm, we are “rolling down” the hill represented by $F_N(z)$ and then using this minimum value in Eq.(26) to compute state averages. As the temperature of the system is lowered, the minimum of $F_N(z)$ becomes more pronounced, and the macrostate average $\langle x_\ell \rangle$ becomes dominated by fewer and fewer microstates. Theoretically, at zero temperature there is only one microstate corresponding to the KP solution. (b) Plot of $\sum_{\ell=1}^N v_\ell X_\ell$ and $\sum_{\ell=1}^N w_\ell X_\ell$ for the X_ℓ computed from Eq.(27) with z_0 the solution to $G(z) = 0$. As we lower the temperature, the optimized value increases as does the associated weight, until we reach the weight limit, suggesting that the optimal solution has been reached. This plot suggests the large N algorithm can find the correct solution for this instance.

4. Select a probability threshold p_{thres} . For each $\ell = 1, \dots, N$ take

$$X_\ell = \begin{cases} 1 & \text{if } \langle x_\ell \rangle > p_{\text{thres}}, \\ 0 & \text{otherwise.} \end{cases} \quad (27)$$

The set $\{X_\ell\}$ represents the final object composition (see Appendix A for a guide to selection of p_{thres}).

Combinatorial optimization is often challenging because algorithms must search a discrete state-space for the state that maximizes an objective function subject to a particular constraint. If an algorithm instead had to search a continuous state-space, it could simply “roll down the valley” or “climb up the hill” defined by the objective function by taking repeated steps in or against the direction of the slope. The essence of the large N solution to the KP is to do precisely this: Convert a combinatorial optimization problem, initially defined by the discrete variables $\{x_i\}$ and an objective function $\sum_{i=1}^N v_i x_i$ (with a constraint), into a continuous optimization problem defined by the continuous variable z and the objective function $F_N(z)$ (with no constraint). So instead of stochastically searching for the $\{x_i\}$ that maximize $\sum_{i=1}^N v_i x_i$ subject to the constraint, we need only “roll down” the valley represented by $F_N(z)$ (Fig. 2a).

This point about stochastic search distinguishes this algorithm from simulated annealing, the more common statistical-physics-based optimization algorithm. Simulated annealing gradually explores a state space by randomly proposing and then rejecting or accepting steps in an energy landscape with gradually deepening valleys. Because the search is probabilistic, some steps are “wasted” in simulated annealing as the system sometimes randomly moves away from the energy minimum. However, the large N algorithm (given the initial z_0) is deterministic, and thus every step it takes in computing z_0 is taken towards the potential minimum of $F_N(z)$. The deterministic nature of the algorithm makes it faster than the stochastic simulated annealing approach as we will show in the next section.

However, although the above algorithm is generally faster than a stochastic search, it is still an approximation. The approximate nature arises from two sources: First, from the large N limit used to simplify the partition function and second, from the fact that we are using a threshold to turn probability estimates into definite binary predictions.

The first approximation is an unavoidable part of the algorithm; indeed, the fact that the partition function can be approximately calculated in the $N \gg 1$ limit when expressed as an integral is the reason we derived the seemingly convoluted expression Eq.(15).

The second approximation stems from the need to convert a set of real numbers into a set of 1s and 0s. Averages in statistical physics like $\langle x_\ell \rangle$ are generally continuous functions even when the microstates used to compute them are defined by a discrete state-space. Therefore, in order to infer the microstate (presuming there is only one) that is associated with a computed macrostate, we need a threshold that converts the continuous function into a step function. This inference from the macrostate to the microstate is the second approximation, and it is also unavoidable.

However, the extent of this approximation can be modulated by our choice of two hyperparameters: The temperature T and the probability threshold p_{thresh} .

In Fig. 2b, we show that as the temperature decreases to zero, the total weight of the included objects predicted from Eq.(27) approaches the limiting weight, and the total value increases to its optimal value. This is as we should expect. In statistical physics, as system temperature T is lowered, the space of microstates where the system spends most of its time gets smaller, until, at zero temperature, the system settles into the single lowest-energy microstate, presuming one exists. At this temperature, the macrostate exactly matches the microstate since only a single microstate is being averaged over. For some special systems (i.e., those that exhibit phase transitions), it is clear well before zero-temperature that the macrostate is collapsing to a particular microstate, and we need not take $T = 0$ in order to obtain a reasonable estimate of the lowest-energy microstate from the macrostate [13].

However, the large N algorithm does not always approach this special microstate as $T \rightarrow 0$ since, for certain parameter choices, it doesn't always yield an accurate solution (See Appendix B for an outline of the failure modes where this typically occurs). Thus in selecting T , we should aim to make it as low as possible but generally not lower than necessary. For the results in this paper, we generally set $T = \min\{v_i\}$ which seemed to be low enough to yield correct solutions but not so low that it resulted in overflow errors.

The second hyperparameter of the system is p_{thresh} , and it defines the limit of macrostate values that correspond to 1 or 0. For the results in this paper, we generally set $p_{\text{thresh}} = 3/5$ since such a value seemed to ensure that the final thresholded-collection of objects did not exceed the weight limit. We discuss more generally how to select these hyperparameters in Appendix A.

In the main body of this paper, we consider the classic 0-1 KP, but there are many variations to this case. In Appendix C we consider how to similarly formulate large N algorithms for the bounded and unbounded versions and derive the partition function for the continuous version.

V. SPEED AND ACCURACY COMPARISONS

In Sec. I, we argued that the large N limit of the KP should, as N increases, yield solutions which are progressively more accurate while taking relatively much less time than an exact algorithm based on brute-search or dynamical programming. In this section, we show that this is indeed the case at least for particular instances of the KP.

We considered five other algorithms as comparisons: The dynamical programming algorithm for the KP that has time complexity $O(NW)$; a brute-search algorithm that enumerates all possible combinations and selects the one with the highest value that satisfies the weight constraint; the fully-polynomial time approximation scheme (FPTAS) which has time complexity $O(N^3/\epsilon)$ for a relative error of ϵ [14] (we set $\epsilon = 0.5$ in this work); the greedy algorithm which arranges objects as a decreasing sequence in v_i/w_i and then includes objects in the collection according to this sequence until the weight limit is reached [15]; the simulated annealing algorithm in which the KP is represented as a thermodynamic system whose temperature is gradually lowered until the system settles into the microstate of highest total value consistent with the constraint [16].

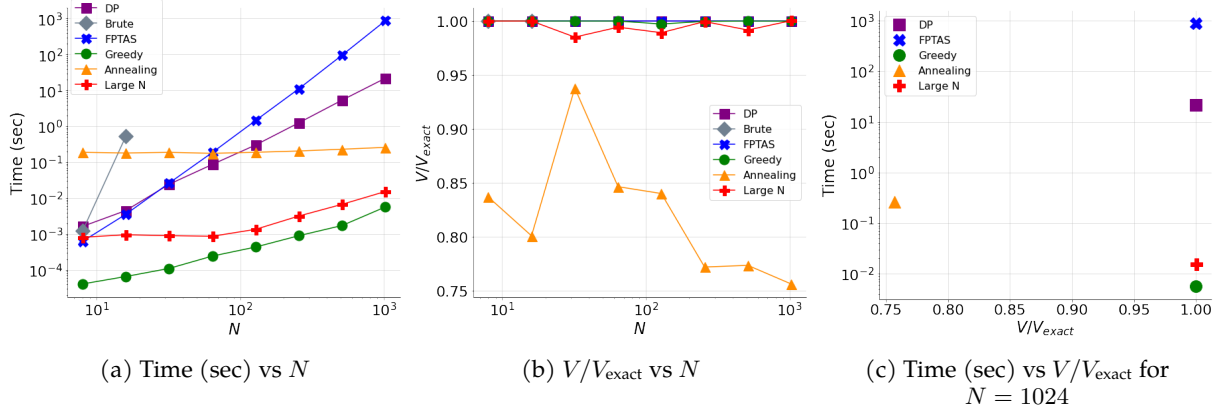


Figure 3: Speed and Accuracy Comparisons: (a) We compare the computation time of five algorithms to that of the large N algorithm for various N . We see that the large N algorithm is generally faster than all algorithms except the greedy algorithm. (b) We compare V/V_{exact} of the five algorithms where V is their computed optimal value and V_{exact} is the exact optimal value. We see that the large N indeed has a high accuracy, though it is less consistently accurate than most other algorithms. (c) We compare computation times and accuracies for an $N = 1024$ problem. We see that the large N algorithm outperforms its computational analog (i.e., simulated annealing) in both speed and accuracy and is orders of magnitude faster than the dynamical programming solution. Thus, consistent with the motivation in Sec. I, the large N approximation to the KP partition function can provide a good basis for approximately solving the KP. The close correspondence between the large N algorithm and the greedy algorithm in Fig. 3c leads us to the question of whether one algorithm is a manifestation of the other.

The large N algorithm presented in this work has the most similar theoretical foundations to the simulated annealing algorithm in that both are formulated as thermal systems. However, whereas the simulated annealing approach computationally models the KP, the large N approach uses analytical approximations as its basis. Comparing the two algorithms should give us a sense as to which approach (the computational or the analytical) is more efficient for such thermodynamically formulated optimization problems.

To compare our set of six algorithms, we considered systems with $N = 8, 16, 32, \dots, 1024$ objects. For each N we randomly selected integer weights and values in the range of 1 to 100 inclusive, and defined the weight limit W to be the average weight of 100 random collections of objects.

In Fig. 3a, we plotted how long (in seconds) it took each algorithm to run as a function of the number of total objects. For the brute-search algorithm, we only plotted the $N = 8$ and $N = 16$ computation times because enumerating all 2^{32} (or more) state combinations required an unwieldy amount of time. In Fig. 3b, we plotted the ratio between the computed optimal value and the exact optimal value for each algorithm as a function of the total number of objects. Since the dynamical programming solution to the KP is exact we used its computed optimal value to define V_{exact} . Many of the V/V_{exact} plots for the algorithms overlap with one another and thus are not clearly visible. Again, we only plotted the $N = 8$ and $N = 16$ values for the brute-search algorithm. In Fig. 3c, we created a scatter plot of time vs V/V_{exact} for each algorithm when $N = 1024$.

From the plots, we see that when $N \gg 1$, the large N algorithm is many orders of magnitude faster than the dynamical programming solution, but manages to obtain very similar accuracy. Moreover, the analytical algorithm is faster and more accurate than the simulated annealing algorithm, its computational counterpart. This latter result isn't surprising. As N increases, the relative error of the analytical algorithm decreases while the space of states that the computational algorithm must randomly explore increases exponentially. This exponential increase in explorable-space has the effect of increasing the time needed for exploration and ultimately decreasing the accuracy of the optimal prediction for fixed time. Thus as N increases, we expect simulated annealing to perform worse, in contrast to the large N algorithm which should perform better.

	N			
	10^2	10^3	10^4	10^5
Large N ratio	0.783	0.700	0.735	0.753
Greedy ratio	0.789	0.697	0.734	0.753

Table I: Comparison of minimum ratios of v_ℓ/w_ℓ computed from the large N algorithm (Eq.(29)) and from the greedy algorithm for various instances of the KP. For each N , the values $\{v_i\}$ and weights $\{w_i\}$ were uniformly drawn from integers from 10 to 100, and the weight W was set as the average of $\sum_{i=1}^N w_i x_i$ for 100 random draws of $\{x_i\}$ where $x_i = 0$ or 1. We see that the minimum ratios are similar for these instances of the problem, thus lending more evidence to the idea that the large N algorithm is a greedy algorithm in disguise (or vice versa).

We also see that the greedy algorithm outperforms the large N algorithm in both speed and accuracy, proceeding in less time and more consistently predicting the optimal V . This might appear strange to those familiar with how greedy algorithms are discussed in KPs. The greedy algorithm is typically touted as a fast but inaccurate way to find an optimal collection of objects because it myopically looks at the next best choice rather than considering more holistic object combinations. One simple example is a two-object collection with a weight limit of 4 and where object A has value and weight 2 and 1, respectively, while object B has value and weight 4 and 4, respectively. The greedy algorithm would place object A in the collection and then not have room left for object B which is the correct single-object solution.

Thus the greedy algorithm does not always yield the correct solution. However, as a base-case demonstration of the large N algorithm, we have chosen "easy instances" of the KP in which the weights and values are uncorrelated. For such instances, greedy algorithms tend to perform quite well since there are typically items with low weights and high values and the algorithm correctly determines that such items should be included in the collection [17].

Ultimately, we see that the large N algorithm is quite accurate and fast, although Fig. 3a shows that it is not the fastest algorithm and Fig. 3b shows that it is not consistently accurate for large N (e.g., $N > 100$). In particular, the close correspondence between the large N algorithm and the greedy algorithm as shown in Fig. 3c, leads us to the question of whether the two algorithms are related, or whether one is a manifestation of the other. We explore this question in the next section.

VI. RELATIONSHIP WITH GREEDY ALGORITHM

Fig. 3 shows an apparent correspondence between the results of the large N algorithm and the results of the greedy algorithm. It seems that the "Time vs N " curve of the large N algorithm tracks the corresponding curve for the greedy algorithm such that the greedy algorithm is generally a fixed time faster than the large N one. This leads us to the question of whether the large N algorithm is essentially the greedy algorithm with more intermediate steps.

We can answer this question by returning to the algorithm in Sec. IV, and asking how must v_ℓ and w_ℓ relate to z_0 and T for object ℓ to be included in the collection. Setting $\langle x_\ell \rangle > p_{\text{thresh}}$ for Eq.(26), we find

$$\frac{v_\ell}{w_\ell} > T \left[\ln(1/z_0) + w_\ell \ln \left(\frac{1 - p_{\text{thresh}}}{p_{\text{thresh}}} \right) \right]. \quad (28)$$

For simplicity, we will eliminate the p_{thresh} dependence by setting $p_{\text{thresh}} = 1/2$. We then find

$$\frac{v_\ell}{w_\ell} > T \ln(1/z_0). \quad (29)$$

Eq.(29) implies that $T \ln(1/z_0)$ defines the minimum value-weight ratio for an object to be included in the

collection for the chosen threshold. For the greedy algorithm, since we arrange items in decreasing order of v_ℓ/w_ℓ and select items in sequence until the weight limit is reached (i.e., a “fill up” procedure), there is always some minimum ratio for v_ℓ/w_ℓ below which objects are not included in the knapsack. If we could compute this ratio as a first step, we could sidestep the ordering and fill-up procedure of the standard greedy algorithm and instead follow a “criteria procedure” where we just include objects whose ratios are above the limit. This latter procedure is what the large N algorithm is essentially doing.

Although the quantity $T \ln(1/z_0)$ seemingly changes as we change T , if we are to have a consistent criteria, we should find that the implicit dependence between z_0 and T leads the quantity $T \ln(1/z_0)$ to reach a constant value that is consistent with the minimum ratio indirectly inferred from the greedy algorithm. Also, the fact that the second term of Eq.(28) is eliminated when we set $p_{\text{thresh}} = 1/2$ suggests that this is an analytically natural choice for the threshold parameter, since in the greedy algorithm there is no such threshold parameter. Of course this “analytically natural” choice is not always optimal in practice (Appendix A).

Thus, with these assumptions, the large N algorithm can be taken to be a greedy algorithm where, instead of filling up the knapsack up to a given weight limit W , we use that weight limit to compute a minimum ratio of acceptance for the value-weight ratio of objects. This interpretation requires that we check whether the ratio Eq.(29) corresponds to the minimum value-weight ratio inferred from the greedy algorithm. For some KP instances this appears to be the case. In Table I, we compare the result of Eq.(29) from the large N algorithm to the “greedy ratio” which is defined as the value of v_ℓ/w_ℓ below which objects are not included in the collection. The results differ by less than a percentage point and grow closer as N increases. We emphasize, however, that all of these cases are “easy instances” of the KP [17].

From Fig. 3, it appears that with regard to solving the KP, computing this ratio in the large N algorithm takes longer than simply following the traditional greedy approach, and so the large N algorithm’s utility does not exist in providing a more performative approximate solution to the KP. Instead, the developed formalism provides a new lens through which to interpret greedy algorithms and a new way to conceptualize the existence of solutions.

One interpretation is that for the KP, the large N algorithm is a greedy algorithm. But another interpretation is that the greedy algorithm is in fact a large N algorithm, namely that although the greedy algorithm is known to not consistently perform well for small N , as N increases the seemingly sub-optimal choices it makes are swamped by the larger number of optimal choices, and its proposed solution converges to the correct one. Our computational explorations in Fig. 3b provide KP instances that are too easy to explore this idea fully (since the greedy algorithm solves these instances exactly in each case), so to affirm this large N interpretation of the greedy algorithm would require us to consider the “Accuracy vs. N ” dependence of the greedy algorithm for hard instances.

With regard to the existence of solutions, by representing the KP in terms of the continuous potential function $F_N(z)$, we can establish conditions for the existence of a unique KP solution based on the existence of a minimum for the potential. If a unique greedy solution exists, then we can compute a real $z_0 \in (0, 1)$ that satisfies Eq.(20) and in turn can compute $T \ln(1/z_0)$. In other words, the existence of $T \ln(1/z_0)$ and its constancy as temperature is lowered is a sufficient condition for the existence of a greedy solution. We express this as a sufficiency condition, rather than as a necessary one, because we previously noted that some hyperparameter choices of T yield invalid solutions for z_0 even if valid KP solution exists. Admittedly sufficiency conditions are weak constraints on problem solutions, but this condition, as it is derived from a potential landscape depiction of the KP, expands the perspectives with which one could analyze the properties of KP solutions.

VII. DISCUSSION

In this work, we represented the knapsack problem (KP) as a system in statistical physics and derived the corresponding thermal partition function. By considering the system in the limit of $N \gg 1$, we were able to define conditions and an equation that represented an approximate solution to the problem, and to then use these results to develop a new algorithm for the problem. We found that the algorithm is faster than the brute-search, dynamical programming, FPTAS, and simulated annealing approaches to the problem, but is slower than a greedy approach. Also, it retains the accuracy of these classic approaches but less consistently so.

We also found an interesting correspondence between the large N algorithm and the greedy algorithm which we ultimately interpreted as being due to the former being a manifestation of the latter. Another interpretation is that the latter is a manifestation of the former which implies that, similar to what is shown in the large N performance schematic (Fig. 1), the greedy algorithm's performance should improve as $N \rightarrow \infty$ even if it makes locally sub-optimal choices for including objects in the collection. Affirming this would require a different investigation where the greedy algorithm is compared to an exact approach for hard instances of the KP for increasing N .

This work can be seen as an analytical counterpart to the simulated-annealing approach to solving the KP. While in simulated annealing one computationally samples the low energy states of a system, and thus indirectly explores the probability-weighted state space of the system, here we are calculating the probability-weighted sum over states directly and using the large N approximation of that partition function to estimate a solution.

The results of this direct calculation are interesting on two accounts: First, by representing our originally discrete partition function as a continuous contour integral, we were able to replace the relatively challenging problem of optimization in a discrete state-space with the simpler problem of optimization in a continuous state-space. The latter optimization is amenable to the methods of calculus, while the former requires a stochastic search or more problem-specific solutions. Second, while in computer science, problems tend to become more difficult (i.e., computationally expensive) as you increase N , the large N limit is commonly taken to simplify statistical physics problems. Thus formulating large N computer science problems as large N statistical physics problems could provide new analytical approaches to solving the former.

Typically, the various correspondences between statistical physics and computation are used to provide new ways to *computationally* formulate optimization problems. In contrast, this work suggests that there are a space of problems in combinatorial optimization that can be approached *analytically* by representing the optimization problem as a statistical physics system. The general steps for this analytical approach are to first define the function to be optimized as an "energy" of the system, to sum over the various states of the system weighted by a Boltzmann factor for the energy, and then, if possible, to use combinatorial identities to represent that summation as a continuous one rather than a discrete one. This final step is the most important one, and it is certainly easier said than done. For the KP we were dealing with a relatively simple state space (i.e., N independent binary-valued elements), but for other classical combinatorial optimization problems (e.g., the traveling salesperson problem) analytically representing the combinatorial system as a statistical physics system could prove more difficult.

There are many questions that this work has not answered. Ostensibly we need $N \gg 1$ to get good results, however, the algorithm sometimes still struggles to find solutions close to the optimal one in a reasonably large N regime. This leads to two questions: How large does N need to be in order to get accurate results (with accuracy likely parameterized by N), and how do the spectrum of elements in the sets $\{v_i\}$ and $\{w_i\}$ affect this accuracy?

In this algorithm, if we can find the minimum of the function $F_N(z)$, we can find z_0 and thus compute $\langle x_\ell \rangle$. However, unlike most approximate algorithms for the KP we do not have a sense of how far the approximated maximum $\sum_{\ell=1}^N v_\ell X_\ell$ is from the true maximum value. Likely this estimate would require a careful accounting of the higher order errors in the steepest descent approximation.

Moreover, we don't know the conditions under which z_0 can be computed from Eq.(20). Being able to state these conditions would give us more precise sufficiency-bounds for the possibility of obtaining a solution to the KP through this approach.

As a more statistical-physics oriented question, we could ask whether the system defined by the partition function Eq.(15) exhibits phase transitions, and if so, can we estimate the temperature at which a transition occurs? This transition temperature would likely coincide with the lowest temperature that defines a valid minimum ratio for Eq.(29), and would thus allow us to better define the temperature hyperparameter for the algorithm.

The fact that the second derivative of $F_N(z)$ is always positive indicates that this formalism can only find a single KP solution. But some KP instances have multiple solutions. Are these multiple solutions present in the original partition function and are only lost when we take the $N \rightarrow \infty$ approximation?

Using Eq.(28), we argued that a natural choice for p_{thresh} was $1/2$ because this value made the limiting ratio for values and weights independent of this threshold parameter, as is the case for the greedy algorithm. This

is a heuristic reasoning and we often find a value for p_{thresh} that is greater than $1/2$ leads to a more accurate prediction of optimal values. It would be useful to find other motivations or reasons to argue for certain threshold parameter values.

The KP is foundational to other combinatorial problems and there are many extensions to it such as the multiple knapsack problem and the generalized balanced assignment problem [1]. Are these extensions also amenable to a large N approach?

All of the results in this paper were based on exploring easy instances of the KP, so clearly we should also explore hard instances. Initial exploration in this direction reveals that the large N algorithm does not perform well on such instances. This is as we would expect. Harder instances of the KP are typified by strong correlations between v_i and w_i [17] which often result in $|v_i - w_i| \ll v_i, w_i$, leading to one of the failure modes presented in Appendix B.

Finally, we noted that the greedy algorithm generally performs better both in terms of accuracy and speed than the large N algorithm. This could lead one to wonder if there is any problem type that the large N algorithm can solve that the greedy algorithm (and other exact and approximate algorithms) cannot.

One scenario is the case of infinite items. Say we have a countably infinite set of weights $\{w_i\}$ and a countably infinite set of values $\{v_i\}$ such that the sum of all the elements of these sets is finite and

$$\sum_{i=1}^{\infty} w_i > W, \quad (30)$$

where W is a weight limit. For example, $w_i = \alpha(1/2)^i$ and $v_i = w_i + \beta/i^2$ for $\alpha, \beta > 0$. We note that such weights and values violate the integer-number assumption that typifies the classic KP. We can define x_i as it was defined for the classic 0-1 problem and seek the set $\{x_i\}$ that

$$\text{maximizes } \sum_{i=1}^{\infty} v_i x_i \quad \text{subject to the constraint } \sum_{i=1}^{\infty} w_i x_i \leq W. \quad (31)$$

The dynamical programming algorithm is not applicable in this case of non-integer weights and values, but it in any case takes $O(NW)$ time to evaluate and thus has a computation time that diverges when $N \rightarrow \infty$. The FPTAS algorithm is similarly inapplicable. The brute-search and simulated-annealing algorithms require finite lists of states to computationally explore the state space and thus cannot be applied when the state space is infinite. The greedy algorithm requires a sorted list which cannot be achieved with an infinite number of items. In contrast to all of the finite N algorithms, the large N limit of the KP evaluates an expression which contains a finite series but which can reasonably be extrapolated to be an infinite series. This is because the derivation of Eq.(15) does not specifically require N to be finite. Extending the large N limit in this way would require a proof of whether the finiteness of $\sum_{i=1}^{\infty} v_i$ and $\sum_{i=1}^N w_i$ implies that the last term in Eq.(15) when $N \rightarrow \infty$ (and $z \in (0, 1)$) is also finite, but there appears to be space to explore such instances in this formalism as opposed to other KP solutions in which such an instance is automatically ruled out.

VIII. SUPPLEMENTARY CODE

The code used to generate all graphs and tables is found in the repository <https://github.com/mowillia/LargeNKP>. Repository also includes code implementations for the bounded and unbounded knapsack problems.

IX. ACKNOWLEDGEMENTS

This work was completed in Jellyfish. The author thanks Nicholas Arcolano, Arlo Clarke, Amir Bitran, and Rostam Razban for useful comments. The author declares no conflicts of interest.

Appendix A: Selecting hyperparameters

Although the algorithm takes the randomness out of simulated annealing, we still need hyperparameters to define our solution. Below we discuss the rationale for particular choices of such hyperparameters.

- *System temperature:* We need to set a system temperature T that is low enough that microstates of the system with highest total value (subject to the weight constraint) are the most likely. Theoretically, we should just set the temperature to be near zero since, at $T = 0$, there should only be a single microstate that contributes to the macrostate average $\langle x_\ell \rangle$, presuming there is only one solution to the associated KP. However, in practice, setting T to be too low results in a breakdown of Eq.(20) such that no z_0 can be found. Thus there is often a minimum temperature T_c below which the large N approximation is no longer valid. It would be preferable to compute this temperature and to then set T to be slightly above it, but doing so is not possible given the nonlinear nature of Eq.(20). So, in lieu of having this minimum temperature, a value that has worked well is to set $T = \min\{v_i\}$. Another way to find the optimal temperature for the large N limit results is to create a plot like Fig. 2b by incrementally lowering the system temperature and calculating the predicted solution weight and volume until the predictions diverge.
- *Probability threshold:* In order to convert the computed averages $\langle x_k \rangle$ into clear assignments of whether k is or is not in the collection, we need to choose a threshold for inclusion. An equitable choice is $p_{\text{thresh.}} = 1/2$ and this choice often gives the correct solution. However, for some choices of W , $\{v_i\}$, and $\{w_i\}$, the calculated $\langle x_k \rangle$ are close enough to $1/2$ that this threshold is no longer an unambiguous demarcator and sometimes leads to values of X_k that violate the weight constraint. Thus, setting a higher threshold (e.g., $p_{\text{thresh.}} = 3/5$) is often better as a first pass to ensure one gets an admissible solution after which the threshold could be lowered to see if the solution changes.

Appendix B: Failure Modes

The large N algorithm presented in Sec. IV sometimes fails to adequately solve the KP. This failure is evidenced by the algorithm not respecting the total weight limit and thus overestimating the optimal total value.

Here we list the properties of instances where the algorithm typically fails. To be clear, the algorithm sometimes succeeds in the following cases, but if one finds that the algorithm is failing to converge to a solution (namely, that it cannot find a real $z_0 \in (0, 1)$ that leads to the weight constraint being satisfied), then the reason is likely due to at least one of the following.

- **Low N :** Our algorithm is primarily a large N algorithm, so as N gets to be on $O(1)$ the algorithm typically performs worse.
- $|v_i - w_i| \ll v_i, w_i$: The algorithm does not perform well when differences in values and weights for objects are much less than the values or weights themselves. This seems to be because the algorithm treats such instances as sufficiently close to the degenerate case of $v_i = w_i$ that it cannot predict a unique solution.
- **Large v_i :** Because the algorithm requires the calculation of quantities like $e^{v_i/T}$, if v_i is very large, then (depending on the computational software) the algorithm cannot precisely track the resulting high exponential values.
- **Low temperature:** Same reason as that stated for "Large v_i ". Although the algorithm should converge to the thermodynamic minimum as $T \rightarrow 0$, for some numerical implementations this limit leads to an overflow error. This fact often puts us in a bind for hyperparameter selection: The temperature needs to be low enough that the optimal microstate dominates the partition function, but if the temperature is too low, the calculation of $\langle x_\ell \rangle$ results in an overflow error in the computational algorithm. We see this in Fig. 2b where, when $T \approx 0$, the results for the weights and values shoot up well beyond their $T \gtrsim 0$ values.

See the *Supplementary Code* (linked in Sec. VIII) for example instances of how the algorithm can fail in the above cases.

Appendix C: Variations

In this appendix we discuss the various generalizations of the 0-1 KP: Bounded, unbounded, and continuous [1]. All generalizations keep the essential problem format in Eq.(1) except each changes the state space available to each object and consequently also changes the associated sum over states. This change in summation alters the solubility of the final partition function and our ability to approximate it. We find that although we can develop algorithms analogous to those found in the main text for the bounded and unbounded KPs, we can only write down the partition function for the continuous KP.

1. Bounded Knapsack Problem

In the bounded KP, we allow each object i to appear a maximum of C_i times in the final collection. For the statistical physics representation of the problem, this change amounts to replacing the summation Eq.(5) with

$$\sum_{\{x_i\}} = \prod_{i=1}^N \sum_{x_i=0}^{C_i} \quad [\text{Summation for "multiple copies" problem}], \quad (\text{C1})$$

where x_i denotes the number of times object i is included in the final collection. Following a derivation similar to that in Sec. II, we find that the partition function for this system is

$$Z_{N,C}(\{\beta v_i\}, \{w_i\}, \{C_i\}, W) = \frac{1}{2\pi i} \oint_{\Gamma} \frac{dz}{z^{W+1}} \frac{1}{1-z} \prod_{i=1}^N \frac{1 - z^{(C_i+1)w_i} e^{(C_i+1)\beta v_i}}{1 - z^{w_i} e^{\beta v_i}}. \quad (\text{C2})$$

With Eq.(C2), we can apply the method of steepest descent as in Sec. III to approximate this partition function and to derive the expressions needed to formulate a new algorithm akin to the general one in Sec. IV for the 0-1 problem.

The first step of the algorithm does not change since we are just selecting the temperature. For the second and third steps, we find that deriving expressions analogous to Eq.(25) and Eq.(26), yields

$$G_{N,C}(z) = -W + \frac{z_0}{1-z_0} + \sum_{i=1}^N \frac{w_i e^{\beta v_i}}{z_0^{-w_i} - e^{\beta v_i}} - \sum_{i=1}^N \frac{(C_i+1)w_i e^{(C_i+1)\beta v_i}}{z_0^{-(C_i+1)w_i} - e^{(C_i+1)\beta v_i}}, \quad (\text{C3})$$

and

$$\langle x_\ell \rangle = \frac{e^{\beta v_\ell}}{z_0^{-w_\ell} - e^{\beta v_\ell}} - \frac{(C_\ell+1)e^{(C_\ell+1)\beta v_\ell}}{z_0^{-(C_\ell+1)w_\ell} - e^{(C_\ell+1)\beta v_\ell}}, \quad (\text{C4})$$

respectively.

For the fourth step, since x_i can be any integer value from 0 to C_i , we can no longer interpret $\langle x_i \rangle$ as a probability of occupancy. Instead, we interpret $\langle x_i \rangle$ generally as a course-grained average occupancy, and we round this average to the nearest integer based on a threshold chosen according to how conservative we want to be about rounding. Specifically we define

$$X_\ell = \lceil \langle x_\ell \rangle - \alpha_{\text{thresh}} \rceil, \quad (\text{C5})$$

where $\lceil x \rceil$ is the ceiling function (e.g., $\lceil 2.7 \rceil = \lceil 2.1 \rceil = 3$) and $\alpha_{\text{thresh}} \in (0, 1)$ is a hyperparameter akin to

p_{thresh} . A standard choice for this hyperparameter is $1/2$ which would make Eq.(C5) a simple rounding to the closest integer with 1.5 rounded to 1 . However, as a more stringent threshold, we could take α_{thresh} to be, for example, 0.9 .

2. Unbounded Knapsack Problem

In the unbounded KP, we allow each object i to appear a countably infinite number of times in the final collection. For our statistical physics representation of the problem this change amounts to replacing the summation Eq.(5) with

$$\sum_{\{x_i\}} = \prod_{i=1}^N \sum_{x_i=0}^{\infty} \quad [\text{Summation for "infinite" problem}], \quad (\text{C6})$$

where x_i denotes the number of times object i is included in the final collection. If we were to follow a derivation similar to that in Sec. II, we would reach the expression

$$Z_{N,\infty}(\{\beta v_i\}, \{w_i\}, W) = \frac{1}{2\pi i} \oint_{\Gamma} \frac{dz}{z^{W+1}} \frac{1}{1-z} \prod_{i=1}^N \sum_{x_i=0}^{\infty} (z^{w_i} e^{\beta v_i})^{x_i}. \quad (\text{C7})$$

This expression contains an infinite series, and for such series there are conditions on whether the final result is finite. In this case, in order for Eq.(C7) to be finite we require

$$|z| < e^{-\beta v_i/w_i} \quad \text{for all } i. \quad (\text{C8})$$

We can ensure this condition by choosing a contour Γ_R whose z values satisfy $z \in R$ where R is the circle in the complex plane with radius $\min\{e^{-\beta v_i/w_i}\}$.

Constraining our contour in this way, we find that the partition function is

$$Z_{N,\infty}(\{\beta v_i\}, \{w_i\}, W) = \frac{1}{2\pi i} \oint_{\Gamma_R} \frac{dz}{z} \exp F_{N,\infty}(z; \{\beta v_i\}, \{w_i\}, W), \quad (\text{C9})$$

where we defined

$$F_{N,\infty}(z; \{\beta v_i\}, \{w_i\}, W) \equiv -W \ln z - \ln(1-z) - \sum_{i=1}^N \ln(1 - z^{w_i} e^{\beta v_i}) \quad (\text{C10})$$

With Eq.(C9), we can apply the method of steepest descent as in Sec. III to approximate this partition function and to derive the necessary expressions to formulate a new algorithm akin to the one in Sec. IV for the 0-1 problem. Namely, we can derive expressions analogous to Eq.(25) and Eq.(26), or Eq.(C3) and Eq.(C4)

However, the z value at which $F_{N,\infty}$ is minimized is not always included in the region of possible contours for which the infinite series that takes us from Eq.(C7) to Eq.(C9) is valid. In other words, the z that minimizes Eq.(C10) can violate Eq.(C8) and thus exist off the contour Γ_R , meaning that we cannot sensibly evaluate the integrand of the partition function at this minimum potential value. Therefore, the method of steepest descent cannot always be applied to the partition function in the unbounded case.

We can rectify this by noting that no non-trivial KP is truly unbounded. If each item has a weight, there must be a maximum number of each item that can be included in the knapsack. Thus we can convert the unbounded KP into a bounded KP where the bound is defined by

$$C_\ell \equiv \lfloor W/w_\ell \rfloor, \quad (\text{C11})$$

where $\lfloor x \rfloor$ is the floor function applied to x (e.g., $\lfloor 5/4 \rfloor = 1$). Thus, the large N algorithm for the unbounded case is identical to the algorithm presented in Appendix C 1 except that $\{C_\ell\}$, rather than being a set of independently defined problem parameters, is computed from the weights and weight-limit through Eq.(C11).

3. Continuous Knapsack Problem

Unlike the bounded and unbounded KPs, the continuous KP has a continuous space of states. Consequently, the previous discrete delta and Heaviside function methods do not apply and we cannot reach an expression to which we can apply the method of steepest descent. Therefore, it seems that we cannot obtain an analogous statistical physics based algorithm for this case. However, it is possible to write a partition function expression for this problem and we do so here.

In the continuous KP, x_i can take on any real number between 0 and 1 inclusive, and each x_i represents the amount of object i we include in the final collection. Taking $\mathbf{x} = (x_1, x_2, \dots, x_N)$ to represent the amounts of each object in the collection, the total weight and total value of the objects are $\mathbf{w} \cdot \mathbf{x}$ and $\mathbf{v} \cdot \mathbf{x}$, respectively, where $\mathbf{w} = (w_1, w_2, \dots, w_N)$ and $\mathbf{v} = (v_1, v_2, \dots, v_N)$ are the corresponding weight and value vectors.

Generalizing our previous discrete-space analysis to this continuous-space case amounts to a change from a discrete sum to a continuous integration. The partition function for this continuous case is

$$Z_N^{\text{cont}}(\mathbf{v}, \mathbf{w}, W) = \int_0^1 d^N \mathbf{x} \bar{\Theta}(W - \mathbf{w} \cdot \mathbf{x}) \exp(\beta \mathbf{v} \cdot \mathbf{x}), \quad (\text{C12})$$

where

$$\int_0^1 d^N \mathbf{x} \equiv \int_0^1 dx_1 \int_0^1 dx_2 \dots \int_0^1 dx_N \quad (\text{C13})$$

is the integration over the state space and where

$$\bar{\Theta}(x) = \begin{cases} 1 & \text{if } x \geq 0 \\ 0 & \text{otherwise,} \end{cases} \quad (\text{C14})$$

is the Heaviside step function with a continuous argument. With such a continuous argument, the step function has the integral representation

$$\bar{\Theta}(x) = \frac{1}{2\pi i} \lim_{\varepsilon \rightarrow 0^+} \int_{-\infty}^{\infty} dk \frac{e^{ikx}}{k - i\varepsilon}, \quad (\text{C15})$$

which can be affirmed by transforming the real-space integral in k into a closed contour integral in the upper-half of the complex plane. Inserting this expression into Eq.(C12), we obtain

$$\begin{aligned} Z_N^{\text{cont}}(\mathbf{v}, \mathbf{w}, W) &= \int_0^1 d^N \mathbf{x} \frac{1}{2\pi i} \lim_{\varepsilon \rightarrow 0^+} \int_{-\infty}^{\infty} dk \frac{e^{ik(W - \mathbf{w} \cdot \mathbf{x}) + \beta \mathbf{v} \cdot \mathbf{x}}}{k - i\varepsilon} \\ &= \frac{1}{2\pi i} \lim_{\varepsilon \rightarrow 0^+} \int_{-\infty}^{\infty} dk \frac{e^{ikW}}{k - i\varepsilon} \int_0^1 d^N \mathbf{x} e^{\mathbf{x} \cdot (\beta \mathbf{v} - ik \mathbf{w})} \\ &= \frac{1}{2\pi i} \lim_{\varepsilon \rightarrow 0^+} \int_{-\infty}^{\infty} dk \frac{e^{ikW}}{k - i\varepsilon} \prod_{j=1}^N \int_0^1 dx_j e^{x_j (\beta v_j - ik w_j)}, \end{aligned} \quad (\text{C16})$$

ultimately yielding the partition function

$$Z_N^{\text{cont}}(\mathbf{v}, \mathbf{w}, W) = \frac{1}{2\pi i} \lim_{\varepsilon \rightarrow 0^+} \int_{-\infty}^{\infty} dk \frac{e^{ikW}}{k - i\varepsilon} \prod_{j=1}^N \frac{e^{(\beta v_j - ikw_j)} - 1}{\beta v_j - ikw_j}. \quad (\text{C17})$$

Since we are no longer integrating over a contour in the complex plane, applying an $N \gg 1$ approximation scheme to Eq.(C17) would require a different formalism from that presented in this paper. Interestingly, fast approximation schemes are not needed for the continuous KP as it can be solved via an $O(N \log N)$ greedy algorithm [15], and thus what would typically be the fastest "approximation" method yields the exact solution.

-
- [1] H. Kellerer, U. Pfersch, and D. Pisinger, "Multidimensional knapsack problems," in *Knapsack problems*, pp. 235–283, Springer, 2004.
 - [2] P. Toth and S. Martello, *Knapsack problems: Algorithms and computer implementations*. Wiley, 1990.
 - [3] "Knapsack problem/0-1," *Rosetta Code*, Sept 2019.
 - [4] L. Ingber, "Simulated annealing: Practice versus theory," *Mathematical and computer modelling*, vol. 18, no. 11, pp. 29–57, 1993.
 - [5] G. E. Hinton, T. J. Sejnowski, *et al.*, "Learning and relearning in boltzmann machines," *Parallel distributed processing: Explorations in the microstructure of cognition*, vol. 1, no. 282-317, p. 2, 1986.
 - [6] M. Mezard and A. Montanari, *Information, physics, and computation*. Oxford University Press, 2009.
 - [7] A. Percus, G. Istrate, and C. Moore, *Computational complexity and statistical physics*. Oxford University Press, USA, 2006.
 - [8] D. McQuarrie, *Statistical Mechanics*. Harper and Row, 1973.
 - [9] S. Hassani, *Mathematical physics: a modern introduction to its foundations*. Springer Science & Business Media, 2013.
 - [10] W. Research, "Nsolve," *Wolfram Language function*, 1991.
 - [11] S. Community, "scipy.optimize.fsolve," *SciPy v1.6.1 Reference Guide*, Mar 2021.
 - [12] P. Virtanen, R. Gommers, T. E. Oliphant, M. Haberland, T. Reddy, D. Cournapeau, E. Burovski, P. Peterson, W. Weckesser, J. Bright, S. J. van der Walt, M. Brett, J. Wilson, K. J. Millman, N. Mayorov, A. R. J. Nelson, E. Jones, R. Kern, E. Larson, C. J. Carey, Í. Polat, Y. Feng, E. W. Moore, J. VanderPlas, D. Laxalde, J. Perktold, R. Cimrman, I. Henriksen, E. A. Quintero, C. R. Harris, A. M. Archibald, A. H. Ribeiro, F. Pedregosa, P. van Mulbregt, and SciPy 1.0 Contributors, "SciPy 1.0: Fundamental Algorithms for Scientific Computing in Python," *Nature Methods*, vol. 17, pp. 261–272, 2020.
 - [13] J. M. Yeomans, *Statistical mechanics of phase transitions*. Oxford University Press, 1992.
 - [14] V. V. Vazirani, *Approximation algorithms*. Springer Science & Business Media, 2013.
 - [15] G. B. Dantzig, "Discrete-variable extremum problems," *Operations research*, vol. 5, no. 2, pp. 266–288, 1957.
 - [16] V. Černý, "Thermodynamical approach to the traveling salesman problem: An efficient simulation algorithm," *Journal of optimization theory and applications*, vol. 45, no. 1, pp. 41–51, 1985.
 - [17] D. Pisinger, "Where are the hard knapsack problems?," *Computers & Operations Research*, vol. 32, no. 9, pp. 2271–2284, 2005.