

WiC = TSV = WSD: On the Equivalence of Three Semantic Tasks

Bradley Hauer, Grzegorz Kondrak

Alberta Machine Intelligence Institute, Department of Computing Science
University of Alberta, Edmonton, Canada
{bmhauer, gkondrak}@ualberta.ca

Abstract

The Word-in-Context (WiC) task has attracted considerable attention in the NLP community, as demonstrated by the popularity of the recent MCL-WiC SemEval shared task. Systems and lexical resources from word sense disambiguation (WSD) are often used for the WiC task and WiC dataset construction. In this paper, we establish the exact relationship between WiC and WSD, as well as the related task of target sense verification (TSV). Building upon a novel hypothesis on the equivalence of sense and meaning distinctions, we demonstrate through the applications of tools from theoretical computer science that these three semantic classification problems can be pairwise reduced to each other, and therefore are equivalent. The results of experiments that involve systems and datasets for both WiC and WSD provide strong empirical evidence that our problem reductions work in practice.

1 Introduction

This paper answers an open question about the relation between two important tasks in lexical semantics. Word sense disambiguation (WSD) is the task of tagging a word in context with its sense (Navigli, 2009). The word-in-context (WiC) problem is the task of deciding whether a word has the same meaning in two different contexts (Pilehvar and Camacho-Collados, 2019). A crucial difference between the two tasks is that WSD depends on a pre-defined sense inventory¹ while WiC does not involve any identification or description of word meanings. Despite ongoing interest in both tasks, there is substantial disagreement in the literature as to whether WiC is a re-formulation of WSD (e.g. Levine et al. (2020)), or an entirely distinct

task (e.g. Martelli et al. (2021)), leaving the exact relationship between them as an open question.

Establishing that WSD and WiC are equivalent provides a theoretical foundation for the transfer of resources and methods between the two tasks. The WSD task has been intensively studied for decades, while the WiC task has recently attracted considerable attention from the research community. For example, WiC has been integrated into the SuperGLUE benchmark (Wang et al., 2019), and the MCL-WiC SemEval shared task involved 48 teams (Martelli et al., 2021). Understanding how the two tasks relate to each other allows us to correctly interpret and confidently build upon those results, including prior work on using WSD systems for WiC.

In this paper, we establish the theoretical equivalence of WiC and WSD by specifying reduction algorithms, which produce a solution for one problem by applying an algorithm for another. In particular, we employ the target sense verification (TSV) task (Breit et al., 2021) as an intermediate step between WSD and WiC, and specify three reductions: WiC to WSD, WSD to TSV, and TSV to WiC. We formalize the three problems using a common notation, and demonstrate by these theoretical reductions that an oracle that solves one of the problems would also perfectly solve the other two. We further provide empirical evidence for the correctness of our reductions. While we focus on English in this paper, we postulate that our results will generalize to other languages.

Our argument is based on the observation that the soundness of all three tasks hinges on the consistency of judgments of sameness of word meaning, whether with respect to discrete sense inventories (WSD), a representation of a single sense (TSV), or simply two words in context (WiC). We posit that *different instances of a word are judged to have the same meaning if and only if they can be independently annotated with the same sense.*

¹For the purposes of this paper, we assume that the WSD sense inventory, the discrete enumeration of the senses of each content word, is the WordNet sense inventory (Fellbaum, 1998), which is a standard practice in WSD (Raganato et al., 2017).

This empirically falsifiable proposition, which we refer to as the *sense-meaning hypothesis*, implies that, WiC judgements induce sense inventories that correspond to word senses used in WSD. This is a highly counter-intuitive finding, with intriguing implications for the task of word sense induction (WSI), as well as algorithmic wordnet construction.

We empirically validate our hypothesis by thoroughly analyzing the results of multiple experiments aimed at verifying the equivalence of the semantic tasks. In particular, we test our WSD-to-WiC and WiC-to-WSD reductions using standard benchmark datasets and state-of-the-art systems. We find that our reductions perform remarkably well, revealing no clear counter-examples to our hypothesis in the process.

Our contributions are as follows: (1) We answer the open question of the relation between WiC and WSD by constructing a theoretical argument for their mutual reducibility, and thus equivalence, which is based on a novel sense-meaning hypothesis. (2) We carry out a series of validation experiments that strongly support the correctness of our reductions. (3) We release the details of our manual analysis and annotations of the instances identified in the validation experiments.

2 Theoretical Formalization

In this section, we formally define the three problems, present a theoretical argument for their equivalence, and specify the reductions.

2.1 Problem Definitions

Senses in our problem definitions refer to *wordnet senses*. A *wordnet* is a theoretical construct which is composed of synonym sets, or *synsets*, such that each synset corresponds to a unique concept, and each sense of a given word corresponds to a different synset. Actual wordnets, such as Princeton WordNet (Fellbaum, 1998), are considered to be imperfect implementations of the theoretical construct.

In the problem definitions below, C, C_1, C_2 represent contexts, each of which contains a single focus word w used in the sense s . We assume that every content word token is used in exactly one sense.²

- **WSD**(C, w): Given a context C which contains a single focus word w , return the sense

²This is empirically supported by the fact that 99.7% of annotated tokens in SemCor are assigned a single sense.

s of w in C .

- **TSV**(C, w, s): Given a context C which contains a single focus word w , and a sense s , return TRUE if s is the sense of w in C , and FALSE otherwise.
- **WiC**(C_1, C_2, w): Given two contexts C_1 and C_2 which contain the same focus word w , return TRUE if w has the same meaning in both C_1 and C_2 , and FALSE otherwise.

2.2 Problem Equivalence

The theoretical argument for the sense-meaning hypothesis is based on the assumption that the relation of sameness of word meaning is shared between the three problems. This is supported by the lack of distinction between *meanings* and *senses* in the original WiC task proposal.³ On the other hand, WordNet exhibits, a strict one-to-one correspondence between distinct meanings, synsets, and concepts, with each word sense corresponding to a specific synset. This implies that senses are ultimately grounded in sameness of meaning as well.⁴ Therefore, every word meaning distinction should correspond to a pairwise sense distinction. Contrariwise, if two tokens of the same word express different concepts, their meaning must be different. This equivalence also includes the TSV problem, provided that the sense of the focus word corresponds to a single synset.

2.3 Problem Reductions

We now present the three problem reductions. For our purposes, a **P-to-Q** reduction is an algorithm that, given an algorithm for a problem **Q**, solves an instance of a problem **P** by combining the solutions of one or more instances of **Q**.

Proposition 1. *WiC is reducible to WSD.*

To reduce **WiC to WSD**, we directly apply the sense-meaning hypothesis from Section 1 by assuming that the focus word has the same meaning in two contexts if and only if it can be independently tagged with the same sense in both contexts. Formally:

³“The proposed dataset, WiC, is based on lexicographic examples, which constitute a reliable basis to [...] discern different **meanings of words**.” (Pilehvar and Camacho-Collados, 2019).

⁴“[Each] synonym set represents one underlying lexical concept. [...] **Word meaning** [refers] to the lexicalized concept that a [word] form can be used to express.” (Miller, 1995).

$$\text{WiC}(C_1, C_2, w) \Leftrightarrow \text{WSD}(C_1, w) = \text{WSD}(C_2, w)$$

Thus, given a method for solving WSD, we can solve any given WiC instance by solving the two WSD instances which consist of the focus word in the first and second context, respectively. We return TRUE if the returned senses are equal, FALSE otherwise (Figure 1a).

Proposition 2. *WSD is reducible to TSV.*

To reduce **WSD to TSV**, we take advantage of the fact that TSV can be applied to a variety of different sense representations, without any explicit dependence on a specific sense inventory. We can therefore query a TSV system with various senses of the focus word, using the same sense inventory as the WSD task:

$$\text{WSD}(C, w) = s \Leftrightarrow \text{TSV}(C, w, s)$$

Thus, given a TSV solver, for any WSD instance we can construct a list of k TSV instances, one for each sense of the focus word in the corresponding WSD sense inventory. We return the sense for which the TSV instance returns TRUE (Figure 1b). The correctness of this reduction hinges on the assumption that every content word in context is used in exactly one sense.

Proposition 3. *TSV is reducible to WiC.*

To reduce **TSV to WiC**, we again leverage our sense-meaning hypothesis by assuming that a content word used in a particular sense will be judged to have the same meaning as in an example sentence for that sense. Formally:

$$\text{TSV}(C, w, s) \Leftrightarrow \text{WiC}(C, C_s, w)$$

where C_s is a context in which w is unambiguously used in sense s . So, given a method for solving WiC, we can solve a TSV instance by replacing the given sense representation with an example, yielding a WiC instance (Figure 1c). This reduction depends on the existence of an algorithm E that, given a sense s of a word w , can generate an example sentence C_s that contains w used in sense s .⁵

These three reductions are sufficient to establish the equivalence of **WSD**, **TSV**, and **WiC**. A method which perfectly solves any of these problems can be used to construct methods which perfectly solve the other two, using a sequence of at most two of the above reductions.

In particular, we can reduce **WSD to WiC**:

⁵This is related to a well-defined and actively researched task known as exemplification modelling (Barba et al., 2021b).

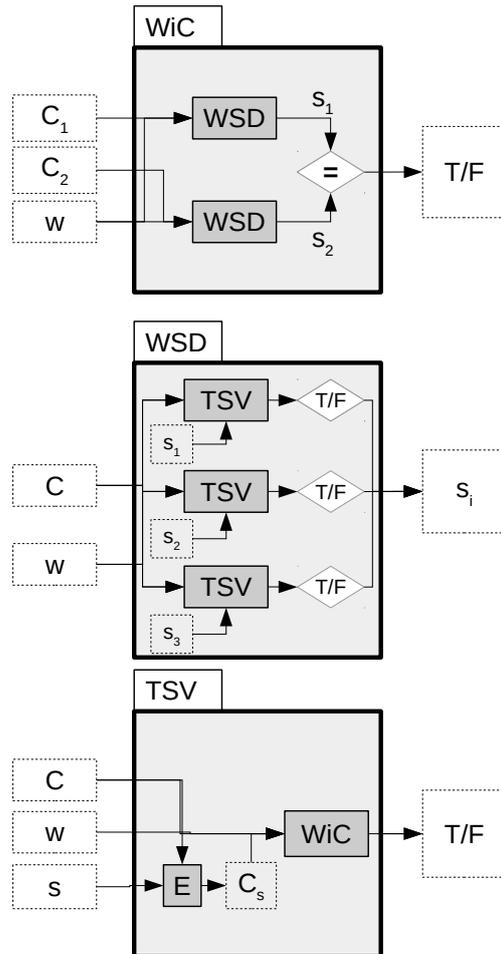


Figure 1: Three problem reductions: a) WiC-to-WSD, b) WSD-to-TSV, and c) TSV-to-WiC.

Corollary 1. *WSD is reducible to WiC.*

To reduce **WSD to WiC**, first reduce the WSD instance to TSV, producing one TSV instance for each sense s of w . Then, reduce each of these TSV instances to a WiC instance, by pairing the context of the WSD instance with an example context for each sense. Succinctly:

$$\text{WSD}(C, w) = s \Leftrightarrow \text{WiC}(C, C_s, w)$$

Thus, solving the original WSD instance can be achieved by identifying the single positive instance in the list of k WiC instances.

3 WiC Datasets

In this section, we discuss and analyze the existing WiC datasets with the aim of finding a dataset suitable for validating our equivalence hypothesis. An instance that contradicts one of the reduction equivalences in Section 2.3 would be an exception

to the hypothesis. Since natural language is not pure logic, falsifying the hypothesis would require finding that such exceptions constitute a substantial fraction of instances, excluding errors and omissions in lexical resources.

3.1 WiC

WiC was originally proposed as a dataset for the evaluation of contextualized embeddings, including neural language models (Pilehvar and Camacho-Collados, 2019). The original WiC dataset consists of pairs of sentences drawn mostly from WordNet, which were further filtered to remove fine-grained sense distinctions. The reported inter-annotator agreement was 80% for the final pruned set, and only 57% for the pruned-out instances.

Since, regardless of the source, all instances were annotated automatically by checking the sense identity in WordNet, the WiC dataset cannot, *by construction*, contain any exceptions to the equivalence hypothesis. Nevertheless, it is possible to automatically identify both senses in about half the instances in the dataset by matching them to the sense usage example sentences in WordNet 3.0. It is interesting to note that combining such a WordNet lookup with a random back-off on the remaining instances results in correctly solving 76.1% of the WiC instances in the test set, which exceeds the current state-of-the-art of 72.1% (Levine et al., 2020).

3.2 WiC-TSV

Breit et al. (2021) propose *target sense verification* (TSV), the task of deciding whether a given word in a given context is used in a given sense. TSV is similar to WiC in that it is also a binary classification task, but only one context is provided. TSV is also similar to WSD in that there is an explicit representation of senses, but there is only one sense to consider. Three sub-tasks are defined depending on the method of representing a sense: (a) definition, (b) hypernyms, and (c) both definition and hypernyms.

Approximately 85% of the instances in the WiC-TSV dataset are derived directly from the original WiC dataset, and so are ultimately based on WordNet senses.⁶ Specifically, the sense of the focus word was established by reversing the process by which the WiC instances were created, as

⁶Three smaller sets are devoted to cocktail, medical, and computer terms, respectively, and appear more related to named entity resolution than to WSD.

in the WordNet lookup procedure applied to the WiC dataset in Section 3.1. Because of this construction method, no exceptions to the equivalence hypothesis can be found in the WiC-TSV dataset.

3.3 MCL-WiC

Martelli et al. (2021) introduce the Multilingual and Cross-lingual Word-in-Context dataset. The English portion of the dataset consists of 10k WiC instances, divided into a training set (8k instances), as well as development and test sets (1k instances each). The monolingual task is exactly the same as the original WiC task, and matches our WiC problem formalization in Section 2.1.

In contrast with the original WiC dataset, which was largely derived from WordNet, the sentence pairs in MCL-WiC were manually selected and annotated. Annotators consulted “multiple reputable dictionaries” to minimize the subjectivity of their decisions. As a result, both the inter-annotator agreement ($\kappa = 0.968$), and the best system accuracy (93.3% on English, Gupta et al. (2021)) are much higher than on the original WiC dataset.

The MCL-WiC dataset (Section 3.3) is especially valuable for testing our sense-meaning equivalence hypothesis because it does not rely on pre-existing WordNet sense annotations, and is agnostic toward WordNet sense distinctions. For this reason, we make the MCL-WiC dataset the focus of the empirical validation of the WiC to WSD reduction experiments in the next section.

4 Empirical Validation

In this section, we aim to quantify and analyze any apparent counter-examples to the sense-meaning hypothesis which are identified in the process of testing the WSD-to-WiC and WiC-to-WSD reductions. We are particularly interested in the exceptions that cannot be attributed to errors in the resources that are used to implement the reductions, because such exceptions represent potential evidence against our hypothesis.

4.1 Systems

In order to implement the WSD-to-WiC and WiC-to-WSD reductions, we adopt two recent systems designed for the WiC and WSD tasks, respectively.

Our WiC system of choice is LIORI (Davletov et al., 2021). In the MCL-WiC shared task, LIORI obtained an accuracy of 91.1% on the English *test set*, which was within 2% of the best perform-

ing system. LIORI works by concatenating each sentence pair into a single string, and fine-tuning a neural language model for binary classification. We use the code made available by the authors⁷, and derive our model from the MCL-WiC English training set.

As our WSD system, we adopt ESCHER (Barba et al., 2021a). ESCHER re-formulates WSD as a span extraction task: For a given WSD instance, the context is concatenated with all glosses of the focus word into a single string, from which the gloss of the correct sense is extracted. We derive our model using the implementation and training procedure provided by the authors⁸. The training data includes SemCor (Miller et al., 1993). In our replication experiments, this model achieves 80.1% F1 on the standard WSD benchmark datasets of Raganato et al. (2017).

It is important to note that the accuracy obtained via the reductions is not expected to match the accuracy of the system used to implement it, but rather decline exponentially with the number of supplementary instances constructed for each instance of the original problem. This is because the reductions are guaranteed to produce a correct solution only if the actual system used to implement them is 100% accurate. In practice, errors in resources further degrade the performance of any functional implementation.

4.2 Solving WSD with WiC

Our first experiment involves an implementation of the reduction of WSD to WiC. For each WSD instance, we construct one WiC instance for each of its senses, solve them with LIORI, and return a single sense, in accordance with the reduction specified in Corollary 1 from Section 2.3. We then present and analyze the results on a standard WSD dataset.

4.2.1 Implementation of the Reduction

Given a WSD instance consisting of a focus word w in a context C , we create a set of k WiC instances, where k is the number of senses of w . In WordNet 3.0, each sense s has a gloss g_s , and sometimes also a usage example of w being used in sense s . Since not all synsets are accompanied by usage examples, we instead generate a new synthetic usage example C_s for each sense of w using the following pattern:

⁷<https://github.com/davletov-aa/mcl-wic>

⁸<https://github.com/SapienzaNLP/esc>

$C_s := \text{“}w \text{ in this context means } g_s\text{”}$. Thus C_s represents an unambiguous example of w being used in sense s . The resulting WiC instance for s is then composed of contexts C and C_s , both of which include the focus word w .

Our LIORI model returns a binary classification and a score for each of the constructed WiC instances. While LIORI may classify zero, one, or more instances as true, our implementation returns only the sense with the highest score. This is in accordance with the definition of the WSD task as identifying a single correct sense for a word in context (Section 2.1).

4.2.2 Results and Discussion

To estimate the expected accuracy of the above implementation, we first apply LIORI to the 1000 instances in the MCL-WiC English development set. LIORI achieves an accuracy of 88.0%, which we use as an estimate of the probability that LIORI correctly classifies any given WiC instance. The average number of senses per instance in our WSD dataset is approximately 8.5. Since any error by LIORI can cause the WSD-to-WiC reduction to output the wrong sense, we estimate the expected probability that LIORI correctly classifies a single WSD instance as $0.880^{8.5} \approx 0.34$.

We test the reduction on the SemEval 2007 dataset, as provided by Raganato et al. (2017). This test set contains 455 WSD instances, all but four of which (over 99%) are annotated with exactly one sense. Our reduction implementation obtains an accuracy of 47.9% by returning a single predicted sense for every WSD instance in the test set. As this result is substantially higher than the expected accuracy of 34%, we interpret it as evidence in favor of our hypothesis.

In theory, for each WSD instance, LIORI should classify as true exactly one of the constructed WiC instances, which represents the single correct sense. In practice, this is the case in only 48 out of 455 cases. Our reduction implementation predicts the correct sense for 38 out of 48, yielding a precision of approximately 79.2%. We verified that ESCHER, trained on over 226k sense annotations in SemCor, correctly annotates 39 of these 48 instances. On this subset of instances, our WSD-to-WiC reduction based on LIORI is therefore competitive with state-of-the-art supervised WSD systems, despite not depending on any sense-annotated training data. This constitutes further evidence for the correctness of our reduction, and our hypothesis.

4.3 Solving WiC with WSD

In this experiment, we apply a state-of-the-art supervised WSD system to solve, via our WiC-to-WSD reduction, all WiC instances in an independently-annotated test set. We then manually analyze a sample of the errors, to assess whether the experiment supports our hypothesis and the correctness of our reduction.

4.3.1 Implementation of the Reduction

The implementation of the WiC-to-WSD reduction is conceptually simpler than the previously described WSD-to-WiC reduction.⁹ Given a WiC instance consisting of contexts C_1 and C_2 for a word w , we create two corresponding WSD instances: (C_1, w) and (C_2, w) . Both WSD instances are passed to ESCHER, which independently assigns senses s_1 and s_2 to w in each of the two contexts. We classify the WiC instance as positive if and only if $s_1 = s_2$.

There are two types of possible counterexamples to our hypothesis: (a) a WiC instance which is annotated as positive in which both focus tokens have different senses; or (b) a WiC instance which is annotated as negative in which both focus tokens have the same sense. These two types could arise from WSD sense distinctions that are too fine-grained or too coarse-grained, respectively.

4.3.2 Expected Accuracy

The expected accuracy of the WiC-to-WSD reduction is more complex to calculate than that of the WSD-to-WiC reduction. Our calculation is based on the simplifying assumption that all WSD errors are independent and equally likely. For the the probability that ESCHER classifies any WSD instance correctly, we use the value of $p = 0.801$, based on our replication result in Section 4.1. The average number of senses per focus token in the dataset used in our experiment is $k = 4.73$.

We estimate the probability of a correct WiC classification by considering the following four cases:

1. ESCHER selects the correct sense for both WSD instances: $P_1 = p^2$
2. Both WSD instances in a positive WiC instance are incorrectly assigned the same sense: $P_2 = (1 - p)^2(1/(k - 1))$

3. One of the WSD instances in a negative WiC instance is classified correctly and the second is incorrectly classified as a different sense: $P_3 = 2p(1 - p)((k - 2)/(k - 1))$.

4. Both instances in a negative WiC instance are annotated incorrectly with different senses: $P_4 = (1 - p)^2((k - 2)/(k - 1))$

Since the dataset is balanced, the total probability is estimated as: $P_1 + (P_2 + P_3 + P_4)/2$. Given the values of $p = 0.801$ and $k = 4.73$, the probability of a WiC instance being classified correctly by our reduction is **0.778**.

4.3.3 Results and Discussion

We test the reduction on the MCL-WiC English development set, which consists of 500 positive and 500 negative WiC instances. We tokenize, lemmatize, and POS-tag all 2000 sentences with TreeTagger¹⁰ (Schmid, 1999) as a pre-processing step. ESCHER is then applied to predict the sense of the focus word in each sentence. In 25 cases, ESCHER failed to make a sense prediction one or both focus words were not disambiguated, due to TreeTagger tokenization or lemmatization errors. The accuracy on the remaining 975 instances is 78.5%, which is within 1% of our theoretical estimate. We conclude that this experiment provides strong empirical support for our hypothesis and the correctness of our reductions.

4.3.4 Analysis

To further evaluate our WiC-WSD reduction, we manually analyzed a sample of 10 false positives and 10 false negatives from this experiment. The sample was *not* random; instead, we attempted to automatically select the instances that were most likely to represent exceptions to our equivalence hypothesis. Specifically, we restricted the analysis to WiC instances that were correctly classified by LIORI, in order to reduce the impact of erroneous annotations, which are unavoidable in any gold dataset. As a result, the accuracy of ESCHER on the WSD instances in this sample is expected to be lower than in the entire dataset. In fact, in 13 of the 20 instances (6 false positives, 7 false negatives), the misclassification was due to an error made by ESCHER.

In 3 of the 8 remaining cases (all false positives), the WiC misclassification was caused the WordNet

⁹In fact, Loureiro and Jorge (2019) implicitly apply this reduction on a WiC dataset with their WSD system LMMS.

¹⁰<https://cis.uni-muenchen.de/~schmid/tools/TreeTagger>

	Lemma	Gloss	Dict
1	partake (v)	Join in (an activity)	OED
2	instant (adj)	Prepared quickly and with little effort	OED
3	hit (n)	Cause harm or distress to	OED
4	familiar (adj)	Of or relating to a family	MW
5	breach (v)	To leap out of water	MW
6	spotter (n)	A member of a motor racing team	OED
7	campaign (n)	An organized course of action to achieve a goal	OED
8	campaign (n)	A set of organized actions that a political candidate undertakes in an election	OED
9	drive (n)	Determination and ambition to achieve something	OED
10	drive (n)	An organized effort by a number of people	OED
11	wedding (n)	A marriage ceremony with accompanying festivities	MW
12	wedding (n)	An act, process, or instance of joining in close association	MW
13	analyst (n)	Someone who analyzes	Wik
14	analyst (n)	A financial analyst; a business analyst	Wik

Table 1: Examples of senses that are not in WordNet (Rows 1-6), and sense distinctions found in external dictionaries (Rows 7-14): OED (Oxford English Dictionary), MW (Merriam-Webster), Wiktionary.

sense inventory not including the correct sense of one of the focus tokens. Since we require ESCHER to produce a WordNet sense as output, such omissions preclude the correct disambiguation of the focus word. In all three cases, we were able to find the omitted sense in one of the dictionaries that we consulted (Oxford or Merriam-Webster). For example, “Join in (an activity)” is the correct sense of the verb “partake” in the WiC sentence “He has **partaken** in many management training and education courses”, and this sense is in the Oxford English Dictionary, but not in WordNet 3.0. The missing WordNet senses in the other three error instances are shown in rows 2-4 of Table 1.

Among the remaining four instances, in one anomalous case the two annotators disagreed on the WordNet sense of the adverb *richly* in the phrase *richly rewarding*. However, in the other three cases, ESCHER’s annotations were unquestionably correct. We defer the discussion of those three interesting instances to the next section.

4.4 Manual Annotation Experiment

To further expand our analysis, we manually analyzed 60 additional randomly-selected instances

from the English MCL-WiC training set. The size of the sample was limited because WSD instances are difficult and time-consuming to analyze, especially when multiple annotators are involved and an effort is made to avoid any unconscious bias.

For each such instance, two of the authors independently assigned WordNet senses to each focus token, based on the glosses and usage examples of the available senses as well as the contents of the corresponding synsets and their hypernym synsets. Subsequently, we attempted to resolve any conflicting sense annotations. We were careful not to access the gold MCL-WiC labels before completing the annotation.¹¹ The manual annotations were then converted into WiC predictions by applying the WiC-to-WSD reduction.

We found that 55 out of 60 instances (91.7%) unquestionably conform to the equivalence hypothesis. The remaining five instances can be divided into three categories: (1) Tokenization errors in MCL-WiC; (2) Missing senses in WordNet; and (3) Possible annotation errors in MCL-WiC. We discuss these three types of errors below.

In two instances, word tokenization errors interfere with the MCL-WiC annotations: (1) *together* in “the final coming together” is annotated as an adverb instead of a particle of a phrasal verb, and (2) *shiner* in “shoes shiners met the inspector” is annotated as a stand-alone noun instead of a part of a compound noun. These tokenization errors prevent the proper assignment of WordNet senses.

In two instances (rows 5 and 6 in Table 1), one of the senses of the focus word is missing in WordNet: (1) *breach* referring to an animal breaking through the surface of the water, and (2) *spotter* referring to a member of a motor racing team who communicates by radio with the driver. Neither of these senses is subsumed by another sense in WordNet, and both of them are present in one of the consulted dictionaries.

In the final problematic instance, MCL-WiC classifies the noun *campaign* as having the same meaning in the contexts “during the election campaign” and “the campaign had a positive impact on behavior.” Since the distinction between these two senses of *campaign* is found in the Oxford English Dictionary which was among the ones consulted by the MCL-WiC annotators (Martelli et al., 2021), we classify it as an MCL-WiC annotation error (rows 7-8 in Table 1).

¹¹We will release the annotated set as supplementary data.

Similarly, we posit an MCL-WiC annotation error in each of the three outstanding false negatives from of Section 4.3.4, which could not be attributed to ESCHER, based on the verification in external dictionaries. For example, unlike WordNet, Oxford and Merriam-Webster both distinguish the emotional and organizational meanings of *drive*. Similar analysis applies in instances involving the words *wedding* and *analyst* (rows 9-14 in Table 1). Since the meanings of the focus words in these contexts are distinguished in a dictionary, they should be considered distinct meanings according to the annotation procedure of Martelli et al. (2021)¹². We conclude that in these final four cases, the MCL-WiC label is incorrect, and so they do not constitute exceptions to our hypothesis.

In summary, a careful analysis of 25 apparent errors made by our reduction across 80 instances, using both automatic and manual WSD, reveals no clear evidence against the correctness of our reduction. We therefore conclude that the results of these experiments strongly support our hypothesis.

5 Discussion

Having presented theoretical and empirical evidence for the equivalence of WiC, WSD, and TSV, we devote this section to the discussion of the relationship between WordNet and WiC.

Most English WiC and TSV datasets are based, in whole or in part, on WordNet. If no sense inventory is used for grounding decisions about meaning, the inter-annotator agreement is reported to be only about 80% (Pilehvar and Camacho-Collados, 2019; Breit et al., 2021). For the MCL-WiC dataset, however, annotators consulted other dictionaries, and obtained “almost perfect agreement” (Martelli et al., 2021). This suggests that sense inventories, and semantic resources in general, are crucial to reliable annotation for semantic tasks. However, because the exact MCL-WiC procedure for resolving differences between dictionaries is not fully specified, and because such dictionaries vary in their availability, the correctness of the annotations cannot be readily verified (c.f. Section 4.3.4).

Moreover, our experiments provide evidence that, even when the WordNet sense inventory is not explicitly used in constructing WiC datasets, WiC annotations nevertheless tend to agree with

WordNet sense distinctions, as our hypothesis predicts. Namely, the MCL-WiC instances in which both focus tokens have the same sense are almost always annotated as positive by the MCL-WiC annotators. This suggests that WordNet sense inventory corresponds closely to human judgements of sameness of meaning, a surprising finding given the high granularity of WordNet.

We postulate that the adoption of WordNet as the standard sense inventory for WiC would have several practical benefits: (1) it has been adopted as the standard inventory for WSD, and so would simplify multi-task evaluation; (2) it allows seamless application of systems across datasets; (3) it facilitates rapid creation of new WiC datasets based on existing sense-annotated corpora; (4) it is freely available; (5) it can be modified to correct errors and omissions; and finally (6) it can be extended to facilitate work with other languages, as in the XL-WiC dataset (Raganato et al., 2020).

In addition, WordNet has strong theoretical advantages. Its fine-granularity is a consequence of its grounding in synonymy and lexical concepts. Therefore, the sense distinctions found in other dictionaries either already correspond to different WordNet concepts, or should lead to adding new concepts to WordNet. Furthermore, unlike in dictionaries, senses of different words in WordNet are linked via semantic relations such as synonymy and hypernymy, which facilitate an objective assignment of every word usage to a single WordNet concept. This property of WordNet may be the reason that the WSD methods based on sense relation information have surpassed the inter-annotator agreement ceiling of around 70% (Navigli, 2006).

6 Conclusion

We formulated a novel sense-meaning hypothesis, which allowed us to demonstrate the equivalence of three semantic tasks by mutual reductions. We corroborated our conclusions by performing a series of experiments involving both WSD and WiC tools and resources. We have argued that these relationships originate from the WordNet properties, which are highly desirable in semantics research. We expect that our findings will stimulate future work on system development, resource creation, and joint model optimization for these tasks.

¹²“To determine whether two occurrences were used with the same meaning or not, annotators were asked to use multiple reputable dictionaries.” (Martelli et al., 2021)

References

- Edoardo Barba, Tommaso Pasini, and Roberto Navigli. 2021a. ESC: Redesigning WSD with extractive sense comprehension. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4661–4672.
- Edoardo Barba, Luigi Procopio, Caterina Lacerra, Tommaso Pasini, and Roberto Navigli. 2021b. Exemplification modeling: Can you give me an example, please? In *Proceedings of 30th International Joint Conference on Artificial Intelligence (IJCAI 2021)*, Online.
- Anna Breit, Artem Revenko, Kiamehr Rezaee, Mohammad Taher Pilehvar, and Jose Camacho-Collados. 2021. [WiC-TSV: An evaluation benchmark for target sense verification of words in context](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 1635–1645.
- Adis Davletov, Nikolay Arefyev, Denis Gordeev, and Alexey Rey. 2021. [LIORI at SemEval-2021 task 2: Span prediction and binary classification approaches to word-in-context disambiguation](#). In *Proceedings of the 15th International Workshop on Semantic Evaluation (SemEval-2021)*, pages 780–786, Online. Association for Computational Linguistics.
- Christiane Fellbaum, editor. 1998. *WordNet: An Electronic Lexical Database*. MIT Press.
- Rohan Gupta, Jay Mundra, Deepak Mahajan, and Ashutosh Modi. 2021. [Mcl@ iitk at semeval-2021 task 2: Multilingual and cross-lingual word-in-context disambiguation using augmented data, signals, and transformers](#). In *Proceedings of the Fifteenth Workshop on Semantic Evaluation*.
- Yoav Levine, Barak Lenz, Or Dagan, Ori Ram, Dan Padnos, Or Sharir, Shai Shalev-Shwartz, Amnon Shashua, and Yoav Shoham. 2020. [SenseBERT: Driving some sense into BERT](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4656–4667.
- Daniel Loureiro and Alípio Jorge. 2019. [LIAAD at SemDeep-5 challenge: Word-in-context \(WiC\)](#). In *Proceedings of the 5th Workshop on Semantic Deep Learning (SemDeep-5)*, pages 1–5, Macau, China. Association for Computational Linguistics.
- Federico Martelli, Najla Kalach, Gabriele Tola, and Roberto Navigli. 2021. SemEval-2021 task 2: Multilingual and Cross-lingual Word-in-Context Disambiguation (MCL-WiC). In *Proceedings of the Fifteenth Workshop on Semantic Evaluation (SemEval-2021)*.
- George A Miller. 1995. WordNet: A lexical database for English. *Communications of the ACM*, 38(11):39–41.
- George A. Miller, Claudia Leacock, Randee I. Tengi, and Ross T. Bunker. 1993. A semantic concordance. In *Proceedings of the ARPA Workshop on Human Language Technology*, pages 303–308.
- Roberto Navigli. 2006. Meaningful clustering of senses helps boost word sense disambiguation performance. In *Proceedings of the 21st International Conference on Computational Linguistics and 44th Annual Meeting of the Association for Computational Linguistics*, pages 105–112.
- Roberto Navigli. 2009. Word sense disambiguation: A survey. *ACM Computing Surveys (CSUR)*, 41(2):10.
- Mohammad Taher Pilehvar and Jose Camacho-Collados. 2019. WiC: the word-in-context dataset for evaluating context-sensitive meaning representations. In *Proceedings of NAACL-HLT*, pages 1267–1273.
- Alessandro Raganato, Jose Camacho-Collados, and Roberto Navigli. 2017. Word sense disambiguation: A unified evaluation framework and empirical comparison. In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 1, Long Papers*, pages 99–110.
- Alessandro Raganato, Tommaso Pasini, Jose Camacho-Collados, and Mohammad Taher Pilehvar. 2020. [XL-WiC: A multilingual benchmark for evaluating semantic contextualization](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 7193–7206.
- Helmut Schmid. 1999. Improvements in part-of-speech tagging with an application to German. In *Natural language processing using very large corpora*, pages 13–25. Springer.
- Alex Wang, Yada Pruksachatkun, Nikita Nangia, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R. Bowman. 2019. Superglue: A stickier benchmark for general-purpose language understanding systems. In *NeurIPS*.