

New trends in indoor positioning based on WiFi and machine learning: A systematic review

Vladimir Bellavista-Parent*, Joaquín Torres-Sospedra†, and Antoni Perez-Navarro*‡

**Internet Interdisciplinary Institute (IN3)*, Universitat Oberta de Catalunya, Castelldefels, Spain

†*UBIK Geospatial Solutions S.L.*, Castellón, Spain

‡*Faculty of Computer Sciences, Multimedia and Telecommunication*, Universitat Oberta de Catalunya, Barcelona, Spain

vbellavista@uoc.edu – torres@ubikgs.com – aperezn@uoc.edu

Abstract—Currently there is no standard indoor positioning system, similar to outdoor GPS. However, WiFi signals have been used in a large number of proposals to achieve the above positioning, many of which use machine learning to do so. But what are the most commonly used techniques in machine learning? What accuracy do they achieve? Where have they been tested? This article presents a systematic review of works between 2019 and 2021 that use WiFi as the signal for positioning and machine learning models to estimate indoor position. 64 papers have been identified as relevant, which have been systematically analyzed for a better understanding of the current situation in different aspects. The results show that indoor positioning based on WiFi trends use neural network-based models, evaluated in empirical experiments. Despite this, many works still conduct an assessment in small areas, which can influence the goodness of the results presented.

Index Terms—indoor, positioning, wifi, bluetooth, WiFi radio map, machine learning

I. INTRODUCTION

Nowadays the outdoor location is resolved in most of the situations, thanks to the GNSS (*Global Navigation Satellite Systems*), among which, the best known are GPS, GLONASS and GALILEO. They are widely used systems all over the planet and we only need one receiver (e.g., a smartphone) to get the position in which we are. The problem arises in indoor spaces, as all these systems stop working due to the low capacity of penetration of the signal into the buildings.

The field of indoor positioning has been advancing in different ways for some years and with different technologies: inertial [1], Bluetooth [2], WiFi [3], Ultrasounds [4], Visible Light [5], among others; and even combining them with each other, what we know as sensor fusion [6, 7]. In recent years, due to advances in machine learning, many of the work is based on applying machine learning algorithms. In addition, the emergence of new technologies, like 5G [8] or WiFi mmWave [9], favour alternatives for indoor positioning.

Nevertheless, the most popular indoor positioning mechanisms are based on WiFi. However, the large number of articles published in this topic in recent years requires a compilation of them and classify them so that they can be useful for future research. This work presents a systematic review of the use of machine learning algorithms for indoor positioning based on WiFi signals in different papers. Specifically, publications since January 2019 are analyzed, of which detailed information

is provided on the algorithms used, as well as on different aspects that have been considered relevant such as: type of work performed (experimental/simulated), size of the test field, number of access points (APs), number of reference points for the radio map, results obtained, evaluation metrics used, type of signal, type of technology used and use of rooms or not for the experiments.

The remainder of this work is organised as follows. Section II briefly reviews the literature related to reviews about indoor positioning. Section III describes the methodology followed in this article. Section IV presents the results with a detailed table. Results are analyzed in Section V. Finally, Section VI gives the conclusion.

II. RELATED WORK

A variety of machine learning approaches have been proposed for indoor localization with WiFi and Machine Learning. Therefore, there are other reviews related to this topic but they are based on other research questions and have different objectives. For example, [10] does an exhaustive analysis of the different indoor positioning articles but focused on articles using collaborative positioning techniques. These techniques are based on the exchange of information between different users and/or devices to improve the overall positioning of the system. These methods have the advantage that requires smaller infrastructure than other methods to create and maintain an indoor positioning system. Their main disadvantage is its greatest computational need, since positioning depends on the calculation of data from multiple sources (users and/or devices).

In [11], we can see a tune-up of all the wireless technologies used in the field of indoor positioning, doing an in-depth analysis of all of them. Thus, they consider works based on the received signal (RSSI or CSI), and those that use data such as Time of Flight (ToF), Angle of Arrival (AoA) or Phase of Arrival (PoA). They also review the different algorithms used to achieve positioning, such as fingerprinting, multilateration or triangulation. Finally, the work classifies the most used Machine Learning algorithms and the methods used to filter received signals. However, it is a review of the technologies used and does not analyze the contribution of every paper individually.

A similar paper, [12], explains other systems and does not focus only on works based on radio signals. It includes any type of wireless signal, even those based on optical or magnetic solutions. The authors also analyze the different algorithms and techniques used to achieve positioning. However, they also do not go into sorting the paper individually.

Finally, [13] makes an exhaustive review of all the deep learning algorithms used in any study that uses fingerprint as a method for positioning. In this review there is also a compilation of the most used public WiFi radio maps and a brief analysis of each one of them. As in the rest of the reviews mentioned above, it focuses more on the analysis of the different elements involved in an indoor positioning job than on analyzing the individual items.

III. METHODOLOGY

The methodology that has been followed in this work to carry out the systematic review is based on the PRISMA [14] guidelines. Thus, a set of questions has been first established to set the objective of the review. The next step has been to define the different search queries to be executed in the digital libraries in which the articles of interest for this work reside. Next, a set of inclusion and exclusion criteria has been set which has been expanded to a full final version that has resulted in the final selection of articles that are part of this work. The following are the research questions:

- RQ1)** Which machine learning algorithms get the best results in WiFi-based indoor positioning?
- RQ2)** What kind of WiFi signal parameter gets the best results?
- RQ3)** What are the most commonly used metrics in indoor positioning studies?
- RQ4)** Are there substantial differences between simulated and experimental studies?
- RQ5)** Which public radio signal maps are the most commonly used in simulation?

To perform queries, *Web of Science* and *Scopus* database has been chosen because they are reliable sources with sufficient content. Figures 1 and 2 introduce the queries we have used to retrieve the scientific papers in those two datasets.

```
TITLE-ABS-KEY (
(wifi OR wi-fi OR wlan OR "802.11"
OR wireless ) AND indoor AND
(posi* OR loca* OR nav* OR track*) AND
(deep* OR machine* OR *nn OR svm OR svr
OR neural OR convolutional
OR "decision tree" OR "boosting"
OR "bagging" OR "particle filter"))
AND (LIMIT-TO (PUBYEAR,2021) OR LIMIT-TO (PUBYEAR,2020) OR
LIMIT-TO (PUBYEAR,2019))
```

Figure 1. Query for *Scopus*

The inclusion criteria that selected papers must satisfy are:

- IC1)** Written in English
- IC2)** Coming from a conference or journal article
- IC3)** Dealing with WiFi-based positioning
- IC4)** Positioning with Machine Learning algorithms
- IC5)** Published between 2019 to 2021

```
(AB=((wifi OR wi-fi OR wlan OR 802.11 OR wireless) AND
indoor AND (posi* OR loca* OR nav* OR track*) AND
(deep* OR machine* OR knn OR k-nn OR svm OR svr
OR neural OR convolutional OR \decision tree"
OR boosting OR bagging OR \particle filter")))
OR TI=((wifi OR wi-fi OR wlan OR 802.11 OR wireless) AND
indoor AND (posi* OR loca* OR nav* OR track*) AND
(deep* OR machine* OR knn OR k-nn OR svm OR svr
OR neural OR convolutional OR \decision tree"
OR boosting OR bagging OR \particle filter")))
OR AK=((wifi OR wi-fi OR wlan OR 802.11 OR wireless) AND
indoor AND (posi* OR loca* OR nav* OR track*) AND
(deep* OR machine* OR knn OR k-nn OR svm OR svr
OR neural OR convolutional OR \decision tree"
OR boosting OR bagging OR \particle filter")))
AND PY=(2019-2021)
```

Figure 2. Query for *Web of Science*

The exclusion criteria are:

- EC1)** Workshops and book chapters
- EC2)** Positioning that's not 100% WiFi
- EC3)** Positioning that has some of the work outdoors
- EC4)** Positioning based on classic multilateration (TOA/TDOA/AOA/POA..)
- EC5)** Positioning based on Sensor Fusion, as we seek only to analyze the behavior of algorithms in WiFi signals
- EC6)** Positioning that uses KNN-based algorithm or Particle Filter, as it is not considered Machine Learning

Once all the results have been obtained, duplicates from the two datasets, *Web of Science* and *Scopus*, have been removed. With the resulting articles, a first analysis of the title and abstract of each of them has been carried out to rule out those who failed to meet the criteria of inclusion or met the exclusion criteria. Finally, a full reading has been made of the included articles to verify whether they met the inclusion criteria and analyse the elements that answer the research questions.

IV. RESULTS

This section presents the results obtained. The complete diagram of the articles obtained can be seen in Figure 3.

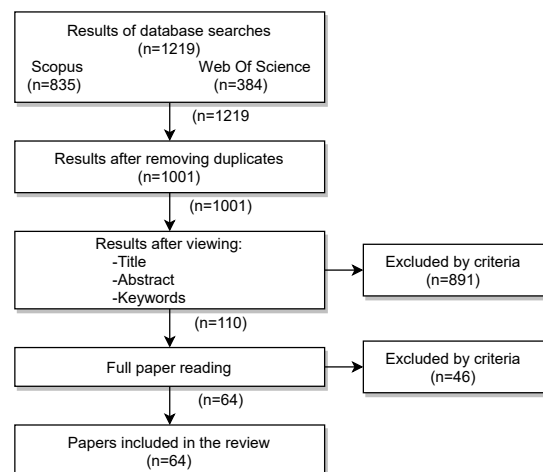


Figure 3. PRISMA flow diagram

Table I
SUMMARY OF REVISED ARTICLES

art	year	WiFi	est	AP	rPoint	fMap	fmRoom	mAlg	sAlg	mError	oError	sType
[15]	2021	WiFi	sim	168	927	IPIN2016 Tutorial	N	DRL		0.244 m		RSSI
		WiFi	sim	589	1840	UTSIndoorLoc	Y	DRL		0.219 m		RSSI
		WiFi	sim	520	993	UJIIndoorLoc	Y	DRL		0.197 m		RSSI
[16]	2021	WiFi	sim	96	80	JUIndoorLoc	Y	BayesNet	Dempster-Shafer		Accuracy = 80% between 3 m and 3.6 m	RSSI
		WiFi	sim	520	993	UJIIndoorLoc	Y	BayesNet	Dempster-Shafer		Accuracy = 98% in 2 m	RSSI
[17]	2020	WiFi	exp	3	21	45 m ²	Y	CNN		1.2669 m	std = 0.6839	CSI
[18]	2020	WiFi	exp	4	264	112 m ²	N	RF		1.68 m		RSSI
[19]	2020	WiFi	exp	4	63	75.6 m ²	N	CNN		1.61 m		CSI
		WiFi	exp	4	N/A	44.8 m ²	N	CNN		1.11 m		CSI
		WiFi	exp	4	N/A	16 m ²	N	CNN		0.98 m		CSI
[20]	2020	WiFi	exp	4	10	169 m ²	Y	CNN		0.98 m		RSSI
[21]	2020	WiFi(mmW)	exp	5	34	55 m ²	N	MLP	Regression	0.37 m	RMSE = 0.84 m	RSSI(SNR)
[22]	2020	WiFi	sim	520	993	UJIIndoorLoc	N	KNN,L,R,SVM,RF			RMSE = 1.87 m	RSSI
[23]	2020	WiFi	exp	6	112	460 m ²	Y	capsnet			Accuracy = 0.68 m	RSSI
[24]	2020	WiFi	exp	8	133	512 m ²	N	Deep Fuzzy Forest		1.36 m	RMSE = 1.79 m	RSSI
[25]	2020	WiFi	exp	1	32	50 m ²	N	DSCP		1.77 m		CSI
		WiFi	exp	1	24	40 m ²	N	DSCP		1.16 m		CSI
		WiFi	exp	1	66	49 m ²	N	DSCP		2.54 m		CSI
[26]	2020	WiFi	exp	6	50	60 m ²	N	RF	Bernoulli distribution		RMSE = 2.50 m	RSSI
[27]	2020	WiFi	exp	25	240	315 m ²	N	RF	Co-forest	2.44 m		RSSI
		WiFi	exp	5	N/A	N/A	N	RF	Co-forest	4.44 m		RSSI
[28]	2020	WiFi	sim	7	1000	Rajen Bhatt	Y	MLP			Accuracy = 94.4%	RSSI
[29]	2020	WiFi	sim	520	993	UJIIndoorLoc	Y	CNN			Accuracy = 88%	RSSI
[30]	2020	WiFi	exp	195	300	800 m ²	N	DNN	HMM	1.22 m	RMSE = 1.43 m	RSSI
[31]	2020	WiFi	exp	3	56	87.75 m ²	N	DNN	LC	0.78 m	std = 1.96	CSI
[32]	2020	WiFi	exp	4	236	1148 m ²	Y	BPNN	GA-PSO	0.215 m		RSSI
[33]	2020	WiFi	exp	10	102	568.4 m ²	Y	LSTM	LF-D	1.48 m		RSSI
		WiFi	exp	30	353	2750 m ²	Y	LSTM	LF-D	1.75 m		RSSI
[34]	2020	WiFi	sim	N/A	N/A	Cramariuc	Y	SEQ2SEQ	LSTM	5.5 m		RSSI
		WiFi	sim	N/A	N/A	Cramariuc B	Y	SEQ2SEQ	LSTM	3.08 m		RSSI
[35]	2020	WiFi	sim	N/A	N/A	UAH	Y	CNN,LSTM		4.93 m		RSSI
		WiFi	sim	N/A	N/A	CAR	Y	CNN,LSTM		5.4 m		RSSI
		WiFi	sim	520	993	UJIIndoorLoc	Y	CNN,LSTM		3.2 m		RSSI
		WiFi	sim	520	993	UJIIndoorLoc	Y	CNN,LSTM		4.98 m		RSSI
[36]	2020	WiFi	exp	5	22	293 m ²	Y	DNN			Accuracy = 95.45% in 3.65 m x 3.65 m	RSSI
[37]	2020	WiFi	exp	N/A	157	5500 m ²	Y	RNN	DL	3.05 m	std = 2.818	RSSI
		WiFi	sim	N/A	157	UJIIndoorLoc	Y	RNN	DL	4.916 m	std = 3.719	RSSI
[38]	2020	WiFi	sim	54	54	10 000 m ²	N	MLP		3.35 m		RSSI
[9]	2020	WiFi(mmW)	exp	3	7	25 m ²	Y	DNN	RESNET	0.11 m	RMSE = 0.08 m	RSSI(SNR)
[39]	2020	WiFi	sim	N/A	40	UJI Library	N	CNN	SVR	2.15 m		RSSI

art	Article	fmRoom	Rooms used in exp/sim
WiFi	WiFi type	mAlg	Main algorithm used
est	Experimental or simulated study	sAlg	Other algorithms used in the study
AP	APs used	mError	Mean Error
rPoint	Reference Points used in offline phase	oError	Other metrics reported in the study
fMap	Size of experimental room or radio-map used	sType	Signal type used

Table I
SUMMARY OF REVISED ARTICLES (CONTINUATION)

art	year	WiFi	est	AP	rPoint	fMap	fmRoom	mAlg	sAlg	mError	oError	sType
[40]	2019	WiFi	exp	3	30	540 m ²	N	DBN	Cross entropy		no accuracy reported	RSSI
[41]	2019	WiFi	exp	2	59	125 m ²	Y	SVM		0.7 m		RSSI
[42]	2019	WiFi	exp	N/A	206	N/A	Y	DNN	Stacked AutoEncoder		Accuracy = 85%	RSSI
[43]	2019	WiFi	exp	1	100	100 m ²	N	SVM		1.909 m	std = 0.068	RSSI/CSI
[44]	2019	WiFi	exp	N/A	N/A	N/A	N/A	J4.8, JRP & SOM	CNN		RMSE = 0.31 m	RSSI
[45]	2019	WiFi	exp	1	N/A	63 m ²	Y	SVM			no accuracy reported	RSSI
		WiFi	exp	1	N/A	63 m ²	Y	MLP			no accuracy reported	RSSI
[46]	2019	WiFi	exp	N/A	N/A	N/A	N/A	SVM			RMSE = 0.42 m	RSSI/CSI
[47]	2019	WiFi	exp	16	83	305 m ²	Y	DNN			Accuracy = 2 m	RSSI
[48]	2019	WiFi	sim	520	993	UJIIndoorLoc	Y	CNN			Accuracy = 95.92%	RSSI
		WiFi	sim	309	3951	Tampere	Y	CNN			Accuracy = 94.13%	RSSI
[49]	2019	WiFi	exp	6	300	300 m ²	N	MEA-BPNN		0.72 m		RSSI
[50]	2019	WiFi	exp	50	N/A	N/A	N/A	ELM			no accuracy reported	RSSI
[51]	2019	WiFi	sim	520	993	UJIIndoorLoc	Y	OSELM		0.7299 m		RSSI
		WiFi	sim	309	1478	Tampere	Y	OSELM		0.9274 m		RSSI
[52]	2019	WiFi	exp	256	74	1664 m ²	Y	CNN			Accuracy = 95.4% in 4 m	RSSI
[53]	2019	WiFi	exp	54	180	1209 m ²	Y	RDF			Accuracy = 89% at room level	RSSI
[54]	2019	WiFi	exp	256	74	300 m ²	Y	CNN		1.46 m	Accuracy = 94% std = 2.24	RSSI
[55]	2019	WiFi	exp	4	42	80 m ²	N	RBF	LM	1.421 m	RMSE = 1.459 m	RSSI
[56]	2019	WiFi	exp	N/A	300	302 m ²	Y	SVM		4.6 m		RSSI
[57]	2019	WiFi	exp	5	10	N/A	N	RF			Accuracy = 97.5% in 2 m	RSSI
[58]	2019	WiFi	exp	8	107	512 m ²	Y	K-ELM			RMSE = 1.7123 m std = 2.418	RSSI
[59]	2019	WiFi	exp	9	96	560 m ²	Y	QKMMCC-BG			average = 0.76 m	RSSI
[60]	2019	WiFi	sim	520	993	UJIIndoorLoc	Y	RNN			Accuracy = 96.45% building 87.41% floor	RSSI
		WiFi	exp	7	N/A	4 Rooms	Y	RNN			Accuracy = 95.8% std = 0.60	RSSI
[61]	2019	WiFi	sim	520	993	UJIIndoorLoc	Y	RNN		4.2 m	std = 3.2	RSSI
		WiFi	exp	6	365	336 m ²	Y	RNN		0.75 m	std = 0.64	RSSI
[62]	2019	WiFi	exp	9	261	300 m ²	N	BPNN		2.7 m	Accuracy = 90%	RSSI
[63]	2019	WiFi	exp	8	66	736 m ²	Y	SDA		3.7 m	Accuracy = 84%	RSSI
[64]	2019	WiFi	exp	1	42	50 m ²	N	CNN		0.46 m	without obstacles	RSSI
		WiFi	exp	1	42	50 m ²	N	CNN		1.11 m	with some obstacles	RSSI
[65]	2019	WiFi	exp	1	15	20 m ²	Y	MLP		1.42 m		RSSI
		WiFi	exp	1	15	20 m ²	Y	CNN		1.67 m		RSSI
		WiFi	exp	1	15	14.4 m ²	N	MLP		1.43 m		RSSI
		WiFi	exp	1	15	14.4 m ²	N	CNN		1.51 m		RSSI
[66]	2019	WiFi	exp	258	9	125 m ²	Y	CNN		3.91 m	Accuracy = 84%	RSSI
[67]	2019	WiFi	sim	N/A	N/A	N/A	Y	BPNN	ACO		Accuracy = 91.4%	RSSI
[68]	2019	WiFi	sim	520	993	UJIIndoorLoc	Y	CNN, GRP		1 m	2.633 m with knn	RSSI
[69]	2019	WiFi	exp	1	25	26.4 m ²	N	BPNN	PCA-PD	1.4223 m	std = 1.1511	CSI
[70]	2019	WiFi	exp	N/A	20	1200 m ²	Y	MLP	SDAE	3.05 m	1day	RSSI
		WiFi	exp	N/A	57	2400 m ²	Y	MLP	SDAE	3.39 m	2days	RSSI
		WiFi	sim	520	993	UJIIndoorLoc	Y	MLP	SDAE	5.64 m	10days	RSSI
[71]	2019	WiFi	sim	520	993	UJIIndoorLoc	Y	VAE			RMSE = 4.65 m	RSSI
[72]	2019	WiFi	exp	6	49	1600 m ²	Y	DNN		0.952 m	Open Doors	RSSI
		WiFi	exp	6	49	1600 m ²	Y	DNN		1.258 m	Closed Doors	RSSI
[73]	2019	WiFi	exp	4	228	1200 m ²	Y	ANN		1.2244 m		RSSI
[74]	2019	WiFi	exp	7	25	1728 m ²	N	RNN	LSTM	1.0538 m	std = 0.8856	RSSI
[75]	2019	WiFi	exp	15	71	4000 m ²	Y	NN	GA	3.47 m		RSSI
[76]	2019	WiFi	exp	4	50	1100 m ²	Y	BGM		2.9 m		RSSI
[77]	2019	WiFi	exp	122	48	629 m ²	Y	DNN		2.64 m		RSSI

art Article
WiFi WiFi type
est Experimental or simulated study
AP APs used
rPoint Reference Points used in offline phase
fMap Size of experimental room or radio-map used

fmRoom Rooms used in exp/sim
mAlg Main algorithm used
sAlg Other algorithms used in the study
mError Mean Error
oError Other metrics reported in the study
sType Signal type used

Table I displays the summary with the main features of the 64 articles reviewed in detail. Please note that:

- Features not explained in the articles appear as N/A .
- Articles that include different experiments and/or simulations are shown grouped together.
- Articles that do not display a metric clear enough, are marked in the column `oError` (Other Errors).
- Articles that are based on or use algorithms different from the main one, are marked in the column `sAlg` (Secondary Algorithm)

V. DISCUSSION

In this section we will analyze the results from several points of view: algorithms used, types of signals used, number of APs and reference points used, metrics, type of experimentation, most commonly used radio maps and the use or not of rooms on these maps.

A. Algorithms

The most commonly used algorithms are those based on artificial neural networks (ANN). Specifically we see up to 39 articles (around 61% of total analysed works) that use this machine learning model or any of its variants (CNN, DNN, BPNN, capsnet, RNN, DSCP, MLP, QKMMCC, NN). The fluctuating signal type of WiFi makes it a good algorithm because it is especially suitable for nonlinear functions, such as WiFi signals. In addition, we see how the best result in the analyzed papers (mean error of 0.11 m) is obtained by using precisely a Deep Neural network to process data from WiFi mmWave signal [9].

We also find different articles that focus on combining different algorithms to choose the one that best results in a given case [16, 22], others that focus on processing data collected from APs [28, 29, 33, 34] and others [32, 37] that rely on applying a double algorithm (one to approximate the location and one to further specify it).

B. Types of WiFi signal parameter used

Regarding the signal information used for positioning, most works are based on received signal strength (RSSI). That is because this signal parameter is easily accessible from any WiFi device (including smartphones and wearable devices). In general, the results obtained with RSSI are around a few meters, although range from almost one meter to several meters. Looking at the data in the table it is easy to see that when smaller and more reference points are used the results improve. Using spaces without rooms also has an impact on the results, that tend to be better. This is explained both, by the effect of signal loss when passing through walls, and the multipath effect, as explained in [78]. It is important to note that although the error in RSSI-based methods is usually higher, paper [32] obtains the second best result among those analyzed 0.22 m.

On the other hand, there are two studies, [25, 31], that use channel state information (CSI) from a WiFi signal and generally with better results in accuracy than those obtained

with RSSI. CSI is not widely used because the channel state information is not easy to obtain and requires specific network cards and modifications on the original *firmware* [25] (i.e., it cannot be used in smartphones).

Finally, we see that the SNR parameter is starting to be used, in particular in combination with those WiFi networks that use *mmWave* [9, 21] instead of the classic networks that broadcast on traditional frequency channels, 2.4 GHz and 5 GHz. We also see better positioning accuracy with these technologies, with which the best and the third best results are obtained.

C. Metrics

In order to compare works among themselves, a common metric is needed. Most jobs report their results with the absolute positioning error mean (euclidean distance between two points), *Mean Error* on the table. Among them, most also report the root mean squared error, *RMSE* on the table. Other metrics used are the mean squared error (*MSE*) and the median error (*MedianError*). On the other hand, 14 papers report the error of success in a certain precision based in percentage [16, 23, 28, 29, 36, 42, 47, 48, 57, 52, 53, 67, 54, 60]. Unfortunately, three articles do not show results clearly or are based on items different from those analyzed in this review [79, 45, 50].

D. Experimental and simulated results

Specifically, we found 27 that present results from simulations and 63 that present empirical results (note that there are articles that perform several experiments and/or simulations). The greater presence of empirical work may be due to an improvement in the APs and mobile devices used today in comparison to those that were used in the different radio maps used in the simulations or by a better situation of the different devices in the actual experiments (optimize the position to force a better result). Three papers apply the same method in both, simulation and experimentation [37, 60, 61]. In two of them, [37, 61], there is an improvement in the results obtained with empirical experimentation. However, this improvement can be due, among other reasons, to the greater number of reference points used to create the WiFi radio map in relation to the space of the experiment compared to the maps used in simulation.

E. Most used radio-maps

In the list, the most commonly used public signal map is the UJIIndoorLoc [80] in all its variants (different buildings). It appears in 14 papers and is clearly the most important, since the rest of the maps found appear only once.

The 35% of experiments reported in 2020 were performed on public databases, whereas only 18% of experiments in 2019 had a similar experimental setup based on external datasets. Having datasets enables researchers to provide useful results as well as performing experiments under a pandemic situation. Others radio-maps used are IPIN2016 [81], UTSIndoorLoc [82], JUIndoorLoc [83], Rajen Bhatt [84] and Cramariuc [85].

On the other hand, there is a great diversity of areas in which experiments take place. Most have been done in university facilities. Specifically, with less than 100 m² we have 16 articles, 14 between 100 m² and 500 m², 8 between 500 m² and 1000 m² and 13 higher than 1000 m². It should be noted that there are articles with more than one experiment and that are therefore part of several groups. Another important aspect of WiFi fingerprinting Radio Maps is whether they are used in spaces without rooms or with rooms. Specifically we see that 57 of the radio maps used have rooms in their experimentation space and there are 30 that are in spaces without any rooms (spaces without walls). Finally, it should be noted that the vast majority of jobs are carried out with the premise of obtaining the best results and do not perform the experiments in an everyday environment.

VI. CONCLUSIONS

This work has shown a systematic review of the current state in the application of deep learning algorithms applied to indoor positioning using WiFi. Information from 64 articles between 2019 and 2021 has been extracted and analysed.

This study shows a tendency to use neural network-based algorithms for positioning based on WiFi, and UJIIndoorLoc as the most used public signal map for most simulations. However, it should be noted that the studies with the best results in terms of accuracy are those carried out experimentally. However, many of these results are obtained in small workspaces with a lot of reference points and/or APs.

We can also note the predominant use of the RSSI of WiFi signals, although the studies that focus on the CSI are very promising, since they are the ones that have obtained the best accuracy.

For future work, we plan to extend the review to a longer period of time to detect whether there are any remarkable trends that have occurred in recent years and to extend the analysis to the computing time required to obtain the results, since in certain circumstances this can be a clear reason for choosing one technology or another. Attention should also be paid to the treatment of signals before being processed by deep learning algorithms, as it has been found that some studies do perform previous pre-processing work but others focus only on the output result of the algorithm.

ACKNOWLEDGMENT

Authors want to thank the Spanish Network of Excellence REPNIN+ (MICINN, ref. TEC2017-90808-REDT). J. Torres-Sospedra acknowledges funding from Torres Quevedo programme (PTQ2018-009981).

REFERENCES

- [1] A.R. Jimenez et al. "Indoor Pedestrian navigation using an INS/EKF framework for yaw drift reduction and a foot-mounted IMU". In: 2010, pp. 135–143.
- [2] R. Faragher and R. Harle. "An analysis of the accuracy of bluetooth low energy for indoor positioning applications". In: vol. 1. Institute of Navigation, 2014, pp. 201–210.
- [3] K. Kaemarungsi and P. Krishnamurthy. "Modeling of indoor positioning systems based on location fingerprinting". In: *IEEE INFOCOM 2004*. Vol. 2. 2004, 1012–1022 vol.2.
- [4] José A. Paredes et al. "3D Indoor Positioning of UAVs with Spread Spectrum Ultrasound and Time-of-Flight Cameras". In: *Sensors* 18.1 (2018).
- [5] M. Yoshino, S. Haruyama, and M. Nakagawa. "High-accuracy positioning system using visible LED lights and image sensor". In: *2008 IEEE Radio and Wireless Symposium, RWS*. 2008, pp. 439–442.
- [6] J. C. Aguilar Herrera et al. "Pedestrian indoor positioning using smartphone multi-sensing, radio beacons, user positions probability map and IndoorOSM floor plan representation". In: *2014 International Conference on Indoor Positioning and Indoor Navigation (IPIN)*. 2014, pp. 636–645.
- [7] Álvaro De-La-Llana-Calvo et al. "Analysis of Multiple-Access Discrimination Techniques for the Development of a PSD-Based VLP System". In: *Sensors* 20.6 (2020).
- [8] S. Horsmanheimo et al. "Indoor Positioning Platform to Support 5G Location Based Services". In: *2019 IEEE International Conference on Communications Workshops (ICC Workshops)*. 2019, pp. 1–6.
- [9] Toshiaki Koike-Akino et al. "Fingerprinting-Based Indoor Localization with Commercial MMWave WiFi: A Deep Learning Approach". In: *IEEE Access* 8 (2020), pp. 84879–84892.
- [10] Pavel Pascacio et al. "Collaborative Indoor Positioning Systems: A Systematic Review". In: *Sensors* 21.3 (Feb. 2021), p. 1002.
- [11] Tan Kim Geok et al. "Review of Indoor Positioning: Radio Wave Technology". In: *Appl. Sci.* 11.1 (Dec. 2020), p. 279.
- [12] Huthaifa Obeidat et al. "A Review of Indoor Localization Techniques and Wireless Technologies". In: *Wirel. Pers. Commun.* (Feb. 2021).
- [13] Fahad Alhomayani and Mohammad H. Mahoor. "Deep learning methods for fingerprint-based indoor positioning: a review". In: *J. Locat. Based Serv.* 14.3 (July 2020), pp. 129–200.
- [14] Matthew J. Page et al. "The PRISMA 2020 statement: An updated guideline for reporting systematic reviews". In: *PLoS Med.* 18.3 (Mar. 2021), e1003583.
- [15] Fei Dou et al. "A Bisection Reinforcement Learning Approach to 3-D Indoor Localization". In: *IEEE Internet Things J.* 8.8 (2021), pp. 6519–6535.
- [16] Priya Roy et al. "Novel weighted ensemble classifier for smartphone based indoor localization". In: *Expert Syst. Appl.* 164 (2021).
- [17] Zhongfeng Zhang, Minjae Lee, and Seungwon Choi. "Deep Learning-based Indoor Positioning System Using Multiple Fingerprints". In: *Int. Conf. ICT Converg.* Vol. 2020-Octob. 2020, pp. 491–493.
- [18] Nyein Aye Maung Maung, Baby Yaw Lwi, and Soe Thida. "An Enhanced RSS Fingerprinting-based Wireless Indoor Positioning using Random Forest Classifier". In: *Proc. 4th Int. Conf. Adv. Inf. Technol. ICAIT 2020*. 2020, pp. 59–63.
- [19] Yuxi Xiao et al. "A passive Indoor Localization with Convolutional Neural Network Approach". In: *Proc. - 2020 Chinese Autom. Congr. CAC 2020*. 2020, pp. 1140–1145.
- [20] S.E. Safae El Abkari et al. "RSS-based Indoor Positioning Using Convolutional Neural Network". In: *Int. J. online Biomed. Eng.* 16.12 (2020), pp. 82–93.
- [21] Abhishek Vashist et al. "Indoor wireless localization using consumer-grade 60 GHz equipment with machine learning for intelligent material handling". In: *Dig. Tech. Pap. - IEEE Int. Conf. Consum. Electron.* Vol. 2020-Janua. Institute of Electrical and Electronics Engineers Inc., 2020.
- [22] Lin Li, Xiansheng Guo, and Nirwan Ansari. "SmartLoc: Smart Wireless Indoor Localization Empowered by Machine Learning". In: *IEEE Trans. Ind. Electron.* 67.8 (2020), pp. 6883–6893.
- [23] Qianwen Ye et al. "CapsLoc: A Robust Indoor Localization System with WiFi Fingerprinting Using Capsule Networks". In: *IEEE Int. Conf. Commun.* Vol. 2020-June. Institute of Electrical and Electronics Engineers Inc., 2020.
- [24] Le Zhang et al. "WiFi-Based Indoor Robot Positioning Using Deep Fuzzy Forests". In: *IEEE Internet Things J.* 7.11 (2020), pp. 1–1.
- [25] Wenjing Xun et al. "Depthwise Separable Convolution based Passive Indoor Localization using CSI Fingerprint". In: *IEEE Wirel. Commun. Netw. Conf. WCNC*. Vol. 2020-May. Institute of Electrical and Electronics Engineers Inc., 2020.
- [26] Jieyu Gao et al. "WiFi-Based Indoor Positioning by Random Forest and Adjusted Cosine Similarity". In: *Proc. 32nd Chinese Control Decis. Conf. CCDC 2020*. Institute of Electrical and Electronics Engineers Inc., 2020, pp. 1426–1431.

- [27] Min Zhao et al. "Research on Crowdsourcing network indoor localization based on Co-Forest and Bayesian Compressed Sensing". In: *Ad Hoc Networks* 105 (2020).
- [28] Mohammad Nabati et al. "Using Synthetic Data to Enhance the Accuracy of Fingerprint-Based Localization: A Deep Learning Approach". In: *IEEE Sensors Lett.* 4.4 (2020).
- [29] Tianqi Qu, Meng Li, and Dong Liang. "Wireless indoor localization using convolutional neural network". In: *J. Phys. Conf. Ser.* Ed. by Asnafi N. Vol. 1633. 1. IOP Publishing Ltd, 2020.
- [30] Yifan Wang et al. "Robust and accurate Wi-Fi fingerprint location recognition method based on deep neural network". In: *Appl. Sci.* 10.1 (2020).
- [31] Wen Liu et al. "LC-DNN: Local Connection Based Deep Neural Network for Indoor Localization with CSI". In: *IEEE Access* 8 (2020), pp. 108720–108730.
- [32] Yongyang Lv et al. "WSN Localization Technology Based on Hybrid GA-PSO-BP Algorithm for Indoor Three-Dimensional Space". In: *Wirel. Pers. Commun.* 114.1 (Sept. 2020), pp. 167–184.
- [33] Zhenghua Chen et al. "WiFi Fingerprinting Indoor Localization Using Local Feature-Based Deep LSTM". In: *IEEE Syst. J.* 14.2 (2020), pp. 3001–3010.
- [34] Hao tai Sun et al. "Wifi based fingerprinting positioning based on seq2seq model". In: *Sensors (Switzerland)* 20.13 (2020), pp. 1–19.
- [35] Rongrong Wang et al. "A Spatial-Temporal Positioning Algorithm Using Residual Network and LSTM". In: *IEEE Trans. Instrum. Meas.* 69.11 (2020), pp. 9251–9261.
- [36] Selda Giney et al. *Wi-Fi Based Indoor Positioning System with Using Deep Neural Network*. 2020 43rd International Conference on Telecommunications and Signal Processing, 2020, pp. 225–228.
- [37] Siqi Bai et al. "DL-RNN: An Accurate Indoor Localization Method via Double RNNs". In: *IEEE Sens. J.* 20.1 (2020), pp. 286–295.
- [38] Zhengtang Sun, Yang Zhang, and Qianqian Ren. "A Reliable Localization Algorithm Based on Grid Coding and Multi-Layer Perceptron". In: *IEEE Access* 8 (2020), pp. 60979–60989.
- [39] Haibing Chen et al. "A WiFi Indoor Localization Method Based on Dilated CNN and Support Vector Regression". In: *Proc. - 2020 Chinese Autom. Congr. CAC 2020*. 2020, pp. 165–170.
- [40] Chih Shun Hsu et al. "An adaptive Wi-Fi indoor localisation scheme using deep learning". In: *Int. J. Ad Hoc Ubiquitous Comput.* Vol. 30. Asia Pacific Conference on Antennas and Propagation 4. 2019, pp. 265–274.
- [41] Erick Schmidt and David Akopian. "Indoor Positioning System Using WLAN Channel Estimates as Fingerprints for Mobile Devices". In: *arXiv*. Ed. by R Creutzburg and D Akopian. Vol. 9411. Proceedings of SPIE. SPIE, 2019.
- [42] Souad BelMannoubi and Haifa Touati. "Deep Neural Networks for Indoor Localization Using WiFi Fingerprints". In: *Lect. Notes Comput. Sci. (including Subser. Lect. Notes Artif. Intell. Lect. Notes Bioinformatics)* 11557 LNCS (2019). Ed. by Bouzeffrane S Leghris C Renault E. Boumerdassi S., pp. 247–258.
- [43] Lu Yin et al. "Improved fingerprint localization algorithm based on channel state information". In: *Proc. 2019 IEEE 1st Int. Conf. Civ. Aviat. Saf. Inf. Technol. ICCASIT 2019*. Ed. by Sun H. Institute of Electrical and Electronics Engineers Inc., 2019, pp. 171–175.
- [44] Munir Naveed et al. "Smart indoor Positioning Model for Deterministic Environment". In: *ITT 2019 - Inf. Technol. Trends Emerg. Technol. Blockchain IoT*. Institute of Electrical and Electronics Engineers Inc., 2019, pp. 288–291.
- [45] Myungsung You et al. "Proxy individual positioning via IEEE 802.11 monitor mode and fine-tuned analytics". In: *IEEE Veh. Technol. Conf.* Vol. 2019-Sept. Institute of Electrical and Electronics Engineers Inc., 2019.
- [46] Chuanhui Ma et al. "A new indoor localization algorithm using received signal strength indicator measurements and statistical feature of the channel state information". In: *CITS 2019 - Proceeding 2019 Int. Conf. Comput. Inf. Telecommun. Syst.* Ed. by Hsiao K.-F. Nicopolitidis P Cascado-Caballero D Obaidat M.S. Mi Z. Institute of Electrical and Electronics Engineers Inc., 2019.
- [47] R. F. Malik et al. "The Indoor Positioning System Using Fingerprint Method Based Deep Neural Network". In: *IOP Conf. Ser. Earth Environ. Sci.* Vol. 248. 1. Institute of Physics Publishing, 2019.
- [48] Xudong Song et al. "Cnnloc: Deep-learning based indoor localization with wifi fingerprinting". In: *Proc. - 2019 IEEE Smart-World, Ubiquitous Intell. Comput. Adv. Trust. Comput. Scalable Comput. Commun. Internet People Smart City Innov. Smart-World/UIC/ATC/SCALCOM/IOP/SCI 2019*. Institute of Electrical and Electronics Engineers Inc., 2019, pp. 589–595.
- [49] Xuechen Jin et al. "LoRa Indoor Localization Based on Improved Neural Network for Firefighting Robot". In: *Commun. Inf. Sci.* 1143 CCIS (2019). Ed. by Lee M Gedeon T. Wong K.W., pp. 355–362.
- [50] Lijun Lian et al. "Improved Indoor positioning algorithm using KPCA and ELM". In: *2019 11th Int. Conf. Wirel. Commun. Signal Process. WCSP 2019*. International Conference on Wireless Communications and Signal Processing. 2019.
- [51] Ahmed Salih Al-Khaleefa et al. "Knowledge preserving OSELM model for Wi-Fi-based indoor localization". In: *Sensors (Switzerland)* 19.10 (2019).
- [52] Amir Haider et al. "Pre- and post-processing algorithms with deep learning classifier for Wi-Fi fingerprint-based indoor positioning". In: *Electron.* 8.2 (2019).
- [53] Beenish Ayesha Akram and Ali Hammad Akbar. "Wi-Fi Fingerprinting Based Room Level Indoor Localization Framework Using Ensemble Classifiers". In: *Mehran Univ. Res. J. Eng. Technol.* 38.1 (2019), pp. 151–174.
- [54] Rashmi Sharan Sinha and Seung Hoon Hwang. "Comparison of CNN applications for rssi-based fingerprint indoor localization". In: *Electron.* 8.9 (2019).
- [55] Hao Meng et al. "Indoor Positioning of RBF Neural Network Based on Improved Fast Clustering Algorithm Combined with LM Algorithm". In: *IEEE Access* 7 (2019), pp. 5932–5945.
- [56] H. Rubiani et al. "Indoor localization based Wi-Fi signal strength using support vector machine". In: *J. Phys. Conf. Ser.* Ed. by A G Abdullah et al. Vol. 1402. Journal of Physics Conference Series 7. 2019.
- [57] Sunmin Lee, Jinah Kim, and Nammee Moon. "Random forest and WiFi fingerprint-based indoor location recognition system using smart watch". In: *Human-centric Comput. Inf. Sci.* 9.1 (Dec. 2019), p. 6.
- [58] Haixia Wang et al. "Mobile Robot Indoor Positioning System Based on K-ELM". In: *J. Sensors* 2019 (2019).
- [59] Nan Xue et al. "On the improvement of positioning accuracy in WiFi-based wireless network using correntropy-based kernel learning algorithms". In: *Trans. Emerg. Telecommun. Technol.* 30.8 (2019).
- [60] Hamza Turabieh and Alaa Sheta. *Cascaded layered recurrent neural network for indoor localization in wireless sensor networks*. 2019 2nd International Conference on New Trends in Computing Sciences. 2019, pp. 296–301.
- [61] Minh Tu Hoang et al. "Recurrent Neural Networks for Accurate RSSI Indoor Localization". In: *IEEE Internet Things J.* 6.6 (2019), pp. 10639–10651. arXiv: 1903.11703.
- [62] Baofeng Wang et al. *Analysis and Improvement for Fingerprinting-Based Localization Algorithm Based on Neural Network*. 2019 15th International Conference on Computational Intelligence and Security. 2019, pp. 82–86.
- [63] Hao Zhang et al. "Dual-band wi-fi based indoor localization via stacked denoising autoencoder". In: *2019 IEEE Glob. Commun. Conf. GLOBECOM 2019 - Proc.* IEEE Global Communications Conference. 2019.
- [64] B. Zhao et al. "Convolutional neural network and dual-factor enhanced variational Bayes adaptive Kalman filter based indoor localization with Wi-Fi". In: *Comput. Networks* 162 (2019).
- [65] Chenlu Xiang et al. "Robust Sub-Meter Level Indoor Localization with a Single WiFi Access Point-Regression Versus Classification". In: *IEEE Access* 7 (2019), pp. 146309–146321. arXiv: 1911.08563.
- [66] Zhenyu Liu et al. "Hybrid wireless fingerprint indoor localization method based on a convolutional neural network". In: *Sensors (Switzerland)* 19.20 (2019).
- [67] Jinghui Chen et al. "A method for indoor Wi-Fi location based on improved back propagation neural network". In: *Turkish J. Electr. Eng. Comput. Sci.* 27.4 (2019), pp. 2511–2525.
- [68] Guolong Zhang et al. "Wireless indoor localization using convolutional neural network and gaussian process regression". In: *Sensors (Switzerland)* 19.11 (2019).
- [69] Xiaochao Dang et al. "A novel indoor localization method using passive phase difference fingerprinting based on channel state information". In: *Int. J. Distrib. Sens. Networks* 15.4 (2019).
- [70] Rongrong Wang et al. "A robust Wi-Fi fingerprint positioning algorithm using stacked denoising autoencoder and multi-layer perceptron". In: *Remote Sens.* 11.11 (2019).

- [71] Boris Chidlovskii and Leonid Antsfeld. "Semi-supervised variational autoencoder for WiFi indoor localization". In: *2019 Int. Conf. Indoor Position. Indoor Navig. IPIN 2019*. International Conference on Indoor Positioning and Indoor Navigation. 2019.
- [72] Wei Yuan Lin et al. "Wi-Fi Indoor Localization based on Multi-Task Deep Learning". In: *Int. Conf. Digit. Signal Process. DSP*. Vol. 2018-Novem. International Conference on Digital Signal Processing. 2019.
- [73] Zahid Farid et al. "A WLAN Fingerprinting Based Indoor Localization Technique via Artificial Neural Network". In: *Int. J. Comput. Sci. Netw. Secur.* 19.7 (2019), pp. 157–165.
- [74] Mohammed Elbes et al. *An Indoor Localization Approach Based on Deep Learning for Indoor Location-Based Services*. 2019 Ieee Jordan International Joint Conference on Electrical Engineering and Information Technology. 2019, pp. 437–441.
- [75] Diogo M.F. Izidio, Antonyus P.A. Do Ferreira, and Edna N.S. Da Barros. *Towards better generalization in WLAN positioning systems with genetic algorithms and neural networks*. Proceedings of the 2019 Genetic and Evolutionary Computation Conference. 2019, pp. 1206–1213.
- [76] Abdulraqeb Alhammadi et al. *Robust 3d indoor positioning system based on radio map using Bayesian network*. 2019 Ieee 5th World Forum on Internet of Things. 2019, pp. 107–110.
- [77] Moustafa Abbas et al. "WiDeep: WiFi-based accurate and robust indoor localization system using deep learning". In: *2019 IEEE Int. Conf. Pervasive Comput. Commun. PerCom 2019*. International Conference on Pervasive Computing and Communications. 2019.
- [78] H. A. Obeidat et al. "An Indoor Path Loss Prediction Model Using Wall Correction Factors for Wireless Local Area Network and 5G Indoor Networks". In: *Radio Sci.* 53.4 (Apr. 2018), pp. 544–564.
- [79] Chih Shun Hsu et al. "An Adaptive Wi-Fi Indoor Localization Scheme using Deep Learning". In: *Proc. 2018 IEEE 7th Asia-Pacific Conf. Antennas Propagation, APCAP 2018*. Institute of Electrical and Electronics Engineers Inc., 2018, pp. 132–133.
- [80] Joaquín Torres-Sospedra et al. "UJIIndoorLoc: A new multi-building and multi-floor database for WLAN fingerprint-based indoor localization problems". In: *2014 International Conference on Indoor Positioning and Indoor Navigation (IPIN)*. 2014, pp. 261–270.
- [81] R. Montoliu et al. "IndoorLoc platform: A public repository for comparing and evaluating indoor positioning systems". In: *2017 International Conference on Indoor Positioning and Indoor Navigation (IPIN)*. 2017, pp. 1–8.
- [82] Xudong Song et al. "A Novel Convolutional Neural Network Based Indoor Localization Framework With WiFi Fingerprinting". In: *IEEE Access* 7 (2019), pp. 110698–110709.
- [83] Priya Roy et al. "JUIndoorLoc: A Ubiquitous Framework for Smartphone-Based Indoor Localization Subject to Context and Device Heterogeneity". In: *Wirel. Pers. Commun.* 106.2 (May 2019), pp. 739–762.
- [84] Jayant G. Rohra et al. "User Localization in an Indoor Environment Using Fuzzy Hybrid of Particle Swarm Optimization & Gravitational Search Algorithm with Neural Networks". In: 2017, pp. 286–295.
- [85] Andrei Cramariuc, Heikki Huttunen, and Elena Simona Lohan. "Clustering benefits in mobile-centric WiFi positioning in multi-floor buildings". In: *2016 International Conference on Localization and GNSS (ICL-GNSS)*. 2016, pp. 1–6.