
Jointly Attacking Graph Neural Network and its Explanations

Wenqi Fan¹ Wei Jin² Xiaorui Liu² Han Xu² Xianfeng Tang³
Suhang Wang³ Qing Li¹ Jiliang Tang² Jianping Wang⁴ Charu Aggarwal⁵

¹The Hong Kong Polytechnic University ²Michigan State University

³The Pennsylvania State University ⁴City University of Hong Kong ⁵IBM T.J. Watson

wenqifan03@gmail.com ²{jinwei2, xiaorui, xuhan1, tangjili}@msu.edu

³{xut10, szw494}@psu.edu csqli@comp.polyu.edu.hk

jianwang@cityu.edu.hk charu@us.ibm.com

Abstract

Graph Neural Networks (GNNs) have boosted the performance for many graph-related tasks. Despite the great success, recent studies have shown that GNNs are highly vulnerable to adversarial attacks, where adversaries can mislead the GNNs' prediction by modifying graphs. On the other hand, the explanation of GNNs (GNNEXPLAINER) provides a better understanding of a trained GNN model by generating a small subgraph and features that are most influential for its prediction. In this paper, we first perform empirical studies to validate that GNNEXPLAINER can act as an inspection tool and have the potential to detect the adversarial perturbations for graphs. This finding motivates us to further initiate a new problem investigation: *Whether a graph neural network and its explanations can be jointly attacked by modifying graphs with malicious desires?* It is challenging to answer this question since the goals of adversarial attacks and bypassing the GNNEXPLAINER essentially contradict each other. In this work, we give a confirmative answer to this question by proposing a novel attack framework (**GEAttack**), which can attack both a GNN model and its explanations by simultaneously exploiting their vulnerabilities. Extensive experiments on two explainers (GNNEXPLAINER and PGExplainer) under various real-world datasets demonstrate the effectiveness of the proposed method.

1 Introduction

Graph neural networks (GNNs) have achieved significant success for graphs in various real-world applications [1–3], such as node classification [4, 5], recommender systems [6–9], and natural language processing [10–12]. Despite the great success, recent studies show that GNNs are highly vulnerable to adversarial attacks [13–15], which has raised great concerns for employing GNNs in security-critical applications [11, 14, 16]. More specifically, attackers can insert adversarial perturbations into graphs, which can lead a well-designed model to produce incorrect outputs or have bad overall performance [17, 11, 18]. For example, adversaries can build well-designed user profiles to promote/demote items in bipartite graphs on many e-commerce platforms such as Alibaba and Amazon [19]; or hackers might intend to damage the reputations of an elector's main opponents by propagating fake news in social media [16].

Recently, interpretation methods for GNNs [20–23] have been proposed to explain the inner working mechanisms of GNNs. In particular, given a trained GNN model and its prediction on a test node, GNNEXPLAINER [20, 23] will return a small subgraph together with a small subset of node features that are most influential for its prediction. On account of this, the model's decision via

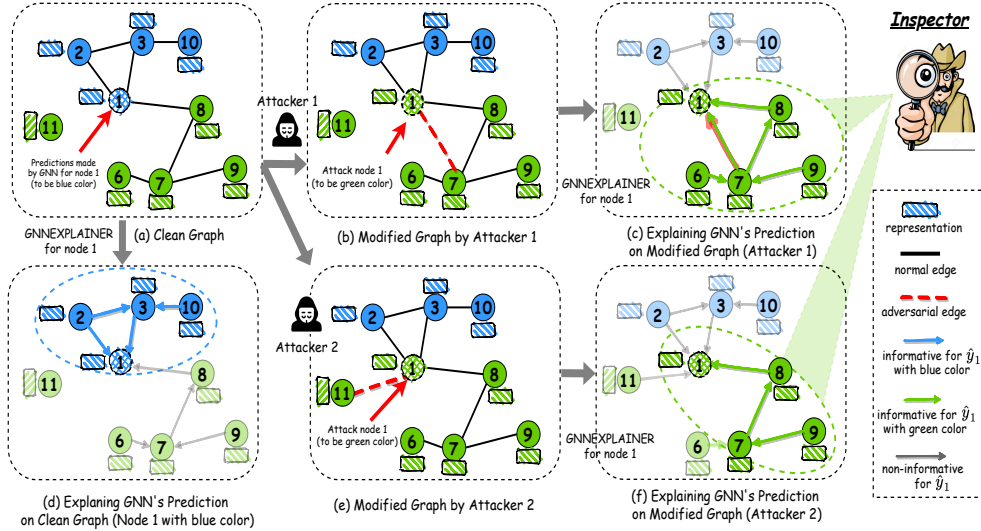


Figure 1: Adversarial attacks and the explanations (GNNEXPLAINER) for prediction made by a GNN model. Some edges form important message-passing pathways (in dotted circle with blue/green color) while others do not (in translucent). The *Attacker 1* can successfully change the GNN’s prediction to green color on the target node v_1 , while the added adversarial edge (v_1, v_7) is included into a subgraph generated by GNNEXPLAINER. While the *Attacker 2* can attack the GNN model, as well as fool the GNNEXPLAINER, where the added adversarial edge (v_1, v_{11}) is not included into a subgraph and successfully evade the detection by an inspector.

the output subgraphs and features can be well-interpreted by people. In our work, we hypothesize that GNNEXPLAINER can also provide great opportunities for people (e.g., inspectors or system designers) to inspect the "confused" predictions from adversarial perturbations. For example, in the e-commerce platform systems, once there exist abnormal predictions for certain products given by the GNN model, GNNEXPLAINER can help locate the most influential users leading the model to make such a prediction. In this way, we can figure out the abnormal users, or adversaries who deliberately propagate such adversarial information to our system. As an illustrative example in Figure 1, an attacker (*Attacker 1*) changes node v_1 ’s prediction of the GNN model by adding an adversarial edge (v_1, v_7) (cf. Figure 1 (b)). At this time, if people find that v_i ’s prediction is problematic, they can apply graph interpretation methods (cf. Figure 1 (c)) to “inspect” this anomaly. Note that GNNEXPLAINER can figure out the most influential components (a In such case, the adversarial edges made by attackers are highly likely to be chosen by GNNEXPLAINER and then detected by the inspector or system designers (cf. Figure 1 (c)). To this end, adversarial users/edges can be excluded from the GNN model to improve the system’s safety. In fact, this hypothesis is verified via empirical studies on real-world datasets. The details can be found in Section 3.

Motivated by the fact that GNNEXPLAINER can act as an inspection tool for graph adversarial perturbations, we further investigate a new problem: *Whether a graph neural network and its explanations can be jointly attacked by modifying graphs with malicious desires?* For example, as shown in Figure 1 (e-f), when an attacker (*Attacker 2*) inserts an adversarial edge (v_1, v_{11}) to mislead the model’s prediction, he can also successfully evade the detection by a GNNEXPLAINER. In such a scenario, the attacker becomes more dangerous where he can even misguide these inspection approaches, leading to more severe safety issues for GNNs. However, jointly fooling graph neural networks and its explanations faces tremendous challenges. The biggest obstacle is that the goals of adversarial attacks and bypassing the GNNEXPLAINER essentially contradict each other. After all, the adversarial perturbations on graphs are highly correlated with the target label, since it is the perturbations that cause such malicious prediction [20, 23]. Therefore, the GNNEXPLAINER has a high chance to detect these perturbations by maximizing the mutual information with GNN’s prediction. Moreover, although there exist extensive works on adversarial attack for a GNN model [13, 14, 24, 25, 16, 17], the joint attack on the GNN model and its explanations is rarely studied which calls for new solutions.

To address the aforementioned challenges, in this work, we propose a novel attack framework (**GEAttack**) for graphs, where an attacker can successfully fool the GNN model and misguide the inspection from GNNEXPLAINER simultaneously. In particular, we first validate that GNNEXPLAINER tools can be utilized to understand and inspect the problematic outputs from adversarially perturbed graph data, which paves a way to improve the safety of GNNs. After that, we propose a new attacking problem, where we seek to jointly attack a graph neural network method and its explanations. Our proposed algorithm **GEAttack** successfully resolves the dilemma between attacking a GNN and its explanations by exploiting their vulnerabilities simultaneously. To the best of our knowledge, we are the first to study this problem that reveals more severe safety concerns. Experimental results on two explainers (GNNEXPLAINER[20] and PGExplainer [23]) demonstrate that GEAttack achieves good performance for attacking GNN models, and adversarial edges generated by GEAttack are much harder to be detected by GNNEXPLAINER, which successfully achieve the joint attacks on a GNN model and its explanations.

2 Related Work

Adversarial Attacks on Graphs. GNNs generalize deep neural networks to graph structured data and become powerful tools for graph representations learning [26, 1, 27]. However, recent studies have demonstrated that GNNs suffer from the same issue as other deep neural networks: they are highly vulnerable to adversarial attacks [28, 14, 11, 25, 29, 30]. Specifically, attackers can generate graph adversarial perturbations by manipulating the graph structure or node features to deceive the GNN model for making incorrect predictions [13, 14, 11]. *Nettack* [13] is one of the first methods that perturbs the graph structure data by preserving degree distribution and feature co-occurrence to perform attack on GNN model [1]. *RL-S2V* [14] is the first work to employ reinforcement learning to generate adversarial perturbations on graph data. *NIPA* [16] also proposes a deep reinforcement learning based method to perform fake node injection attack on graph by simulating the attack process, and sequentially adds the adversarial edges and designs labels for the injected fake nodes. *IG-Attack* [17] introduces an integrated gradients based attack method to accurately reflect the effect of perturbing certain features or edges on graph data. *Metattack* [25] is proposed to globally perturb the graph based on meta learning technique. In our work, we first claim that GNNEXPLAINER tools can serve as an alternative way to improve the GNN model’s safety, by people (such as system inspectors or designers) doing inspections on the problematic prediction outcomes of GNN models, and then locating the potential adversarial perturbations in the graph.

Explaining GNNs. The explanation techniques of deep models aim to study the underlying relationships behind the predictions of deep models, and provide human-intelligible explanations, which can make the deep models more trustable [31, 32, 21]. Some recent efforts have been made to explain the deep models for image and text data [33, 34, 31, 35]. However, the explainability of graph neural network models on graph structured data is less explored, which is critical for understanding deep graph neural networks [20–23, 36]. In particular, as one of the very first methods to interpret GNN, GNNEXPLAINER [20] maximizes the mutual information between the distribution of possible subgraphs and the GNN’s prediction to find the subgraph that is most influential for the prediction. PGExplainer [23] is proposed to generate an explanation for each instance with a global understanding of the target GNN model in an inductive setting. GraphLIME [22] proposes a local interpretable explanation framework for GNN with the Hilbert-Schmidt Independence Criterion (HSIC) Lasso. Meanwhile, in order to investigate what input patterns can result in a certain prediction, XGNN [21] is proposed to train a graph generator for finding graph patterns to maximize a certain prediction of the target GNN model by formulating the graph generation process as a reinforcement learning problem. The improved interpretability is believed to offer a sense of security by involving human in the decision-making process [21, 31]. However, given its data-driven nature, the interpretability itself is potentially susceptible to malicious manipulations [11]. Note that there are other efforts devoted to connecting these two topics by attacking interpretation methods [37–40] on non graph-structured data. In this work, our goal is to fool a GNN model as well as its interpretation methods. To the best of our knowledge, this is the very first effort to attack both GNNs model and its explanations on graph structured data.

3 Preliminary Study

In this section, we investigate the potential of GNNEXPLAINER [20] to detect adversarial attacks through empirical study. Note that in the remaining of the paper, we focus on GNNEXPLAINER; however, the proposed methods can be also applied to other explanation methods and detailed results can be found in the Section 5.3. Next, we first introduce key notations and concepts used in this work.

Graph Neural Networks. Formally, let $G = (V, E)$ denote a graph where $V = \{v_1, \dots, v_n\}$ is the set of n nodes and $E = \{e_1, \dots, e_k\}$ is the edge set. We use $\mathbf{A} \in \{0, 1\}^{n \times n}$ to indicate the adjacency matrix of G , where the i, j -th element A_{ij} is 1 if node v_i and node v_j are connected in G , and 0 otherwise. We also use $\mathbf{X} = [\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_n] \in \mathbb{R}^{n \times d}$ to represent the node feature matrix, where \mathbf{x}_i is the d -dimensional feature vector of the node v_i . Here we use $G = (\mathbf{A}, \mathbf{X})$ to represent the graph data. Without loss of generality, given a graph $G = (\mathbf{A}, \mathbf{X})$, we consider the problem of node classification for GNNs to learn a function $f_\theta : V_L \rightarrow Y_L$, that maps a part of nodes $V_L = \{v_1, v_2, \dots, v_l\}$ to their corresponding labels $Y_L = \{y_1, y_2, \dots, y_l\}$ [1]. The objective function of GNNs can be defined as:

$$\min_{\theta} \mathcal{L}_{\text{GNN}}(f_\theta(\mathbf{A}, \mathbf{X})) := \sum_{v_i \in V_L} \ell(f_\theta(\mathbf{A}, \mathbf{X})_{v_i}, y_i) = - \sum_{v_i \in V_L} \sum_{c=1}^C \mathbb{I}[y_i = c] \ln(f_\theta(\hat{\mathbf{A}}, \mathbf{X})_{v_i}^c). \quad (1)$$

where θ is the parameters of a GNN model f_θ . $f_\theta(\mathbf{A}, \mathbf{X})_{v_i}^c$ denotes the c -th softmax output of node v_i and C is the number of class. y_i is the true label of node v_i and $\ell(\cdot, \cdot)$ is the cross-entropy loss function. In this work, we adopt a two-layer GCN model [1] with $\theta = (\mathbf{W}_1, \mathbf{W}_2)$ as: $f_\theta(\mathbf{A}, \mathbf{X}) = \text{softmax}(\tilde{\mathbf{A}} \sigma(\tilde{\mathbf{A}} \mathbf{X} \mathbf{W}_1) \mathbf{W}_2)$, where $\tilde{\mathbf{A}} = \tilde{\mathbf{D}}^{-1/2}(\mathbf{A} + \mathbf{I})\tilde{\mathbf{D}}^{-1/2}$ and $\tilde{\mathbf{D}}$ is the diagonal matrix of $\mathbf{A} + \mathbf{I}$ with $\tilde{\mathbf{D}}_{ii} = 1 + \sum_j \mathbf{A}_{ij}$. σ is the activation function such as ReLU.

GNNEXPLAINER. In order to explain why a GNN model f_θ predicts a given node v_i 's label as Y , the GNNEXPLAINER acts to provide a local interpretation $G_S = (\mathbf{A}_S, \mathbf{X}_S)$ by highlighting the relevant features \mathbf{X}_S and the relevant subgraph structure \mathbf{A}_S for its prediction [20, 23]. To achieve this goal, it formalizes the problem as an optimization task to find the optimal explanation (G_S), which has the maximum Mutual Information (MI) with the GNN's prediction Y : $MI(Y, (\mathbf{A}_S, \mathbf{X}_S)) := H(Y) - H(Y | \mathbf{A} = \mathbf{A}_S, \mathbf{X} = \mathbf{X}_S)$. As the GNN model f_θ is fixed, the entropy term $H(Y)$ is also fixed. In other words, the explanation for v_i 's prediction \hat{y}_i is a subgraph \mathbf{A}_S and associated features \mathbf{X}_S that minimize the uncertainty of the GNN f_θ when the neural message-passing is limited to G_S as: $\max_{(\mathbf{A}_S, \mathbf{X}_S)} MI(Y, (\mathbf{A}_S, \mathbf{X}_S)) \approx \min_{(\mathbf{A}_S, \mathbf{X}_S)} - \sum_{c=1}^C \mathbb{I}[\hat{y}_i = c] \ln f_\theta(\mathbf{A}_S, \mathbf{X}_S)_{v_i}^c$.

Experimentally, the objective function of GNNEXPLAINER can be optimized to learn adjacency mask matrix \mathbf{M}_A and feature selection mask matrix \mathbf{M}_F in the following manner [20, 23]:

$$\min_{(\mathbf{M}_A, \mathbf{M}_F)} \mathcal{L}_{\text{Explainer}}(f_\theta, \mathbf{A}, \mathbf{M}_A, \mathbf{X}, \mathbf{M}_F, v_i, \hat{y}_i) := - \sum_{c=1}^C \mathbb{I}[\hat{y}_i = c] \ln f_\theta(\mathbf{A} \odot \sigma(\mathbf{M}_A), \mathbf{X} \odot \sigma(\mathbf{M}_F))_{v_i}^c \quad (2)$$

where \odot denotes element-wise multiplication, and σ is the sigmoid function that maps the mask to $[0, 1]^{n \times n}$. After the optimal mask \mathbf{M}_A is obtained, we can compute $\mathbf{A}_S = \mathbf{A} \odot \sigma(\mathbf{M}_A)$ and use a threshold to remove low values. Finally, top- L edges with the largest values can provide an explanation \mathbf{A}_S for GNN's prediction at node v_i . The same operation $\mathbf{X}_S = \mathbf{X} \odot \sigma(\mathbf{M}_F)$ can be used to produce explanations by considering the feature information.

GNNEXPLAINER as Adversarial Inspector. In our work, we first hypothesize that if a model gives a wrong prediction to a test node v_i because of some adversarially inserted fake edges, these "adversarial edges" should make a great contribution to the model's prediction outcome. Therefore, if a GNNEXPLAINER can understand this wrong prediction outcome by figuring out the most influential edges, we are highly likely to find and locate the adversarial edges and finally exclude them from data. In particular, GNNEXPLAINER can reduce search space by generating a subgraph, and then domain

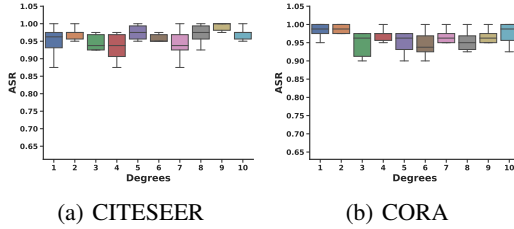


Figure 2: Results of Attack Success Rate (ASR) under Nettack on CITESEER and CORA datasets.

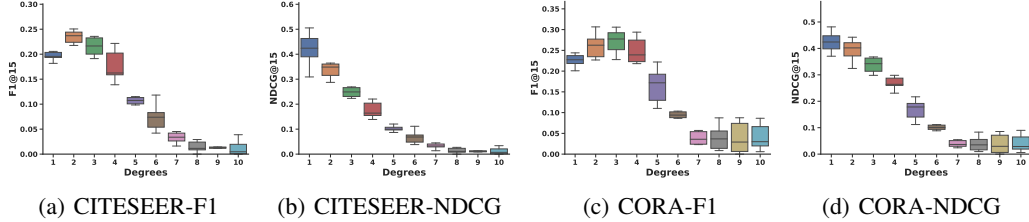


Figure 3: Results of detecting the adversarial edges via GNNEXPLAINER under Nettack on CITESEER and CORA datasets.

experts can efficiently inspect the anomaly in the subgraph. For example, in a GNN based system for credit card fraud detection, when the system predicts a high-risk transaction for a consumer, financial experts can adopt a GNNEXPLAINER to generate a small subgraph with some influential nodes (factors/features) from millions of features for this transaction. Then, financial experts use their professional knowledge to effectively inspect the anomaly in the generated subgraph.

In this subsection, we first dispatch empirical studies to validate the above mentioned hypothesis. Note that in this work we concentrate on GNN’s explanation on graph structural adversarial perturbations (for graph feature perturbations are similar, we leave it for future work). Thus, the objective function of GNNEXPLAINER for adversarial edges detection can be defined as:

$$\min_{\mathbf{M}_A} \mathcal{L}_{\text{Explainer}}(f_\theta, \mathbf{A}, \mathbf{M}_A, \mathbf{X}, v_i, \hat{y}_i) \rightarrow \max_{\mathbf{M}_A} \sum_{c=1}^C \mathbb{I}[\hat{y}_i = c] \ln f_\theta(\mathbf{A} \odot \sigma(\mathbf{M}_A), \mathbf{X})_{v_i}^c. \quad (3)$$

where we find an optimal adjacency mask matrix \mathbf{M}_A , namely the influential subgraph for v_i ’s prediction. To check the inspection performance and verify our hypothesis, we check whether the influential subgraph generated by GNNEXPLAINER can help detect the adversarially inserted fake edges.

Inspection Performance. We conduct preliminary experiments on two real-world datasets (i.e., CITESEER and CORA). The details of experimental settings can be found in Section 5.1. In these experiments, we choose the state-of-the-art graph attack method for GNN model, *Nettack* [13], to perturb the graph data by adding adversarial edges only¹. For each different node’s degree, we randomly choose 40 target (victim) nodes to validate whether the adversarial edges can be found by GNNEXPLAINER for them. To extract the subgraph (G_S) for explanation, GNNEXPLAINER first computes the important weights on edges via masked adjacency (\mathbf{M}_A), and then uses a threshold to remove the edges with low values. Finally, top L edges provide the explanation (G_S) for the GNN’s prediction at target node [20]. In other words, adversarial edges with higher important weights are more likely to present at top ranks and be easily detected by people (such as system inspectors or designers). Here, we adopt the F1 and NDCG to evaluate the detection rate on adversarial edges, where higher values of F1 and NDCG indicate that the adversarial edges are more likely to be detected and noticeable. As shown in Figures 2 and 3, the *Nettack* attacker can perform effective attacks for nodes with different degrees, achieving around 95% attack success rate (ASR). Meanwhile, we can observe that the detection performance via GNNEXPLAINER on these datasets are quite high, especially for the nodes with low degree achieving around 0.4 under the NDCG metric. It means that the adversarial edges are highly likely to be ranked top among all edges which contribute to the model’s prediction. In other words, GNNEXPLAINER can generate a small subgraph (with some influential nodes) to reduce search space from millions of edges, and adversarial edges ranked top among all edges in the subgraph are likely to be inspected by domain experts. Thus, these observations indicate that GNNEXPLAINER has the potential to mark the adversarial edges in corrupted graph data for GNNs. **Note that similar observations on another representative explainer (PGExplainer [23]) can be found in Figure 7 (Refer to Appendix Section).**

Problem Statement. Given the node classification task, the attacker aims to attack a specific target node $v_i \in V_t$ by performing small perturbations on the graph $G = (\mathbf{A}, \mathbf{X})$ and obtains the corrupted graph $\hat{G} = (\hat{\mathbf{A}}, \hat{\mathbf{X}})$, such that the predicted label of the target node v_i can be manipulated [13, 17].

¹Removing edges or modifying nodes’ features is much expensive and harder than adding fake connections among nodes in real-world social networks such as Facebook and Twitter [41, 16].

There are two main types of adversarial perturbations on the graph, including structure attacks to modify the adjacency matrix \mathbf{A} and feature attacks to modify the feature matrix \mathbf{X} . For *simplicity*¹, we focus on the structure attacks, where attackers only add fake edges to connect the target nodes with others under certain perturbation budget Δ . Note that a fixed perturbation budget Δ can be constrained as: $\|\mathbf{E}'\| = \|\hat{\mathbf{A}} - \mathbf{A}\|_0 \leq \Delta$,

where \mathbf{E}' denotes the added adversarial edges by the attackers. In our work, in order to jointly attack a GNN model and its explanations, we design a new attacking method which is designed to achieve: (1) misleading the GNN model f_θ to give a wrong prediction \hat{y}_i on node v_i ; and (2) misleading the explanations of the GNN model such that the added fake edges do not appear in the output subgraph \mathbf{A}_S given by the GNNEXPLAINER [20]. More formally, we state our attacking objective as:

Problem: Given $G = (\mathbf{A}, \mathbf{X})$, target (victim) nodes $v_i \subseteq V_t$ and specific target label \hat{y}_i , the attacker aims to select adversarial edges to composite a new graph $\hat{\mathbf{A}}$ which fulfills the following two goals: (1) The added adversarial edges can change the GNN’s prediction to a specific target label: $\hat{y}_i = \arg \max_c f_\theta(\hat{\mathbf{A}}, \mathbf{X})_{v_i}^c$; and (2) The added adversarial edges will not be included in the subgraph generated by explainer: $\hat{\mathbf{A}} - \mathbf{A} \notin \mathbf{A}_S$.

4 The Proposed Framework

In this section, we first introduce the basic component of graph attack via inserting adversarial edges and then propose how to bypass the detection of GNNEXPLAINER. Finally, we present the overall framework GEAttack and the detailed algorithm.

4.1 Graph Attack

We first formulate the problem to attack a GNN model as one optimization problem to search an optimal model structure $\hat{\mathbf{A}}$ which can let the model predict the victim node v_i with a wrong label \hat{y}_i . In particular, given a well trained GNN model f_θ on the clean input graph G , we propose to achieve the attack on the target node v_i with a specific target label \hat{y}_i by searching $\hat{\mathbf{A}}$ which let the model have a minimum loss on v_i :

$$\min_{\hat{\mathbf{A}}} \mathcal{L}_{\text{GNN}}(f_\theta(\hat{\mathbf{A}}, \mathbf{X})_{v_i}, \hat{y}_i) := - \sum_{c=1}^C \mathbb{I}[\hat{y}_i = c] \ln(f_\theta(\hat{\mathbf{A}}, \mathbf{X})_{v_i}^c). \quad (4)$$

Note that since we minimize the negative likelihood probability of the target label \hat{y}_i , the optimization of the above loss will promote the prediction probability of class \hat{y}_i such that the prediction is maliciously manipulated from the original prediction y_i to \hat{y}_i .

To solve this optimization problem, we desire to apply the gradient-based attack methods, such as [42] to figure out each input edge’s influence on the model output. However, due to the discrete property and cascading effects of graph data [13, 24], it is not straightforward to attack a GNN model via the gradient-based attack method, like FGSM in continued space in computer vision tasks [42]. To address the graph attack problem, we first relax the adjacency matrix $\mathbf{A} \in \{0, 1\}^{n \times n}$ as continuous variable $\mathbb{R}^{n \times n}$. The calculated gradient information can help us approximately find the most “adversarial” edge in the current adjacency matrix, which is the element in the gradient that has the largest negative value. Once added this founded edge into the input graph, the model is highly likely to give a wrong prediction.

4.2 GNNEXPLAINER Attack

The graph attack introduced in Section 4.1 is usually satisfactory in terms of the successful attacking rate (ASR and ASR-T) as we will show in Section 5. However, just like existing attack methods on graph data, since the adversarial edges are highly correlated with the target prediction \hat{y}_i , they are most likely included in the subgraph generated by the GNNEXPLAINER and then become noticeable to the inspector or system designers. Therefore, it is highly nontrivial to achieve attacking while bypassing the detection by GNNEXPLAINER.

As introduced in Section 3, GNNEXPLAINER aims to identify an important small subgraph G_S that influences the GNN’s prediction the most for making GNN’s explanations. It works by minimizing

$\mathcal{L}_{\text{Explainer}}$ (eq. 3) and selecting the top- L edges in the adjacency mask matrix \mathbf{M}_A with the largest values. Therefore, to bypass the detection by GNNEXPLAINER, we propose a novel GNNEXPLAINER *attack* to suppress the possibility of adversarial edges being detected as follows:

$$\min_{\hat{\mathbf{A}}} \sum_{v_j \in \mathcal{N}(v_i)} \mathbf{M}_A^T[i, j] \cdot \mathbf{B}[i, j]. \quad (5)$$

where $\mathbf{B} = \mathbf{1}\mathbf{1}^T - \mathbf{I} - \mathbf{A}$, \mathbf{I} is an identity matrix, and $\mathbf{1}\mathbf{1}^T$ is all-ones matrix. $\mathbf{1}\mathbf{1}^T - \mathbf{I}$ corresponds to the fully-connected graph. When t is 0, \mathbf{M}_A^0 is randomly initialized; while t is larger than 0, \mathbf{M}_A^t is updated with step-size η as follows:

$$\mathbf{M}_A^t = \mathbf{M}_A^{t-1} - \eta \nabla_{\mathbf{M}_A^{t-1}} \mathcal{L}_{\text{Explainer}}(f_{\theta}, \hat{\mathbf{A}}, \mathbf{M}_A^{t-1}, \mathbf{X}, v_i, \hat{y}_i). \quad (6)$$

There are several key motivations:

- The update of \mathbf{M}_A^t mimics the gradient descent step in optimizing the loss function of GNNEXPLAINER in Eq. (2) and \mathbf{M}_A^T corresponds to the adjacency mask matrix after T steps of update.
- The loss term represents the total value of the adjacency mask corresponding to the edges between node v_i and its direct neighbors $\mathcal{N}(v_i)$ since we focus on direct attack. Therefore, the adversarial edges we search among those neighbors tend to have a small value in the mask matrix \mathbf{M}_A ; Since GNNEXPLAINER only selects edges with large values to construct the subgraph, there is a higher chance that adversarial edges could bypass the detection.
- The penalty on existing edges in the clean graph is excluded by the matrix \mathbf{B} where $\mathbf{B}[i, j] = 0$ if edge (v_i, v_j) exists in the clean graph \mathbf{A} . In this way, GNNEXPLAINER is still able to include normal edges in the subgraph. In other words, the GNNEXPLAINER works normally if not being attacked.

Note that this loss function essentially accumulates and penalizes the gradient of $\mathcal{L}_{\text{Explainer}}$ with respect to \mathbf{M}_A^t along the optimization path $\mathbf{M}_A^0 \rightarrow \mathbf{M}_A^1 \rightarrow \dots \rightarrow \mathbf{M}_A^T$. Each step of the gradient has a sophisticated dependency on the optimization variable $\hat{\mathbf{A}}$ and it requires the high-order gradient computation which is supported by deep learning frameworks such as PyTorch and TensorFlow.

4.3 GEAttack

After introducing the graph attack and GNNEXPLAINER attack, we finally obtain our proposed GEAttack framework as follows:

$$\min_{\hat{\mathbf{A}}} \mathcal{L}_{\text{GEAttack}} := \mathcal{L}_{\text{GNN}}(f_{\theta}(\hat{\mathbf{A}}, \mathbf{X})_{v_i}, \hat{y}_i) + \lambda \sum_{v_j \in \mathcal{N}(v_i)} \mathbf{M}_A^T[i, j] \cdot \mathbf{B}[i, j]. \quad (7)$$

where \mathbf{M}_A^0 is randomly initialized when t is 0, and for $t > 0$, \mathbf{M}_A^t can be updated as follows:

$$\mathbf{M}_A^t = \mathbf{M}_A^{t-1} - \eta \nabla_{\mathbf{M}_A^{t-1}} \mathcal{L}_{\text{Explainer}}(f_{\theta}, \hat{\mathbf{A}}, \mathbf{M}_A^{t-1}, \mathbf{X}, v_i, \hat{y}_i). \quad (8)$$

The first loss term \mathcal{L}_{GNN} guides the search of adversary edges such that the prediction of node v_i is attacked; the second loss term guides the search process to bypass the detection of GNNEXPLAINER; and λ is a hyperparameter which balances these two losses. We propose **GEAttack** to solve this optimization problem as shown in Algorithm 1. It majorly runs two loops:

- In the inner loop, we mimic the optimization process of GNNEXPLAINER to obtain the adjacency mask \mathbf{M}_A^T by T steps of gradient descent. Note that we maintain the computation graph of these updates such that the dependency of \mathbf{M}_A^T on $\hat{\mathbf{A}}$ is maintained, which facilitates the gradient computation in the outer loop;
- In the outer loop, we compute the gradient of $\mathcal{L}_{\text{GEAttack}}$ with respect to $\hat{\mathbf{A}}$. Note that this step requires the backward propagation through all gradient descent updates in the inner loop and requires high-order gradient computation which is supported by the Automatic Differentiation Package in PyTorch and TensorFlow. In each iteration, we select one adversarial edge (set $\hat{\mathbf{A}}[i, j] = 1$) according to the largest value in this gradient since this update will decrease the loss maximally, similar to the greedy coordinate descent algorithm.

Algorithm 1 GEAttack

- 1: **Input:** perturbation budget: Δ ; step-size and update iterations of GNNEXPLAINER: η, T ; target node v_i ; target label \hat{y}_i ; graph $G = (\mathbf{A}, \mathbf{X})$, and a GNN model: f_θ .
 - 2: **Output:** the adversarial adjacency matrix $\hat{\mathbf{A}}$.
 - 3: $\mathbf{B} = \mathbf{1}\mathbf{1}^T - \mathbf{I} - \mathbf{A}$, $\hat{\mathbf{A}} = \mathbf{A}$, and randomly initialize \mathbf{M}_A^0 ;
 - 4: **for** $o = 1, 2, \dots, \Delta$ **do** // outer loop over $\hat{\mathbf{A}}$;
 - 5: **for** $t = 1, 2, \dots, T$ **do** // inner loop over \mathbf{M}_A^t ;
 - 6: compute $\mathbf{P}^t = \nabla_{\mathbf{M}_A^{t-1}} \mathcal{L}_{\text{Explainer}}(f_\theta, \hat{\mathbf{A}}, \mathbf{M}_A^{t-1}, \mathbf{X}, v_i, \hat{y}_i)$;
 - 7: gradient descent: $\mathbf{M}_A^t = \mathbf{M}_A^{t-1} - \eta \mathbf{P}^t$;
 - 8: **end for**
 - 9: compute the gradient w.r.t. $\hat{\mathbf{A}}$: $\mathbf{Q}^o = \nabla_{\hat{\mathbf{A}}} \mathcal{L}_{\text{GEAttack}}$;
 - 10: select the edge between node pair (v_i, v_j) with the maximum element $\mathbf{Q}^o[i, j]$ as the adversarial edge, and update $\hat{\mathbf{A}}[i, j] = 1$ and $\mathbf{B}[i, j] = 0$;
 - 11: **end for**
 - 12: **Return** $\hat{\mathbf{A}}$.
-

5 Experiment

In this section, we conduct experiments to verify the effectiveness of our attacking model. We first introduce the experimental settings, then discuss the performance comparison results with various baselines, and finally study the effect of different model components on our model. Note that we also provide extended experimental settings (i.e., parameter settings in Appendix A.1 and evaluation metrics in Appendix A.2) and results to show deep insights of GEAttack in Appendix Section.

5.1 Experimental Settings

Datasets. We conduct experiments on three widely used benchmark datasets for node classification, including CITESEER [1], CORA [1], and ACM [43, 44]. The processed datasets can be found in the github link². Following [25], we only consider the largest connected component (LCC) of each graph. More details of datasets are provided in Appendix A.3.

Baselines. Since the problem for jointly attacking GNN and GNNEXPLAINER in this paper is a novel task, there are no joint attack baselines. Thus, we mainly compare it with the state-of-the-art adversarial attack algorithms. We choose five baselines [45]², Random Attack (RNA), FGA [24], FGA-T, Nettack [13], and IG-Attack [17]. As most baselines are not directly applicable in target attack with a specific target label, we modify the attacking operations accordingly, such as modifying the loss function with the specific target label, or constraining adversarial edges connecting with nodes who have the specific target label. Moreover, we also develop a straightforward baseline (**FGA-T&E**) to jointly attack a GNN model and its explanations. More details of baselines are provided in Appendix A.4.

Attacker Settings. In our experiments, we perform the target attack by selecting a set of target nodes under white-box setting and only consider the adding fake edges when doing adversarial perturbations. Following the setting of IG-Attack [17], we select in total 40 victim target nodes which contain the 10 nodes with top scores, 10 nodes with the lowest scores, and the remaining nodes are randomly selected. Note that we conducted direct attacks on the edges directly connected to the target node with a specific target label. To obtain a specific target label for each node, we first perform attack to fool the target nodes via the basic FGA attack method. The changed label for each target node then is set to be the specific target label if success. Note that we use these successfully attacked nodes to evaluate the final attacking performance. In addition, we conduct the evasion attack, where attacking happens after the GNN model is trained or in the test phase. The model is fixed, and the attacker cannot change the model parameter or structure. The perturbation budget Δ of each target node is set to its degree. Note that we report the average performance of 5 runs with standard deviations.

²<https://github.com/DSE-MSU/DeepRobust/tree/master/deeprobust/graph>

Table 1: Results with standard deviations (\pm std) on three datasets using different attacking algorithms.

	Metrics (%)	FGA ³	RNA	FGA-T	Nettack	IG-Attack	FGA-T&E	GEAttack
CITSEER	ASR	86.79 \pm 0.08	55.52 \pm 0.08	99.56 \pm 0.01	99.11 \pm 0.01	91.54 \pm 0.05	98.74 \pm 0.02	100\pm0.00
	ASR-T	-	54.27 \pm 0.10	99.56 \pm 0.01	99.11 \pm 0.01	91.54 \pm 0.05	98.74 \pm 0.02	100\pm0.00
	Precision	13.45 \pm 0.01	9.96 \pm 0.01	13.44 \pm 0.02	10.21 \pm 0.01	10.21 \pm 0.01	13.31 \pm 0.01	9.87\pm0.02
	Recall	74.55 \pm 0.05	63.80\pm0.05	74.55 \pm 0.05	66.48 \pm 0.06	65.73 \pm 0.04	74.28 \pm 0.05	64.05 \pm 0.07
	F1	21.65 \pm 0.02	16.44\pm0.02	21.64 \pm 0.02	17.08 \pm 0.02	16.96 \pm 0.02	21.47 \pm 0.02	16.49 \pm 0.03
	NDCG	47.18 \pm 0.04	39.21 \pm 0.04	46.60 \pm 0.04	38.45 \pm 0.05	40.26 \pm 0.04	47.02 \pm 0.05	36.11\pm0.05
CORR	ASR	90.54 \pm 0.05	62.97 \pm 0.10	100\pm0.00	100\pm0.00	90.17 \pm 0.07	99.79 \pm 0.01	100\pm0.00
	ASR-T	-	62.58 \pm 0.10	100\pm0.00	100\pm0.00	90.17 \pm 0.07	99.79 \pm 0.01	100\pm0.00
	Precision	16.02 \pm 0.01	10.47\pm0.01	16.08 \pm 0.01	12.78 \pm 0.01	13.47 \pm 0.03	15.95 \pm 0.01	12.21 \pm 0.01
	Recall	72.65 \pm 0.05	55.40\pm0.07	72.75 \pm 0.05	63.83 \pm 0.06	67.66 \pm 0.04	72.45 \pm 0.05	65.03 \pm 0.06
	F1	25.30 \pm 0.02	17.00\pm0.02	25.38 \pm 0.02	20.64 \pm 0.02	21.79 \pm 0.04	25.21 \pm 0.02	20.06 \pm 0.02
	NDCG	43.15 \pm 0.04	34.16\pm0.05	43.41 \pm 0.04	36.47 \pm 0.04	38.05 \pm 0.05	43.46 \pm 0.04	35.60 \pm 0.03
ACM	ASR	67.50 \pm 0.07	63.66 \pm 0.13	100\pm0.00	98.00 \pm 0.03	98.82 \pm 0.02	100\pm0.00	100\pm0.00
	ASR-T	-	63.66 \pm 0.13	100\pm0.00	98.00 \pm 0.03	98.82 \pm 0.02	100\pm0.00	100\pm0.00
	Precision	11.57 \pm 0.05	9.26\pm0.01	11.88 \pm 0.05	12.98 \pm 0.03	11.69 \pm 0.05	11.31 \pm 0.05	9.61 \pm 0.02
	Recall	38.21 \pm 0.12	34.05\pm0.05	38.34 \pm 0.12	43.67 \pm 0.09	44.49 \pm 0.14	37.90 \pm 0.12	38.08 \pm 0.08
	F1	14.16 \pm 0.05	12.75\pm0.02	14.35 \pm 0.05	17.61 \pm 0.04	16.61 \pm 0.07	13.91 \pm 0.05	14.03 \pm 0.03
	NDCG	38.58 \pm 0.14	36.68 \pm 0.10	38.17 \pm 0.13	46.90 \pm 0.09	41.23 \pm 0.13	38.07 \pm 0.13	24.43\pm0.06

³ FGA cannot evaluate ASR-T metric where the specific target label are not available.

5.2 Attack Performance Comparison

We first evaluate how the attack methods perform and whether the adversarial edges can be detected by GNNEXPLAINER. The results are demonstrated in Table 1. According to the results, we have the following observations.

Attacking GNN Model. Our proposed attacker GEAttack works consistently comparable to or outperform other strong GNN attacking methods. In all three datasets (CITSEER, CORR, and ACM), our proposed attacker GEAttack achieves around 100% attacking success rate when doing adversarial attacks with and without target labels (ASR-T & ASR). It suggests that GEAttack can achieve similar attacking power compared to other strongest GNN attackers such as FGA-T and Nettack, while also outperforming other attackers such as IG-Attack and random attack (RNA).

Attacking GNNEXPLAINER. Our proposed attacker GEAttack consistently outperforms other methods when attacking the GNNEXPLAINER, except for the RNA method. In other words, our proposed GEAttack is much harder to be detected by GNNEXPLAINER than all other attacking methods, only except for the RNA attacker. *Note that the RNA method is the strongest baseline with regard to evade the detection of GNNEXPLAINER, while having the worst performance on attacking the GNN model with the ASR-T & ASR metrics.* That is due to the fact that RNA attacker randomly adds edges to the target node, so the added edge is expected to have low influence on the model’s prediction. From our experimental results, we could see, when excluding RNA attacker, our proposed GEAttack is the most strongest attacker for GNNEXPLAINER. Compared to the most successful GNN attackers (Nettack and FGA-T), GEAttack can let the GNNEXPLAINER have much lower Precision, Recall, F1, and NDCG score, which suggests that the GNNEXPLAINER has much lower power to detect adversarial perturbations from GEAttack. For another baseline method, FGA-T&E which also tries to evade the GNNEXPLAINER (by considering only attack the edges that are not selected by GNNEXPLAINER), the GNNEXPLAINER detector still has a high chance to figure out the adversarial perturbations. In conclusion, our proposed GEAttack can have good performance for attacking GNN models, which is comparable to other strongest attackers. At the same time, it is much harder to be detected by GNNEXPLAINER. The experimental results can verify that our proposed method can jointly attack both a GNN model and its explanations (GNNEXPLAINER).

5.3 Jointly attacking GNNs and PGExplainer

In this section, in order to evaluate the effectiveness of our proposed attacking method on both GNNs and its explanations, we apply our proposed method to another representative explainer for the GNNs model (PGExplainer [23]), which adopts a deep model to parameterize the generation process of explanations in the inductive setting. As shown in Figure 7 (Appendix Section), we first conducted empirical studies to validate that PGExplainer has the potential to mark the adversarial edges in corrupted graph data for GNNs, which has similar observations on GNNEXPLAINER in Section 3.

Table 2: Results with standard deviations (\pm std) on CITESEER dataset using different attacking algorithms.

Metrics (%)	FGA	RNA	FGA-T	Nettack	IG-Attack	FGA-T&E	GEAttack
ASR	88.89 \pm 0.06	55.19 \pm 0.04	99.24 \pm 0.01	97.20 \pm 0.18	98.93 \pm 0.01	98.76 \pm 0.01	99.34\pm0.03
ASR-T	-	51.74 \pm 0.06	99.24 \pm 0.01	96.91 \pm 0.11	98.42 \pm 0.02	98.81 \pm 0.01	99.34\pm0.03
Precision	6.77 \pm 0.03	4.10 \pm 0.02	6.47 \pm 0.02	6.45 \pm 0.03	6.52 \pm 0.02	5.66 \pm 0.02	4.65\pm0.01
Recall	40.39 \pm 0.14	27.37 \pm 0.12	39.71 \pm 0.16	40.50 \pm 0.16	43.73 \pm 0.10	35.14 \pm 0.16	28.60\pm0.11
F1	11.07 \pm 0.04	6.79 \pm 0.03	10.61 \pm 0.04	10.65 \pm 0.05	10.72 \pm 0.03	9.19 \pm 0.04	7.47\pm0.02
NDCG	22.65 \pm 0.09	14.85 \pm 0.07	22.87 \pm 0.11	23.07 \pm 0.09	26.76 \pm 0.06	19.38 \pm 0.11	16.45\pm0.07

To perform jointly attacking, we adopt a similar manner to the search of adversarial edges via the gradient computation of PGExplainer. Table 2 shows the overall attack performance comparison on CITESEER dataset. We do not show the results on CORA and ACM datasets since similar observations can be made. In general, we find that our proposed attacker GEAttack achieves the highest attacking success rate (ASR/ASR-T) compared with baselines. Meanwhile, as for attacking PGExplainer, our proposed attacker GEAttack also consistently outperforms other methods under Precision/Recall/F1/NDCG metrics when attacking the PGExplainer, except for the RNA method. Note that as RNA attacker randomly adds edges to the target node for jointly attacking, these adversarial edges might have a low influence to the model’s prediction and could easily lead to evade the detection from Explainer, while making it difficult to attack the GNN model under the ASR-T & ASR metrics. These observations demonstrate that both GNNs model and its explanations are vulnerable to adversarial attacks, and our proposed method can jointly attack both a GNN model and its explanations.

5.4 Balancing the Graph Attack and GNNEXPLAINER Attack - λ

In the previous subsection, we have demonstrated the effectiveness of the proposed method. In this subsection, we study the effect of model components between Graph Attack and GNNEXPLAINER Attack, which is controlled by λ . When λ is close to 0, GEAttack is degraded to Graph Attack model, while it focuses on GNNEXPLAINER Attack for larger values of λ .

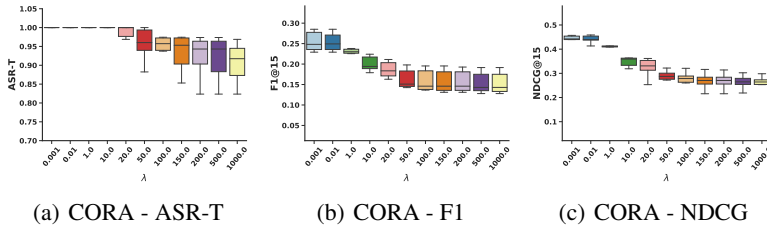


Figure 4: Effect of λ under Attack Success Rate with Target label (ASR-T) and detection rate (F1/NDCG) on CORA dataset.

The ASR-T performance change of GEAttack on CORA dataset is illustrated in Figure 4. As we can see from figures, the ASR-T of GEAttack can maintain 100% successfully attacked nodes when λ is set to 20. However, larger values of λ can greatly hurt the ASR-T performance. For instance, the ASR-T performance of GEAttack can reduce to 95% when λ is set to 50. Moreover, from the figures, we first observe that when the value of λ becomes large, the detection rate on CORA dataset consistently has the same trend under F1/NDCG metrics. In addition, the detection ratio maintains stable when the value of λ is larger than 50. This observation suggests that a larger value of λ is more likely to encourage GEAttack for selecting the adversarial edges as more unnoticeable as possible.

To summarize, larger values of λ can hurt Graph Attack, while benefiting to GNNEXPLAINER Attack, and vice versa. These observations demonstrate that there may indeed exist the trade-off relation between attacking GNN model and the GNNEXPLAINER. However, selecting a proper λ can facilitate us to achieve good attacking performance for the two adversarial goals simultaneously. Note that more results on CITESEER dataset regarding the effect of λ are shown in Figure 8 (Appendix Section).

6 Conclusion

In this paper, we first dispatched empirical studies to demonstrate that GNNEXPLAINER can act as an inspection tool and have the potential to detect the adversarial perturbations for graph data. After that, we introduced a new problem: *Whether a graph neural network and its explanations can be jointly attacked by modifying graph data with malicious desires?* To address this problem, we presented a novel attacking method (**GEAttack**) to jointly attack a graph neural network and its explanations. Our thorough experiments on several real-world datasets suggested the superiority of the proposed GEAttack over a set of competitive baselines. Then, we furthermore performed the model analysis to better understand the behavior of GEAttack.

Currently, we only consider detecting adversarial edges via GNNEXPLAINER, while there exist other adversarial perturbations, like modifying features and injecting fake nodes. In the future, we would like to extend the proposed model for performing attacks via other types of adversarial perturbations. Moreover, we would like to extend the proposed framework on more complicated graph data such as heterogeneous information and dynamic graphs.

References

- [1] Thomas N. Kipf and Max Welling. Semi-supervised classification with graph convolutional networks. In *ICLR*, 2017.
- [2] Tyler Derr, Yao Ma, Wenqi Fan, Xiaorui Liu, Charu Aggarwal, and Jiliang Tang. Epidemic graph convolutional network. In *Proceedings of the 13th International Conference on Web Search and Data Mining*, pages 160–168, 2020.
- [3] Wenqi Fan, Yao Ma, Qing Li, Jianping Wang, Guoyong Cai, Jiliang Tang, and Dawei Yin. A graph neural network framework for social recommendations. *IEEE Transactions on Knowledge and Data Engineering*, 2020.
- [4] Will Hamilton, Zhitao Ying, and Jure Leskovec. Inductive representation learning on large graphs. In *NeurIPS*, pages 1024–1034, 2017.
- [5] Wei Jin, Tyler Derr, Yiqi Wang, Yao Ma, Zitao Liu, and Jiliang Tang. Node similarity preserving graph convolutional networks. In *Proceedings of the 14th ACM International Conference on Web Search and Data Mining*, pages 148–156, 2021.
- [6] Wenqi Fan, Yao Ma, Qing Li, Yuan He, Eric Zhao, Jiliang Tang, and Dawei Yin. Graph neural networks for social recommendation. In *WWW*, 2019.
- [7] Wenqi Fan, Tyler Derr, Yao Ma, Jianping Wang, Jiliang Tang, and Qing Li. Deep adversarial social recommendation. In *28th International Joint Conference on Artificial Intelligence (IJCAI-19)*, pages 1351–1357, 2019.
- [8] Wenqi Fan, Yao Ma, Dawei Yin, Jianping Wang, Jiliang Tang, and Qing Li. Deep social collaborative filtering. In *Proceedings of the 13th ACM Conference on Recommender Systems*, pages 305–313, 2019.
- [9] Wenqi Fan, Qing Li, and Min Cheng. Deep modeling of social relations for recommendation. In *Thirty-Second AAAI Conference on Artificial Intelligence*, 2018.
- [10] Haochen Liu, Jamell Dacon, Wenqi Fan, Hui Liu, Zitao Liu, and Jiliang Tang. Does gender matter? towards fairness in dialogue systems. *arXiv preprint arXiv:1910.10486*, 2019.
- [11] Han Xu, Yao Ma, Haochen Liu, Debayan Deb, Hui Liu, Jiliang Tang, and Anil K Jain. Adversarial attacks and defenses in images, graphs and text: A review. *International Journal of Automation and Computing*, 2020.
- [12] Daniel Beck, Gholamreza Haffari, and Trevor Cohn. Graph-to-sequence learning using gated graph neural networks. In *ACL*, 2018.
- [13] Daniel Zügner, Amir Akbarnejad, and Stephan Günnemann. Adversarial attacks on neural networks for graph data. In *ACM KDD*, 2018.

- [14] Hanjun Dai, Hui Li, Tian Tian, Xin Huang, Lin Wang, Jun Zhu, and Le Song. Adversarial attack on graph structured data. In *ICML*, 2018.
- [15] Binghui Wang and Neil Zhenqiang Gong. Attacking graph-based classification via manipulating the graph structure. In *SIGSAC*, 2019.
- [16] Yiwei Sun, Suhang Wang, Xianfeng Tang, Tsung-Yu Hsieh, and Vasant Honavar. Adversarial attacks on graph neural networks via node injections: A hierarchical reinforcement learning approach. In *WWW*, 2020.
- [17] Huijun Wu, Chen Wang, Yuriy Tyshetskiy, Andrew Docherty, Kai Lu, and Liming Zhu. Adversarial examples for graph data: deep insights into attack and defense. In *IJCAI*, 2019.
- [18] Kaidi Xu, Hongge Chen, Sijia Liu, Pin-Yu Chen, Tsui-Wei Weng, Mingyi Hong, and Xue Lin. Topology attack and defense for graph neural networks: an optimization perspective. In *IJCAI*, 2019.
- [19] Wenqi Fan, Tyler Derr, Xiangyu Zhao, Yao Ma, Hui Liu, Jianping Wang, Jiliang Tang, and Qing Li. Attacking black-box recommendations via copying cross-domain user profiles. In *IEEE ICDE*, 2021.
- [20] Zhitao Ying, Dylan Bourgeois, Jiaxuan You, Marinka Zitnik, and Jure Leskovec. Gnnexplainer: Generating explanations for graph neural networks. In *NeurIPS*, 2019.
- [21] Hao Yuan, Jiliang Tang, Xia Hu, and Shuiwang Ji. Xgnn: Towards model-level explanations of graph neural networks. In *ACM KDD*, 2020.
- [22] Qiang Huang, Makoto Yamada, Yuan Tian, Dinesh Singh, Dawei Yin, and Yi Chang. Graphlime: Local interpretable model explanations for graph neural networks. *arXiv preprint arXiv:2001.06216*, 2020.
- [23] Dongsheng Luo, Wei Cheng, Dongkuan Xu, Wenchao Yu, Bo Zong, Haifeng Chen, and Xiang Zhang. Parameterized explainer for graph neural network. In *NeurIPS*, 2020.
- [24] Wei Jin, Yaxing Li, Han Xu, Yiqi Wang, Shuiwang Ji, Charu Aggarwal, and Jiliang Tang. Adversarial attacks and defenses on graphs. *ACM SIGKDD Explorations Newsletter*, 22(2):19–34, 2021.
- [25] Daniel Zügner and Stephan Günnemann. Adversarial attacks on graph neural networks via meta learning. In *ICLR*, 2019.
- [26] Wei Jin, Tyler Derr, Haochen Liu, Yiqi Wang, Suhang Wang, Zitao Liu, and Jiliang Tang. Self-supervised learning on graphs: Deep insights and new direction. *arXiv preprint arXiv:2006.10141*, 2020.
- [27] Xiaorui Liu, Wei Jin, Yao Ma, Yaxin Li, Hua Liu, Yiqi Wang, Ming Yan, and Jiliang Tang. Elastic graph neural networks. In *International Conference on Machine Learning*, pages 6837–6849. PMLR, 2021.
- [28] Haochen Liu, Yiqi Wang, Wenqi Fan, Xiaorui Liu, Yaxin Li, Shaili Jain, Anil K Jain, and Jiliang Tang. Trustworthy ai: A computational perspective. *arXiv preprint arXiv:2107.06641*, 2021.
- [29] Jiaqi Ma, Shuangrui Ding, and Qiaozhu Mei. Towards more practical adversarial attacks on graph neural networks. *NeurIPS*, 2020.
- [30] Heng Chang, Yu Rong, Tingyang Xu, Wenbing Huang, Honglei Zhang, Peng Cui, Wenwu Zhu, and Junzhou Huang. A restricted black-box adversarial framework towards attacking graph embedding models. In *AAAI*, 2020.
- [31] Marco Tulio Ribeiro, Sameer Singh, and Carlos Guestrin. " why should i trust you?" explaining the predictions of any classifier. In *ACM KDD*, 2016.
- [32] M Vu and MT Thai. Pgm-explainer: Probabilistic graphical model explanations for graph neural networks. In *NeurIPS*, 2020.

- [33] Ramprasaath R Selvaraju, Michael Cogswell, Abhishek Das, Ramakrishna Vedantam, Devi Parikh, and Dhruv Batra. Grad-cam: Visual explanations from deep networks via gradient-based localization. In *IEEE ICCV*, 2017.
- [34] Bolei Zhou, Aditya Khosla, Agata Lapedriza, Aude Oliva, and Antonio Torralba. Learning deep features for discriminative localization. In *IEEE CVPR*, 2016.
- [35] Siwon Kim, Jihun Yi, Eunji Kim, and Sungroh Yoon. Interpretation of nlp models through input marginalization. In *EMNLP*, 2020.
- [36] Hao Yuan, Haiyang Yu, Jie Wang, Kang Li, and Shuiwang Ji. On explainability of graph neural networks via subgraph explorations. *ICML*, 2021.
- [37] Ninghao Liu, Hongxia Yang, and Xia Hu. Adversarial detection with model interpretation. In *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pages 1803–1811, 2018.
- [38] Amirata Ghorbani, Abubakar Abid, and James Zou. Interpretation of neural networks is fragile. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 3681–3688, 2019.
- [39] Juyeon Heo, Sunghwan Joo, and Taesup Moon. Fooling neural network interpretations via adversarial model manipulation. In *Advances in Neural Information Processing Systems*, pages 2925–2936, 2019.
- [40] Xinyang Zhang, Ningfei Wang, Hua Shen, Shouling Ji, Xiapu Luo, and Ting Wang. Interpretable deep learning under fire. In *29th {USENIX} Security Symposium ({USENIX} Security 20)*, 2020.
- [41] Xuening Xu, Xiaojiang Du, and Qiang Zeng. Attacking graph-based classification without changing existing connections. In *ACSAC*, 2020.
- [42] Ian J. Goodfellow, Jonathon Shlens, and Christian Szegedy. Explaining and harnessing adversarial examples. In *ICLR*, 2015.
- [43] Xiao Wang, Meiqi Zhu, Deyu Bo, Peng Cui, Chuan Shi, and Jian Pei. Am-gcn: Adaptive multi-channel graph convolutional networks. In *ACM KDD*, 2020.
- [44] Xiao Wang, Houye Ji, Chuan Shi, Bai Wang, Yanfang Ye, Peng Cui, and Philip S Yu. Heterogeneous graph attention network. In *WWW*, 2019.
- [45] Yaxin Li, Wei Jin, Han Xu, and Jiliang Tang. Deeprobust: A pytorch library for adversarial attacks and defenses. *arXiv preprint arXiv:2005.06149*, 2020.
- [46] Wei Jin, Yao Ma, Xiaorui Liu, Xianfeng Tang, Suhang Wang, and Jiliang Tang. Graph structure learning for robust graph neural networks. In *ACM KDD*, 2020.
- [47] Yao Ma, Suhang Wang, Tyler Derr, Lingfei Wu, and Jiliang Tang. Attacking graph convolutional networks via rewiring. *arXiv preprint arXiv:1906.03750*, 2019.
- [48] Jiawei Han, Jian Pei, and Micheline Kamber. *Data mining: concepts and techniques*. Elsevier, 2011.

Supplementary Material: Jointly Attacking Graph Neural Network and its Explanations

In this section, we provide the necessary information for reproducing our insights and experimental results. These include the detailed description of parameter settings in Section A.1, evaluation metrics in Section A.2, datasets in Section A.3, the quantitative results on PGExplainer that can further support our insights in Figure 7, and hyper-parameters (i.e., λ , T , L) studies as shown in Figure 5, 6, 8.

A Experimental Settings

A.1 Parameter Settings

For training the GNN model in each graph, we randomly choose 10% of nodes for training, 10% of nodes for validation and the remaining 80% of nodes for test [46]. The hyper-parameters of all the models are tuned based on the loss and accuracy on the validation set. Without any specific mention, we adopt the default parameter setting in the author’s implementation. The implementation of our proposed method is based on the DeepRobust repository [45]⁵, a PyTorch library for adversarial attacks. The search spaces for hyper-parameters are as follows:

- $\lambda = \{0.001, 0.01, 1, 10, 20, 50, 100, 200, 500\}$
- $d = \{4, 8, 16, 32, 64, 128\}$
- $T = \{1, 2, 3, 4, 5, 6, 7, 8, 9, 10\}$
- $L = \{5, 10, 20, 40, 60, 80, 100\}$
- Learning rate = $\{0.01, 0.005, 0.001, 0.0005, 0.0001, 0.00005, 0.00001\}$

A.2 Evaluation Metrics

Evaluation Metrics. We evaluate the effectiveness of different attacking methods from two perspectives. One type includes **Attack Success Rate (ASR)** [47] and **Attack Success Rate with Target label (ASR-T)**, which are the ratio of the successfully attacked nodes among all target nodes to any wrong label and specific (incorrect) target label. In our preliminary study in Section 3, we have demonstrated that GNNEXPLAINER can act as an inspector for adversarial edges. Therefore, the other type of evaluation metrics are the popular accuracy metrics for detection rate [48]: **Precision@K**, **Recall@K**, **F1@K**, and Normalized Discounted Cumulative Gain (**NDCG@K**). The first three metrics (Precision@K, Recall@K, F1@K) focus on how many adversarial edges are included in the Top-K list of the subgraph generated via GNNEXPLAINER, while the last metric (NDCG@K) accounts for the ranked position of adversarial edges in the Top-K list. We set K as 15 only. Note that adversarial edges with higher important weights in masked adjacency (M_A) are more likely to present at top ranks and be easily detected by people (such as system inspectors or designers). Hence, higher values of these metrics (Precision@K, Recall@K, F1@K, and NDCG@K) indicate that the adversarial edges are more likely to be detected and noticeable. Meanwhile, lower values of them indicate that adversarial edges are less likely to present in the subgraph (G_S) and more unnoticeable to human, where the GNNEXPLAINER can be attacked. Without any specific mention, we adopt the default parameter setting of GNNEXPLAINER in the author’s implementation⁴, and the size of subgraph L is set to 20. Note that we further analyse the impact of GNNEXPLAINER inspector on adversarial edges based on the various size of subgraph L at Section B.1.1.

A.3 Datasets

We conduct experiments on three widely used benchmark datasets for node classification, including CITESEER [1], CORA [1], and ACM [43, 44]. These processed datasets can be found in the github link⁵. The statistics of these three datasets are presented in Table 3.

⁴<https://github.com/RexYing/gnn-model-explainer>

⁵<https://github.com/DSE-MSU/DeepRobust/tree/master/deeprobust/graph>

Table 3: The statistics of the datasets by considering the Largest Connected Component (LCC).

Datasets	Nodes	Edges	Classes	Features
CITeseer	2,110	3,668	6	3,703
CORA	2,485	5,069	7	1,433
ACM	3,025	13,128	3	1,870


- **CITeseer** [1]. CITeseer is a research paper citation network with nodes representing papers and edges representing their citation relationship. The node labels are based on the paper topics and the node attributes are bag-of-words descriptions about the papers.
- **CORA** [1]. CORA is also a citation network where nodes are papers and edges are the citation relationship between the papers. The node attributes are also bag-of-words descriptions about the papers. The papers are divided into seven classes.
- **ACM** [43]. This network is extracted from ACM dataset where nodes represent papers with bag-of-words representations as node attributes. The existence of an edge between two nodes indicates they are from the same author. The nodes are divided into three classes.

A.4 Additional Details on Baselines

The details for baselines are as follows:

- **Random Attack (RNA)**: The attacker randomly adds adversarial edges to connect the target node with one from candidate nodes whose label is specific target label until reaching the perturbation budget.
- **FGA** [24]: This is a gradient-based attack method which aims to find adversarial edges by calculating the gradient of model’s output on the adjacency matrix. Note that this method does not consider to fool the model to specific label.
- **FGA-T**: Similar to FGA attack, FGA-T is a targeted version of FGA attack which aims to attack the target node to specific target label.
- **Nettack** [13]: This method introduces the first study of adversarial attacks on graph data by preserving important graph characteristics.
- **IG-Attack** [17]: This baseline introduces an integrated gradients method that could accurately reflect the effect of perturbing edges for adversarial attacks on graph data.
- **FGA-T&E**: Another baseline based on FGA-T method, but further incorporates the desire to evade the detection GNNEXPLAINER when generating adversarial edges. We first adopt GNNEXPLAINER to generated a small subgraph. Then, we exclude the potential nodes from the subgraph when generating the adversarial edges between the target node and the potential nodes.

B Additional Experiments

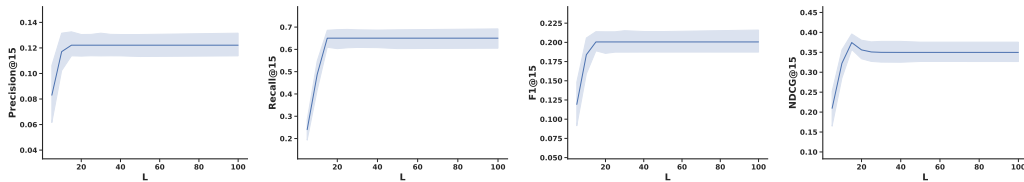

(a) CORA - Precision

(b) CORA - Recall

(c) CORA - F1

(d) CORA - NDCG

Figure 5: Effect of size of subgraph L under detection rate (Precision/Recall/F1/NDCG) on CORA dataset.

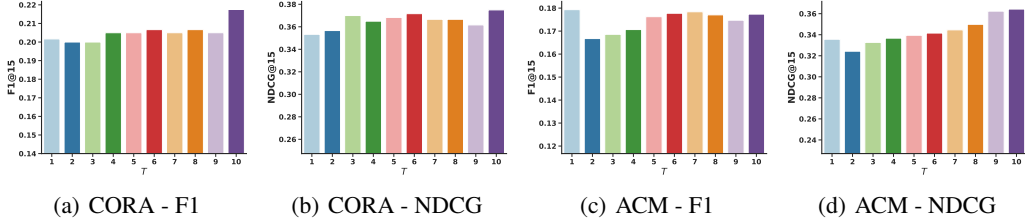


Figure 6: Effect of T under detection rate (F1/NDCG) on CORA and ACM datasets.

B.1 Parameter Analysis

In this section, we study the effect of model hyper-parameters for understanding the proposed method, including the size of subgraph L and the number of update iterations T .

B.1.1 Effect of Subgraph Size L

In this subsection, we further study the impact of GNNEXPLAINER inspector for adversarial edges based on the size of subgraph L . Figure 5 shows the detection rate of GEAttack with varied sizes of the subgraph L . As we can see, when the size of subgraph increases, the performance tends to increase first. And GEAttack can not keep increasing when the size of subgraph is larger than around 20.

B.1.2 Effect of the Number of Update Iterations T

In this subsection, we explore the sensitivity of hyper-parameter T for our proposed GEAttack. T is the number of steps of updating GNNEXPLAINER, which may influence the learning of M_A^t . The results are given in Figure 6 on CORA and ACM datasets. We do not show the results under attack success rate (ASR- T) as the performance almost achieves 100% and do not change too much. From the figure, we can observe that our proposed GEAttack method can achieve good performance under a small value of T (i.e., less than 3), which indicates that sub-optimal solutions of GNNEXPLAINER can provide sufficient gradient signal regarding M_A^t to guide the selection of adversarial edges for jointly attacking graph neural networks and GNNEXPLAINER.



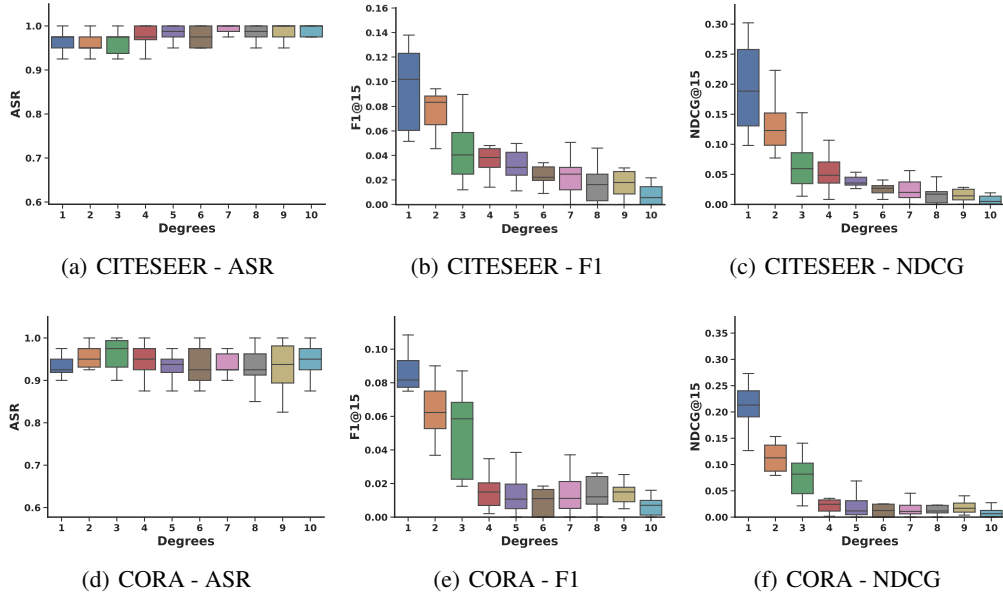



Figure 7: Results of detecting the adversarial edges via PGExplainer Inspector under Nettack on CITESEER and CORA datasets.

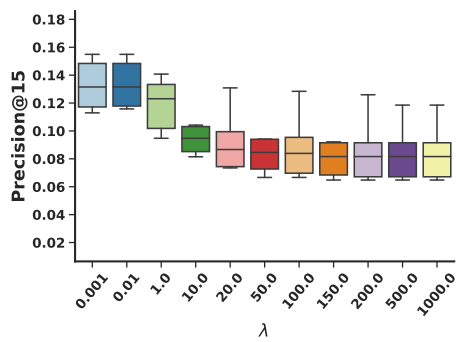


(a) CITESEER - Precision

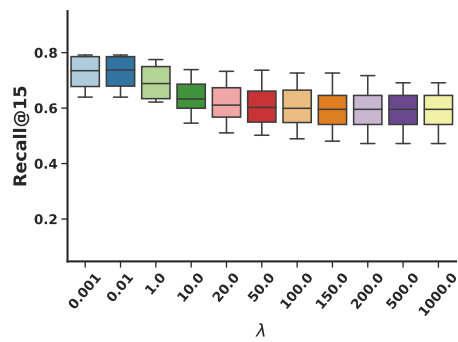

(b) CITESEER - Recall

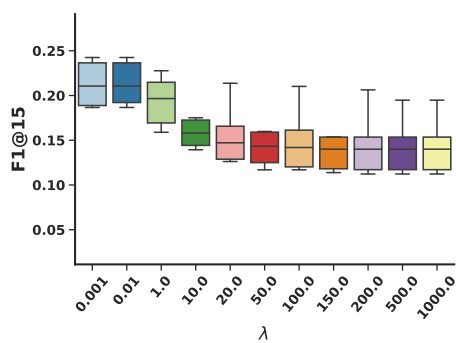

(c) CITESEER - F1

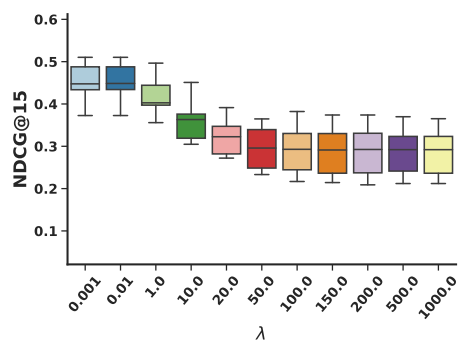

(d) CITESEER - NDCG

Figure 8: Effect of λ under detection rate (Precision/Recall/F1/NDCG) on CITESEER dataset.