

Completion and Augmentation based Spatiotemporal Deep Learning Approach for Short-Term Metro Origin-Destination Matrix Prediction under Limited Observable Data

Jiexia Ye¹, Juanjuan Zhao^{2*}, Furong Zheng² and Chengzhong Xu³

¹Guangdong-Hong Kong-Macao Joint Laboratory of Human-Machine Intelligence-Synergy Systems, Shenzhen Institute of Advanced Technology, Chinese Academy of Sciences.

²Shenzhen Institute of Advanced Technology, Chinese Academy of Sciences.

³State Key Lab of IOTSC, Department of Computer Science, University of Macau.

*Corresponding author(s). E-mail(s): jj.zhao@siat.ac.cn;

Contributing authors: zumri.jiexiaye@um.edu.mo; fr.zheng@siat.ac.cn; czxu@um.edu.mo;

Abstract

Accurate prediction of short-term origin-destination (OD) matrix is crucial for operations in metro systems. Recently, some deep learning-based models have been proposed for OD matrix forecasting in ride-hailing or high way scenarios. However, the metro OD matrix forecasting receives less attention and it has different prior knowledge and complex spatiotemporal contextual setting, for example, the sparse destination distribution and the incomplete OD matrices collection in recent time slots due to unfinished trips before the predicted time slot. This paper designs a deep learning approach for metro OD matrix prediction by addressing the recent destination distribution availability, augmenting the flow presentation for each station, and digging out the global spatial dependency and multiple temporal scale correlations in the mobility patterns of metro passengers. Specifically, it first proposes to complete the recent OD matrices by combining some empirical knowledge including the historical mobility pattern and travel time distribution. Then it learns the complementary spatiotemporal contextual features by embedding methods to enrich the station representation. Finally, it captures global mobility trend of metro passengers at each origin station through aggregating the trend of all other origin stations by self-attention mechanism since the mobility synchronizes among stations from spatial perspective. Three temporal convolutional networks are leveraged to extract three temporal trends in passenger mobility data, i.e. recent trend, daily trend, weekly trend. Smart card data from Shenzhen and Hangzhou metro systems are utilized to demonstrate the superiority of our model over other competitors.

Keywords: Origin-Destination Matrix Prediction, Destination Distribution Availability, Self-Attention Mechanism, Temporal Convolution Network

1 Introduction

OD prediction in Urban Rail Transit (URT) is one of the critical tasks in intelligent transportation

systems. The prediction result can benefit both individuals and traffic operators. For operators, such knowledge could help them better understand the real-time passenger flow distribution in

whole subway network, thus supporting decisions on network management tasks, such as congestion control and traffic resources deployment. For individuals, OD prediction can provide more accurate suggestions for them to arrange their route plannings, thus improving travel experience. However, the short-term OD flow prediction in metro systems confronts some important challenges as follows:

Flow Distribution Sparsity. Passenger flow prediction at OD pair level is much larger in scale than that at station level. Take Shenzhen subway with 118 stations for example, only 118 elements need to be predicted if we want to forecast the passenger flow at station level while there are 13,924 (i.e. the square number of 118) predicted elements in OD matrix prediction. The high data dimensionality comes with sparsity. The limited inflow/outflow of each station disperses across the whole network, leading to sparse passenger flow distribution, i.e. many OD pairs with small or even zero values. According to statistics, nearly half of OD pairs in Shenzhen metro dataset have lower than 4 passengers at half-an-hour time granularity, usually attributed to randomly generated trips which significantly decrease the regularity of OD flows. The sparse destination distribution largely increases the difficulty to predict the OD flows accurately.

Incomplete Recent Destination Distribution. Most of the existing OD prediction methods are based on the premise that the complete traffic data can be obtained in time. For instance, the rail-hailing OD matrices at previous steps can be obtained for prediction. However, the metro OD matrices at latest several time slots, namely recent OD matrices, are likely to be collected partially and thus incomplete before the predicted time slot. For any passenger trip, there is a time gap between the entrance and exit of the subway stations. For passengers entering the origin station during a past time slot, it's likely that part of them reach their destinations before the predicted time slot and the remainder finish their journeys after the target time slot. Therefore, destination distributions collected in recent time slots are likely to be incomplete and the accurate real-time passenger movement information is unavailable.

Multiple Temporal Dependency and Global Dynamic Spatial Correlation. Given a station, the passenger mobility is not only related

to its own past distributions which contain various temporal trends (e.g recent trend, daily trend, weekly trend), but also depends on other stations, showing global spatial dependency. For example, the passenger flows might be abnormally large during an unpredictable event. For any station, the abnormally increasing passenger flow may be regarded as a purely random phenomenon. However, if aggregating the flows of multiple stations, the abnormal passenger mobility pattern comes to the surface, which is difficult to discover from the view of a single station. Purely random fluctuation of OD flow in one station might not have great impact on future prediction, while the abnormal passenger flow in a global scale might last for a long period. We can call this phenomenon as mobility synchronization, which is useful for predicting future passenger mobility of each station more accurately. Note that the correlations among stations are nonlinear and time-evolving, increasing the prediction difficulty.

Traditional methods in OD metro prediction, e.g. least-square [1], matrix factorization [2–4], probabilistic model [5] and so on [6], fail to model the complex spatiotemporal dependency in OD flows. In recent years, some researches tried to predict OD Matrix based on various deep neural network architectures [7–12]. Some utilized recurrent neural networks, e.g. LSTM [7, 8, 10, 12] to learn the temporal dependencies and leveraged CNN [9, 11] and their variants to extract the spatial dependencies in traffic networks. However, these approaches don't focus on capture the dynamic spatial dependency in metro OD flow from a global perspective, which is valuable for improving the prediction accuracy. In addition, many of them are limited about dealing with the incomplete OD matrices at last several time slots. Only the recent inflow is incorporated into the model [11] or only some of the OD values in recent OD matrix are utilized resulting in a sparse input [2]. [8] utilized both station entry demand and partially OD flow but simply by a fully connected layer which can't fully investigated the mobility information in the available data. As to the sparse flow distribution problem, most of the work above didn't pay attention to it except that [11] proposed to solve it by only focusing on the large OD values and ignoring the small ones which might not meet the demand of accurate flow control. To sum up,

none of the work tackled the challenges mentioned in this paper sufficiently.

In order to deal with the aforementioned challenges of metro OD Matrix prediction, we propose a novel model, called Completion Augmentation based Self-Attention Temporal Convolutional Network (i.e. CA-SATCN). First, a fusion gate mechanism is designed to adaptively estimate the unobservable part of Recent OD Matrices based on two kinds of moving pattern information, i.e. historical stable passenger mobility trend and latest dynamic passenger mobility trend, from various available data (e.g. inflow, incomplete recent OD matrices, historical destination distribution ratio and statistical travel time distribution). Then, we augment the sparse flow distribution with compact destination distribution and spatiotemporal context (e.g. geographical position, region function) by leveraging appropriate embedding methods, e.g. LINE and Latent Dirichlet Allocation (LDA). Finally, the augmented flow distribution is fed into a variant of self-attention mechanism to produce a global high-level representation of passenger moving pattern for each station through aggregating the mobility trends of all other stations weighted by their dynamic spatial correlations. From these high-level features, three matrices sequences are constructed on different time scales and fed into different Temporal Convolution Networks (TCNs) to extract various temporal trends (i.e. recent trend, daily trend, weekly trend) for prediction. Overall, the main contributions of our paper are as follows:

- We novelly reconstruct the Recent OD Matrices by designing a fusion gate mechanism to combine the historical stable passenger mobility trend and latest dynamic passenger mobility trend from observable data including inflow, partially available recent OD matrices, historical destination distribution ratio and statistical travel time distribution.
- To alleviate the flow distribution sparsity problem, we utilize a series of strategies to learn a dense high-level representation for each station by compacting its destination distribution and complementing it with spatiotemporal context. For example, graph embedding model LINE and document topic model LDA are leveraged to learn spatial context for each station.

- A variant of self-attention mechanism is designed to model the dynamic and global spatial dependency in passenger mobility pattern, based on which three TCNs are proposed to capture temporal trends from different perspectives (i.e. recent trend, daily trend, weekly trend) in metro OD flow sufficiently.
- Extensive experiments on two real-world metro datasets demonstrate the superiority of our model.

2 Preliminary

In order to facilitate our discussion, we first introduce some basic definitions and then formulate the problem formally.

Definition 1 (Time Slot). We evenly partition each day by a given time granularity δ into K time slots.

Definition 2 (Inflow). The number of passengers entering station i during time slot t is defined as the station inflow, denoted as in_t^i . Suppose there are N metro stations in a subway system, the inflow of the subway network at t is denoted as $IN_t = [in_t^1, \dots, in_t^N] \in \mathbb{R}^N$.

Definition 3 (Finished/Delayed Inflow). The inflow of station i at an input time slot t can be divided into two parts according to the predicted time slot t' , i.e. Finished Inflow and Delayed Inflow. The former is defined as the number of passengers finishing their trips before the predicted time slot, denoted as $in_{t,t'}^{i,f}$. The latter is defined as the remainder finishing their journeys during or after the predicted time slot, denoted as $in_{t,t'}^{i,d}$. Note that $in_t^i = in_{t,t'}^{i,f} + in_{t,t'}^{i,d}$. The Finished Inflow and Delayed Inflow of the subway are denoted as $IN_{t,t'}^f = [in_{t,t'}^{1,f}, \dots, in_{t,t'}^{N,f}] \in \mathbb{R}^N$ and $IN_{t,t'}^d = [in_{t,t'}^{1,d}, \dots, in_{t,t'}^{N,d}] \in \mathbb{R}^N$ respectively.

Definition 4 (DVector). The destination distribution of passengers entering an origin station i at a time slot t is defined as its *DVector*, denoted as $E_t^i = [m_t^{i,1}, \dots, m_t^{i,N}] \in \mathbb{R}^N$, where $\sum_{j=1}^N m_t^{i,j} = in_t^i$ and $m_t^{i,j}$ is the number of passengers entering station i during time slot t and exiting at station j .

Definition 5 (OD Matrix). The OD Matrix of a metro system at time slot t is composed of DVectors of all origin stations at t , denoted as $M_t = [E_t^1, \dots, E_t^N] = (m_t^{ij})_{N \times N}$. The rows

and the columns of E_t represent the origins and destinations respectively.

Definition 6 (*Finished/Delayed OD Matrix*). Similarly to the definition of Finished/Delayed Inflow, the OD Matrix at an input time slot t can be divided into two parts according to the predicted time slot t' , namely Finished OD Matrix and Delayed OD Matrix. Finished OD Matrix describes passengers entering subway during the input time slot and exiting the subway before the predicted time slot, denoted as $M_{t,t'}^f \in \mathbb{R}^{N \times N}$. Delayed OD Matrix describes passengers entering the subway during the input time slot and exiting the subway after or during the predicted time slot, denoted as $M_{t,t'}^d \in \mathbb{R}^{N \times N}$. Note that $M_{t,t'}^f + M_{t,t'}^d = M_t$.

Definition 7 (*Recent OD Matrices*). The OD matrices at adjacent time slots next to predicted time slot are defined as Recent OD Matrices. As mentioned above, each Recent OD Matrix can be divided into Finished OD Matrix and Delayed OD Matrix according to the predicted time slot. Note that the recent Finished OD Matrix can be collected while the recent Delayed OD Matrix can not be observed before the predicted time slot. If the unobserved Delayed OD Matrix has non-zero elements, it refers that not all the passengers exit the subway before the predicted time slot. When they leave the subway is unknown and in such case the available Recent OD Matrix before the predicted time slot is incomplete.

Problem Formulation. The available OD data in metro scenario is the Finished OD Matrices at current day and historical OD matrices at previous days or weeks. In this paper, we take full advantage of both the inflow information and the available previous OD data to predict the OD Matrix at the predicted time slot. The problem can be formulated as follows:

$$\hat{M}_{t'} = g([IN_{t'-1}, \dots, IN_{t'-P}], [M_{t'-1}^f, \dots, M_{t'-P}^f], [M_{t_1}, \dots, M_{t_P}]) \quad (1)$$

where t' is the predicted time slot, $\hat{M}_{t'}$ is the prediction at t' . g is the mapping function. $[t' - 1, \dots, t' - P]$ is the input time slot sequence at current day and $[t_1, \dots, t_P]$ is the input time slot sequence at previous days or weeks.

3 Methodology

In this section, we introduce CA-SATCN (as shown in Figure 2), a general solution to forecast the next metro OD Matrix. Firstly, the recent OD matrices are estimated through merging historical stable passenger mobility information and latest dynamic passenger mobility information by a fusion gate mechanism. Then, we obtain a compact and dense representation of each station at each time slot by compacting its destination distribution at each time slot and enriching it with its spatiotemporal context learned by appropriate embedding approaches such as LINE and LDA. Based on the augmented representation, a variant of self-attention mechanism is designed to extract the dynamic spatial correlations globally for each station at each input step. Finally, three sequential representations at different time scales are fed into three temporal TCN-based components to learn temporal trends (i.e. recent trend, daily trend, weekly trend) for each station. The results of all the trends are fused to generate the predicted OD Matrix.

3.1 Recent OD Matrices Completion

The Recent OD Matrices (as defined in section 2) are likely to be incomplete due to various factors, e.g. time difference between input time slot and predicted time slot, passenger travel time among OD pairs. The closer the input time slot is to the predicted time slot, the more incomplete its OD Matrix is likely to be. In addition, the longer travel passenger time of an OD pair, the more incomplete its OD value is likely to be. To obtain more valuable real-time mobility information for prediction, this section proposes to reconstruct recent complete OD matrices by a gate mechanism from two perspectives, i.e. historical stable passenger mobility and latest dynamic passenger mobility, with the available historical destination distribution, inflow data and passenger travel time distribution data.

As mentioned in section 2, each Recent OD Matrix M_t is composed of the available Finished OD Matrix $M_{t,t'}^f$ and unobserved Delayed OD Matrix $M_{t,t'}^d$. Further, the Delayed OD Matrix is the product of the available Delayed Inflow $IN_{t,t'}^d$ and its corresponding destination distribution probability $P_{t,t'}^d$, namely *Delayed Destination*

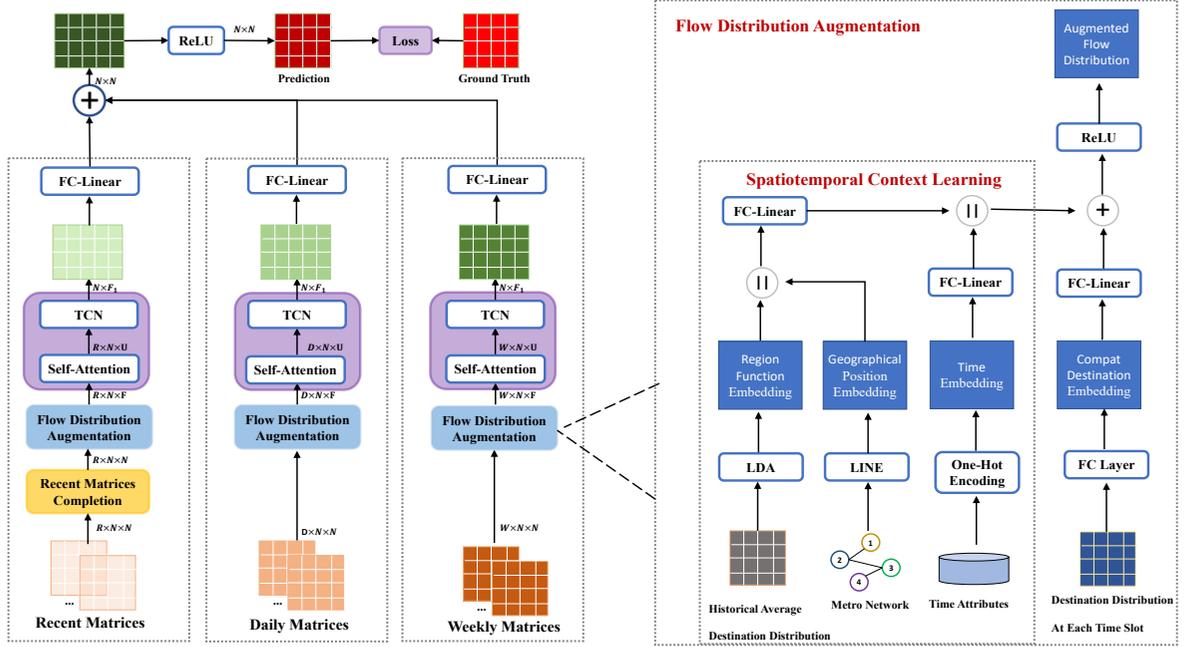


Fig. 1 The architecture of our model CA-SATCN. TCN refers to temporal convolution network. FC Linear refers to fully connected layer without activation function. FC Layer refers to fully connected layer with activation function.

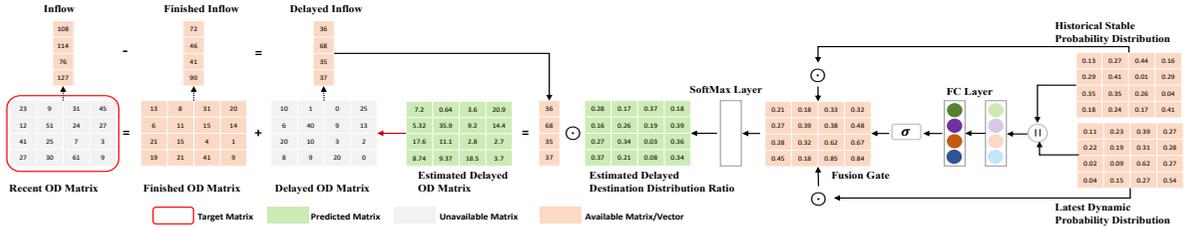


Fig. 2 A toy example of recent OD matrix estimation. Specifically, we estimate the partial observable recent OD matrix based on the historical stable passenger mobility trend and latest dynamic passenger mobility trend with available data like delayed inflow, finished OD matrix.

Distribution Ratio (short for *DDR*). Therefore, the complete Recent OD Matrix can be represented as follows:

$$M_t = M_{t,t'}^f + M_{t,t'}^d = M_{t,t'}^f + IN_{t,t'}^d * P_{t,t'}^d \quad (2)$$

If we can estimate $P_{t,t'}^d$, we can further estimate M_t based on the above equation. We estimate the $P_{t,t'}^d$ by extracting the long-term stable periodicity and recent dynamic correlation in recent OD flows.

3.1.1 Historical Stable Passenger Mobility Information

Both the historical destination distribution and statistical passenger travel time distribution contain historical stable passenger mobility information, which are utilized for DDR estimation. First, we define two related concepts as follows:

Definition 8 (*Destination Distribution Ratio*). The average historical destination distribution ratio of passengers entering subway at time slot t is denoted as $\mathbf{A}_t = (a_t^{ij})_{N \times N}$. The a_t^{ij} denotes the probability of passengers entering station i at t who destined to station j and satisfies $\sum_{j=1}^N a_t^{ij} = 1$.

Definition 9 (*Travel Time Distribution Probability*). Due to the influence of passenger walking speed, waiting time and other factors, the travel time of the trips belonging to same OD pair may be different. We do statistic on all the historical trips to obtain travel time distribution of the OD pair ij , denoted as $C_{ij} = \{c_{ij}^1, c_{ij}^2, \dots, c_{ij}^q, \dots, c_{ij}^Q\}$ and $\sum_{q=1}^Q c_{ij}^q = 1$. c_{ij}^q represents the proportion of the trips traveling between station i and j with time cost in the range $[\delta(q-1), \delta q]$. The δ is the time granularity and consistent with predicted time granularity. The setting of Q depends on the largest travel time of all trips.

The proportion of the trips starting at station i during t and destining to station j before t' can be represented by the accumulated statistical passenger travel time distribution before $(t' - t)\delta$, denoted as $d_{t,t'}^{ij} = \sum_{q=t'-t}^Q c_{ij}^q$. Further, DDR can be estimated as follows:

$$(PH_{t,t'}^d)^{ij} = \frac{a_t^{ij} \times d_{t,t'}^{ij}}{\sum_{k=1}^N a_t^{ik} \times d_{t,t'}^{kj}} \quad (3)$$

3.1.2 Latest Dynamic Passenger Mobility Information

For each origin station, different from its trips beginning at a given input time slot t which are partially finished before target time slot t' , its trips ending at t are totally observable. The destination distribution of these trips contains the recent passenger flow mobility information. We use this information to estimate the DDR.

Definition 10 (D_t Vector). We define the destination distribution of passengers entering origin station i before the input time slot t and arriving at their destinations during t as D_t Vector, denoted as $\bar{E}_t^i = [\bar{m}_t^{i,1}, \dots, \bar{m}_t^{i,N}] \in \mathbb{R}^N$ where $\bar{m}_t^{i,j}$ is the number of finished trips departing from station i and arriving at station j during t .

The latest passenger mobility flow in D_t Vector and delayed flow probability are combined to estimate DDR as follows:

$$(PL_{t,t'}^d)^{ij} = \frac{\bar{m}_t^{ij} \times d_{t,t'}^{ij}}{\sum_{k=1}^N (\bar{m}_t^{ik} \times d_{t,t'}^{kj})} \quad (4)$$

3.1.3 Estimation by a Fusion Gate

We estimate the delayed distribution by combining the historical stable destination distribution information and latest destination distribution information together on a data-driven basis. Inspired by the gate mechanism in LSTM, we design a fusion gate to identify the importance of two distributions and fuse them to get the estimation as follows:

$$u = \sigma([PH_{t,t'}^d, PL_{t,t'}^d] \cdot W_1 + b_1) \cdot W_2 + b_2$$

$$\hat{P}_{t,t'}^d = \text{Softmax}(u \odot PH_{t,t'}^d + (1 - u) \odot PL_{t,t'}^d) \quad (5)$$

where σ is the Sigmoid activation function. \cdot is matrix multiplication and \odot is Hadamard product. $W_1 \in \mathbb{R}^{2N \times F}$, $W_2 \in \mathbb{R}^{F \times N}$ are trainable weights and b_1, b_2 are corresponding biases. $\hat{P}_{t,t'}^d$ is the fused delayed distribution. Further, we estimate the complete Recent OD Matrix \hat{M}_t by Equation 2.

3.2 Flow Distribution Augmentation

As mentioned in 1, the destination distribution of passenger flow has data sparsity problem. Some OD values are very small or even zeros. Therefore, they are insufficient for extracting passenger moving pattern information, degrading model performance. However, except OD flow, other characteristics of stations also contain valuable spatiotemporal information for prediction, e.g. the spatial context and time context. *The spatial context* refers to a station's physical features. One is about station's geographical position. According to Tobler's first law of geography, near things are more related to each other. A station in a metro system might have more influence on its adjacent neighbors than its distant neighbors. Another is about station's functional characteristics (e.g. educational / business / residential area). Stations with similar functionality are likely to share similar mobility patterns. *The time context* refers to the time attributes of passenger flow of a station, e.g. day of week, time of day and so on. The time context can reflect the passenger mobility patterns in some extent for that passengers have different travel behaviors at different time context. In this section, we aim to augment the flow distribution of each station at each time slot by learning and fusing the spatial context and time context.

3.2.1 Spatial Context Learning

We extract two spatial properties (i.e. its geographical position and region function) of each station by learning the corresponding latent embeddings.

Geographical Position Representation:

We use graph embedding model LINE [13] to extract a station's position representation on a metro graph with the edge weight measured by travel time. Compared with other graph embedding methods, e.g. DeepWalk and Node2Vec, LINE can not only model global connectivity of the metro network by the first-order proximity but also capture the local structure of a target station by second-order proximity, denoted as $L = \text{LINE}(\mathbf{A})$ where \mathbf{A} is the adjacent matrix of the metro graph. $L = [L^1, \dots, L^N] \in \mathbb{R}^{N \times L}$ is the spatial embedding matrix for the whole network. $L^i \in \mathbb{R}^L$ is the embedding vector for station i to preserve its position information.

Region Function Representation:

Intuitively, the historical destination distribution of a station can reflect its functional characteristic. We follow the idea [14, 15] to utilize Latent Dirichlet Allocation (LDA for short) to learn the function representation of each station. LDA is widely used in capturing the hidden topics in large-scale documents. LDA assumes that each document has multiple topics and each word in a document belongs to a certain topic. Therefore, LDA can infer the hidden topics of a document based on all the observed words. In our scenario, an origin station is analogous to a document and its region function is similar to the topic of a document. The destination distribution of an origin station is treated as words in a document. The historical average destination distributions of the whole network is similar to the corpus of all documents and we feed them into LDA to obtain functional representations of all the stations in the metro network.

We use D^i to represent the functional representation of station i . We concatenate the representations of L^i and D^i of the station i to get the spatial representation S^i . Such spatial representation is static and it is the same for each time slot.

3.2.2 Time Context Learning

For a station i at time slot t , its time attributes can help the model better learn the correlation of passenger movement patterns at different time slots. We utilize a temporal embedding method to encode its temporal attributes into a temporal vector. Specifically, we adopt one-hot coding to encode the time-of-day attribute into a K dimension space, denoted as $D_t \in \mathbb{R}^K$, where K is the total number of the time slots in one day defined in section 2. The day-of-week attribute is encoded into a 7 dimension space, denoted as $H_t \in \mathbb{R}^7$. To align the two temporal vectors, all temporal embeddings are fed into two fully connected layers with T output units and added together to get the final temporal representation as $T_t^i = W_{h_2} \text{ReLU}(W_{h_1} H_t^i + b_1) + W_{d_2} \text{ReLU}(W_{d_1} D_t^i + b_2) \in \mathbb{R}^T$ where $W_{h_1} \in \mathbb{R}^{T \times 7}$, $W_{t_2} \in \mathbb{R}^{T \times T}$, $W_{d_1} \in \mathbb{R}^{T \times K}$, $W_{d_2} \in \mathbb{R}^{T \times T}$ are trainable parameters.

3.2.3 Compact Destination Distribution

As mentioned in 1, the original distribution representation of each station at each time slot (i.e. DVector) is high dimension. In order to distill valuable mobility information and align with the spatiotemporal embeddings, we get a dense and compact destination distribution for each station at each time slot, by feeding DVector E_t^i into two fully connected layers as $C_t^i = \text{ReLU}(W_{f_2} \text{ReLU}(W_{f_1} E_t^i + b_1) + b_2) \in \mathbb{R}^C$ where the number of output units C is much smaller than the number of stations N . $W_{f_1} \in \mathbb{R}^{C \times N}$ and $W_{f_2} \in \mathbb{R}^{C \times C}$ are trainable parameters.

To fuse the above features to get a final high-level flow representation F_t^i of station i at time slot t , we first concatenate the spatial representation and time representation and then merge the compact destination distribution with its spatiotemporal representation by adding them together in different weights as follows:

$$F_t^i = \text{ReLU}(W_1 C_t^i + W_2 (W_T T_t^i \parallel W_S S^i)) \in \mathbb{R}^F \quad (6)$$

where \parallel represents the concatenation.

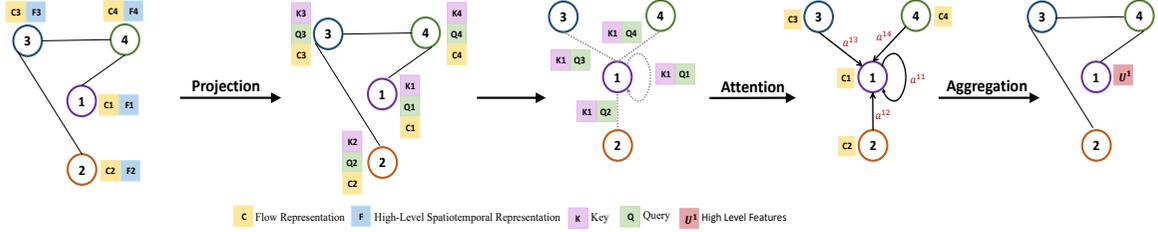


Fig. 3 We deploy a variant of self-attention mechanism to extract the global spatial correlation in the network and generate high-level feature for each station at each time slot.

3.3 Global Mobility Trend based Spatiotemporal Dependency Modeling

In the section above, we have already obtained a rich and dense representation for each station at each time slot. Based on these augmented features, this section aims to model the global and dynamic spatial correlations among stations and dig out multiple temporal moving patterns in the passenger mobility data by a self-attention mechanism and temporal convolutional network.

3.3.1 Self-Attention for Global Dynamic Spatial Dependency Extraction

We have extracted the spatiotemporal representation of each station at each time slot. In this section, we capture the global and high-level passenger mobility pattern for each station by learning from other stations. In recent years, transformer made huge success initially in natural language processing [16] and is extended to other domains, e.g. traffic domain. Some works utilized transformer based methods to extract the spatiotemporal dependencies in traffic tasks, such as trajectory prediction [17], traffic flow forecasting [18] and achieved state-of-the-art results. The power of transformer network is due to its self-attention mechanism, which can model the complex correlations among objects globally. In this paper, we design a variant of self-attention mechanism to model the spatial dependency among the mobility patterns of stations.

For a target station i and its context station j at a given time slot t , to measure the amount of passenger mobility knowledge that i can learn from j , we project the high-level representation of i into a latent Key Space and that of j into a Query Space, resulting in the corresponding vectors named Key, Query for these two stations as

follows:

$$\begin{aligned} K_t^i &= f_{Key}(F_t^i) \in \mathbb{R}^F \\ Q_t^j &= f_{Query}(F_t^j) \in \mathbb{R}^F \end{aligned} \quad (7)$$

where F_t^i is the high-level embedding of station i at time slot t . f_{Key} , f_{Query} are three fully connected layers with activation function ReLU. Then, the inner product of key vector of station i and query vector of station j is calculated to represent the dynamic spatial attention that i should pay on j as follows:

$$\begin{aligned} e_t^{ij} &= (K_t^i)^T \cdot Q_t^j \in \mathbb{R} \\ \alpha_t^{ij} &= \frac{\exp(e_t^{ij})}{F^{0.5} \sum_{j=1}^N \exp(e_t^{ij})} \in \mathbb{R} \end{aligned} \quad (8)$$

where e_t^{ij} is the attention and α_t^{ij} is the normalized attention through Softmax function. $\frac{1}{F^{0.5}}$ is the scaling factor. Note that each station has both a key and a query value. The attention between any two stations is not symmetrical. After obtaining the attention that the target station pays to other stations in the network, we can extract the mobility knowledge from all the context stations and cohere them into the representation of the target station as follows:

$$U_t^i = ReLu(W_2 ReLu(W_1 (\sum_{j=1}^N \alpha_t^{ij} C_t^j))) \in \mathbb{R}^U \quad (9)$$

where W_1, W_2 are trainable parameters.

The high-level representation that contains the global spatial dependency information has been constructed for each station at time slot t and we stack such representations of all stations together, obtaining the high-level representation for the whole network as $U_t = [U_t^1, U_t^2, \dots, U_t^N] \in \mathbb{R}^{N \times U}$.

3.3.2 TCN for Multiple Temporal Dependency Extraction

We have extracted the global spatial correlations among stations in the metro network and generated high-level representation for the network at each time slot. In this section, we identify three temporal trends of passengers' mobility, i.e. recent trend, daily trend, weekly trend. The weekly trend and daily trend are about long-term periodic dependencies. The recent trend is about short-term dynamic dependency. We construct three sequences and feed them into three TCN based modules to model the temporal trends sufficiently.

(1) Temporal Sequences Construction:

We construct the corresponding sequences for three trends based on the historical high-level representations generated by self-attention mechanism, i.e. $[U_{t_1}, U_{t_2}, \dots, U_{t_m}]$ where $[t_1, t_2, \dots, t_m]$ are historical time slots.

Weekly Sequence: Weekly trend reflects periodicity within a week in trips. We utilize the high-level representations at the same time slots of previous days with the same week attribute (e.g. Monday) from previous W weeks for prediction, denoted as $U_W = [U_{t_1}, \dots, U_{t_W}] \in \mathbb{R}^{W \times N \times U}$ where $[t_1, \dots, t_W] = [t' - 7K, \dots, t' - 7KW]$ and K is the number of total time slots in one day. t' is the predicted time slot.

Daily Sequence: The weekly trend can't capture the movement pattern of those less regular trips generated by some activities in a few days (e.g. a sport game lasting for some consecutive days), namely daily trend. To extract the daily trend in OD flow, we utilize representations at the same time slots of previous D days for prediction, denoted as $U_D = [U_{t_1}, \dots, U_{t_D}] \in \mathbb{R}^{D \times N \times U}$ where $[t_1, \dots, t_D] = [t' - K, \dots, t' - KD]$.

Recent Sequence: Both weekly and daily trend can only capture temporal dependency in OD flow from the same time slots at historical days but ignore dependency from last R intervals at the same day, namely recent trend, which also has an obvious influence on OD flow at the predicted time slot, denoted as $U_R = [U_{t_1}, \dots, U_{t_R}] \in \mathbb{R}^{R \times N \times U}$ where $[t_1, \dots, t_R] = [t' - 1, \dots, t' - R]$.

(2) Temporal Convolution Network: Previous OD Matrix prediction works mainly leveraged Long Short Term Memory Network (LSTM) to capture the temporal dependency in OD flows [7]. However, the complex structure of LSTM

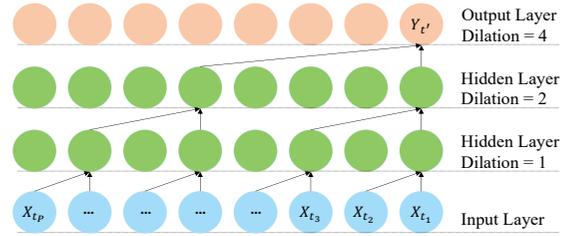


Fig. 4 An illustration of Temporal Convolution Network. Its kernel size is 2 with a dilation factor $\mathbf{d} = 2^l$. It picks inputs every \mathbf{d} step and 1D convolution is applied to the selected inputs.

leads to more memory requirement and longer training time [19]. Recently, some traffic works focusing on prediction of traffic speed [20], traffic flow [21] and traffic state [19, 22] utilized temporal convolution network (TCN) [23] to extract temporal dependency because TCN can tackle sequence modeling problem more efficiently in a non-recursive manner and achieve a better performance. In this paper, we leverage TCN (as shown in Figure 4) to extract each temporal trend from its corresponding OD sequence, simply denoted as $[U_{t_1}, U_{t_2}, \dots, U_{t_m}]$. In each TCN layer, the j th output feature of station i at time t is generated by the dilated causal convolution as follows:

$$Y_{t,j}^i = \rho \left(\sum_{m=1}^{U^l} \sum_{k=0}^{\mathbf{K}-1} w_{j,m,k} U_{t-\mathbf{d}k,m}^i \right) \quad (10)$$

where U^l is the number of input feature at layer l th. $j \in \{1, \dots, U^{l+1}\}$ and U^{l+1} is the number of output features. $U_{t-\mathbf{d}k,m}^i \in \mathbb{R}$ is the m th input feature of station i at time $t - \mathbf{d}k$. \mathbf{d} is the dilation rate controlling the skipping distance. ρ is the activation function. \mathbf{K} is the kernel size and kernel $\Theta_j = (w_{j,m,k})_{\mathbf{K} \times U^l}$ is trainable. The same convolution kernel is applied to all the metro stations. The whole TCN layer can be formulated as follows:

$$Y_t^{l+1} = \rho(\Theta *_{\mathcal{T}^{\mathbf{d}}} U_t^l) \quad (11)$$

where l is the l th layer. $U_t^l \in \mathbb{R}^{N \times U^l}$ is the input of l th layer. $Y_t^{l+1} \in \mathbb{R}^{N \times U^{l+1}}$ is the output of $l+1$ th layer. Following previous works [20], the dilation rate $\mathbf{d}^l = 2^l$. TCN layer leverages zero padding strategy to keep the output length the same as the input length. Since we only predict the OD Matrix of one future step, we take the last step of TCN output as its final output.

(3) Weighted Fusion for Multiple Temporal Trends: We feed the high-level sequence of each trend into the corresponding TCN to extract the long term dependency in historical OD flow. We denote the output of each trend as H_R , H_D , H_W . These outputs are merged according to their importance in OD prediction task and we attach different weights to them on a data-driven basis as follows:

$$\hat{M}_t = \text{ReLU}(H_R * W_r + H_D * W_d + H_W * W_w) \quad (12)$$

where $\hat{M}_t \in \mathbb{R}^{N \times N}$ is the prediction result. $[W_r, W_d, W_w]$ are trainable parameters. We choose ReLU as the activation function because the number of passengers can't be negative.

4 Experiments

In this section, extensive experiments are conducted to answer the following research questions.

RQ1: How does our model perform at prediction accuracy compared with other benchmarks on different datasets?

RQ2: Is the proposed data completion method effective to improve the model performance?

RQ3: How does each temporal trend contribute to improve prediction accuracy?

RQ4: Is our model sensitive to the hyper-parameters?

4.1 Experiment Settings

4.1.1 Datasets

We conduct our experiments in two real-world large-scale subway datasets collected by the automatic fare collection systems (AFCs) in big cities, i.e. Shenzhen, Hangzhou, on the premise of complying with the security and privacy policies. The AFC in metro system has generated a very large amount of records of all passengers, including both entry station records and exit station records. An entry record and its corresponding exit record are preprocessed into a complete trip which contains five kinds of information, i.e., the smart card ID, the entry station ID, the entry time, the exit station ID and the exit time. We focus on 7:00-23:00 of each day and aggregate the trips on a 30 minutes time granularity to construct OD matrices.

Specifically, Shenzhen covers nearly 100 millions records of 118 stations for twelve months in 2014. Hangzhou has about 5 millions records of 80 stations in January 2019. As to the data split, we divide 70% of each dataset into train data, 10% into validation data, 20% into test data chronologically. The data normalization method is Z-Score.

4.1.2 Baselines

Baselines in this paper can be divided into two categories. The first is the generalized methods utilized as baselines in previous OD metro works [4, 11], including HA, Ridge, ANN, FC-LSTM, ConvLSTM and GCN. The second is the recent state-of-the-art OD prediction models, including CASCNN in metro OD prediction, and GEML in rail-hailing OD prediction. OD prediction in different scenarios share the complex spatiotemporal challenge in some extent.

HA (Historical Average) is the simplest and the most commonly used baseline in time series forecasting tasks. HA in this paper averages the previous OD values of an OD pair to predict its future value in the next step. Its performance is evaluated on all the OD pairs.

Ridge is a linear regression method with L2 regularizer. It tends to treat all the input features equally. We utilize the RidgeCV class from Sklearn and set its two parameters as $\alpha = [1, 0.1, 0.01, 0.001]$ and $cv = 5$.

ANN (Artificial Neural Network) is the simplest neural network and it can capture the linearity and non-linearity of traffic data. Our ANN has two hidden layers and an output layer. Each hidden layer has 128 units and the output layer has N (i.e. the number of stations) units. The activation function of all layers is Rectified Linear Units (ReLU).

FC-LSTM (Fully Connected-Long Short Term Memory Network) is typically used for capturing long-term temporal pattern in time series data. There are also two hidden layers with 128 units and an output layer with N units in our LSTM. The activation function of the output layer is ReLU function. We utilize LSTM to predict the OD vector of an original station i with its previous OD vectors as input. All the stations share the same LSTM parameters.

ConvLSTM (Convolutional LSTM) [24] replaces the fully connection operation in FC-LSTM with convolution operation. It can extract both the temporal and grid-based spatial dependency while FC-LSTM is only able to extract temporal dependency. Following previous works [11], ConvLSTM has three layers with 8, 8, and 1 filters respectively and the kernel size of all the filters is set to be 3×3 in the model.

GCN (Graph Convolution Network) [25] can extract the graph-based spatial dependency through aggregating the features from neighbors in a traffic graph. Afterward, a fully connected layer is utilized to transform the outputs of GCN at previous time slots to obtain the final result.

CASCNN (Channel-wise Attentive Split Convolutional Neural Network) [11] is a deep learning framework for metro OD prediction. It only utilizes the historical OD Matrix at previous days and recent inflow/outflow information for prediction by channel-wise attention mechanism. In addition, split CNN is leveraged to overcome the data sparsity problem.

GEML (Grid-Embedding based Multi-task Learning) [26] is a deep learning framework aiming to capture the spatiotemporal dependency in rail-hailing OD prediction task by jointly utilizing graph convolutional network and LSTM.

4.1.3 Loss Function

In this paper, our main task is to predict OD Matrix at the target time slot t' . Following previous works [4, 11], we adopt mean square error (MSE) as the loss function. The predicting errors of large OD values are enlarged through MSE. Thus, MSE pays more attention on OD pairs with higher volumes, which are also considered to be more important in metro scenario. The loss function is as follows:

$$\begin{aligned} \mathcal{L} &= MSE(M_{t'} - \hat{M}_{t'}) \\ &= \frac{1}{N \times N} \sum_{i=1}^N \sum_{j=1}^N (m_{t'}^{ij} - \hat{m}_{t'}^{ij})^2 \end{aligned} \quad (13)$$

4.1.4 Evaluation Metrics

Following previous works [4, 11, 26, 27], we evaluate model performance with four widely-applied metrics, i.e. mean absolute error (MAE), root

mean square error (RMSE) and weighted mean-absolute-percentage (WMAPE), symmetric mean absolute percentage error (SMAPE) as follows:

$$\begin{aligned} MAE &= \frac{1}{N \times N} \sum_{i=1}^N \sum_{j=1}^N |m_{t'}^{ij} - \hat{m}_{t'}^{ij}| \\ RMSE &= \sqrt{\frac{1}{N \times N} \sum_{i=1}^N \sum_{j=1}^N (m_{t'}^{ij} - \hat{m}_{t'}^{ij})^2} \\ WMAPE &= \frac{\sum_{i=1}^N \sum_{j=1}^N |m_{t'}^{ij} - \hat{m}_{t'}^{ij}|}{\sum_{i=1}^N \sum_{j=1}^N m_{t'}^{ij}} \\ SMAPE &= \frac{1}{N \times N} \sum_{i=1}^N \sum_{j=1}^N \frac{|m_{t'}^{ij} - \hat{m}_{t'}^{ij}|}{(m_{t'}^{ij} + \hat{m}_{t'}^{ij})/2 + c} \end{aligned} \quad (14)$$

MAE and RMSE are sensitive to data scale while WMAPE and SMAPE is data-scale independent. RMSE is also sensitive to the outliers. WMAPE can avoid zero-division and over-skewing confronting by MAPE. While WMAPE is inclined to underestimate, SMAPE is symmetric and can avoid such problem. c is a small positive constant to avoid zero-division, set as 1 [26].

4.1.5 Experiment Settings

GEML [26] and CASCNN [11] follow the parameter settings in original papers and the hyperparameters of other baselines are tuned on the validation set. In terms of training, we utilize Adam optimizer [28] to optimize all the deep learning models and the initial learning rate is 0.01. We take the learning rate decay strategy to get the best results of each model. The maximum number of epochs is set as 1000 and an early stop strategy is taken if the validation loss stops decreasing for 20 epochs. The batch size for Shenzhen datasets is set as 32, for Hangzhou dataset as 16. We utilize Python and TensorFlow for the code. The experiments are run on a GPU (32GB) machine with TESLA V100.

4.2 Experiment Results

As shown in Table 1, there are three kinds of input patterns corresponding to three kinds of temporal trends, i.e. \mathbf{R}^i for incomplete recent OD input, \mathbf{D} for daily OD input and \mathbf{W} for weekly OD input. We test the generalized methods (i.e. HA, Ridge, ANN, FC-LSTM, ConvLSTM, GCN) on all

Table 1 Evaluation of Various Approaches for OD Matrix Prediction on Different Datasets

Datasets	Shenzhen (SZ)				Hangzhou (HZ)			
	MAE	RMSE	WMAPE	SMAPE	MAE	RMSE	WMAPE	SMAPE
HA (R ⁱ)	1.93±0.110	6.92±0.152	0.66±0.017	0.41±0.107	3.25±0.048	6.97±0.182	0.60±0.013	0.57±0.103
HA (D)	1.81±0.003	5.37±0.029	0.55±0.041	0.38±0.021	3.02±0.146	5.47±0.211	0.55±0.012	0.52±0.036
HA (W)	1.45±0.038	4.32±0.149	0.46±0.045	0.37±0.024	2.73±0.042	4.56±0.143	0.51±0.014	0.49±0.003
Ridge (R ⁱ)	2.31±0.151	6.48±0.210	0.79±0.015	0.64±0.058	3.19±0.123	6.69±0.236	0.59±0.113	0.57±0.173
Ridge (D)	1.78±0.052	5.78±0.341	0.55±0.607	0.42±0.027]	2.98±0.078	5.39±0.312	0.53±0.032	0.51±0.030
Ridge (W)	1.44±0.321	4.10±0.132	0.45±0.139	0.36±0.508	2.69±0.102	4.48±0.815	0.50±0.081	0.47±0.073
ANN (R ⁱ)	1.37±0.011	3.17±0.079	0.42±0.157	0.34±0.341	2.45±0.026	4.41±0.193	0.47±0.018	0.45±0.371
ANN (D)	1.77±0.114	5.03±0.216	0.59±0.260	0.42±0.016	3.18±0.127	6.11±0.149	0.57±0.112	0.54±0.024
ANN (W)	1.54±0.214	4.17±0.142	0.48±0.279	0.38±0.036	2.81±0.129	5.07±0.135	0.52±0.028	0.50±0.142
FC-LSTM (R ⁱ)	1.35±0.281	2.99±0.174	0.41±0.167	0.33±0.209	2.11±0.113	4.27±0.153	0.42±0.183	0.41±0.289
FC-LSTM (D)	1.71±0.221	4.91±0.132	0.56±0.127	0.40±0.019	2.61±0.031	5.39±0.169	0.49±0.205	0.46±0.135
FC-LSTM (W)	1.53±0.136	4.27±0.189	0.47±0.039	0.37±0.125	2.41±0.112	4.63±0.185	0.45±0.282	0.45±0.133
ConvLSTM (R ⁱ)	1.37±0.215	3.09±0.267	0.45±0.001	0.34±0.136	2.21±0.035	4.35±0.016	0.43±0.007	0.42±0.008
ConvLSTM (D)	1.67±0.116	4.01±0.146	0.49±0.103	0.39±0.261	2.51±0.124	5.61±0.162	0.54±0.065	0.50±0.107
ConvLSTM (W)	1.42±0.138	3.80±0.253	0.46±0.006	0.37±0.157	2.37±0.136	5.01±0.238	0.49±0.324	0.47±0.025
GCN (R ⁱ)	1.41±0.245	3.20±0.116	0.46±0.032	0.35±0.147	2.31±0.162	4.51±0.156	0.44±0.154	0.44±0.335
GCN (D)	1.80±0.152	5.39±0.138	0.59±0.104	0.41±0.011	2.72±0.119	6.23±0.218	0.55±0.114	0.52±0.027
GCN (W)	1.56±0.028	4.10±0.130	0.48±0.124	0.36±0.017	2.80±0.184	5.32±0.139	0.51±0.221	0.48±0.122
CASCNN (D)	1.43±0.023	3.65±0.138	0.46±0.025	0.33±0.038	2.34±0.127	4.60±0.115	0.46±0.158	0.45±0.104
GEML (R ⁱ)	1.22±0.102	2.52±0.018	0.40±0.103	0.32±0.103	2.07±0.023	4.03±0.132	0.41±0.023	0.40±0.154
CA-SATCN	1.13±0.164	2.31±0.261	0.35±0.217	0.29±0.106	1.79±0.038	3.61±0.123	0.37±0.057	0.36±0.210

Note: All the experiment results in Table 1 are obtained from test set. Each experiment is repeated five times to calculate the means and standard errors to get more convincing results.

the input patterns to observe their best results, which are highlighted in bold. As to the state-of-the-art OD prediction approaches (e.g. GEML, CASCNN), their problem setting is to take the specific pattern as input. The best experiment results under each dataset are highlighted in red.

4.2.1 Performance Comparison

Table 1 shows performance of all models under different input patterns on two metro datasets. Our model achieves better performance than baselines. Compared with GEML, i.e. the state-of-the-art baseline, **CA-SATCN** improves the performance by [5%, 4%] in WMAPE and [3%, 4%] in SMAPE on two datasets respectively.

The traditional statistical methods, i.e. HA and Ridge, achieve the best performance at weekly trend pattern. These two methods are good at extracting linearity in traffic data, indicating that linear correlation in weekly OD data is stronger than that in daily OD data or recent OD data. It is in consistence with the common knowledge that the weekly passenger mobility pattern is more regular while the recent passenger movement is more stochastic. The simple deep learning methods (i.e. ANN, FC-LSTM, ConvLSTM and GCN) perform best when fed with the recent OD data, probably due to their superior capacity to capture the complex non-linearity in OD data. Among these approaches, FC-LSTM has the best performance, indicating that the extracting temporal

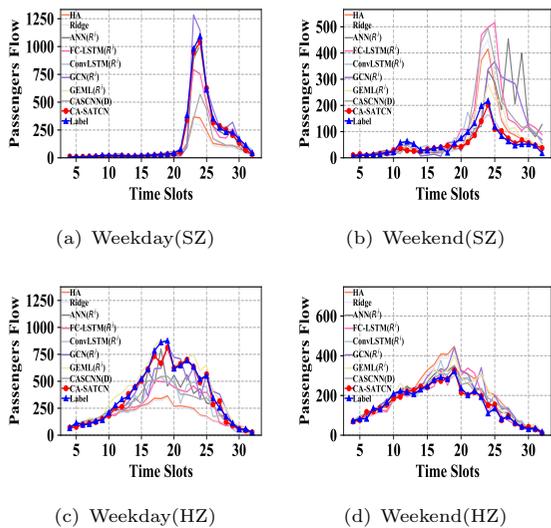


Fig. 5 We visualize the prediction and ground truth on randomly chosen OD pair on each dataset at a randomly chosen day of weekday or weekend. As we can see in the figure, the prediction result of our model (i.e. the red curve) gives the best fit to the ground truth (i.e. the blue curve) in all datasets.

dependency is vital for prediction. ConvLSTM can also capture the temporal pattern in OD data while its performance is worse than LSTM. This is probably because it treats OD Matrix as grids and intends to extract spatial dependency from it, which is obviously not appropriate for that OD Matrix reflects the OD flow pattern instead of metro network spatial topology. GCN is gifted at extracting the static graph-based spatial dependency while it can't deal with temporal pattern. Another observation is that all these deep learning approaches have the worst performance at the daily input pattern, referring that the daily trend is less valuable compared with the recent trend and weekly trend. Such conclusion can be augmented by the observation that although CASCNN has the best performance over the methods with the daily input pattern, its performance is worse compared with some baselines fed by recent input, e.g. FC-LSTM. GEMLR can capture both temporal pattern and graph-based spatial dependency in a unified way, thus it has the best performance over other benchmarks. However, GEMLR defines the spatial correlation manually and statistically and only captures the recent trend. Compared to GEMLR, our model reconstructs the recent OD matrices to get more

useful real-time mobility information for prediction. It also utilizes the self-attention mechanism to dynamically capture the complex spatial correlations among stations globally and extract three kinds of temporal trends sufficiently, resulting in better prediction.

4.2.2 Model Ablation Analysis

We perform ablation tests to demonstrate the effectiveness of each component in our model. Due to the space limitation, Table 4.2.1 only shows the ablation results on Hangzhou dataset but those on Shenzhen datasets have similar conclusions.

It can be observed that the four metrics of all variants deteriorate in some extent, proving that all components are necessary to improve prediction accuracy. However, their contributions are different. When we remove the recent sequence, the variant obtains the worst performance with 10% increased in WMAPE and 7% increased in SMAPE, which indicates that recent trend contributes the most for future OD flow prediction in our model. Without Recent OD Matrices Completion, the model performance also deteriorates to a large extent, i.e. 4% increased in both WMAPE and SMAPE, which proves the effectiveness of data completion. The spatiotemporal contexts are also important for prediction, without which WMAPE increases 3% and SMAPE increases 2%. Besides, the experiments show that weekly sequence contributes more to improve prediction accuracy than daily sequence does, indicating that the next step OD flow depends more on weekly trend than daily trend. The spatial context is more important than the temporal context for prediction. Overall, we can clearly observe that our full model achieves the best result, illustrating that the three temporal trends, data completion and spatiotemporal contexts are beneficial to the improvement of model performance.

4.2.3 Effectiveness of Data Completion

Figure 6 visualizes the performance of data completion on randomly chosen OD pairs from each dataset. We show the experiment results at the best length of recent trend on SZ dataset, i.e. 5 input steps. It can be observed that the estimated OD values are closer to the ground truths on OD pairs with different scales. The data completion method plays an important role for the

Table 2 Model Degradation In HZ Dataset

Modules	MAE	RMSE	WMAPE	SMAPE
No Recent Sequence	2.37±0.234	4.54±0.172	0.47±0.084	0.43±0.133
No Daily Sequence	2.06±0.212	4.15±0.172	0.40±0.274	0.39±0.184
No Weekly Sequence	2.13±0.135	4.19±0.188	0.41±0.254	0.40±0.315
No Spatiotemporal Contexts	2.05±0.271	4.13±0.183	0.40±0.171	0.38±0.314
No Spatial Context	1.94±0.172	3.90±0.184	0.39±0.341	0.38±0.198
No Temporal Context	1.89±0.325	3.75±0.301	0.38±0.246	0.37±0.120
No Recent Data Completion	2.14±0.121	4.33±0.118	0.41±0.315	0.40±0.261
ALL	1.79±0.038	3.61±0.123	0.37±0.057	0.36±0.210

Note: Each time we remove one component and keep the remainder unchanged to test the effectiveness of each component. When we remove the recent sequence, we also remove the data completion. Each experiment is repeated five times to calculate the means and standard errors to get more convincing results. The best results are highlighted in bold.

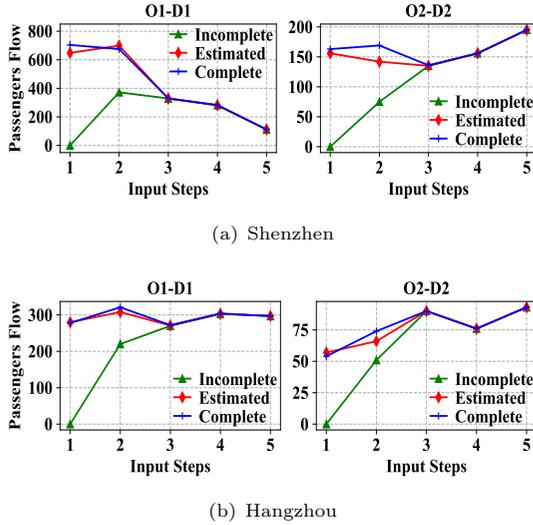


Fig. 6 Data completeness of different randomly chosen OD pairs with different passenger flow scale on two datasets. The number of the input steps is set at 5. The green curve represents the collected partially finished trips before the target time slot. The blue curve represents all the finished trips in a whole day but unobservable before the target time slot. The red curve represents the estimated trips by our proposed data completion method.

input steps close to the output step by alleviating the sparsity problem. For example, as we can see in Hangzhou O1-D1 pair, the first step closest to the predicted step has nearly zero value which refers the serve loss of passenger mobility information. After the data completion method, we can obtain an estimated value 293 close to the true value 297 at input step 1 of which the collected value is close to zero. The estimated values can provide more valuable recent distribution information. Also, as shown in Table 4.2.1, the data completion approach contributes to improve the model performance by decreasing 4% in both WMAPE

and SMAPE in Hangzhou dataset, demonstrating its effectiveness.

4.2.4 Hyper-Parameter Analysis

In this section, we aim to test the sensitive-ness of our model on hyper-parameters. Due to the space limitation, we choose some important parameters and test them on Shenzhen dataset, i.e. the sequence lengths of three temporal trends [R, D, W]. We keep other parameters as default values when varying the target parameter. The default values of sequence length in sensitive test are R = 3, D = 3, W = 3.

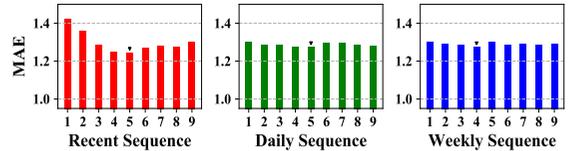


Fig. 7 MAE performance on different sequence lengths of three temporal trends on SZ dataset.

As shown in Figure 7, when we change the length of recent input, the performance of the model improves as the length increases and it reaches the best at 5 steps. However, as the steps increases, the model performance degrades, which might due to the disturbance of irrelevant information at longer steps. The best value of daily sequence is also step 5 and that of weekly sequence is at 4. The variation of model performance at recent test is larger than that of daily or weekly test, suggesting that parameter of recent trend seems more important in our model.

5 Related Works

5.1 OD Matrix Prediction in Traffic Domain

A considerable number of works have been conducted on traffic flow prediction [29–31], while Origin-Destination (OD) matrix prediction receives less attention for its greater complexity [32, 33]. To date, related works on metro OD prediction are critically few [11, 34]. Although metro OD demand has different contextual setting from other OD demands, e.g. road network [35–37], taxi OD demand [38–40] and so on [41]. they share some common challenges (e.g. data sparsity, complex spatiotemporal dependency) in some extent. Therefore, we extend the introduction to similar OD matrix prediction in traffic domain.

The methods proposed to solve OD demand problem can be roughly divided into three categories. The first class is conventional methods like least-square approach [1], Kalman Filtering modeling [42, 43] and probability based analysis [5]. They are hard to deal with a large amount of data and their performances need to be improved. The second category is machine learning methods [44]. For example, The matrix factorization-based methods [2],[4], [3] can solve the dimension curse in OD prediction. However, they are hard to extract complex spatiotemporal correlations in OD flows. The last group is deep learning methods [11, 36, 37, 45]. Some works develop LSTM variants to learn temporal property in OD data [7, 27]. However, it can't capture the spatial correlation in OD prediction. Recently, graph neural networks are applied in capturing the spatial correlations in OD prediction [26, 35, 36, 39, 40]. However, most of them predefined the spatial correlations, resulting in learning only static spatial dependency. In this paper, we focus on learning the dynamic spatial dependency in metro OD scenario.

5.2 Transformer

Transformer was first proposed in natural language processing [16] and gained extensive popularity quickly. It has also been successfully applied in other domains, such as computer vision [46], recommendation [47, 48] due to its powerful self-attention mechanism. In traffic domain, some

pioneering works have applied transformer in several research directions and achieved state-of-the-art performance [49]. [50] utilized self-attention mechanism in transformer to develop a spatial attention mechanism to capture the dynamic correlations between sensors in the road network. In order to encode traffic evolving patterns, [31] designed a self-attention layer to automatically perform the temporal aggregation in bike sharing scenario. [51] integrated a spatial transformer network into CNN to perform a geometric transformation in traffic sign recognition. [52] proposed a novel spatial-temporal transformer network capturing spatial-temporal dependencies in long-term traffic flow prediction. However, to the best of our knowledge, the existing transformer methods are not yet applied in OD prediction problem. In this paper, we adopt the core mechanism of transformer, i.e. the self-attention mechanism to capture the dynamic spatial correlation in metro OD prediction.

6 Conclusion

This paper proposes a model CA-SATCN to conduct short-term OD prediction in rail transit network. In our model, a novelly adaptive fusion method capturing long-term stable periodicity and short-term dynamic correlation is proposed to solve the incomplete recent matrices problem in metro scenario. Embedding methods are utilized to enrich flow distribution to alleviate the data sparsity problem. A variant of self-attention mechanism is designed to capture the dynamic global spatial dependency in OD flows. Afterward, three temporal trends, i.e. recent trend, daily trend and weekly trend, are captured by three temporal convolutional networks respectively. Extensive experiments are carried out on two real-world metro datasets, showing the superiority of our model over other benchmarks.

References

- [1] Bierlaire, M., Crittin, F.: An efficient algorithm for real-time estimation and prediction of dynamic od tables. *Operations Research* **52**(1), 116–127 (2004)
- [2] Gong, Y., Li, Z., Zhang, J., Liu, W., Zheng, Y., Kirsch, C.: Network-wide crowd flow

- prediction of sydney trains via customized online non-negative matrix factorization. In: Proceedings of the 27th ACM International Conference on Information and Knowledge Management, pp. 1243–1252 (2018)
- [3] Gong, Y., Li, Z., Zhang, J., Liu, W., Zheng, Y.: Online spatio-temporal crowd flow distribution prediction for complex metro system. *IEEE Transactions on Knowledge and Data Engineering* (2020)
- [4] Cheng, Z., Trepanier, M., Sun, L.: Real-time forecasting of metro origin-destination matrices with high-order weighted dynamic mode decomposition. *Transportation Science* (2022)
- [5] Dai, X., Sun, L., Xu, Y.: Short-term origin-destination based metro flow prediction with probabilistic model selection approach. *Journal of Advanced Transportation* **2018** (2018)
- [6] Yao, X., Zhao, P., Yu, D.-d.: Real-time origin-destination matrices estimation for urban rail transit network based on structural state-space model. *Journal of Central South University* **22**, 4498–4506 (2015)
- [7] Li, D., Cao, J., Li, R., Wu, L.: A spatio-temporal structured lstm model for short-term prediction of origin-destination matrix in rail transit with multisource data. *IEEE Access* **8**, 84000–84019 (2020)
- [8] Jiang, W., Ma, Z., Koutsopoulos, H.N.: Deep learning for short-term origin-destination passenger flow prediction under partial observability in urban railway systems. *Neural Computing and Applications*, 1–18 (2022)
- [9] Noursalehi, P., Koutsopoulos, H.N., Zhao, J.: Dynamic origin-destination prediction in urban rail systems: A multi-resolution spatio-temporal deep learning approach. *IEEE Transactions on Intelligent Transportation Systems* (2021)
- [10] Toqué, F., Côme, E., El Mahrsi, M.K., Oukhellou, L.: Forecasting dynamic public transport origin-destination matrices with long-short term memory recurrent neural networks. In: 2016 IEEE 19th International Conference on Intelligent Transportation Systems (ITSC), pp. 1071–1076 (2016)
- [11] Zhang, J., Che, H., Chen, F., Ma, W., He, Z.: Short-term origin-destination demand prediction in urban rail transit systems: A channel-wise attentive split-convolutional neural network method. *Transportation Research Part C: Emerging Technologies* **124**, 102928 (2021)
- [12] Zhang, J., Chen, F., Wang, Z., Liu, H.: Short-term origin-destination forecasting in urban rail transit based on attraction degree. *IEEE Access* **7**, 133452–133462 (2019)
- [13] Tang, J., Qu, M., Wang, M., Zhang, M., Yan, J., Mei, Q.: LINE: large-scale information network embedding. In: Proceedings of the 24th International Conference on World Wide Web, WWW 2015, Florence, Italy, May 18–22, 2015, pp. 1067–1077 (2015)
- [14] Zhao, J., Zhang, L., Ye, J., Xu, C.: Mdlf: A multi-view-based deep learning framework for individual trip destination prediction in public transportation systems. *IEEE Transactions on Intelligent Transportation Systems*, 1–14 (2021)
- [15] Yuan, J., Zheng, Y., Xie, X.: Discovering regions of different functions in a city using human mobility and pois. In: The 18th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD '12, Beijing, China, August 12–16, 2012, pp. 186–194 (2012)
- [16] Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A.N., Kaiser, L., Polosukhin, I.: Attention is all you need. *arXiv preprint arXiv:1706.03762* (2017)
- [17] Yu, C., Ma, X., Ren, J., Zhao, H., Yi, S.: Spatio-temporal graph transformer networks for pedestrian trajectory prediction. In: Computer Vision - ECCV 2020 - 16th European Conference, vol. 12357, pp. 507–523 (2020)
- [18] Xu, M., Dai, W., Liu, C., Gao, X., Lin, W.,

- Qi, G.-J., Xiong, H.: Spatial-temporal transformer networks for traffic flow forecasting. arXiv preprint arXiv:2001.02908 (2020)
- [19] Yu, B., Yin, H., Zhu, Z.: Spatio-temporal graph convolutional networks: A deep learning framework for traffic forecasting. In: IJCAI, pp. 3634–3640 (2018)
- [20] Ge, L., Li, H., Liu, J., Zhou, A.: Temporal graph convolutional networks for traffic speed prediction considering external factors. In: MDM, pp. 234–242 (2019)
- [21] Fang, S., Zhang, Q., Meng, G., Xiang, S., Pan, C.: Gstnet: Global spatial-temporal network for traffic flow prediction. In: IJCAI, pp. 2286–2293 (2019)
- [22] Wu, Z., Pan, S., Long, G., Jiang, J., Zhang, C.: Graph wavenet for deep spatial-temporal graph modeling. In: IJCAI (2019)
- [23] Bai, S., Kolter, J.Z., Koltun, V.: An empirical evaluation of generic convolutional and recurrent networks for sequence modeling. arXiv:1803.01271 (2018)
- [24] Shi, X., Chen, Z., Wang, H., Yeung, D.-Y., Wong, W.-K., Woo, W.-c.: Convolutional lstm network: A machine learning approach for precipitation nowcasting. arXiv preprint arXiv:1506.04214 (2015)
- [25] Kipf, T.N., Welling, M.: Semi-supervised classification with graph convolutional networks. arXiv preprint arXiv:1609.02907 (2016)
- [26] Wang, Y., Yin, H., Chen, H., Wo, T., Xu, J., Zheng, K.: Origin-destination matrix prediction via graph convolution: a new perspective of passenger demand modeling. In: Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining, pp. 1227–1235 (2019)
- [27] Chu, K.-F., Lam, A.Y.S., Li, V.O.K.: Deep multi-scale convolutional lstm network for travel demand and origin-destination predictions. *IEEE Transactions on Intelligent Transportation Systems* **21**(8), 3219–3232 (2020)
- [28] Kingma, D.P., Ba, J.: Adam: A method for stochastic optimization. arXiv preprint arXiv:1412.6980 (2014)
- [29] Park, C., Lee, C., Bahng, H., Tae, Y., Jin, S., Kim, K., Ko, S., Choo, J.: St-grat: A novel spatio-temporal graph attention networks for accurately forecasting dynamically changing road speed. In: Proceedings of the 29th ACM International Conference on Information & Knowledge Management, pp. 1215–1224 (2020)
- [30] Xie, Q., Guo, T., Chen, Y., Xiao, Y., Wang, X., Zhao, B.Y.: Deep graph convolutional networks for incident-driven traffic speed prediction. In: Proceedings of the 29th ACM International Conference on Information & Knowledge Management, pp. 1665–1674 (2020)
- [31] Zhang, X., Huang, C., Xu, Y., Xia, L.: Spatial-temporal convolutional graph attention networks for citywide traffic flow forecasting. In: Proceedings of the 29th ACM International Conference on Information & Knowledge Management, pp. 1853–1862 (2020)
- [32] Zhang, D., Xiao, F., Shen, M., Zhong, S.: Dneat: A novel dynamic node-edge attention network for origin-destination demand prediction. *Transportation Research Part C: Emerging Technologies* **122**, 102851 (2021)
- [33] Tang, K., Cao, Y., Chen, C., Yao, J., Tan, C., Sun, J.: Dynamic origin-destination flow estimation using automatic vehicle identification data: A 3d convolutional neural network approach. *Computer-Aided Civil and Infrastructure Engineering* **36**(1), 30–46 (2021)
- [34] Zhao, J., Rahbee, A., Wilson, N.H.: Estimating a rail passenger trip origin-destination matrix using automatic data collection systems. *Computer-Aided Civil and Infrastructure Engineering* **22**(5), 376–387 (2007)
- [35] Hu, J., Yang, B., Guo, C., Jensen, C.S., Xiong, H.: Stochastic origin-destination

matrix forecasting using dual-stage graph convolutional, recurrent neural networks. In: 2020 IEEE 36th International Conference on Data Engineering (ICDE), pp. 1417–1428 (2020)

- [36] Xiong, X., Ozbay, K., Jin, L., Feng, C.: Dynamic prediction of origin-destination flows using fusion line graph convolutional networks. *CoRR* **abs/1905.00406** (2019)
- [37] Duan, Z., Zhang, K., Chen, Z., Liu, Z., Tang, L., Yang, Y., Ni, Y.: Prediction of city-scale dynamic taxi origin-destination flows using a hybrid deep neural network combined with travel time. *IEEE Access* **7**, 127816–127832 (2019)
- [38] Liu, L., Qiu, Z., Li, G., Wang, Q., Ouyang, W., Lin, L.: Contextualized spatial-temporal network for taxi origin-destination demand prediction. *IEEE Trans. Intell. Transp. Syst.* **20**(10), 3875–3887 (2019)
- [39] Shi, H., Yao, Q., Guo, Q., Li, Y., Zhang, L., Ye, J., Li, Y., Liu, Y.: Predicting origin-destination flow via multi-perspective graph convolutional network. In: 2020 IEEE 36th International Conference on Data Engineering (ICDE), pp. 1818–1821 (2020)
- [40] Ke, J., Qin, X., Yang, H., Zheng, Z., Zhu, Z., Ye, J.: Predicting origin-destination ride-sourcing demand with a spatio-temporal encoder-decoder residual multi-graph convolutional network. *Transportation Research Part C: Emerging Technologies* **122**, 102858 (2021)
- [41] Ma, J., Chan, J., Rajasegarar, S., Ristanoski, G., Leckie, C.: Multi-attention 3d residual neural network for origin-destination crowd flow prediction. In: 2020 IEEE International Conference on Data Mining (ICDM), pp. 1160–1165 (2020)
- [42] Barceló Bugeda, J., Montero Mercadé, L., Bullejos, M., Serch, O., Carmona Bautista, C.: A kalman filter approach for the estimation of time dependent od matrices exploiting bluetooth traffic data collection. In: TRB 91st Annual Meeting Compendium of Papers DVD, pp. 1–16 (2012)
- [43] Zheng, F., Liu, J., Zuylen, H.v., Wang, K., Liu, X., Li, J.: Dynamic od prediction for urban networks based on automatic number plate recognition data: Parametric vs. non-parametric approaches. In: 2019 IEEE Intelligent Transportation Systems Conference (ITSC), pp. 4037–4042 (2019)
- [44] Ma, Y., Kuik, R., van Zuylen, H.J.: Day-to-day origin-destination tuple estimation and prediction with hierarchical bayesian networks using multiple data sources. *Transportation research record* **2343**(1), 51–61 (2013)
- [45] Zhang, J., Zheng, Y., Qi, D.: Deep spatio-temporal residual networks for citywide crowd flows prediction. In: Thirty-first AAAI Conference on Artificial Intelligence (2017)
- [46] Carion, N., Massa, F., Synnaeve, G., Usunier, N., Kirillov, A., Zagoruyko, S.: End-to-end object detection with transformers. In: European Conference on Computer Vision, pp. 213–229 (2020)
- [47] Li, J., Wang, Y., McAuley, J.: Time interval aware self-attention for sequential recommendation. In: Proceedings of the 13th International Conference on Web Search and Data Mining, pp. 322–330 (2020)
- [48] Xia, L., Huang, C., Xu, Y., Dai, P., Zhang, B., Bo, L.: Multiplex behavioral relation learning for recommendation via memory augmented transformer network. In: Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval, pp. 2397–2406 (2020)
- [49] Cai, L., Janowicz, K., Mai, G., Yan, B., Zhu, R.: Traffic transformer: Capturing the continuity and periodicity of time series for traffic forecasting. *Transactions in GIS* **24**(3), 736–755 (2020)
- [50] Zheng, C., Fan, X., Wang, C., Qi, J.: Gman: A graph multi-attention network for traffic prediction. In: Proceedings of the AAAI Conference on Artificial Intelligence, vol. 34, pp.

1234–1241 (2020)

- [51] Arcos-García, Á., Alvarez-Garcia, J.A., Soria-Morillo, L.M.: Deep neural network for traffic sign recognition systems: An analysis of spatial transformers and stochastic optimisation methods. *Neural Networks* **99**, 158–165 (2018)

- [52] Li, S., Jin, X., Xuan, Y., Zhou, X., Chen, W., Wang, Y.-X., Yan, X.: Enhancing the locality and breaking the memory bottleneck of transformer on time series forecasting. *arXiv preprint arXiv:1907.00235* (2019)