

mMARCO: A Multilingual Version of the MS MARCO Passage Ranking Dataset

Luiz Henrique Bonifacio
Univ. of Campinas
NeuralMind

Vitor Jeronymo
Univ. of Campinas
NeuralMind

Hugo Queiroz Abonizio
NeuralMind

Israel Campiotti
NeuralMind

Marzieh Fadaee
Zeta Alpha

Roberto Lotufo
Univ. of Campinas
NeuralMind

Rodrigo Nogueira
Univ. of Campinas
Univ. of Waterloo
NeuralMind

Abstract

The MS MARCO ranking dataset has been widely used for training deep learning models for IR tasks, achieving considerable effectiveness on diverse zero-shot scenarios. However, this type of resource is scarce in languages other than English. In this work, we present mMARCO, a multilingual version of the MS MARCO passage ranking dataset comprising 13 languages that was created using machine translation. We evaluated mMARCO by fine-tuning monolingual and multilingual re-ranking models, as well as a dense multilingual model on this dataset. Experimental results demonstrate that multilingual models fine-tuned on our translated dataset achieve superior effectiveness to models fine-tuned on the original English version alone. Our distilled multilingual re-ranker is competitive with non-distilled models while having 5.4 times fewer parameters. Lastly, we show a positive correlation between translation quality and retrieval effectiveness, providing evidence that improvements in translation methods might lead to improvements in multilingual information retrieval. The translated datasets and fine-tuned models are available at <https://github.com/unicamp-dl/mMARCO.git>.

1 Introduction

Deep learning models applied to Information Retrieval (IR) tasks can be categorized into two main approaches: dense retrieval or re-ranking models. For the first approach, bi-encoder models are largely used (Khattab and Zaharia, 2020a; Xiong et al., 2020; Karpukhin et al., 2020; Gao et al., 2021; Zhan et al., 2020; MacAvaney et al., 2020)

whereas for re-ranking approaches, an initial retrieval system (e.g., using a bag-of-words (BOW) or dense method) provides a list of candidates which are typically re-ranked using a cross-encoder model (Nogueira et al., 2020, 2019; Qu et al., 2021; Zhang et al., 2021b; Ma et al., 2021). Usually, the models used in both approaches are fine-tuned on a labeled dataset containing queries and examples of relevant documents.

For many languages, the available training and evaluation datasets are biased towards traditional techniques (Thakur et al., 2021), such as bag-of-words, as they are often used to build these resources (Buckley et al., 2007; Yilmaz et al., 2020). As a consequence, neural models are at a disadvantage when evaluated on these datasets. Moreover, creating new labeled resources for this task is an expensive process. Thus, there is a lack of reliable datasets for fine-tuning and evaluating models for IR tasks in many languages.

More recently, researchers observed that multilingual models fine-tuned on monolingual datasets (usually English) achieve good effectiveness in a zero-shot manner when evaluated on other languages (Conneau et al., 2020; Wu and Dredze, 2019; Xue et al., 2020). Having the same labeled resource available in multiple languages allows researchers and practitioners to explore different aspects of the design space such as model architectures and training algorithms. Moreover, a way to further explore multilingual model capabilities beyond zero-shot learning is to fine-tune them on multilingual data. We believe that this approach could improve results for these models in several tasks.

Some techniques to tackle the lack of labeled

data include using lexical overlap or heuristics (Min et al., 2020), cross-lingual alignments (Hedderich et al., 2020), and dataset translation (Xue et al., 2020) which is the method we adopted in this work. As most languages have none or a limited number of labeled datasets, using automatic translation is an attainable way to derive the same resources for a wider range of languages.

Considering a multilingual resource prospect for IR, the MS MARCO passage ranking dataset is a suitable candidate as it shows good transfer learning capabilities, as well as being a popular choice for evaluating deep learning models (Craswell et al., 2020, 2021).

In this paper, we adopted an automatic translation approach to create a multilingual version of the MS MARCO passage ranking dataset, named mMARCO. The translation method leverages extensive manually annotated data. As far as we know, no previous work has translated a large IR dataset such as MS MARCO to multiple languages.

Our contributions are translating and making available the MS MARCO (both training and evaluation sets) in 13 different languages such as Portuguese, Spanish, German, and Chinese. Moreover, we make available the Transformer-based models fine-tuned on our translated datasets. One of them is a distilled multilingual re-ranker with a reduced number of parameters that is competitive with a much larger model. Others have shown that distilled models perform well on IR tasks (Li et al., 2020a; Gao et al., 2020; Lu et al., 2020; Hofstätter et al., 2020). Our experiments confirm those results in a multilingual setup.

2 Related Work

When considering multilingual representations used in NLP tasks, we classify the techniques into three main categories: word representations, pre-trained multilingual models with contextualized word representations, and dataset translation. Mikolov et al. (2013) proposed a distributed representation for machine translation using large amounts of monolingual data to learn a linear mapping between vector spaces of languages. Their method successfully learned translation for individual words of three different languages. Ammar et al. (2016) presented a method for estimating word representations for more than 50 languages in a shared space without requiring a parallel data by using only a dictionary-based estimation. Chen

and Cardie (2018) demonstrated that it is possible to learn multilingual word embeddings by exploiting the relationships between languages. This approach outperformed other unsupervised and supervised models.

With the introduction of the Transformer architecture, a variety of research was done on pre-training strategies and models. As a result of this, several multilingual pre-trained models have emerged in recent years. These models extend the progress on NLP to a wide range of languages and investigate whether using a diverse set of languages during language model pre-training is beneficial when fine-tuning on downstream tasks. Models such as mBERT (Devlin et al., 2018), XLM (Lample and Conneau, 2019), XLM-R (Conneau et al., 2019), mT5 (Xue et al., 2020), and mMiniLM (Wang et al., 2020) achieved performance improvements in cross-lingual tasks, showing to be competitive with strong monolingual models. This evidence motivated Isbister et al. (2021) to investigate whether using automatically translated datasets is sufficient in these tasks and there is no need to train monolingual models on various languages.

There are several successful attempts in the literature reporting the use of dataset translation techniques. Rodrigues et al. (2019) demonstrated that translating sentences to English in order to use an English-based pre-trained model outperforms its multilingual counterpart for semantic similarity and textual entailment tasks. In other studies, the dataset translation goal is not to replace multilingual models, but to provide more training data for downstream tasks that can be used in fine-tuning. Carrino et al. (2019) proposed a method called Translate Align Retrieve for automatically translating the SQuAD dataset. Using the translated resource, they fine-tuned a multilingual BERT, and show significant improvements over previous works. In a related approach, Araújo et al. (2020) demonstrated that using machine translation to translate examples to English in order to use an English monolingual model culminates in better results when compared to monolingual models in languages other than English. In addition, there are cross-lingual datasets such as XQuAD (Artetxe et al., 2019), which consists of paragraphs and question-answer pairs from the development set of SQuAD v1.1 translated into ten languages by professional translators and XNLI (Conneau et al., 2018), an extension of NLI corpus into 15

languages. Finally, Xue et al. (2020) and Xue et al. (2021) showed that fine-tuning multilingual models on translated NLI and question answering datasets improved results.

In the IR community, there have been several efforts to create multilingual resources. Initiatives like TREC, CLEF, FIRE, and NCTIR have proposed annotated collections to evaluate IR systems. However, given the small size of most of these resources, they are not appropriate to fine-tune large models such as transformer-based re-rankers. Moreover, the text data used to build such collections often comes from specific domains. This lack of diversity ends up harming the model’s generalization ability. On the other hand, as MS MARCO dataset assembles documents from different sources and styles, the translation process maintains this diversity in the target languages.

Closest to our work is MR. TYDI (Zhang et al., 2021a), a multilingual IR dataset derived from the Tydi QA dataset (Clark et al., 2020). A key difference is that Mr. Tydi uses Wikipedia as a corpus, whereas mMARCO’s corpus consists of diverse passages extracted from web pages. Another difference is related to query-relevant document pairs for training per language. Mr. Tydi has an irregular distribution of examples over all languages. The Korean language has the minimum number of examples, 1,317, while the Arabic language has the maximum, 12,377. The dataset mean of training examples is 4466. mMARCO contains 532,761 query-relevant document pairs for each language.

3 Methodology

In this section we describe the procedure to translate the MS MARCO dataset, the target languages that were selected and the two translation methods.

3.1 Dataset

We use the MS MARCO passage ranking dataset (Bajaj et al., 2016), a large-scale IR dataset comprising more than half million anonymized questions that were sampled from Bing’s search query logs. The MS MARCO dataset is formed by a collection of 8.8M passages, approximately 530k queries, and at least one relevant passage per query, which were selected by humans. The development set of MS MARCO comprises more than 100k queries. However, a smaller set of 6,980 queries is actually used for evaluation in most published works. We choose to translate this dataset because

of its structure and its effectiveness in transfer learning.

Regarding its format, MS MARCO passages do not hold any label within the text. This makes the dataset an excellent candidate for translation. Most labeled datasets in the field of NLP have their labels linked to one token or a span of tokens. Since the sentence structure can be different in different languages, it is very challenging to retain the same annotation structure. For instance, Rosa et al. (2021) has demonstrated this difficulty when translating a question answering dataset. To preserve the labels on the original data, special answer delimiter symbols were added before the translation, expecting to mark the target tokens to be extracted after translation. However, the authors argue that this strategy did not work consistently and a considerable portion of the dataset was discarded after translation. Additionally, models fine-tuned on MS MARCO have demonstrated good transfer learning capabilities (Thakur et al., 2021; Pradeep et al., 2020).

We believe that having the same resource available for a wider range of languages can be a unique contribution, as this dataset is arguably one of the most popular in evaluating deep learning models for *ad hoc* retrieval.

3.2 Translation

To translate the MS MARCO dataset, we experimented with two different approaches. The first one uses the translation models made available on HuggingFace by The Language Technology Research Group at University of Helsinki Tiedemann and Thottingal (2020).¹ We refer to these models as “Helsinki” in the rest of this paper. We selected the target languages according to three criteria: the largest number of Wikipedia articles, the most spoken languages in the world², and the availability of the language translation pair from English to the target language in the Helsinki repository. We ended up selecting 13 languages for translation.

Although there are considerable differences between the selected languages, the translation process was conducted the same way for all of them. First, we split MS MARCO passages into sentences. As the longest passage of MS MARCO has 362 words, splitting the passages is a way to alleviate the possibility of long inputs as most trans-

¹<https://huggingface.co/Helsinki-NLP>

²<https://www.ethnologue.com/guides/ethnologue200>

lation models tend to produce high-quality translations when prompted with sentences instead of paragraphs. Once the sentences are translated to the target language, we reassemble the passage by joining all translated sentences that were previously separated. Regarding the queries, we simply translate them without any pre-processing, given that they are shorter. We translate batches of 64 sentences and a maximum sequence length of 512 tokens on a Tesla V100 GPU.

The second translation approach uses Google Translate, available via a paid API. Unlike the Helsinki translation, there is no need to split the passages into smaller sentences. The only requirement is the maximum number of characters, which is set to 5000. This way, we translate the passages (and queries) by grouping them in batches up to this limit of characters. The average translation time for both translation methods is reported in Table 1.

		Passages	Queries
(1)	Helsinki	79.58	8.19
(2)	Google Translate	78.59	1.01

Table 1: Average translation time in hours for passages and queries of MS MARCO. *Queries* refers to all the dataset queries.

After translating the dataset to all target languages, we create a training set split using an equal proportion of samples from each language. The original MS MARCO training set consists of 39 million triples. Each triple is formed by a query followed by a relevant and non-relevant passage. These triples are used to fine-tune a re-ranking model. To fine-tune a multilingual model using the same triples from the original dataset but distributed among different languages, we construct a set of multilingual triples. To do this, we select the same queries and passages in the original dataset and randomly replace them with their translations. We always use the same language in the triple (i.e., the query and its respective positive and negative passages). Although we translated MS MARCO into 13 different languages, the multilingual training set was created using 9 languages, including English. This allows us to evaluate the models in a zero-shot manner, i.e., fine-tune in one language and evaluate on another.

3.3 Experimental Setup

We evaluate the datasets derived from our translation process in the passage ranking task. Fol-

lowing a two-stage pipeline widely adopted in IR (Nogueira et al., 2019), we first retrieve a ranked list of translated passages using BM25 (Pradeep et al., 2021; Nogueira et al., 2020; Li et al., 2020b) with the translated queries as input. We use the Pyserini framework to perform this task (Lin et al., 2021).

We further re-rank the list of passages using multilingual pretrained MT5 and MMINILM models. These models were fine-tuned on our multilingual training set, comprising examples in 9 different languages. To fine-tune the MT5 model, we follow the recommendation of Nogueira et al. (2020). While the aforementioned work used `true` and `false` as predictions tokens, we train our MT5 model to generate a `yes` token when a given document is relevant to a query and a `no` token otherwise. We use a batch size of 128, a maximum sequence length of 512 tokens, and fine-tune the model for 100k iterations, which took approximately 27 hours on a TPU v3-8. We use a constant learning rate of 0.001 and all layers use a dropout of 0.1.

The MMINILM model was fine-tuned with a batch size of 32 and a maximum sequence length of 512 tokens, which took approximately 50 hours on a Tesla A100 GPU. A learning rate warm-up was set over the 5,000 first training batches. We use the implementation provided by Reimers and Gurevych (2020). For both fine-tuning procedures, we use an equal number of examples per language. The MT5 was trained with 12.8 million training examples, while MMINILM used 80 million examples. For inference, both models re-rank the top 1000 passages retrieved by BM25.

Furthermore, we fine-tune and evaluate a multilingual dense model based on ColBERT (Khattab and Zaharia, 2020b), referred to as mColBERT in this paper. We start from the mBERT checkpoint, which was pre-trained on approximately one hundred languages. We then fine-tune it on mMARCO’s translation from Google Translate with a batch size of 64, and maximum sequence length of 180 and 32 tokens for passages and queries respectively. This model is fine-tuned with 25.6M examples, which takes approximately 36 hours on a Tesla V100 GPU. We set mColBERT’s final linear layer dimension to 64, but we split each token embedding into two, thus resulting in an embedding of size 32 and twice the amount of embeddings for retrieval. Compared to the original ColBERT’s implementation that uses embeddings of

	Language	R@1k		MRR@10			
		BM25	mColB.	BM25	mT5	mMiniLM	mColB.
(1)	English (Orig.)	0.857	0.953	0.184	0.366	0.366	0.352
(2)	Spanish	0.770	0.897	0.158	0.314	0.309	0.301
(3)	French	0.769	0.891	0.155	0.302	0.296	0.289
(4)	Italian	0.753	0.888	0.153	0.303	0.291	0.292
(5)	Portuguese	0.744	0.887	0.152	0.302	0.289	0.292
(6)	Indonesian	0.767	0.854	0.149	0.298	0.293	0.275
(7)	German	0.674	0.867	0.136	0.289	0.278	0.281
(8)	Russian	0.685	0.836	0.124	0.263	0.251	0.250
(9)	Chinese	0.678	0.837	0.116	0.249	0.249	0.246
<i>Zero-shot (models were fine-tuned on the 9 languages above)</i>							
(10)	Japanese	0.714	0.806	0.141	0.267	0.263	0.236
(11)	Dutch	0.694	0.862	0.140	0.292	0.276	0.273
(12)	Vietnamese	0.714	0.719	0.136	0.256	0.247	0.180
(13)	Hindi	0.711	0.785	0.134	0.266	0.262	0.232
(14)	Arabic	0.638	0.749	0.111	0.235	0.219	0.209

Table 2: Main results on the mMARCO passage ranking dataset. The re-rankers mT5 and mMiniLM and the dense retrieval model mColBERT were fine-tuned on mMARCO translated with Google Translate.

Translation	<i>es</i>	<i>fr</i>	<i>pt</i>	<i>it</i>	<i>id</i>	<i>de</i>	<i>ru</i>	<i>zh</i>	<i>ar</i>	<i>hi</i>	avg
BM25											
(1) Helsinki	0.144	0.138	0.141	0.131	0.120	0.121	0.083	0.064	0.089	0.016	0.105
(2) Google	0.158	0.155	0.152	0.153	0.149	0.136	0.124	0.116	0.111	0.134	0.138
mMiniLM											
(3) Helsinki	0.292	0.271	0.275	0.252	0.239	0.258	0.174	0.142	0.169	0.035	0.211
(4) Google	0.309	0.296	0.289	0.291	0.293	0.278	0.251	0.249	0.219	0.262	0.274
mT5											
(5) Helsinki	0.297	0.279	0.285	0.248	0.244	0.264	0.183	0.152	0.187	0.035	0.217
(6) Google	0.314	0.302	0.302	0.303	0.298	0.289	0.263	0.249	0.235	0.266	0.281

Table 3: Comparison of Helsinki translation models (open source) vs Google Translate (commercial). The reported metric is MRR@10 on the development set of mMARCO.

size 128, our method achieves a similar MRR@10 on the MS MARCO development set while using half of the CPU memory. Cosine similarity was used in both training and retrieval.

4 Results

The main results on the development set of mMARCO are shown in Table 2. We report MRR@10, which is the official metric of the MS MARCO passage dataset, as well as recall@1000. As our baseline, row (1) shows results from the original dataset in English, i.e., no translation involved.

The first observation is regarding R@1000 of BM25, in which the English dataset has the high-

est among all, while an average drop of 0.14 is observed in other languages. One possible reason for this drop is the lexical mismatch between the translated query and relevant passages. Since queries and passages are translated independently, the same word can be translated into two different (but synonym) words in the translated query and passage. For instance, the English word *car* may be translated as *carro* or *automóvel* when translated to Portuguese. If because of the context, the former translation is used in the relevant passage and the latter is used in the translated query, a lexical mismatch is introduced in the resulting dataset. As a consequence, BM25 might not return this relevant document as it relies on lexical match-

	Pre-training	Fine-tuning	EN		PT	
			T5	MiniLM	T5	MiniLM
(1)	EN	EN	0.381	0.396	0.181	0.164
(2)	PT	PT	0.200	-	0.299	-
(3)	PT	EN+PT	0.354	-	0.301	-
(4)	MULTI	EN	0.371	0.382	0.293	0.277
(5)		PT	0.357	0.336	0.303	0.296
(6)		EN+PT	0.374	0.374	0.306	0.299
(7)		MULTI	0.366	0.366	0.302	0.277

Table 4: Ablation results for monolingual and multilingual models. The reported metric is MRR@10.

ing. Subsequently, re-rankers might be penalized.

On the other hand, mColBERT’s R@1000 suggests that a dense retrieval model mitigates the lexical mismatch problem. For all languages, it achieved higher figures when compared to BM25. For instance, German (7) and Dutch (11) mColBERT’s R@1000 are 0.193 and 0.168 points higher than BM25’s.

Considering the results from English evaluation, we observe that MT5 and mMINILM achieve the same MRR@10. This is an interesting finding since mMINILM is a much lighter model; while MT5 has 580 million parameters, mMINILM has 107 million. This result further shows the effectiveness of the mMINILM language model distillation. Comparing the remaining results between MT5 and mMINILM, we observe an average drop of 0.08 and 0.09 in MRR@10 for rows (2) to (14) when compared to the English results.

The results from rows (10) to (14) came from a zero-shot evaluation, i.e., they were fine-tuned on the nine languages shown in rows (1) to (9) and directly evaluated on the languages in rows (10) to (14). These results show how effective are multilingual models, both considering language and task aspects.

Table 3 compares the IR results when using open source and commercial translation mechanisms. We observe that all languages have benefited from Google Translate translations when considering the MRR@10 metric. Moreover, we highlight the improvements on languages like Russian, Chinese, Arabic, and Hindi, as the commercial translations resulted in improvements in MRR@10 scores.

4.1 Ablation Study

In this section, we verify how monolingual and multilingual models perform when varying pre-training, fine-tuning, and evaluation languages. As

the number of pairwise language combinations is large, we only use English and Portuguese in this ablation study. The monolingual models we use are an English (Raffel et al., 2019) and a Portuguese (Carmo et al., 2020) pre-trained T5 model.

Table 4 shows the results. Rows (1) to (3) use models mostly pretrained on a single language (T5 and miniLM), and rows (4) to (7) report results for multilingual pretrained models (MT5 and mMINILM). When fine-tuned on monolingual datasets, we observe insignificant differences between monolingual and multilingual models in both English and Portuguese evaluation sets. We observe that for the monolingual configuration, miniLM outperforms T5 in English (1). We argue that the model was able to leverage training data for both languages and thus reduced most inaccuracies introduced by noisy translations.

When considering the results from English dataset, it is important to mention that both multilingual re-rankers were fine-tuned on a smaller amount of English examples than the models in row (1). This shows that the translation did not harm the resulting datasets significantly. Albeit the lexical mismatch problem discussed in Section 4, both re-rankers were able to learn the task from the translated data.

Rows (4) and (5) in Table 4 exhibit the results for MT5 fine-tuned on monolingual datasets. Whilst the results were lower for the English dataset when compared to monolingual T5 (1), the results on the Portuguese version were marginally higher than the ones observed in row (2). This cross-lingual evaluation shows how a multilingual model fine-tuned on one language and evaluated on another still can reach good results. Although this observation is not true for the Portuguese-English cross-lingual evaluation (row 5), as the result was below the monolingual one (row 1), the difference is small. Even

when fine-tuned on a translated dataset, the multilingual model was able to achieve competitive results when evaluated on the original English dataset. Additionally, multilingual T5 fine-tuned only on Portuguese (row 5) outperformed Portuguese models (rows 2 and 3) when evaluated on Portuguese. This result supports the observation that multilingual models fine-tuned on monolingual datasets perform considerably well on the same task in a different language (Conneau et al., 2020; Wu and Dredze, 2019; Xue et al., 2020).

The best result on the Portuguese MS MARCO was achieved by finetuning MT5 and MMINILM on the English-Portuguese versions of MS MARCO. On the other hand, the same models achieve lower results when fine-tuned on more than two languages, as shown in row (7). The results are even lower for MMINILM. Given the small number of parameters of this model, we hypothesize that it is not able to fully benefit from other languages.

Lastly, the models fine-tuned on multilingual data were not far below when evaluated on English and Portuguese datasets. Particularly for MT5, the multilingual fine-tuned model (row 7) slightly outperformed the monolingual one (row 2) in the Portuguese dataset. Once more, this evidence supports our hypothesis that our translated dataset can be beneficial for multilingual models during fine-tuning.

4.2 Translation Quality vs Retrieval Effectiveness

In this section, we investigate the correlation between the quality of the translation models, measured in BLEU points, and the effectiveness of different retrieval models on mMARCO, measured in MRR@10. In Figure 1, the x-axis represents the BLEU scores of Helsinki translation models on the Tatoeba dataset (Artetxe and Schwenk, 2019). The source language is English and the target language is one of {es, fr, it, pt, id, de, ru, zh} languages. The y-axis is the MRR@10 of the retrieval methods (BM25, MMINILM and MT5) on the mMARCO subset of that same language. The three trend lines have a R^2 of approximately 0.33, which shows a weak correlation between translation quality and retrieval effectiveness. Thus, it is reasonable to expect that improvements in translation methods can bring improvements to multilingual information retrieval.

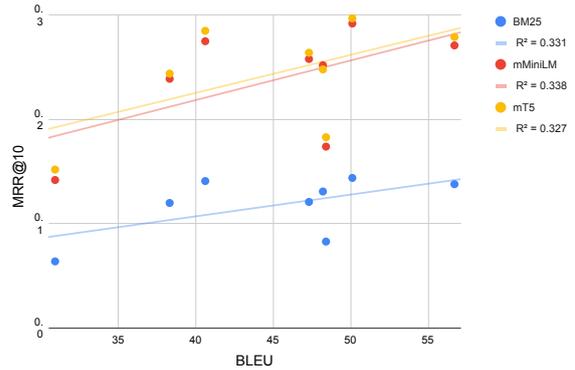


Figure 1: Translation quality measured as BLEU on Tatoeba vs retrieval quality measured as MRR@10 on mMARCO.

5 Conclusions and Future Work

In this work, we translate and make available mMARCO, a multilingual IR dataset in 13 different languages. This resource can be used for training and evaluating models. Additionally, we train and evaluate several monolingual and multilingual Transformer-based models on these datasets and provide benchmarks for further study in multilingual IR. As a way to encourage future creation of more datasets in new languages, we made available our translation code. In addition, all models and datasets are available at HuggingFace.

Our findings indicate that multilingual models fine-tuned on multilingual datasets achieve competitive results when compared to monolingual approaches (both in pre-training and fine-tuning approaches). Furthermore, we show that the translation quality has a significant impact on retrieval results. This outcome showed to be even greater when considering non-Latin based languages, such as Russian and Chinese, where the commercial translation achieved higher results in contrast to translations from open sourced models. Our results also showed that translating datasets is a feasible mechanism to overcome the labeled data scarcity.

Furthermore, we demonstrated how a lighter distilled model, MINILM, is competitive when fine-tuned in the same way as a much larger model. As future work, we would like to evaluate our fine-tuned models on a dataset in a language never seen during the language model pre-training or fine-tuning.

Acknowledgments

We thank Xinyu Zhang for helping us with the evaluation of the Chinese translation.

This research was funded by a grant from Fundação de Amparo à Pesquisa do Estado de São Paulo (FAPESP) 2020/09753-5.

References

- Waleed Ammar, George Mulcaire, Yulia Tsvetkov, Guillaume Lample, Chris Dyer, and Noah A. Smith. 2016. [Massively multilingual word embeddings](#). *CoRR*, abs/1602.01925.
- Matheus Araújo, Adriano Pereira, and Fabrício Benvenuto. 2020. [A comparative study of machine translation for multilingual sentence-level sentiment analysis](#). *Information Sciences*, 512:1078–1102.
- Mikel Artetxe, Sebastian Ruder, and Dani Yogatama. 2019. [On the cross-lingual transferability of monolingual representations](#). *CoRR*, abs/1910.11856.
- Mikel Artetxe and Holger Schwenk. 2019. [Massively multilingual sentence embeddings for zero-shot cross-lingual transfer and beyond](#). *Transactions of the Association for Computational Linguistics*, 7:597–610.
- Payal Bajaj, Daniel Campos, Nick Craswell, Li Deng, Jianfeng Gao, Xiaodong Liu, Rangan Majumder, Andrew McNamara, Bhaskar Mitra, Tri Nguyen, et al. 2016. Ms marco: A human generated machine reading comprehension dataset. *arXiv preprint arXiv:1611.09268*.
- Chris Buckley, Darrin Dimmick, Ian Soboroff, and Ellen Voorhees. 2007. [Bias and the limits of pooling for large collections](#). *Information retrieval*, 10(6):491–508.
- Diedre Carmo, Marcos Piau, Israel Campiotti, Rodrigo Nogueira, and Roberto Lotufo. 2020. [Ptt5: Pre-training and validating the t5 model on brazilian portuguese data](#). *arXiv preprint arXiv:2008.09144*.
- Casimiro Pio Carrino, Marta R. Costa-jussà, and José A. R. Fonollosa. 2019. [Automatic spanish translation of the squad dataset for multilingual question answering](#). *CoRR*, abs/1912.05200.
- Xilun Chen and Claire Cardie. 2018. [Unsupervised multilingual word embeddings](#). *CoRR*, abs/1808.08933.
- Jonathan H Clark, Jennimaria Palomaki, Vitaly Nikolaev, Eunsol Choi, Dan Garrette, Michael Collins, and Tom Kwiatkowski. 2020. [Tydi qa: A benchmark for information-seeking question answering in typologically diverse languages](#). *Transactions of the Association for Computational Linguistics*, 8:454–470.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2019. [Unsupervised cross-lingual representation learning at scale](#). *CoRR*, abs/1911.02116.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020. [Unsupervised cross-lingual representation learning at scale](#).
- Alexis Conneau, Guillaume Lample, Ruty Rinott, Adina Williams, Samuel R. Bowman, Holger Schwenk, and Veselin Stoyanov. 2018. [XNLI: evaluating cross-lingual sentence representations](#). *CoRR*, abs/1809.05053.
- Nick Craswell, Bhaskar Mitra, Emine Yilmaz, and Daniel Campos. 2021. [Overview of the TREC 2020 deep learning track](#). *CoRR*, abs/2102.07662.
- Nick Craswell, Bhaskar Mitra, Emine Yilmaz, Daniel Campos, and Ellen M. Voorhees. 2020. [Overview of the TREC 2019 deep learning track](#). *CoRR*, abs/2003.07820.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. [BERT: pre-training of deep bidirectional transformers for language understanding](#). *CoRR*, abs/1810.04805.
- Luyu Gao, Zhuyun Dai, and Jamie Callan. 2020. [Understanding BERT rankers under distillation](#). In *Proceedings of the 2020 ACM SIGIR on International Conference on Theory of Information Retrieval (IC-TIR 2020)*, pages 149–152.
- Luyu Gao, Zhuyun Dai, Tongfei Chen, Zhen Fan, Benjamin Van Durme, and Jamie Callan. 2021. [Complement lexical retrieval model with semantic residual embeddings](#). In *Advances in Information Retrieval*, pages 146–160, Cham. Springer International Publishing.
- Michael A. Hedderich, Lukas Lange, Heike Adel, Jannik Strötgen, and Dietrich Klakow. 2020. [A survey on recent approaches for natural language processing in low-resource scenarios](#). *CoRR*, abs/2010.12309.
- Sebastian Hofstätter, Sophia Althammer, Michael Schröder, Mete Sertkan, and Allan Hanbury. 2020. [Improving efficient neural ranking models with cross-architecture knowledge distillation](#). *arXiv preprint arXiv:2010.02666*.
- Tim Isbister, Fredrik Carlsson, and Magnus Sahlgren. 2021. [Should we stop training more monolingual models, and simply use machine translation instead?](#) *CoRR*, abs/2104.10441.
- Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. 2020. [Dense passage retrieval for](#)

- open-domain question answering. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6769–6781.
- Omar Khattab and Matei Zaharia. 2020a. [Colbert: Efficient and effective passage search via contextualized late interaction over BERT](#). *CoRR*, abs/2004.12832.
- Omar Khattab and Matei Zaharia. 2020b. Colbert: Efficient and effective passage search via contextualized late interaction over bert. In *Proceedings of the 43rd International ACM SIGIR conference on research and development in Information Retrieval*, pages 39–48.
- Guillaume Lample and Alexis Conneau. 2019. [Cross-lingual language model pretraining](#). *CoRR*, abs/1901.07291.
- Canjia Li, Andrew Yates, Sean MacAvaney, Ben He, and Yingfei Sun. 2020a. Parade: Passage representation aggregation for document reranking. *arXiv preprint arXiv:2008.09093*.
- Canjia Li, Andrew Yates, Sean MacAvaney, Ben He, and Yingfei Sun. 2020b. [PARADE: passage representation aggregation for document reranking](#). *CoRR*, abs/2008.09093.
- Jimmy Lin, Xueguang Ma, Sheng-Chieh Lin, Jheng-Hong Yang, Ronak Pradeep, and Rodrigo Nogueira. 2021. Pyserini: A python toolkit for reproducible information retrieval research with sparse and dense representations. In *Proceedings of the 44th Annual International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR 2021)*.
- Wenhao Lu, Jian Jiao, and Ruofei Zhang. 2020. Twinbert: Distilling knowledge to twin-structured bert models for efficient retrieval. *arXiv preprint arXiv:2002.06275*.
- Xinyu Ma, Jiafeng Guo, Ruqing Zhang, Yixing Fan, Xiang Ji, and Xueqi Cheng. 2021. Prop: Pre-training with representative words prediction for ad-hoc retrieval. In *Proceedings of the 14th ACM International Conference on Web Search and Data Mining*, pages 283–291.
- Sean MacAvaney, Franco Maria Nardini, Raffaele Perego, Nicola Tonello, Nazli Goharian, and Ophir Frieder. 2020. Expansion via prediction of importance with contextualization. In *Proceedings of the 43rd International ACM SIGIR conference on research and development in Information Retrieval*, pages 1573–1576.
- Tomás Mikolov, Quoc V. Le, and Ilya Sutskever. 2013. [Exploiting similarities among languages for machine translation](#). *CoRR*, abs/1309.4168.
- Junghyun Min, R. Thomas McCoy, Dipanjan Das, Emily Pitler, and Tal Linzen. 2020. [Syntactic data augmentation increases robustness to inference heuristics](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 2339–2352, Online. Association for Computational Linguistics.
- Rodrigo Nogueira, Zhiying Jiang, and Jimmy Lin. 2020. Document ranking with a pre-trained sequence-to-sequence model. *CoRR*, abs/2003.06713.
- Rodrigo Nogueira, Wei Yang, Kyunghyun Cho, and Jimmy Lin. 2019. [Multi-stage document ranking with BERT](#). *CoRR*, abs/1910.14424.
- Ronak Pradeep, Xueguang Ma, Xinyu Zhang, H. Cui, Ruizhou Xu, Rodrigo Nogueira, Jimmy J. Lin, and D. Cheriton. 2020. H2ooloo at trec 2020: When all you got is a hammer... deep learning, health misinformation, and precision medicine. In *TREC*.
- Ronak Pradeep, Rodrigo Nogueira, and Jimmy Lin. 2021. [The expando-mono-duo design pattern for text ranking with pretrained sequence-to-sequence models](#). *CoRR*, abs/2101.05667.
- Yingqi Qu, Yuchen Ding, Jing Liu, Kai Liu, Ruiyang Ren, Wayne Xin Zhao, Daxiang Dong, Hua Wu, and Haifeng Wang. 2021. Rocketqa: An optimized training approach to dense passage retrieval for open-domain question answering. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5835–5847.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2019. [Exploring the limits of transfer learning with a unified text-to-text transformer](#). *CoRR*, abs/1910.10683.
- Nils Reimers and Iryna Gurevych. 2020. [The curse of dense low-dimensional information retrieval for large index sizes](#). *arXiv preprint arXiv:2012.14210*.
- Ruan Chaves Rodrigues, Jéssica Rodrigues da Silva, Pedro Vitor Quinta de Castro, Nádia Silva, and A. S. Soares. 2019. Multilingual transformer ensembles for portuguese natural language tasks. In *ASSIN@STIL*.
- Guilherme Moraes Rosa, Luiz Henrique Bonifacio, Leandro Rodrigues de Souza, Roberto de Alencar Lotufo, and Rodrigo Nogueira. 2021. [A cost-benefit analysis of cross-lingual transfer methods](#). *CoRR*, abs/2105.06813.
- Nandan Thakur, Nils Reimers, Andreas Rücklé, Abhishek Srivastava, and Iryna Gurevych. 2021. [BEIR: A heterogeneous benchmark for zero-shot evaluation of information retrieval models](#). *CoRR*, abs/2104.08663.
- Jörg Tiedemann and Santhosh Thottingal. 2020. OPUS-MT — Building open translation services for the World. In *Proceedings of the 22nd Annual Conference of the European Association for Machine Translation (EAMT)*, Lisbon, Portugal.

- Wenhui Wang, Furu Wei, Li Dong, Hangbo Bao, Nan Yang, and Ming Zhou. 2020. [Minilm: Deep self-attention distillation for task-agnostic compression of pre-trained transformers](#). *CoRR*, abs/2002.10957.
- Shijie Wu and Mark Dredze. 2019. [Beto, bentz, becas: The surprising cross-lingual effectiveness of bert](#).
- Lee Xiong, Chenyan Xiong, Ye Li, Kwok-Fung Tang, Jialin Liu, Paul N. Bennett, Junaid Ahmed, and Arnold Overwijk. 2020. [Approximate nearest neighbor negative contrastive learning for dense text retrieval](#). *CoRR*, abs/2007.00808.
- Linting Xue, Aditya Barua, Noah Constant, Rami Al-Rfou, Sharan Narang, Mihir Kale, Adam Roberts, and Colin Raffel. 2021. [Byt5: Towards a token-free future with pre-trained byte-to-byte models](#). *CoRR*, abs/2105.13626.
- Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. 2020. [mt5: A massively multilingual pre-trained text-to-text transformer](#). *CoRR*, abs/2010.11934.
- Emine Yilmaz, Nick Craswell, Bhaskar Mitra, and Daniel Campos. 2020. On the reliability of test collections for evaluating systems of different types. In *proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 2101–2104.
- Jingtao Zhan, Jiaxin Mao, Yiqun Liu, Min Zhang, and Shaoping Ma. 2020. [Repbert: Contextualized text embeddings for first-stage retrieval](#). *arXiv preprint arXiv:2006.15498*.
- Xinyu Zhang, Xueguang Ma, Peng Shi, and Jimmy Lin. 2021a. [Mr. tydi: A multi-lingual benchmark for dense retrieval](#). In *Proceedings of the 1st Workshop on Multilingual Representation Learning*, pages 127–137.
- Xinyu Zhang, Andrew Yates, and Jimmy Lin. 2021b. [Comparing score aggregation approaches for document retrieval with pretrained transformers](#). In *European Conference on Information Retrieval*, pages 150–163. Springer.