

Cross-lingual Transfer of Monolingual Models

Evangelia Gogoulou

RISE, KTH

evangelia.gogoulou@ri.se

Tim Isbister

Peltarion

tim.isbister@peltarion.com

Ariel Ekgren

RISE

ariel.ekgren@ri.se

Magnus Sahlgren

RISE

magnus.sahlgren@ri.se

Abstract

Recent studies in zero-shot cross-lingual learning using multilingual models have falsified the previous hypothesis that shared vocabulary and joint pre-training are the keys to cross-lingual generalization. Inspired by this advancement, we introduce a cross-lingual transfer method for monolingual models based on domain adaptation. We study the effects of such transfer from four different languages to English. Our experimental results on GLUE show that the transferred models outperform the native English model independently of the source language. After probing the English linguistic knowledge encoded in the representations before and after transfer, we find that semantic information is retained from the source language, while syntactic information is learned during transfer. Additionally, the results of evaluating the transferred models in source language tasks reveal that their performance in the source domain deteriorates after transfer.

1 Introduction

Training a language model from scratch requires considerable resources, both with respect to data and compute. These requirements can be a limiting factor for many actors, and for smaller languages, it is not clear whether there even *exists* enough data to train a language model. Consequently, there is an increasing interest in using cross-lingual transfer to alleviate the requirements of monolingual models. In such transfer scenarios, a model is trained on data in one or several source languages, and then applied to a new target language with or without fine-tuning to the new language. Most of the work in this direction (see the next section) concerns multilingual models, where transfer is achieved by simply training on data containing several languages.

In this paper, we focus on the specific case where we perform cross-lingual transfer using monolin-

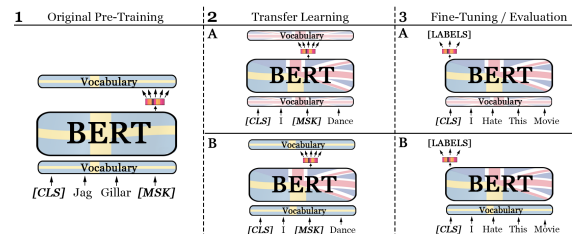


Figure 1: Our cross-lingual transfer method, applied to the transfer from Swedish to English: we continue pre-training Swedish BERT on our English Corpus, using the English (2A) or the Swedish (2B) vocabulary. Then, we fine-tune the transferred model on an English task.

gual models. The main research question is how to best initialize a new model in a new language; can we gain anything by starting from a pre-trained model in another language, or is it better to aim for fully native language models? In addition to investigating the performance of cross-lingual transfer of monolingual models using standard evaluation benchmarks such as GLUE, we also study the linguistic effects of such transfer; which types of linguistic features (if any) does the model learn during transfer, and does the model retain its knowledge of the source language after transfer? Inspired by the recent claim that Transformer-based Language Models (LM) encode *universal* properties (Lu et al., 2021), we want to investigate if a monolingual LM can be transferred to another language domain.

Our contributions in this work are the following: (i) we introduce a domain adaptation approach for cross-lingual transfer from other languages to English (Section 3), illustrated in Figure 1, (ii) we show that the English transferred model outperforms a native English model in the GLUE benchmark for all source languages studied here (Section 4.4), (iii) we show that the knowledge gained by the model during transfer is primarily syntactic (Section 4.6), (iv) we find that the transferred model shows signs of catastrophic forgetting in the source language (Section 4.7).

2 Related work

The standard methodology of transferring knowledge across languages is by training cross-lingual representations (Ruder et al., 2019). There have been several recent large-scale multilingual models published recently (examples include LASER (Schwenk and Douze, 2017), the multilingual BERT (mBERT) by Devlin et al. (2019), XLM(-R) (Conneau et al., 2020a), LaBSE (Feng et al., 2020), and multilingual T5 (Xue et al., 2020)). These models are trained using self-supervised language modeling on massively multilingual data using a shared vocabulary. Multilingual pre-training has proven to be successful for *zero-shot* cross-lingual transfer Pires et al. (2019), where the multilingual model, in this case mBERT, is fine-tuned on a downstream task in the source language and evaluated on the same task in the target language.

Pires et al. (2019) hypothesize that cross-lingual generalization requires (or at least is facilitated by) joint training across multiple languages using a shared vocabulary. Several recent studies contradict this assumption.

Karthikeyan et al. (2020) show that in a joint-training setting, multilinguality can be achieved even if the two languages do not share any vocabulary. On the contrary, structural similarity, defined as every property that is invariant to the script of the language such as word-ordering and morphology is shown to be crucial for zero-shot cross-lingual transfer. Lauscher et al. (2020) also demonstrate that transfer performance correlates with linguistic similarity between source and target languages. Conneau et al. (2020b) train jointly bilingual masked language models that share only a number of top Transformer layers, outperforming mBERT on multiple zero-shot classification tasks. Additionally, they study the similarity of pretrained monolingual BERT models using orthogonal mapping, finding that the representations produced at the word-level, contextual word-level and sentence-level are highly similar.

A different perspective is provided by Artetxe et al. (2020), who disregard the joint pre-training constraint and transfer monolingual BERT to a new language by learning only a new embedding matrix from scratch while freezing the rest of the model. When applied to XNLI with zero-shot learning, their method achieves results comparable to mBERT. Their results indicate that neither shared vocabulary nor joint pre-training are necessary for

cross-lingual transfer in the zero-shot setting.

The overarching conclusion from all the above papers is that monolingual embedding spaces learned by Transformer-based language models are *inherently* multilingual, in the sense that they share linguistic knowledge, most arguably semantics. We would like to exploit this observation in the traditional domain adaptation scenario (Ruder, 2019), where the target language is considered as a new domain. Our hypothesis is that the shared properties between the embedding spaces of the source and target language will boost the model performance in the target language domain.

3 Method

Given the abundance of English evaluation data, we focus on the transfer from other languages to English. The proposed method is illustrated in Figure 1. For each non-English original language *lang*, we perform the following cross-lingual transfer experiments:

1. **[*lang*→en][en]**: Inspired by Artetxe et al. (2020), we *replace* the original vocabulary [*lang*] with the English vocabulary, obtained from a Wordpiece Tokenizer trained from scratch on English Wikipedia, and *continue* pre-training monolingual BERT[*lang*] on English Wikipedia. Unlike Artetxe et al. (2020), we *keep* the embedding matrix of the original model, in order to fully utilize the learned [*lang*] embeddings in the English domain. Given that the vocabulary tokens learned by a Wordpiece tokenizer are in practice ordered by descending frequency, our method initializes the representations of tokens in the [en] vocabulary with the learned representations of [*lang*] tokens with similar frequency. We hypothesize that this frequency-based initialization schema loosely corresponds to a kind of grammatical initialization.
2. **[*lang*→en][*lang*]**: Considering the English language as a new domain in the spirit of Gururangan et al. (2020), we *continue* pre-training BERT[*lang*] on English Wikipedia using the *original* vocabulary [*lang*].

The main criteria for including a monolingual LM in the experiments is that its architecture and training procedure should follow BERT-base (Devlin et al., 2019) and its pre-training corpus should

Language	Model name	Alias	Vocab size	Data (GB)
English	BERT-base (original) (Devlin et al., 2019)	BERT-base	30,000	≈ 22
Swedish	KB-BERT (Malmsten et al., 2020)	sv	50,325	18
Dutch	BERTje (de Vries et al., 2019)	nl	30,000	12
Finnish	FinBERT (Virtanen et al., 2019)	fi	50,105	≈ 48
Arabic	AraBERTv01 (Antoun et al., 2020)	ar1	64,000	23
	AraBERTv02 (Antoun et al., 2020)	ar2	64,000	77

Table 1: List of the monolingual BERT models considered. Data size refers to the size of data used for pre-training.

include Wikipedia. The complete list of monolingual BERT models employed is presented in Table 1, while the details of model selection can be found in Appendix section A. The varying linguistic proximity of the included languages to English enables the systematic exploration of cross-lingual transfer effects, originating from different language domains. The experimentation with LMs that differ only in the amount of data they have been pre-trained, namely [ar1] and [ar2], facilitates the study of the role of pre-training data size in model performance in the English domain.

4 Experiments

Our goal is to study the cross-lingual transfer of monolingual models in a realistic scenario, where limited computational resources and data are available. This is reflected in our experimental setup, which is presented below.

4.1 Tokenization

Our pre-training corpus is English Wikipedia¹, which accounts to 13G English text. We train a Wordpiece tokenizer on the downloaded English Wikipedia, similar to Devlin et al. (2019). The vocabulary size is fixed to 32K. For facilitating the comparison between the two types of transfer experiments, the original vocabulary [*lang*], except for [nl], is resized to 32K, by keeping only the first 32K vocabulary tokens.

4.2 English pre-training

Each [*lang*→en] model is trained for one epoch on English Wikipedia using the Masked Language Modeling training objective. The Next Sentence Prediction objective is disregarded following (Liu et al., 2019), who show that it does not contribute to training performance. The complete list of training hyperparameters is shared between all trained

models and can be found in Appendix section B. All models were trained on a single GPU machine (Nvidia Tesla v100 sxm2 32GB), with the average training time per model being 4 days.

4.3 Fine-tuning

All models are fine-tuned on the tasks included in the GLUE benchmark (Wang et al., 2019b)(excluding WNLI given the known issues with the dataset construction²). The standard fine-tuning procedure is followed (Devlin et al., 2019) and the hyper-parameters can be found in Appendix section B. In order to account for the variance in the results between different runs, each model is fine-tuned using 5 different seeds and the average metric score on the validation set is reported. We refrain from reporting the GLUE test results, since the comparison with models achieving SOTA performance in GLUE is out of the scope of this work.

4.4 Baselines

For each language pair (*lang*, en), the fine-tuning performance of models [*lang*→en] are compared with the following models:

- **[en][en]**: BERT-base model trained from scratch on our English corpus, using the [en] tokenizer and the same hyperparameters and training objective with the transferred models. Unarguably, the [en][en] model is not expected to reach the performance of original BERT-base, given that it is pre-trained only for 210K steps, which accounts for ≈ 10% of the pre-training steps of BERT-base. However, it serves as a fair baseline in our experimental setup.
- **[*lang*]**: Direct fine-tuning of the [*lang*] model on GLUE.

¹Downloaded in November 2019, using this script: <https://github.com/facebookresearch/XLM/blob/master/get-data-wiki.sh>

Lang	Vocab	CoLA	MNLI (m/mm)	MRPC	QNLI	QQP	RTE	SST-2	STS-B	AVG
Bert-base	Bert-base	57.06	84.54/84.76	87.89	91.54	87.84	64.18	92.65	88.16	82.00
Our contributions										
en	en	25.68	76.21/76.13	82.69	85.86	85.21	54.21	88.04	82.71	72.97
sv	sv	13.26	77.88/78.40	86.93	86.47	85.50	62.45	88.64	84.57	73.79
sv→en	sv	33.50	74.86/75.86	87.54	86.32	83.55	53.49	84.92	79.24	73.25
sv→en	en	43.65	80.72/81.77	88.93	89.11	86.32	55.08	90.22	84.91	77.85
nl	nl	08.85	71.48/71.85	86.31	82.71	83.26	62.59	81.73	79.16	69.77
nl→en	nl	29.01	75.74/76.03	84.39	86.00	84.29	55.73	86.99	78.70	72.99
nl→en	en	39.87	78.96/79.79	85.65	87.34	85.82	55.01	89.10	83.65	76.13
fi	fi	07.34	75.81/76.41	86.85	84.51	85.27	64.03	84.23	84.82	72.14
fi→en	fi	18.67	70.92/71.14	83.46	81.08	80.94	55.44	74.30	74.18	68.54
fi→en	en	40.01	79.90/80.52	87.82	88.30	86.37	52.12	88.18	83.82	76.34
ar1	ar1	01.32	72.53/73.09	85.17	81.97	83.63	62.08	82.60	82.59	69.44
ar1→en	ar1	35.78	76.35/77.08	82.35	84.95	84.74	54.86	87.56	82.26	73.99
ar1→en	en	33.29	78.90/79.38	87.16	87.46	86.09	54.21	88.87	84.46	75.54
ar2	ar2	01.67	74.51/75.09	85.43	84.23	83.73	63.30	83.36	84.90	70.70
ar2→en	ar2	38.19	77.10/77.10	80.61	84.04	84.88	54.22	89.10	82.46	74.27
ar2→en	en	39.82	79.52/80.28	88.46	88.35	85.72	57.18	90.10	83.77	77.02

Table 2: GLUE validation metric score for all models and tasks. Accuracy is the reported metric for all tasks, except from CoLA (Mathew correlation coefficient), QQP and MRPC (F1 score) and STS-B (Spearman correlation ($\times 100$)). The ‘‘AVG’’ column corresponds to the average score computed across all evaluated GLUE tasks. The bold font underlines the overall best performing model per source language, comparing to the source monolingual model and the [en][en] model.

4.5 GLUE fine-tuning

The GLUE validation results of our models, together with the results of original BERT-base, are reported in Table 2. The standard deviation of the metric score in each task is presented in Appendix section C. The results confirm our original hypothesis that transferring a non-English LM to English, namely [*lang*→en], leads to significantly better fine-tuning performance than *both* an English LM trained from scratch, namely [en][en], *and* than the [*lang*] model without English pre-training. The best performing model, in terms of average score, is [sv→en][en], outperforming [en][en] by 4.88 absolute difference.

Additionally, we make the following interesting observations:

- **Switching vocabularies is crucial for fine-tuning performance:** [*lang*→en][en] performs consistently better than [*lang*→en][*lang*] for all studied languages.
- **The source language does not affect fine-tuning performance:** Interestingly, the GLUE performance of the transferred models is not affected by the linguistic proximity between the source language and English. As

an example, we observe that [ar1→en][en] has similar average performance on GLUE with [sv→en][en].

- **The data size of the pre-training corpus in the source language matters:** The best performing model originating from [ar2], namely [ar2→en][en], performs better than [ar1→en][en], which is the best model transferred from [ar1]. Given that [ar2] is trained on ≈ 3 times more data than [ar1], this indicates the important role of pre-training data size in cross-lingual performance.
- **Surprisingly good results on GLUE for native language models:** Our hypothesis here is that Transformer-based language models learn a general language prior, which is independent of the language domain. This prior is most likely semantics, a claim supported by the unarguably higher performance of [*lang*] models on semantic (QQP, STS-B, SST2) and inference tasks (MNLI, QNLI) comparing to syntactical ones (CoLA).

Interestingly, the only case where our cross-lingual transfer method has a negative effect is the task of Recognizing Textual Entailment (RTE). [*lang*→en] models perform consistently worse than

²<https://gluebenchmark.com/faq>(Number 12)

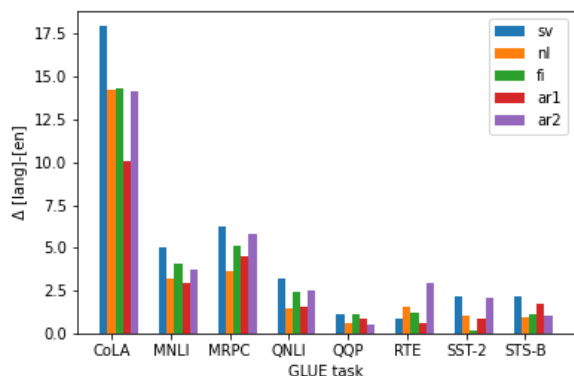


Figure 2: Maximum performance difference $\max(\Delta[l\text{ang}][en] - [en][en], \Delta[l\text{ang}][l\text{ang}] - [en][en])$ for each $l\text{ang} \neq en$ and GLUE task. In the case of MNLI, the average difference over the two tasks (m/mm) is computed.

$[l\text{ang}]$ models on this task. Admittedly, the validation performance of Bert-base on RTE lies only 14% above random-chance, which indicates that it is a hard task, at least for base-sized models. Therefore, we expect that a larger non-English monolingual LM trained on a larger English corpus would perform better on RTE. This is supported by the work of Zhang et al. (2020), who find that solving SuperGLUE tasks that require common-sense knowledge, RTE among others, with a RoBERTa-base model, requires pre-training on 1B words at minimum.

Figure 2 illustrates the maximum performance increase from the $[en][en]$ model for each pair of $[l\text{ang} \rightarrow en]$ models. Across all source languages, the highest performance increase is observed for the task Corpus of Linguistic Acceptability (CoLA), where the model learns to detect if an input sentence is grammatically correct. Given the grammatical nature of this task, it is not surprising that a model pre-trained on English will be better than a non-English model at recognizing grammatically correct English sentences. Relatively large improvement is observed for MNLI, MRPC and QNLI, while minimum average increase of 2.0 is observed on QQP. Overall, our results indicate that the cross-lingual transfer is more beneficial for tasks that require syntactic knowledge, like CoLA, comparing to semantic tasks.

Furthermore, we investigate if models transferred to English encode more gender bias information than a native English model. For this purpose, we evaluate the $[en][en]$ and $[l\text{ang} \rightarrow en]$ models

on the Winogender Diagnostic schema (Rudinger et al., 2018) which is part of SuperGLUE (Wang et al., 2019a). The details about this experiment are described in Appendix section E. Our results are inconclusive, since all models perform no better than random. However, this performance is in the same level of performance as BERT-large, which is one of the SuperGLUE baselines. This strengthens our hypothesis that performing the same experiment on larger models, which are pre-trained on more data, would lead to more clear results.

4.6 English Linguistic Probing

The GLUE experiments show that the performance benefit from the cross-lingual transfer varies across tasks, with bigger increase observed in the grammatical tasks, comparing to the semantic tasks. This could imply that the linguistic knowledge gained during the cross-lingual transfer is primarily syntactical. To investigate this further, we evaluate the syntactic and semantic knowledge of the $[l\text{ang} \rightarrow en]$ models through probing their representations.

More specifically, we evaluate the word representations yielded by $[l\text{ang} \rightarrow en]$ on the *structural probe*, proposed by Hewitt and Manning (2019), which detects whether syntactic trees are encoded in a linear transformation of the model embedding space. Following Chi et al. (2020), the probing dataset used is the English part of Universal Dependencies v2.7(English-EWT)³(Nivre et al., 2020). For the semantic probing of the transferred models, we use the Words In Context task (WiC, (Pilehvar and Camacho-Collados, 2019)). The goal here is to determine if a given word is used with the same meaning or not in two different contexts. The details of our probing setup can be found in Appendix section F.

The probing results are presented in Table 3. The clear improvement of the $[l\text{ang} \rightarrow en][en]$ model over the $[l\text{ang}]$ model on the structural probe for all source languages confirms our initial hypothesis that the cross-lingual transfer contributes significantly to the syntactic knowledge of the model. The lower performance of $[l\text{ang} \rightarrow en][l\text{ang}]$ on the syntactic probing, comparing to $[l\text{ang} \rightarrow en][en]$, strengthens our claim that switching to the vocabulary of the target language is crucial for cross-lingual performance. On the other hand, the model

³https://github.com/UniversalDependencies/UD_English-EWT

Language	Vocabulary	Syntax		Semantics
		UUAS	DSpr	WiC (acc)
en	en	66.21	70.41	56.73
sv	sv	63.92	70.25	61.18
sv→en	sv	64.61	71.76	60.49
sv→en	en	67.22	72.15	61.09
nl	nl	44.38	58.19	58.95
nl→en	nl	62.34	69.86	59.08
nl→en	en	66.59	71.73	59.46
fi	fi	60.7	68.23	57.89
fi→en	fi	60.82	69.47	59.96
fi→en	en	67.02	71.56	61.06
ar1	ar1	44.39	57.74	57.17
ar1→en	ar1	64.25	69.20	58.96
ar1→en	en	67.53	71.67	59.99
ar2	ar2	36.49	48.43	61.25
ar2→en	ar2	61.82	67.73	60.09
ar2→en	en	64.98	70.48	59.90

Table 3: Syntactic and semantic probing results of all trained models. Results of structural probes (Hewitt and Manning, 2019) on the English-EWT test set (Nivre et al., 2020) are reported using the undirected unlabeled attachment score (UUAS) and Spearman correlation between predicted and true word pair distances (DSpr) as metrics. Accuracy is used for measuring the model performance on WiC (Pilehvar and Camacho-Collados, 2019) dev set. The bold font highlights the models with the highest UUAS or DSpr score per source language, comparing to the source monolingual model and the [en][en] model.

performance on WiC is at a similar level before and after cross-lingual transfer, given the high standard deviation of the results presented in Table 11, Appendix Section F. This implies that the semantic representations are transferred from the source *lang* to English. The fairly similar, in some cases better, performance of [*lang*→en][en] comparing to [en][en], for both types of probing, indicates that the models transferred from non-English languages approximate the native English model in terms of English linguistic understanding.

4.7 Performance in the original language

The results presented so far clearly demonstrate that monolingual non-English models transferred with our method perform better than a native English model on English tasks. Now we move back to the source language domain and evaluate the transferred English models on fine-tuning tasks in the *original* language. More specifically, we evaluate the fine-tuning performance of [sv] and [fi] models, before and after transfer, on the ScandiSent sentiment corpus (Isbister et al., 2021), where the task is to distinguish between texts with positive or negative sentiment. The [sv] models are fine-tuned and evaluated on the English and Swedish part,

while the [fi] models on the English and Finnish part of ScandiSent. Appendix section D.1 contains the fine-tuning details. Our hypothesis is that English pre-training will cause performance degrading in the original language, while it will boost model performance in the English task. The results illustrated in Figure 3 confirm this. Each bar visualizes the difference of each model accuracy from the average one, which is computed for each combination of task (ScandiSent-{en, sv, fi}) and group of models ([sv], [fi]). As expected, [sv→en][en] and [fi→en][en] are the best performing models on ScandiSent-en. At the same time, these models have by far the worst performance on the corresponding original task, ScandiSent-{sv, fi}. We also performed additional experiments, where we fine-tune the [sv] models on the Swedish (machine translated) semantic textual similarity (STS-B) task (Isbister and Sahlgren, 2020). These results are in agreement with our original hypothesis and are presented in Appendix section D.2.

5 Discussion

In this work, we explore the effects of transferring a monolingual model to another language, in com-

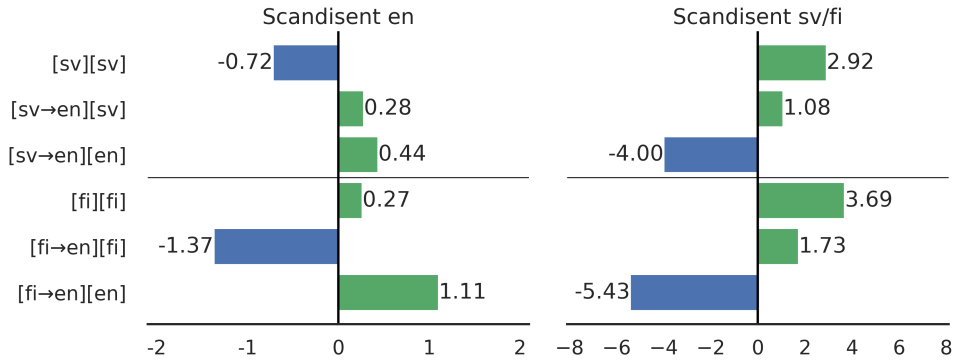


Figure 3: Performance difference in validation accuracy of each model from the average accuracy score, which is computed for each combination of task (ScandiSent-{en, sv, fi}) and group of models ([sv], [fi]) (Isbister et al., 2021).

parison to a native monolingual model. Our experimental results give rise to the following discussion points:

5.1 Effect of pre-training domain

The monolingual experimental setup employed here allows us to control for the source language domain and study the effect of this choice on cross-lingual performance. The presented results on GLUE as well as English probing tasks show that the linguistic similarity between source and target language is not important for cross-lingual transfer in our setup. However, this does not apply for the cross-lingual transfer from Dutch to English. Against our intuition, models transferred from [nl] have worse performance on English tasks comparing to models transferred from [sv], despite that Swedish and Dutch are fairly similar languages. Admittedly, our experimental setup does not control the pre-training domain: factors such as type and quality of the pre-training data, as well as quality of the original model could impact the performance of the transferred model in the target language domain. To the best of our knowledge, this information is currently poorly documented, a point recently made also by Rust et al. (2020). To battle this, rigorous evaluation of non-English monolingual models is necessary.

5.2 Effect of changing the vocabulary

A consistent observation across all evaluation experiments of the transferred models in the English domain is that switching to the English vocabulary is important for cross-lingual transfer. Keeping the original tokenizer in the English language domain leads to the out-of-vocabulary (OOV) words problem, since the subword distribution learned in

the source language domain does not match the English pre-training corpus. Replacing the original vocabulary with the vocabulary learned on the English corpus solves this issue, while keeping the original embedding matrix is shown to be a good initialization scheme according to our experiments. Related to this, Rust et al. (2020) find that training a language-specific embedding layer (and tokenizer), while freezing all other mBERT parameters, leads to better fine-tuning performance than mBERT across different tasks and languages.

5.3 Cross-lingual transfer as domain adaptation

Our setup differs significantly from *zero-shot* cross-lingual transfer, where the source model is transferred to the target language during test time, after being fine-tuned on a task in the source language. On the contrary, we approach cross-lingual transfer from the perspective of domain adaptation (Ruder, 2019), having English Wikipedia as our target domain and GLUE the collection of target tasks. Gururangan et al. (2020) show that adapting the original language model on the target domain through extra pre-training improves model performance on the target task. Our experimental results suggest that this approach is also beneficial for model transfer between two different language domains. In particular, the disproportionately higher performance gain of the transferred model in syntactic fine-tuning and probing tasks in the English domain leads us to the conclusion that the original model learns primarily syntactic information during transfer. In relation to this, Artetxe et al. (2020) observe that semantic representations are transferred from the original to the target language

in their cross-lingual transfer setting. Additionally, the reduced performance of the transferred models evaluated on tasks in the source language domain indicates the presence of catastrophic forgetting (Yogatama et al., 2019).

5.4 Transformers as universal computation engines

As the machine learning field progresses we see that the Transformer model is used to learn representations from various types of data, including images (Chen et al., 2020; Dosovitskiy et al., 2021), video (Sun et al., 2019) and proteins (Madani et al., 2020; Vig et al., 2021)). Taking this one step further, Jaegle et al. (2021) and Akbari et al. (2021) apply the same Transformer-based architectures to different types of inputs. Yun et al. (2020) provide theoretical evidence for this, demonstrating that Transformers can approximate random continuous sequence-to-sequence functions. Furthermore, Lu et al. (2021) show that Transformers that are pre-trained on natural language constitute a good starting point for learning fine-tuning tasks in other modalities. According to their analysis, the statistical properties learned during language pre-training of a Transformer are universal across modalities. We argue that our work also points in this direction, suggesting that monolingual pre-training is transferable to other language domains.

6 Conclusion

In this paper we show that using a pre-trained language transformer model as initialization for pre-training in new language domains is beneficial with regards to model performance on downstream tasks. The best way to do this is to keep the full model including the reuse of the embedding parameters but assign them new domain appropriate tokens. We show that this holds for smaller model sizes. Although it was not within the scope of this work to do the same experiments with larger transformer models we believe that the same pattern would hold as you scale up both parameter counts and dataset sizes. We hope that our work will inspire practitioners and researchers to start new pre-training tasks with parameters from existing models if possible. This in order to be able to train competitive models in low resource settings, generally save compute resources and reach higher performance on downstream tasks.

References

- Hassan Akbari, Linagzhe Yuan, Rui Qian, Wei-Hong Chuang, Shih-Fu Chang, Yin Cui, and Boqing Gong. 2021. Vatt: Transformers for multimodal self-supervised learning from raw video, audio and text. *arXiv preprint arXiv:2104.11178*.
- Wissam Antoun, Fady Baly, and Hazem Hajj. 2020. Arabert: Transformer-based model for arabic language understanding. *arXiv preprint arXiv:2003.00104*.
- Mikel Artetxe, Sebastian Ruder, and Dani Yogatama. 2020. [On the cross-lingual transferability of monolingual representations](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4623–4637, Online. Association for Computational Linguistics.
- Mark Chen, Alec Radford, Rewon Child, Jeffrey Wu, Heewoo Jun, David Luan, and Ilya Sutskever. 2020. Generative pretraining from pixels. In *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pages 1691–1703. PMLR.
- Ethan A. Chi, John Hewitt, and Christopher D. Manning. 2020. [Finding universal grammatical relations in multilingual BERT](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5564–5577, Online. Association for Computational Linguistics.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020a. [Unsupervised cross-lingual representation learning at scale](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8440–8451, Online. Association for Computational Linguistics.
- Alexis Conneau, Shijie Wu, Haoran Li, Luke Zettlemoyer, and Veselin Stoyanov. 2020b. [Emerging cross-lingual structure in pretrained language models](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 6022–6034, Online. Association for Computational Linguistics.
- Wietse de Vries, Andreas van Cranenburgh, Arianna Bisazza, Tommaso Caselli, Gertjan van Noord, and Malvina Nissim. 2019. Bertje: A dutch bert model. *arXiv preprint arXiv:1912.09582*.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.

- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. 2021. [An image is worth 16x16 words: Transformers for image recognition at scale](#). In *International Conference on Learning Representations*.
- Fangxiaoyu Feng, Yinfei Yang, Daniel Cer, Naveen Arivazhagan, and Wei Wang. 2020. [Language-agnostic BERT sentence embedding](#). ArXiv:2007.01852.
- Suchin Gururangan, Ana Marasović, Swabha Swayamdipta, Kyle Lo, Iz Beltagy, Doug Downey, and Noah A. Smith. 2020. [Don't stop pretraining: Adapt language models to domains and tasks](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8342–8360, Online. Association for Computational Linguistics.
- John Hewitt and Christopher D. Manning. 2019. [A structural probe for finding syntax in word representations](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4129–4138, Minneapolis, Minnesota. Association for Computational Linguistics.
- Tim Isbister, Fredrik Carlsson, and Magnus Sahlgren. 2021. [Should we stop training more monolingual models, and simply use machine translation instead?](#) *arXiv preprint arXiv:2104.10441*. Presented in NoDaLiDa 2021.
- Tim Isbister and Magnus Sahlgren. 2020. [Why not simply translate? A first Swedish evaluation benchmark for semantic similarity](#). *arXiv preprint arXiv:2009.03116*. Presented in SLTC 2020.
- Andrew Jaegle, Felix Gimeno, Andrew Brock, Andrew Zisserman, Oriol Vinyals, and Joao Carreira. 2021. [Perceiver: General perception with iterative attention](#). *arXiv preprint arXiv:2103.03206*.
- K Karthikeyan, Zihan Wang, Stephen Mayhew, and Dan Roth. 2020. [Cross-lingual ability of multilingual bert: An empirical study](#). In *International Conference on Learning Representations*.
- Anne Lauscher, Vinit Ravishankar, Ivan Vulić, and Goran Glavaš. 2020. [From zero to hero: On the limitations of zero-shot language transfer with multilingual Transformers](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 4483–4499, Online. Association for Computational Linguistics.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. [Roberta: A robustly optimized bert pretraining approach](#). *arXiv preprint arXiv:1907.11692*.
- Kevin Lu, Aditya Grover, Pieter Abbeel, and Igor Mordatch. 2021. [Pretrained transformers as universal computation engines](#). *arXiv preprint arXiv:2103.05247*.
- Ali Madani, Bryan McCann, Nikhil Naik, Nitish Shirish Keskar, Namrata Anand, Raphael R Eguchi, Po-Ssu Huang, and Richard Socher. 2020. [Progen: Language modeling for protein generation](#). *arXiv preprint arXiv:2004.03497*.
- Martin Malmsten, Love Börjeson, and Chris Haffenden. 2020. [Playing with words at the national library of sweden—making a swedish bert](#). *arXiv preprint arXiv:2007.01658*.
- Joakim Nivre, Marie-Catherine de Marneffe, Filip Ginter, Jan Hajič, Christopher D. Manning, Sampo Pyysalo, Sebastian Schuster, Francis Tyers, and Daniel Zeman. 2020. [Universal Dependencies v2: An evergrowing multilingual treebank collection](#). In *Proceedings of the 12th Language Resources and Evaluation Conference*, pages 4034–4043, Marseille, France. European Language Resources Association.
- Mohammad Taher Pilehvar and Jose Camacho-Collados. 2019. [WiC: the word-in-context dataset for evaluating context-sensitive meaning representations](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 1267–1273, Minneapolis, Minnesota. Association for Computational Linguistics.
- Telmo Pires, Eva Schlinger, and Dan Garrette. 2019. [How multilingual is multilingual BERT?](#) In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 4996–5001, Florence, Italy. Association for Computational Linguistics.
- Adam Poliak, Aparajita Haldar, Rachel Rudinger, J. Edward Hu, Ellie Pavlick, Aaron Steven White, and Benjamin Van Durme. 2018. [Collecting diverse natural language inference problems for sentence representation evaluation](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 67–81, Brussels, Belgium. Association for Computational Linguistics.
- Sebastian Ruder. 2019. *Neural transfer learning for natural language processing*. Ph.D. thesis, NUI Galway.
- Sebastian Ruder, Ivan Vulić, and Anders Søgaard. 2019. [A survey of cross-lingual word embedding models](#). *Journal of Artificial Intelligence Research*, 65:569–631.
- Rachel Rudinger, Jason Naradowsky, Brian Leonard, and Benjamin Van Durme. 2018. [Gender bias in coreference resolution](#). *arXiv preprint arXiv:1804.09301*.

- Phillip Rust, Jonas Pfeiffer, Ivan Vulić, Sebastian Ruder, and Iryna Gurevych. 2020. How good is your tokenizer? on the monolingual performance of multilingual language models. *arXiv preprint arXiv:2012.15613*.
- Holger Schwenk and Matthijs Douze. 2017. [Learning joint multilingual sentence representations with neural machine translation](#). In *Proceedings of the 2nd Workshop on Representation Learning for NLP*, pages 157–167, Vancouver, Canada. Association for Computational Linguistics.
- Chen Sun, Austin Myers, Carl Vondrick, Kevin Murphy, and Cordelia Schmid. 2019. Videobert: A joint model for video and language representation learning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 7464–7473.
- Jesse Vig, Ali Madani, Lav R. Varshney, Caiming Xiong, richard socher, and Nazneen Rajani. 2021. {BERT}ology meets biology: Interpreting attention in protein language models. In *International Conference on Learning Representations*.
- Antti Virtanen, Jenna Kanerva, Rami Ilo, Jouni Luoma, Juhani Luotolahti, Tapio Salakoski, Filip Ginter, and Sampo Pyysalo. 2019. Multilingual is not enough: Bert for finnish. *arXiv preprint arXiv:1912.07076*.
- Alex Wang, Yada Pruksachatkun, Nikita Nangia, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. 2019a. [Superglue: A stickier benchmark for general-purpose language understanding systems](#). In *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc.
- Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R. Bowman. 2019b. GLUE: A multi-task benchmark and analysis platform for natural language understanding. In the Proceedings of ICLR.
- Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. 2020. [mT5: A massively multilingual pre-trained text-to-text transformer](#). ArXiv:2010.11934.
- Dani Yogatama, Cyprien de Masson d’Autume, Jerome Connor, Tomas Kocisky, Mike Chrzanowski, Lingpeng Kong, Angeliki Lazaridou, Wang Ling, Lei Yu, Chris Dyer, et al. 2019. Learning and evaluating general linguistic intelligence. *arXiv preprint arXiv:1901.11373*.
- Chulhee Yun, Srinadh Bhojanapalli, Ankit Singh Rawat, Sashank Reddi, and Sanjiv Kumar. 2020. Are transformers universal approximators of sequence-to-sequence functions? In *International Conference on Learning Representations*.
- Yian Zhang, Alex Warstadt, Haau-Sing Li, and Samuel R Bowman. 2020. When do you need billions of words of pretraining data? *arXiv preprint arXiv:2011.04946*.

A Selection of Monolingual Language models

All monolingual models used were downloaded from the HuggingFace model hub⁴, which is an open library. All selected models are cased, with the exception of AraBERTs. The mapping between alias name in the paper and model name in the Hugging Face model hub is presented in Table 4.

In Table 1, the pre-training data sizes of KB-BERT, BERTje and AraBERTs were taken directly from the corresponding papers Malmsten et al. (2020); de Vries et al. (2019); Antoun et al. (2020). For BERT-base, our estimation of the pre-training data size is based on the total number of words (3.3B) in the pre-training corpus, provided by (Devlin et al., 2019). Our estimation for FinnBERT is based on the total number of characters (24B), stated in the original paper Virtanen et al. (2019).

Alias	Hugging Face name
BERT-base (original)	bert-base-cased
sv	KB/bert-base-swedish-cased
nl	GroNLP/bert-base-dutch-cased
fi	TurkuNLP/bert-base-finnish-cased-v1
ar1	aubmindlab/bert-base-arabertv01
ar2	aubmindlab/bert-base-arabertv02

Table 4: Mapping between model alias name in the paper and model name in the Hugging Face model hub.

B Training details

The implementation of English pre-training and GLUE fine-tuning is heavily based on the example scripts⁵ provided by the HuggingFace `transformers` library. The hyperparameters used are presented in Table 5. The parameters which are not presented here have been set to their default value⁶. For training the English Wordpiece tokenizer, we used the example code which is part of the HuggingFace `tokenizers` library⁷.

⁴<https://huggingface.co/>

⁵https://github.com/huggingface/transformers/blob/master/examples/pytorch/language-modeling/run_mlm.py, https://github.com/huggingface/transformers/blob/master/examples/pytorch/text-classification/run_glue.py

⁶https://huggingface.co/transformers/_modules/transformers/training_args.html

⁷<https://huggingface.co/docs/tokenizers/python/latest/pipeline.html#all-together-a-bert-tokenizer-from-scratch>

Hyperparameter	Training value	Fine-tuning value
batch size	128	32
learning rate	5e-5	2e-5
maximum sequence length	128	128
train_epochs	1.0	3.0
optimizer	AdamW	AdamW

Table 5: Hyperparameters used for English pre-training (second column) and GLUE fine-tuning (third column).

C GLUE results

For each model and task, we perform 5 runs with varying random seed. The standard deviation from the average performance across these 5 runs is presented in Table 7. Overall, we observe that the standard deviation is notably higher in CoLA and RTE comparing to the rest of the GLUE tasks.

D Fine-tuning tasks in the original language

D.1 Sentiment classification

Each of the ScandiSent- $\{en, sv, fi\}$ consists of 7500 training examples and 2500 validation examples, with even class balance in each set. The task implementation is `Pytorch` and the HuggingFace `Transformers` libraries. The hyperparameters used for fine-tuning the models on the ScandiSent corpus (Isbister et al., 2021) are presented in Table 6.

Hyperparameter	Value
train_epochs	2.0
early_stopping	false
optimizer	AdamW
learning_rate	4e-5
batch_size	128
max_seq_length	128
max_grad_norm	1.0

Table 6: Training hyperparameters for the sentiment classification experiments using the ScandiSent corpus (Isbister et al., 2021).

Figure 3 (Section 4.7) illustrates a summarized version of the obtained results. The full results on the ScandiSent corpus for the Swedish and Finish models are presented in Table 8.

D.2 Semantic textual similarity

In addition to the sentiment analysis task, we evaluated the fine-tuning performance of the $[sv]$ models on the Swedish STS-B corpus (Isbister and Sahlgren, 2020). This corpus is machine translated

Lang	Vocab	CoLA (stdev)	MNLI (stdev) (m/mm)	MRPC (stdev)	QNLI (stdev)	QQP (stdev)	RTE (stdev)	SST-2 (stdev)	STS-B (stdev)
Bert-base	Bert-base	1.43	0.17/0.23	1.10	0.24	0.05	1.28	0.24	0.19
Our contributions									
en	en	2.62	0.23/0.28	0.42	0.30	0.05	1.89	0.85	0.19
sv	sv	3.73	0.41/0.28	1.03	0.43	0.08	1.32	0.23	0.65
sv→en	sv	2.52	0.10/0.15	0.60	0.27	0.15	0.97	0.64	0.79
sv→en	en	1.21	0.17/0.09	0.19	0.19	0.07	1.95	0.32	0.28
nl	nl	1.45	0.2/0.34	0.41	0.40	0.16	1.81	0.90	0.26
nl→en	nl	0.69	0.25/0.15	0.76	0.28	0.12	1.54	0.46	0.93
nl→en	en	1.22	0.24/0.27	0.75	0.44	0.09	0.82	0.36	0.40
fi	fi	1.66	0.24/ 0.31	0.59	0.16	0.09	1.50	0.48	0.37
fi→en	fi	2.74	0.19/0.18	1.13	0.11	0.16	2.11	0.62	0.23
fi→en	en	2.71	0.12/0.14	0.65	0.28	0.09	1.54	0.51	0.48
ar1	ar1	3.66	0.33/0.15	0.95	0.32	0.13	1.67	0.60	0.27
ar1→en	ar1	2.21	0.17/0.34	0.64	0.29	0.09	1.67	1.01	0.19
ar1→en	en	2.63	0.16/0.18	0.71	0.54	0.10	2.87	0.68	0.15
ar2	ar2	2.48	0.11/0.40	0.96	0.14	0.54	1.15	0.48	0.36
ar2→en	ar2	1.89	0.20/0.15	1.23	0.42	0.28	2.51	0.42	0.89
ar2→en	en	0.74	0.19/0.21	1.06	0.37	0.05	2.12	0.43	0.44

Table 7: Standard deviation in GLUE validation results. Each value corresponds to the square root of the sample variance from the mean, computed across 5 runs per combination of model and task.

Lang	Vocab	en	sv	Lang	Vocab	en	fi
sv	sv	92.68	97.04	fi	fi	92.48	95.68
sv→en	sv	93.68	95.20	fi→en	fi	90.84	93.72
sv→en	en	93.84	90.12	fi→en	en	93.32	86.56

Table 8: *Left*: Full results of the [sv] models on the ScandiSent-{en, sv} validation sets. *Right*: Full results of the [fi] models on the ScandiSent-{en, fi}(Isbister et al., 2021) validation sets.

from the STS-B GLUE (Wang et al., 2019b) task through the Google machine translation API. The data splits in the original STS-B task are used. The task implementation uses the Pytorch and the HuggingFace Transformers libraries, while the training hyperparameters are the same with the ones used for the sentiment classification task, presented in Table 6. The obtained validation performance of the [sv] models, measured in pearson and spearman correlation, is illustrated in Table 9. As in the case of the sentiment classification task, we observe a clear drop in task performance on the Swedish models that are pre-trained on English, namely [sv→en][sv], [sv→en][en].

Lang	Vocab	Swedish STS-B (Pears/Spear)
sv	sv	85.15 / 85.39
sv→en	sv	70.33 / 70.76
sv→en	en	64.87 / 65.14

Table 9: Performance of the [sv] models on the validation set of the Swedish STS-B corpus (machine translated from English) (Isbister and Sahlgren, 2020).

E Transfer of bias

We evaluate the models on the Winogender Diagnostic schema (Rudinger et al., 2018) in its formulation as a textual entailment task (Poliak et al.,

2018), using the `jiant` library⁸. The task consists of a set of NLI questions pairs with the only difference between the pairs being that the gender pronoun is either male or female. The task performance is measured in terms of accuracy and Gender Parity Score (gps): the latter means that the prediction of entailment does not change based on the gender pronoun. With that being said, the perfectly unbiased model would have both high accuracy and gps score. As presented in Table 10, the accuracy of all models is at the level of random baseline. Therefore, no clear conclusion can be drawn from these results.

Lang	Vocab	gps	acc
en	en	100.00	50.00
sv→en	sv	100.00	50.00
sv→en	en	100.00	50.00
nl→en	nl	100.00	50.00
nl→en	en	91.57	49.72
fi→en	fi	100.00	50.00
fi→en	en	94.94	49.72
ar1→en	ar1	100.00	50.56
ar1→en	en	80.34	51.97
ar2→en	ar2	100.00	50.00
ar2→en	en	93.82	48.60

Table 10: Performance on Winograd gender schema (Rudinger et al., 2018). The reported metrics are Gender parity score (gps) and accuracy.

⁸<https://github.com/nyu-ml1/jiant>

F English linguistic probing experiments

F.1 Syntactic probing

Our implementation of the structural probing method (Hewitt and Manning, 2019) is heavily based on the coding repositories⁹ of (Hewitt and Manning, 2019; Chi et al., 2020). Following the evaluation procedure of Hewitt and Manning (2019), we use the following evaluation metrics: Spearman correlation between predicted and true word pair distances (DSpr.), averaged across the input sentences with length 5-50, and the percentage of undirected edges placed correctly in comparison with the gold parse tree, namely undirected attachment score (UUAS).

F.2 Semantic probing

The `jiant` library¹⁰ was used for training and evaluation of our models on the WiC task (Pilehvar and Camacho-Collados, 2019). The reported accuracy corresponds to the average accuracy across 5 runs, each one with a different random seed. As presented in Table 11, the computed standard deviation across runs is relatively high.

Table 11: Standard deviation (stdev) of the average accuracy on WiC validation set over 5 runs with different random seeds. Standard deviation is computed as the square root of the sample variance from the mean accuracy.

Lang	Vocab	WiC (stdev)
en	en	1.19
sv	sv	0.90
sv→en	sv	1.96
sv→en	en	1.27
nl	nl	1.34
nl→en	nl	1.00
nl→en	en	0.76
fi	fi	0.65
fi→en	fi	1.93
fi→en	en	1.76
ar1	ar1	1.25
ar1→en	ar1	2.39
ar1→en	en	1.10
ar2	ar2	1.10
ar2→en	ar2	1.68
ar2→en	en	1.22

⁹<https://github.com/ethanachi/multilingual-probing-visualization>
<https://github.com/john-hewitt/structural-probes/>

¹⁰<https://github.com/nyu-ml1/jiant>