

Numerically Stable Binary Coded Computations

Neophytos Charalambides, Hessam MahdaviFar, and Alfred O. Hero III

Abstract

This paper addresses the gradient coding and coded matrix multiplication problems in distributed optimization and coded computing. We present a numerically stable binary coding method which overcomes the drawbacks of the gradient coding method proposed by Tandon et al., and can also be leveraged by coded computing networks whose servers are of heterogeneous nature. The proposed binary encoding avoids operations over the real and complex numbers which are inherently numerically unstable, thereby enabling numerically stable distributed encodings of the partial gradients. We then make connections between gradient coding and coded matrix multiplication. Specifically, we show that any gradient coding scheme can be extended to coded matrix multiplication. Furthermore, we show how the proposed binary gradient coding scheme can be used to construct three different coded matrix multiplication schemes, each achieving different trade-offs.

Index Terms

Distributed gradient descent, distributed matrix multiplication, binary erasure codes, straggler mitigation, numerical stability.

I. INTRODUCTION

The *curse of dimensionality* has been a major impediment to solving large scale problems, which often require heavy computations. Recently, coding-theoretic ideas have been adopted in order to accommodate such computational tasks in a distributed fashion, under the assumption that *straggler* workers are present [1]–[13]. Stragglers are workers whose assigned tasks may never be completed, due to delay or outage, and can significantly increase the overall computation time. When the computational tasks are encoded, e.g., by using linear codes, the distributed computations can be protected against erasures.

In this paper, we first focus on the problem of exact recovery of the gradient in a distributed computing setting. We adopt the framework of [14] where *Gradient Coding* (GC)¹ was proposed for recovery of the gradient when the objective loss function is differentiable and additively separable. Gradient recovery is accomplished by replicating the tasks in a certain way, so as to introduce the redundancy needed to combat the effect of stragglers. The problem of exact recovery of the gradient was studied in several prior works, e.g., [14]–[18], while the numerical stability issue was studied in [19]. There are also several works involving GC for approximate recovery of the gradient [16], [20]–[28]. Also, an idea similar to GC had appeared in [29], though not within a coding-theoretic setting.

We propose a scheme for GC that is numerically stable, which works in fixed point precision. The proposed scheme avoids floating point representations and operations, e.g., division or multiplication of real or complex numbers. Furthermore, the encoding matrix is binary, simplifying the encoding process. This scheme is also deterministic and does not require generating random numbers. The method is similar in spirit to the *fractional repetition scheme* introduced in [14], [30], where we also drop the strict assumption that $s + 1$ divides n , where n is the number of workers and s is the number of stragglers that the scheme tolerates. The main advantage of encoding and decoding real-valued data using binary matrices is that it does not introduce further instability, possibly adding to the computational instability of the associated computation tasks. Such a binary approach was considered in [31] for matrix-vector multiplication. The fact that the encoding matrix is defined over $\{0, 1\}$ allows us to view the encoding as task assignments. This also leads to a more efficient online decoding, which avoids searching through an exponentially large table in the number of workers n , as in the original GCS proposed in [14].

Dropping the aforementioned assumption results in an unbalanced load assignment among the workers. Under the assumption that the workers are *homogeneous*, we allocate the partitions as uniform as possible. To avoid bias when considering workers of *heterogeneous* nature, i.e., of different computational power, the allocation of the computational tasks should be done in such a way that all workers have the same expected execution time; as the stragglers are assumed to be uniformly random. We provide an analysis which determines how to appropriately allocate the assignments, so that this objective is met. We note that similar ideas appear in [14], [17], in the context of *partial* and *non-persistent* stragglers; respectively.

The majority of coded computing has focused on fundamental algebraic operations, such as matrix multiplication and polynomial evaluation. Directly adopting these schemes in general optimization problems is often not possible, since the gradient computation may not have any algebraic structure, or can only be evaluated numerically [32]. In this work we study the other direction, i.e., how to devise *Coded Matrix Multiplication* (CMM) schemes from gradient coding. The key idea is to leverage the additive structure underlying both problems. In a similar fashion, we can transform any GCS into a distributive straggler robust addition scheme.

Part of the material in this paper was presented at the 2020 IEEE International Symposium on Information Theory (ISIT), Los Angeles, USA, June 2020.

The authors are with the Department of Electrical Engineering and Computer Science, University of Michigan, Ann Arbor, MI 48104 (email: neochara@umich.edu, hessam@umich.edu, hero@umich.edu). This work was partially supported by grant ARO W911NF-15-1-0479.

¹For brevity, we refer to a *gradient coding scheme* as GCS, a *coded matrix multiplication scheme* as CMMS; and CMMSs for plural.

The proposed GC method can be adapted to compute matrix-matrix multiplication in the presence of stragglers; which has gained a lot of attention recently, as well as matrix inverse approximations [33]. The first CMMS was proposed in [1]. Since then, a multitude of CMMSs have been proposed [34]–[42], with each of them being advantageous to others in certain aspects. There is also a considerable amount of work on matrix-vector multiplication in distributed computing [31], [43]–[45]. Furthermore, numerical stability for matrix multiplication has been studied in [40], [41]. Approximate coded matrix-matrix and matrix-vector schemes have also been devised [46]–[49].

We show that any GCS can be extended to a CMMS. The main idea is that the product of two matrices is equal to the sum of the outer-products of their columns and rows, respectively. This property has been utilized in the context of CMM [38], [39], [48] and, to our knowledge, we are the first to connect this to GC. We derive three new CMMSs based on the proposed binary GC, each achieving different trade-offs. Since the proposed CMMSs are derived from a GCS, they have properties that differ from other CMM approaches, and do not satisfy the same bounds and thresholds. However, our proposed schemes achieve the optimal trade-off between task allocations and the number of stragglers of GC. They also preserve the desired properties possessed by binary GC methods. For example, there is no need for complex encoding and decoding procedures; and the proposed methods are numerically stable.

Our main contributions are the following:

- Introduction of a *binary* GCS — both in the encoding and decoding, that is resilient to stragglers;
- Elimination of the restrictive assumption $(s + 1) \mid n$ in [14];
- We show that the proposed GCS achieves perfect gradient recovery;
- We show how the unbalanced assignment, which arises when $(s + 1) \nmid n$, can be made optimal when the workers are homogeneous;
- As compared to the original binary scheme [14], we give a more efficient online decoding step;
- We determine the optimal task assignment for heterogeneous workers;
- We show how any GCS can be turned into a CMMS;
- We use our binary GCS to derive three binary CMMSs;

The rest of this paper is organized as follows. In Section II we provide a review of the straggler problem in GC [14]. In Section III binary GC is introduced, and the encoding and decoding procedures are discussed. In Section IV we establish the optimality of our GCS, and consider scenarios with heterogeneous workers. The focus is then shifted towards CMM, and in Section V we show how any GCS can be utilized to devise a CMMS. Then, two other schemes derived from our GCS are presented in V-C and V-D. In V-E we compare and contrast our three CMMSs, and discuss where two of them have been utilized in other coded computing applications. In Section VI we compare our schemes to prior methods, and draw connections with other areas in information theory. Section VII concludes the paper.

We also provide appendices with further details on our algorithms, numerical examples, and experimental justification. In Appendix E we present various applications in which CMM can be utilized in gradient descent iterative algorithms; for Frobenius-norm minimization problems. These demonstrate further connections between the CMM and GC problems.

II. PRELIMINARIES

A. Straggler Problem

Consider a single central server that has at its disposal a dataset $\mathcal{D} = \{(\mathbf{x}_i, y_i)\}_{i=1}^N \subset \mathbb{R}^p \times \mathbb{R}$ of N samples, where \mathbf{x}_i represents the features and y_i denotes the label of the i^{th} sample. The central server distributes the dataset \mathcal{D} among n workers to facilitate computing the solution of the problem

$$\theta^* = \arg \min_{\theta \in \mathbb{R}^p} \left\{ \sum_{i=1}^N \ell(\mathbf{x}_i, y_i; \theta) + \mu R(\theta) \right\} \quad (1)$$

where $L(\mathcal{D}; \theta) = \sum_{i=1}^N \ell(\mathbf{x}_i, y_i; \theta)$ is the empirical loss; for $\ell(\mathbf{x}_i, y_i; \theta)$ a predetermined differentiable loss-function, and $\mu R(\theta)$ is a regularizer. A common approach to solving (1) is to employ gradient descent. Even if closed-form solutions exist for (1), gradient descent is advantageous for large N .

The central server is assumed to be capable of distributing the dataset appropriately, with a certain level of redundancy, in order to recover the gradient based on the full dataset \mathcal{D} . As a first step we partition \mathcal{D} into k disjoint parts $\{\mathcal{D}_j\}_{j=1}^k$ each of size N/k . The gradient is the quantity

$$g = \nabla_{\theta} L(\mathcal{D}; \theta) = \sum_{j=1}^k \nabla_{\theta} \ell(\mathcal{D}_j; \theta) = \sum_{j=1}^k g_j. \quad (2)$$

We refer to the terms $g_j := \nabla_{\theta} \ell(\mathcal{D}_j; \theta)$ as *partial gradients*. If k does not divide N , one can add auxiliary samples $(\mathbf{0}_{p \times 1}, 0)$ to the dataset \mathcal{D} so that this is met. Since these auxiliary samples would not affect the partial gradients, nor the gradient, without loss of generality, we assume that $k \mid N$.

In a distributed computing setting each worker node completes its task by returning a certain encoding of its assigned partial gradients. There can be different types of failures that may occur during the computation or the communication process. The

worker nodes that fail to complete their tasks and return the outcome to the central server are called *stragglers*. It is assumed that there are s stragglers, thus, the central server only receives $f = n - s$ completed tasks. Let $\mathcal{I} \subsetneq \mathbb{N}_n := \{1, \dots, n\}$ denote the set of indices of the f workers who complete and return their tasks. In practice, the completed tasks may be received at different times. Once *any* set of f tasks is received, the central server should be able to decode the received encoded partial gradients and recover the full gradient g .

B. Gradient Coding

Gradient coding, proposed in [14], is a procedure comprised of an encoding matrix $\mathbf{B} \in \Sigma^{n \times k}$, and a decoding vector $\mathbf{a}_{\mathcal{I}} \in \Sigma^n$; determined by \mathcal{I} , for Σ the field over which the encoding-decoding takes place. It is commonly assumed that the workers have the same computational power, in which case the same number of tasks is assigned to each of them. We relax this restriction in this paper, and thus do not need to impose the assumption $(s + 1) \mid n$ from [14]. Each row of \mathbf{B} corresponds to an encoding vector, also regarded as a task allocation, and each column corresponds to a data partition \mathcal{D}_j .

Each worker node is assigned a number of partial gradients from the partition $\{\mathcal{D}_j\}_{j=1}^k$, indexed by $\mathcal{J}_i \subsetneq \mathbb{N}_k$. The workers are tasked to compute an encoded version of the partial gradients $g_j \in \mathbb{R}^p$ corresponding to their assignments. Let

$$\mathbf{g} := \begin{pmatrix} | & | & & | \\ g_1 & g_2 & \dots & g_k \\ | & | & & | \end{pmatrix}^T \in \mathbb{R}^{k \times p} \quad (3)$$

denote the matrix whose rows constitute the transposes of the partial gradients. The received encoded partial gradients will be the rows of $\mathbf{B}\mathbf{g} \in \mathbb{R}^{n \times p}$ indexed by \mathcal{I} .

The full gradient of the objective (1) on \mathcal{D} can be recovered by applying $\mathbf{a}_{\mathcal{I}}$ which is designed to have a support that is a subset of \mathcal{I}

$$g^T = \mathbf{a}_{\mathcal{I}}^T (\mathbf{B}\mathbf{g}) = \mathbf{1}_{1 \times k} \mathbf{g} = \sum_{j=1}^k g_j^T, \quad (4)$$

provided that the encoding matrix \mathbf{B} satisfies $\mathbf{a}_{\mathcal{I}}^T \mathbf{B} = \mathbf{1}_{1 \times k}$ for all $\binom{n}{s}$ possible index sets \mathcal{I} . Note that every partition is sent to $s + 1$ servers, and each server will receive at least $\frac{k}{n}(s + 1)$ distinct partitions. In Section III, we propose a binary design of the encoding matrix \mathbf{B} and decoding vector $\mathbf{a}_{\mathcal{I}}$. These may then be used for recovering the gradient g at each iteration by the central server.

In [14], a *balanced* assignment is considered, which is the case where all the workers are assigned the same number of tasks. This number is lower bounded by $\frac{k}{n}(s + 1)$, i.e.,

$$\|\mathbf{B}_{(i)}\|_0 \geq \frac{k}{n}(s + 1) \quad \text{for all } i \in \mathbb{N}_n \quad (5)$$

for $\mathbf{B}_{(i)}$ the i^{th} row of \mathbf{B} . When this lower bound is met with equality, the scheme is maximum distance separable (MDS). The restriction $(s + 1) \mid n$ allows the GC to satisfy this bound, as $\frac{n}{s+1}$ needs to be an integer.

In general, GC schemes require processing over $s + 1$ partitions from each worker in order to tolerate s stragglers. Since these schemes encode over partial gradients computed from unprocessed data, they are applicable to a large class of loss functions, as well as loss functions whose gradient can only be computed numerically, e.g., in deep neural networks [32].

We point out that in [50] the partitions sent to each worker are pre-processed, such that the computations at the workers are viewed as evaluating a polynomial at distinct points. This approach is referred to as *Polynomially coded regression*, and only applies to the least squares objective function. The central server computes the gradient by interpolating this polynomial. By working on the encoded data instead, the authors of [50] reduce the threshold on the number of workers that need to respond.

C. Notational Conventions

The vector Euclidean norm of $\mathbf{v} \in \mathbb{R}^p$ is defined as $\|\mathbf{v}\|_2 = \sqrt{\mathbf{v}^T \mathbf{v}} = (\sum_i \mathbf{v}_i^2)^{1/2}$, and the matrix Frobenius norm of $\mathbf{V} \in \mathbb{R}^{p \times q}$ as $\|\mathbf{V}\|_F = \sqrt{\text{tr}(\mathbf{V}^T \mathbf{V})} = (\sum_i \sum_j \mathbf{V}_{ij}^2)^{1/2}$. Also, $\mathbf{V}_{(i)}$ denotes the i^{th} row of \mathbf{V} , $\mathbf{V}^{(j)}$ denotes the j^{th} column of \mathbf{V} , and the $p \times p$ identity matrix is denoted by \mathbf{I}_p . We denote the set of nonnegative integers by $\mathbb{N}_0 := \{0, 1, 2, \dots\}$.

In the context of GC, the parameter N is reserved for the number of data samples, each consisting of p features and one label. In the context of CMM, the parameter N denotes the common dimension of the two matrices being multiplied, i.e., the number of columns of the first matrix and the number of rows of the second matrix.

The integer k denotes the number of partitions of the dataset in GC, and of the matrix or matrices in CMM. With n the number of workers and s the number of stragglers, the number of ‘‘blocks’’ is determined by $\ell = \lfloor \frac{n}{s+1} \rfloor$. The set of indices of the $f = n - s$ non-straggling workers is denoted by \mathcal{I} . Our encoding matrix is denoted by \mathbf{B} , and our decoding vector for the case where a certain \mathcal{I} occurs is denoted by $\mathbf{a}_{\mathcal{I}}$. In the CMM setting, these are denoted by $\bar{\mathbf{B}}$ and $\bar{\mathbf{a}}_{\mathcal{I}}$, respectively.

Finally, $\text{supp}(\cdot)$ denotes the support of a matrix or a vector, i.e., the index set of elements which are nonzero. The remainder function is denoted by $\text{rem}(\cdot, \cdot)$, i.e., for positive integers a and b ; $\text{rem}(b, a) = b - a \cdot \lfloor \frac{b}{a} \rfloor$.

III. BINARY GRADIENT CODING

In this section we describe the proposed GCS. The main idea behind the scheme is to ensure that the superposition of the corresponding encoding vectors of a certain subset of the workers with non-overlapping assigned tasks, results in the all ones vector. Also, in order to work around the $(s + 1) \mid n$ assumption, our encoding ensures that all workers are assigned roughly the same number of tasks, which we relax in IV-B.

A. Encoding Matrix

The idea is to work with congruence classes $\text{mod}(s + 1)$ on the set of the workers' indices \mathbb{N}_n , in such a way that the workers composing a congruence class are roughly assigned the same number of partitions (differing by no more than one), while all partitions appear exactly once in each class. By *congruence class* we simply mean the set of integers $j \in \mathbb{N}_n$ which are equivalent $\text{mod}(s + 1)$. The classes are denoted by $\{[i]_{s+1}\}_{i=0}^s$. One could use a random assignment once it is decided how many partitions are allocated to each worker. However, in order to get a deterministic encoding matrix, we assign the partitions in "blocks", i.e., submatrices consisting of only 1's. For clarity, we assume that $n = k$, though it is straightforward to adapt this approach to cases with $n \neq k$.

Let $n = \ell \cdot (s + 1) + r$ with $\ell = \lfloor \frac{n}{s+1} \rfloor$. Note that $r \equiv n \text{ mod } (s + 1)$. Similarly, let $r = t \cdot \ell + q$; which specifies the Euclidean division of r by ℓ . Therefore, $n = \ell \cdot (s + t + 1) + q$. In a particular case, we will also need the parameters specified by the division of n by $(\ell + 1)$. Let $n = \lambda \cdot (\ell + 1) + \tilde{r}$ (if $\ell = s - r$, then $\lambda = s$). To summarize, we have

$$n = \ell \cdot (s + 1) + r \quad 0 \leq r < s + 1 \quad (6)$$

$$r = t \cdot \ell + q \quad 0 \leq q < \ell \quad (7)$$

$$n = \lambda \cdot (\ell + 1) + \tilde{r} \quad 0 \leq \tilde{r} < \ell + 1 \quad (8)$$

where all terms are nonnegative integers.

In the proposed GCS, the encoding is identical for the classes $\mathcal{C}_1 := \{[i]_{s+1}\}_{i=0}^{r-1}$, and is also identical for the classes $\mathcal{C}_2 := \{[i]_{s+1}\}_{i=r}^s$. The objective is to design \mathbf{B} to be as close to a block diagonal matrix as possible. We refer to the ℓ disjoint sets of consecutive $s + 1$ rows of \mathbf{B} as *blocks*, and the submatrix comprised of the last r rows as the *remainder block*. Note that in total we have $\ell + 1$ blocks, including the remainder block, and that each of the first ℓ blocks have workers with indices forming a complete residue system. We will present the task assignments for \mathcal{C}_1 and \mathcal{C}_2 separately. A numerical example where $n = k = 11$ and $s = 3$, is presented in Appendix B.

B. Repetition Assignment for Classes 0 to $r - 1$

In our construction each of the first r residue classes also have an assigned row in the remainder block, such that we could assign r partitions to the last worker of each class in \mathcal{C}_1 , and evenly assign $s + 1$ to all other workers corresponding to \mathcal{C}_1 . Our objective though is to distribute the k tasks among the workers corresponding to the $\ell + 1$ blocks as evenly as possible, for the congruence classes corresponding to \mathcal{C}_1 , in such a way that *homogeneous* workers have similar loads. By homogeneous we mean the workers have the same computational power, which implies that they exhibit independent and identically distributed statistics for the computation time of similar tasks.

Note that $n = (\ell + 1) \cdot s + (\ell + r - s)$. Hence, when $\ell > s - r$, we can assign $s + 1$ tasks to each worker in the first $\ell + r - s$ blocks, and s tasks to the workers in the remaining $s + 1 - r$ blocks. In the case where $\ell \leq s - r$, we assign $\lambda + 1$ tasks to the first \tilde{r} blocks and λ tasks to the remaining $\ell + 1 - \tilde{r}$ blocks. It is worth pointing out that $\lambda = s$ and $\tilde{r} = 0$ when $\ell = s - r$, which means that every worker corresponding to \mathcal{C}_1 is assigned $\lambda = s$ tasks, as $n = (\ell + 1) \cdot s$.

A pseudocode for this encoding process is presented in Algorithm 5, in Appendix A. For coherence, we index the rows by i starting from 0, and the columns by j starting from 1. We point out that when $\ell > s - r$, we have $\lambda = s$ and $\tilde{r} = \ell + r - s > 0$. In the case where $\ell \leq s - r$, we need to invoke (8) which was introduced solely for this purpose, as we need the remainder \tilde{r} to be nonnegative. It follows that Algorithm 5 can be reduced to only include the **else if** statement; eliminating the conditional clause.

C. Repetition Assignment for Classes r to s

For the workers corresponding to \mathcal{C}_2 , we first check if $q = 0$. If this is the case, the n partitions are evenly distributed between these workers, i.e., each worker is assigned $(s + t + 1)$ partitions; as $n = \ell \cdot (s + t + 1)$ and here we are only considering ℓ blocks. When $0 < q < r$, we assign $(s + t + 2)$ tasks to each worker of \mathcal{C}_2 in the first q blocks, and $(s + t + 1)$ to the workers in the remaining $\ell - q$ blocks. A pseudocode for the encoding process is provided in Algorithm 6, in Appendix A.

The final step is to *combine* the encodings of the classes \mathcal{C}_1 and \mathcal{C}_2 to get \mathbf{B} . That is, we combine the outcomes $\tilde{\mathbf{B}}_{\mathcal{C}_1}$ of Algorithm 5 and $\tilde{\mathbf{B}}_{\mathcal{C}_2}$ of Algorithm 6. One could merge the two algorithms into one or run them separately, to get $\mathbf{B} = \tilde{\mathbf{B}}_{\mathcal{C}_1} + \tilde{\mathbf{B}}_{\mathcal{C}_2}$.

The encoding matrix \mathbf{B} is also the adjacency matrix of a bipartite graph $G = (\mathcal{L}, \mathcal{R}, \mathcal{E})$, where the vertices \mathcal{L} and \mathcal{R} correspond to the n workers and the k partitions, respectively. We can also vary the number of stragglers s the scheme can tolerate for a fixed n , by trading the sparsity of \mathbf{B} . In other words, if \mathbf{B} is designed to tolerate more stragglers, then more overall partial gradients need to be computed. This results in more computations over the network, as $|\text{supp}(\mathbf{B})| = k \cdot (s + 1)$.

D. Decoding Vector

A drawback of the binary GCS introduced in [14] is that a matrix inversion is required to compute $\mathbf{A} \in \mathbb{R}^{\binom{n}{f} \times n}$; which contains the decoding vectors corresponding to all possible index sets of responsive workers \mathcal{I} . This matrix needs to be stored and searched through at each iteration of the gradient descent procedure. We propose a more efficient online decoding algorithm in order to mitigate this problem.

The construction of the decoding matrix in [14] when using regular matrix multiplication and inversion, requires $O(k^3(k+2n-2s))$ operations to construct the pseudoinverse of a submatrix of \mathbf{B} , for each of the possible $\binom{n}{s}$ index sets \mathcal{I} . Furthermore, at each iteration of gradient descent, the decoding step requires a search through the rows of \mathbf{A} . This comes at a high cost when compared to our online algorithm, which constructs a decoding vector in $O(n+s)$ operations, and does not require any additional storage space.

We point out that a similar decoding approach was developed independently in [20], which focuses on approximating the gradient rather than recovering the exact gradient. The main idea behind the two approaches is that we look at the index set of responsive workers, and then only consider the response of workers with mutually exclusive assigned partitions. While the objective of the scheme in [20] is to form a vector which is close to $\mathbf{1}_{1 \times k}$, we guarantee that this vector is attained once $n-s$ workers respond. By (4), we can therefore recover the exact gradient.

In the proposed binary GCS there is no rescaling of the partial gradients taking place by encoding through \mathbf{B} , as the coefficients are 1 or 0. As a result, the proposed decoding reduces to simply summing a certain subset of the completed encoded tasks, while making sure that each partial gradient is added exactly once. To this end, among any f workers who send back their computed sum of partial gradients, we need to have ℓ workers, $\ell = \frac{n}{s+1} \in \mathbb{Z}_+$ (or $\ell+1$ where $\ell = \lfloor \frac{n}{s+1} \rfloor$, if $(s+1) \nmid n$), who have no common assigned partitions. We elaborate on this in the next paragraph.

If $r=0$, the decoder traverses through the $s+1$ classes consecutively to find one which is a complete residue system (Algorithm 1). This will be used to determine the decoding vector $\mathbf{a}_{\mathcal{I}}$. When $r>0$, the decoder first traverses through the last $s+1-r$ congruence classes; checking only the first ℓ blocks. If it cannot find a complete residue system corresponding to returned tasks by non-stragglers, it proceeds to the first r classes; checking also the remainder block. This extra step makes the scheme more efficient. In both cases, by the pigeonhole principle we are guaranteed to have a complete residue system, provided that f completed tasks are received.

The next step is to devise a decoding vector for each of the $\binom{n}{s}$ different straggler scenarios \mathcal{I} . We associate the i^{th} complete residue class with a decoding vector \mathbf{a}_i defined as

$$\mathbf{a}_i := \sum_{j \in [i]_{\ell}} \mathbf{e}_j \in \{0, 1\}^{1 \times n}, \quad (9)$$

for $i \in \mathbb{N}_{\ell-1}$, where \mathbf{e}_j denotes the j^{th} standard basis vector of \mathbb{R}^n . Also, note that $\|\mathbf{a}_i\|_0 = \ell+1$ for the decoding vectors corresponding to the first r classes, and $\|\mathbf{a}_i\|_0 = \ell$ for the remaining classes. In both cases, \mathbf{a}_{i+1} is a cyclic shift of \mathbf{a}_i .

At each iteration the gradient is computed once f worker tasks are received. Define the *received-indicator vectors*

$$(\text{rec}_{\mathcal{I}})_i = \begin{cases} 1 & \text{if } i \in \mathcal{I} \\ 0 & \text{if } i \notin \mathcal{I} \end{cases}, \quad (10)$$

for each possible \mathcal{I} , where $\|\text{rec}_{\mathcal{I}}\|_0 = f$ and $n - \|\text{rec}_{\mathcal{I}}\|_0 = s$. Thus, there is at least one $i \in \mathbb{N}_{\ell-1}$ for which $\text{supp}(\mathbf{a}_i) \subsetneq \text{supp}(\text{rec}_{\mathcal{I}})$. If there are multiple \mathbf{a}_i 's satisfying this property, any of them can be selected. The pseudocode is presented in Algorithm 1.

Theorem 1. *The proposed encoding-decoding pair $(\mathbf{B}, \mathbf{a}_{\mathcal{I}})$ satisfy condition (4), for any \mathcal{I} of size $n-s$. That is, $(\mathbf{B}, \mathbf{a}_{\mathcal{I}})$ comprise a valid GCS which tolerates up to s stragglers.*

Proof. By our construction of \mathbf{B} , the rows corresponding to a congruence class are mutually exclusive and their superposition is precisely $\mathbf{1}_{1 \times k}$.

By the pigeonhole principle the number of completed encoded tasks that is required at the decoder to guarantee a successful recovery of the gradient, denoted by ν , is equal to

$$\begin{aligned} \nu &:= \ell \cdot r + (\ell - 1) \cdot [(s+1) - r] + 1 \\ &= \ell \cdot (s+1) - s + r = [\ell \cdot (s+1) + r] - s = n - s. \end{aligned} \quad (11)$$

Therefore, as long as $\nu = n-s$ many workers respond, there is at least one subset of them whose indices form a complete residue system $\text{mod}(s+1)$. Algorithm 1 determines such an index subset, and constructs a binary vector whose support corresponds to this subset. As a result, $\mathbf{a}_{\mathcal{I}}^T \mathbf{B} = \mathbf{1}_{1 \times k}$ for any \mathcal{I} of size $n-s$, and (4) is satisfied. \square

Algorithm 1: Decoding Vector $\mathbf{a}_{\mathcal{I}}$ **Input:** received indicator-vector $\text{rec}_{\mathcal{I}}$ **Output:** decoding vector $\mathbf{a}_{\mathcal{I}}$ **if** $r=0$ **then** **for** $i = 0$ **to** s **do** **if** $(\text{rec}_{\mathcal{I}})_i = 1$ **then** $l \leftarrow i$ **if** $\text{supp}(\mathbf{a}_l) \subseteq \text{supp}(\text{rec}_{\mathcal{I}})$ **then** $\mathbf{a} \leftarrow \mathbf{a}_l$ **break** **end** **end** **end****end****else if** $r > 0$ **then** run the above for-loop **for** $i = r$ **to** s and then **for** $i = 0$ **to** $r - 1$ **end****return** $\mathbf{a}_{\mathcal{I}} \leftarrow \mathbf{a}$ ▷ \mathbf{a}_l is defined in (9)

Note that the total number of task assignments is $k \cdot (s + 1)$, for any pair of integers (s, n) where $0 \leq s < n$, as expected. This is the same total load required by the MDS based schemes. Also, our GCS meets the lower bound on total task assignments of \mathbf{B} implied by (5)

$$|\text{supp}(\mathbf{B})| = \sum_{i=1}^n \|\mathbf{B}_{(i)}\|_0 \geq n \cdot \frac{k}{n}(s + 1) = k \cdot (s + 1) \quad (12)$$

with equality.

It can be observed that the runtime complexity of Algorithm 1 is $O((\ell + 1) \cdot (s + 1)) = O(n + s)$. This complexity can be slightly reduced by the following modification. The for-loop in Algorithm 1 can be stopped early by only traversing through the classes $0, \dots, s - 1$, and assigning $\mathbf{a}_{\mathcal{I}} \leftarrow \mathbf{a}_s$ if none was selected. This reduces the runtime complexity to $O((\ell + 1) \cdot s)$, hence our proposed decoder is significantly faster than the decoding algorithm of [14]. The decoding matrix \mathbf{A} of [14] requires $\binom{n}{s}$ applications of a pseudoinverse for its construction, which makes it impractical. Once this has been constructed, at each gradient descent iteration it requires an additional decoding step of time complexity $O(f^3)$.

An alternative decoding is to consider a decoding of each of \mathcal{C}_1 and \mathcal{C}_2 separately; in a streaming fashion, and terminate whenever one of the two is completed. This decoding procedure will be especially useful in our first CMMS. Both the CMMS and the alternative decoding will be described in more detail in V-B.

IV. CLOSE TO UNIFORM ASSIGNMENT DISTRIBUTION

A drawback of the GCS proposed in Section III is that the load assignments can have a wide range depending on how small r is compared to $s + 1$. This is due to the lighter load assigned to the workers in the remainder block; which is of size r . The uneven workload is the cost we pay for dropping the assumption $(s + 1) \mid n$, which does not often hold for a pair of two arbitrary positive integers $(s, n)^2$.

In our construction, we assign tasks to the servers such that the difference in the load assigned to any two workers within the same set of classes \mathcal{C}_1 or \mathcal{C}_2 is at most one.

Definition 2. Define $d_s(\mathbf{B}) := \sum_{i=1}^n \left| \|\mathbf{B}_{(i)}\|_0 - \frac{k}{n}(s + 1) \right|$ for $\mathbf{B} \in \mathbb{N}_0^{n \times k}$. This function measures how far the task allocations $\{\|\mathbf{B}_{(i)}\|_0\}_{i=1}^n$ are from being **uniform**, i.e., $\|\mathbf{B}_{(i)}\|_0 = \lfloor \frac{k}{n}(s + 1) + \frac{1}{2} \rfloor$ for all $i \in \mathbb{N}_n$. Furthermore, $\{\|\mathbf{B}_{(i)}\|_0\}_{i=1}^n$ is uniform; i.e., all elements are equal, if and only if $d_s(\mathbf{B}) = 0$.

Theorem 3. The task allocation through \mathbf{B} resulting from Algorithms 5 and 6 is a solution to the integer program:

$$(IP) \quad \min_{\mathbf{B} \in \mathbb{N}_0^{n \times k}} \{d_s(\mathbf{B})\},$$

such that $\sum_{i=1}^n \|\mathbf{B}_{(i)}\|_0 = k \cdot (s + 1)$.

²For fixed n and random $s \in \{0, \dots, n - 1\}$; we have $(s + 1) \mid n$ with probability $\frac{\sigma_0(n) - 2}{n}$, where σ_0 is the divisor function of the 0th power.

Theorem 3 holds for permutations of the columns of \mathbf{B} , or a random assignment of tasks per class; as opposed to repeating blocks — as long as all partitions are present only once in a single worker of each congruence class. The decoding in either of these cases remains the same. Moreover, the solution to (IP) is unique up to a permutation of rows and columns of \mathbf{B} . Furthermore, the proposed $\bar{\mathbf{B}}$ can be viewed as an extension of the *cyclic repetition* scheme introduced in [14]. An example of how the allocations can be modified for each congruence class is given in Appendix B.

For the purpose of the applications considered in this paper, one does not need to consider the case where the rows or columns of \mathbf{B} are permuted. A permutation of the rows corresponds to permutation of the workers' indices, and a permutation of the columns simply means the workers are assigned different partitions, but since the same number of partitions is allocated to each worker, their total workload remains the same.

Theorem 4. *A binary encoding matrix $\bar{\mathbf{B}}$ is a valid permutation of the task allocations per congruence class³ of the encoding matrix \mathbf{B} proposed by Algorithms 5 and 6, for which Algorithm 1 produces a correct decoding vector, i.e., $\mathbf{a}_{\mathcal{I}}^T \bar{\mathbf{B}} = \mathbf{1}_{1 \times k}$ for all possible \mathcal{I} , if:*

- 1) $\|\bar{\mathbf{B}}_{(i)}\|_0 = \|\mathbf{B}_{(i)}\|_0$
- 2) $\text{supp}(\bar{\mathbf{B}}_{(i)}) \cap \text{supp}(\bar{\mathbf{B}}_{(j)}) = \emptyset$ if $i \equiv j \pmod{s+1}$

for $i, j \in \mathbb{N}_n$ distinct.

Corollary 5. *Conditions 1) and 2) of Theorem 4 are sufficient and necessary for $\bar{\mathbf{B}}$ to be a solution to (IP), up to a permutation of the rows, while also satisfying $\mathbf{a}_{\mathcal{I}}^T \bar{\mathbf{B}} = \mathbf{1}_{1 \times k}$. These conditions also imply that $\|\bar{\mathbf{B}}^{(i)}\|_0 = s+1$ for all $i \in \mathbb{N}_k$.*

A. Distribution of Assignments for $n \geq s^2$

Considering the identities (6), (7) and (8), note that for $\ell > r$ we have $t = 0$ and $r = q$. Furthermore, when $\ell = s$ we have $n = s \cdot (s+1) + r \approx s^2$, and in the regime $n \geq s^2$, there are only three values for n for which $t = 1$. Consequently, for $\ell + r > s$, the difference in the number of allocated partitions to each worker will not exceed 3.

Lemma 6. *Let $n = s^2 + a$ for $a \in \mathbb{N}_0$ and $s < n$. Then, we have $t = 1$ only when $a = s - 2, s - 1$ or $2s$. Otherwise, $t = 0$.*

Proof. We break up the proof into three cases:

Case $a \in \{0, \dots, s-3\}$: For $\alpha = s - a \in \{3, 4, \dots, s\}$:

$$n = s \cdot (s+1) - \alpha = \overbrace{(s-1)}^{\ell} \cdot (s+1) + \overbrace{(s+1-\alpha)}^r, \quad (13)$$

and $\ell > r$ for any α . Thus, $t = 0$ and $r = q$.

Case $a \in \{s, \dots, 2s-1\}$: Let $n = s^2 + a = s^2 + (s + \beta)$ for $\beta \in \{0, \dots, s-1\}$. Then $n = s \cdot (s+1) + \beta$ implies $\ell = s$ and $r = \beta$. Since $r < \ell$, it follows that $t = 0$ and $r = q$.

Case $a \geq 2s$: The final case to consider is $a = 2s + \gamma$, for $\gamma \in \mathbb{Z}_+$. The resulting parameters are $r = q = \text{rem}(\text{rem}(\gamma, s+1) - 1, s+1)$, $\ell = (s^2 + 2s + \gamma - r)/(s+1)$ and $t = 0$.

When $\alpha = 1$ it follows that $r = s$ and $\ell = s - 1$, thus $t = 1$ and $q = 1$. For $\alpha = 2$ we get $r = \ell = s - 1$, hence $t = 1$ and $q = 0$. For both $\alpha = 1$ and $\alpha = 2$; $t = 1$ is a consequence of $r \geq \ell$. In addition, when $\beta = s$ we have $r = \ell = s$; thus $t = 1$ and $q = 0$. \square

B. Task Allocation to Heterogeneous Workers

We now discuss how to allocate the partitions when the workers are of *heterogeneous* nature, such that all workers have the same expected execution time. We present the case where we have two groups of machines, each consisting of the same type. The analysis for more than two groups of machines can be done in a similar fashion.

The two types of workers are denoted by \mathcal{T}_i ; with a total of τ_i machines, and their expected execution for computing g_j (for equipotent \mathcal{D}_j 's) by

$$t_i := \mathbb{E}[\text{time for } \mathcal{T}_i \text{ to compute } g_j], \quad (14)$$

for $i \in \{1, 2\}$, where $t_1 \leq t_2$; i.e., machines \mathcal{T}_1 are faster. Let $|\mathcal{J}_{\mathcal{T}_i}|$ denote the number of partitions each worker of \mathcal{T}_i is assigned. The goal is to find $|\mathcal{J}_{\mathcal{T}_1}|$ and $|\mathcal{J}_{\mathcal{T}_2}|$ so that

$$\mathbb{E}[\mathcal{T}_1 \text{ compute their task}] = \mathbb{E}[\mathcal{T}_2 \text{ compute their task}], \quad (15)$$

³By this we mean that a separate permutation is applied to the set of rows corresponding to each congruence class.

implying $t_1 \cdot |\mathcal{J}_{\mathcal{T}_1}| = t_2 \cdot |\mathcal{J}_{\mathcal{T}_2}|$. Hence $|\mathcal{J}_{\mathcal{T}_1}| \gtrsim |\mathcal{J}_{\mathcal{T}_2}|$, as $t_1 \lesssim t_2$. Let $\tau_1 = \frac{\alpha}{\beta} \cdot \tau_2$ for $\frac{\alpha}{\beta} \in \mathbb{Q}_+$ in reduced form. Since $\tau_1 + \tau_2 = n$, it follows that

$$\tau_1 = \frac{\alpha}{\alpha + \beta} n \quad \text{and} \quad \tau_2 = \frac{\beta}{\alpha + \beta} n. \quad (16)$$

To simplify the presentation of the task assignments, we assume $(s + 1) \mid n$. If $(s + 1) \nmid n$, one can follow a similar approach to that presented in Subsection III-A to obtain a close to uniform task allocation; while *approximately* satisfying (15).

The main idea is to fully partition the data across the workers, such that each congruence class is comprised of roughly $\frac{\alpha}{\alpha + \beta} \cdot \frac{k}{s + 1}$ workers of type \mathcal{T}_1 , and $\frac{\beta}{\alpha + \beta} \cdot \frac{k}{s + 1}$ workers of type \mathcal{T}_2 . We want $\frac{\tau_1 + \tau_2}{s + 1} = \frac{n}{s + 1}$ many workers for each congruence class, and

$$|\mathcal{J}_{\mathcal{T}_1}| \cdot \frac{\tau_1}{s + 1} + |\mathcal{J}_{\mathcal{T}_2}| \cdot \frac{\tau_2}{s + 1} = k \quad (17)$$

partitions to be assigned to each class. That is, the dataset \mathcal{D} is completely distributed across each congruence class, and our GCS is designed accordingly.

Putting everything together, the following conditions determine $|\mathcal{J}_{\mathcal{T}_1}|$ and $|\mathcal{J}_{\mathcal{T}_2}|$

- (i) $t_1 \cdot |\mathcal{J}_{\mathcal{T}_1}| = t_2 \cdot |\mathcal{J}_{\mathcal{T}_2}| \iff |\mathcal{J}_{\mathcal{T}_2}| = \frac{t_1}{t_2} \cdot |\mathcal{J}_{\mathcal{T}_1}|$
- (ii) $|\mathcal{J}_{\mathcal{T}_1}| \cdot \tau_1 + |\mathcal{J}_{\mathcal{T}_2}| \cdot \tau_2 = (s + 1) \cdot k$
- (iii) $\tau_2 = \frac{\beta}{\alpha} \cdot \tau_1 \iff \tau_1 = \frac{\alpha}{\beta} \cdot \tau_2$.

By substituting (iii) into (ii) to solve for $|\mathcal{J}_{\mathcal{T}_2}|$, and then plugging it into (i) to solve for $|\mathcal{J}_{\mathcal{T}_1}|$, we get

$$|\mathcal{J}_{\mathcal{T}_1}| = (s + 1) \cdot k \cdot \left(\frac{\alpha t_2}{\alpha t_2 + \beta t_1} \right) \cdot \frac{1}{\tau_1} \quad (18)$$

$$|\mathcal{J}_{\mathcal{T}_2}| = (s + 1) \cdot k \cdot \left(\frac{\beta t_1}{\alpha t_2 + \beta t_1} \right) \cdot \frac{1}{\tau_2} \quad (19)$$

which we round to get appropriate numbers of assignments.

This framework may be generalized to any number of different groups of machines. Under the same assumptions, for $\mathcal{T}_1, \dots, \mathcal{T}_m$ different groups with $t_i \lesssim t_{i+1}$ for all $i \in \mathbb{N}_{m-1}$:

- (i) $t_1 \cdot |\mathcal{J}_{\mathcal{T}_1}| = t_2 \cdot |\mathcal{J}_{\mathcal{T}_2}| = \dots = t_m \cdot |\mathcal{J}_{\mathcal{T}_m}|$
- (ii) $|\mathcal{J}_{\mathcal{T}_1}| \cdot \tau_1 + |\mathcal{J}_{\mathcal{T}_2}| \cdot \tau_2 + \dots + |\mathcal{J}_{\mathcal{T}_m}| \cdot \tau_m = (s + 1) \cdot k$
- (iii) $\tau_1 = \frac{\alpha_2}{\beta_2} \cdot \tau_2 = \dots = \frac{\alpha_m}{\beta_m} \cdot \tau_m$, for $\frac{\alpha_{i+1}}{\beta_{i+1}} \in \mathbb{Q}_+$

need to be met. This gives us a system of $2(m - 1) + 1 = 2m - 1$ equations with m unknowns $\{|\mathcal{J}_{\mathcal{T}_j}|\}_{j=1}^m$, which is solvable.

V. BINARY CODED MATRIX MULTIPLICATION SCHEMES

Multiplication of two matrices is one of the most common operations. Coded matrix multiplication is a principled framework for providing redundancy in distributed networks, to guarantee recovery in the presence of stragglers [35]. As in GC, each worker is requested to carry out some computation and encode it; before sending it back to the central server. In this section we first show how *any* GCS can be used to devise a CMMS, and then present three different schemes based on our binary GCS. Like the fractional repetition scheme, our three schemes resemble replication codes. For simplicity in presentation, throughout this section we assume that $k \mid N$.

The three CMMSs have applications beyond matrix multiplication, which we discuss in Subsection V-E. Regarding matrix multiplication, the schemes have different trade-offs in terms of communication, storage, and computational operations, required by each worker. Depending on the application and the resources available, one may even be easier to implement compared to the others.

As pointed out in [50], despite recent advancements in distributed gradient computations, schemes under parameters (s, n) have not been developed which have a *recovery threshold* (i.e., the worst case minimum number of workers that need to respond in order to recover the full gradient) less than $f = n - s$. On the other hand, many CMMSs exhibit considerably better recovery thresholds — the optimum asymptotic recovery threshold of $\mu\nu$ for $1/\mu$ and $1/\nu$ respectively the fraction of A and B stored by each worker; was achieved through Polynomial Codes [34].

Improving the recovery threshold comes at the cost of trading encoding and decoding complexities, storage, restrictions on how the matrices are partitioned, and numerical stability. The three schemes we propose have a recovery threshold of $f = n - s$, though do not suffer from any of the aforementioned drawbacks. For simplicity in presentation, we assume that $N = \ell \cdot k$ for $\ell \in \mathbb{Z}_+$ and N the effective dimension; which implies that we have a balanced assignment. When this is not the case, the analysis carried out in III-A can be applied.

A. CMM-1 — Outer-Product Representation

Consider a single central server node that has at its disposal the matrices $A \in \mathbb{R}^{L \times N}$ and $B \in \mathbb{R}^{N \times M}$, and it can distribute submatrices of A and B among n workers; to compute their product $C = AB$ in an accelerated manner. One way of computing C is to leverage the fact that

$$C = \sum_{i=1}^N A^{(i)} B_{(i)} \quad (20)$$

which has also been used in [38], [39]. Recall that $A^{(i)}$ denotes the i^{th} column of A , and $B_{(i)}$ the i^{th} row of B , as specified in Subsection II-C. This makes the process parallelizable. To make use of this outer-product representation, we partition A and B each into k disjoint submatrices consisting of $\tau = N/k$ columns and rows respectively, which we denote by $\tilde{A}_j \in \mathbb{R}^{L \times \tau}$ and $\tilde{B}_j \in \mathbb{R}^{\tau \times M}$ for $j = 1, \dots, k$. That is

$$A = \begin{bmatrix} \tilde{A}_1 & \dots & \tilde{A}_k \end{bmatrix} \quad \text{and} \quad B = \begin{bmatrix} \tilde{B}_1^T & \dots & \tilde{B}_k^T \end{bmatrix}^T. \quad (21)$$

The central server is then capable of distributing the pairs $(\tilde{A}_j, \tilde{B}_j)$ appropriately, with a certain level of redundancy, in order to recover C

$$C = \sum_j^k \tilde{A}_j \tilde{B}_j. \quad (22)$$

Define $X_j := \tilde{A}_j \tilde{B}_j \in \mathbb{R}^{L \times M}$ for all j , and the matrix

$$\mathbf{X} := \left[X_1^T \mid \dots \mid X_k^T \right]^T \in \mathbb{R}^{kL \times M}, \quad (23)$$

similar to how \mathbf{g} was defined (3) in Section II. Recall that the main idea behind GC is to construct the pair of encoding matrix \mathbf{B} and decoding vector $\mathbf{a}_{\mathcal{I}}$, such that $\mathbf{a}_{\mathcal{I}}^T \mathbf{B} = \mathbf{1}_{1 \times k}$ for all $\binom{n}{s}$ possible index sets \mathcal{I} . A CMMS can be derived by the pair $(\mathbf{B}, \mathbf{a}_{\mathcal{I}})$. The matrix product $C = AB$ is described as:

$$C = \underbrace{\left(\mathbf{a}_{\mathcal{I}}^T \otimes \mathbf{I}_L \right)}_{\tilde{\mathbf{a}}_{\mathcal{I}}^T} \cdot \left(\underbrace{\left(\mathbf{B} \otimes \mathbf{I}_L \right)}_{\tilde{\mathbf{B}}} \cdot \mathbf{X} \right) = \underbrace{\left(\mathbf{a}_{\mathcal{I}}^T \tilde{\mathbf{B}} \right)}_{\mathbf{a}_{\mathcal{I}}^T \mathbf{B}} \cdot \mathbf{X} = \sum_{j=1}^k X_j, \quad (24)$$

where $\tilde{\mathbf{B}} \in \mathbb{C}^{nL \times kL}$ is now the encoding matrix for the CMM, and $\tilde{\mathbf{a}}_{\mathcal{I}} \in \mathbb{C}^{nL \times L}$ is the *decoding matrix* corresponding to the non-straggler index set \mathcal{I} . Expression (24) is analogous to (4).

Theorem 7. Any GCS can be turned into a coded matrix multiplication or addition scheme.

Proof. Consider a GCS $(\mathbf{B}, \mathbf{a}_{\mathcal{I}})$, for which $\mathbf{a}_{\mathcal{I}}^T \mathbf{B} = \mathbf{1}_{1 \times k}$. By (24) it follows that

$$\tilde{\mathbf{a}}_{\mathcal{I}}^T (\tilde{\mathbf{B}} \mathbf{X}) = \sum_{j=1}^k X_j = C. \quad (25)$$

Therefore, a CMM method $(\tilde{\mathbf{B}}, \tilde{\mathbf{a}}_{\mathcal{I}})$ is obtained.

For matrix addition, we simply construct \mathbf{X} by augmenting the k equi-sized matrices we want to add; instead of the products $\{\tilde{A}_j \tilde{B}_j\}_{j=1}^k$ in (23), and we obtain a coded matrix addition scheme. \square

Let $(\mathbf{B}, \mathbf{a}_{\mathcal{I}})$ be the encoding-decoding GC pair from Section III. In Theorem 7, the resulting pair $(\tilde{\mathbf{B}}, \tilde{\mathbf{a}}_{\mathcal{I}})$ is a CMMS whose encoding matrix $\tilde{\mathbf{B}} = \mathbf{B} \otimes \mathbf{I}_L$ represents the partition pairs $(\tilde{A}_j, \tilde{B}_j)$ as the columns of $\tilde{\mathbf{B}}$; and its rows represent the n workers. That is, the worker corresponding to the i^{th} row of \mathbf{B} receives the partition pairs corresponding to $\mathcal{J}_i = \text{supp}(\mathbf{B}_{(i)})$, and is asked to send back the summation of the outer-products

$$C_j := \sum_{j \in \mathcal{J}_i} \tilde{A}_j \tilde{B}_j = \sum_{j \in \mathcal{J}_i} X_j. \quad (26)$$

The decoding matrix $\tilde{\mathbf{a}}_{\mathcal{I}}^T = \mathbf{a}_{\mathcal{I}}^T \otimes \mathbf{I}_L$ only involves the computations of a complete residue system associated with the received workers, which are determined by $\text{supp}(\mathbf{a}_{\mathcal{I}})$.

The communication cost per worker which along with the storage required at the central server are the major drawbacks of this approach. Each worker will have to send back a matrix of size $L \times M$, and in the worst case, the central server will need to store $k \cdot (s + 1)$ matrices of this size before it can recover C . The computation cost per worker is equivalent to that of multiplying two matrices, of dimensions corresponding to the block pairs. An alternative CMM decoding process overcomes the storage issue at the central server, which is described next.

B. Decoding as a Streaming Process

In the case where $(s+1) \mid n$, we can use a streaming process for the recovery of C . In this process, we only retain a single computation corresponding to each of the blocks of the encoding matrix \mathbf{B} ; where \mathbf{B} is now a block diagonal matrix with $\ell = \frac{n}{s+1}$ diagonal blocks of the form $\mathbf{1}_{(s+1) \times \lfloor k/\ell \rfloor}$ or $\mathbf{1}_{(s+1) \times \lceil k/\ell \rceil}$. The process terminates once a single worker from each block has responded. The pseudocode for this procedure is given in Algorithm 2.

Algorithm 2: Decoding in a Streaming Fashion

Input: computations C_j sequentially

Output: product C

Initialize: $C \leftarrow \mathbf{0}_{L \times N}$, and $R = \emptyset$ the index set of the received workers' blocks

while $|R| < \ell$ **do**

 receive computation C_j

$\hat{\ell} \leftarrow \lceil j/(s+1) \rceil$

if $\hat{\ell} \notin R$ **then**

$C \leftarrow C + C_j$

$R \leftarrow R \cup \{\hat{\ell}\}$

end

end

$\triangleright j \in \mathbb{N}_n$
 \triangleright block index of the j^{th} worker

The benefit of this approach, compared to the decoding $\tilde{\mathbf{a}}_{\mathcal{I}}^T = \mathbf{a}_{\mathcal{I}}^T \otimes \mathbf{I}_L$ for $\mathbf{a}_{\mathcal{I}}$ from Algorithm 1, is that the central server will never need to store more than double the entries of the product C . In the case where $(s+1) \nmid n$, we can do the exact same process by simply breaking the problem into two subroutines, one dealing with the workers whose indices correspond to the first r congruence classes $\text{mod}(s+1)$, and the other with the workers corresponding to the remaining $s+1-r$ congruence classes. That is, we will work with $\mathbf{B}_{\mathcal{C}_1}$ for $\ell+1$ blocks; and $\mathbf{B}_{\mathcal{C}_2}$ for ℓ blocks separately. We carry out Algorithm 2 in parallel for the two cases, and terminate whenever one of the two has computed C . Now, the central server will need to store a total number of entries no more than twice the size of matrix C . This decoding procedure can be done analogously for GCS. An example with further details is provided in B-A.

Algorithm 2 takes into account *which* workers have responded up to a certain instance, rather than only the *total number* of workers which have responded. The recovery threshold in the worst case is $n-s$, matching that of our previous decoding procedure. On average though, considering all possible index sets \mathcal{I} of responsive workers which correspond to a valid decoding according to Algorithm 2, less workers than the worst case of $n-s$ need to respond.

If $(s+1) \nmid n$, the worst case occurs when all workers corresponding to ℓ blocks of $\mathbf{B}_{\mathcal{C}_1}$ and $\ell-1$ blocks of $\mathbf{B}_{\mathcal{C}_2}$ respond, along with only one worker from either of the two remaining blocks. By (11), the total number of responsive workers is $n-s$. In the best case, we need a single worker corresponding to each block of $\mathbf{B}_{\mathcal{C}_2}$ to respond, i.e., $\ell = \lfloor \frac{n}{s+1} \rfloor$ responsive workers. Similarly, if $(s+1) \mid n$, in the best case we require $\ell = \frac{n}{s+1}$ workers to respond, and in the worst case $n - (\ell-1) \cdot (s+1) + 1 = n-s$ many workers.

C. CMM-2 — Augmentation of Submatrices

In a system where the main limitation is the communication load which can be handled from the workers to the central server, CMM-1 is not ideal, even with the more efficient decoding process. Next, we discuss an alternative CMMS which superior in this aspect.

In contrast to the partitioning (21) of CMM-1, in this scheme we partition only one of the two matrices, say B ; along its columns. Each worker computes the product of a submatrix of B with the matrix A , and then the central server augments the received computations accordingly. The key property that we utilize is the following:

$$AB = A \cdot \begin{bmatrix} \bar{B}_1 & \cdots & \bar{B}_k \end{bmatrix} = \begin{bmatrix} A\bar{B}_1 & \cdots & A\bar{B}_k \end{bmatrix} = \begin{bmatrix} \tilde{C}_1 & \cdots & \tilde{C}_k \end{bmatrix} \quad (27)$$

where $\tilde{C}_j := A\bar{B}_j$, for all $j = 1, \dots, k$. For convenience we assume that $(s+1) \mid M$, and similar to our GCS that $n = k$. To further simplify our construction and description, under the assumption that $(s+1) \mid M$, we can assume that the equipotent partitions of $\{\bar{B}_i\}_{i=1}^k$ which are distributed to the workers are of size $T = M/k \in \mathbb{Z}_+$, which implies that $(s+1) \mid k$. All in all, each worker receives only one $\bar{B}_j \in \mathbb{R}^{N \times T}$; where T is a multiple of $(s+1)$, and $\tilde{C}_j \in \mathbb{R}^{L \times T}$. We also note that a similar multiplication can take place if we instead partition A along its rows.

As mentioned, the main benefit of CMM-2 when compared to CMM-1, is that the communication load between the i^{th} worker and the central server drops by a factor of $k/|\mathcal{J}_i|$; when considering equipotent partitions of B . Therefore, if Algorithm 1 were to be used for the decoding step, the central server would also require much less temporary storage. The workers on the other hand, need to store the entire matrix A .

The idea behind both the decoding Algorithms 1 and 2 work, under a slight modification which we explain. In the proposed GCS we dealt with vector addition, and in our first CMMS; with matrix addition. Now, we focus on submatrices of the final product, which is common in CMM [1], [34]. Our decoding vector $\mathbf{a}_{\mathcal{I}}$ will be the same, but the way we apply it is different. If Algorithm 1 were to be used, every worker corresponding to the same congruence class $c \in \{0, 1, \dots, s\}$ communicates back the same set of computations $\{\tilde{C}_j\}_{j \in \mathcal{I}_{[c]_{s+1}}}$, which sets are distinct for each congruence class. Hence, whenever a complete residue system, in terms of the workers indices, is received, then the central server will have in its possession all the computations $\{\tilde{C}_j\}_{j=1}^k$. These computations are then concatenated.

If Algorithm 2 were to be used, the same idea holds. The central server waits until at least one corresponding worker from each block, from one of the two matrices $\mathbf{B}_{\mathbf{e}_1}$ or $\mathbf{B}_{\mathbf{e}_2}$ has responded. Formally, we want a scheme $(\tilde{\mathbf{B}}, \tilde{\mathbf{a}}_{[I]_{s+1}})$ such that $\tilde{\mathbf{a}}_{[I]_{s+1}}^T \tilde{\mathbf{B}} = \mathbf{I}_M$ for any \mathcal{I} , where $[I]_{s+1}$ is the congruence class of the complete residue system present in \mathcal{I} . This is analogous to the GC condition $\mathbf{a}_{\mathcal{I}} \mathbf{B} = \mathbf{1}_{k \times 1}$. To summarize, the encoding process is

$$\underbrace{(\mathbf{I}_k \otimes \mathbf{1}_{(s+1) \times 1} \otimes \mathbf{I}_T)}_{\tilde{\mathbf{B}} \in \{0,1\}^{kT(s+1) \times kT}} \cdot \begin{bmatrix} \tilde{C}_1^T \\ \vdots \\ \tilde{C}_k^T \end{bmatrix} = \begin{bmatrix} \tilde{C}_1^T \\ \vdots \\ \tilde{C}_1^T \\ \vdots \\ \tilde{C}_k^T \\ \vdots \\ \tilde{C}_k^T \end{bmatrix}, \quad (28)$$

where the transpose of each submatrix \tilde{C}_j appears $s + 1$ times along the rows of the encoding $\tilde{\mathbf{B}} \mathbf{C}^T \in \mathbb{R}^{(s+1)M \times L}$, each corresponding to one of the $s + 1$ potential workers that are asked to compute \tilde{C}_j . This encoding is analogous to the encoding $\mathbf{B} \mathbf{g}$ in our GCS, where the partial gradients $\{g_j\}_{j=1}^k$ correspond to the submatrices $\{\tilde{C}_j\}_{j=1}^k$. Furthermore, $\tilde{\mathbf{B}}$ reveals the task allocation which is applied to B by $\tilde{\mathbf{B}} B^T$. Alternatively, the matrix $\tilde{\mathbf{B}}$ is constructed as described in Algorithm 3.

Algorithm 3: Encoding Matrix $\tilde{\mathbf{B}}$ — CMM-2

Input: parameters k, s and $T = M/k$

▷ assume $n = k$

Output: $\tilde{\mathbf{B}} \in \{0, 1\}^{M(s+1) \times M}$

Initialize: $\mathbf{B} \leftarrow \{0, 1\}^{k(s+1) \times k}$

for $j = 1$ **to** k **do**

 | $\mathbf{B}[(j-1) \cdot (s+1) + 1 : j \cdot (s+1), j] = \mathbf{1}_{(s+1) \times 1}$

end

return $\tilde{\mathbf{B}} \leftarrow \mathbf{B} \otimes \mathbf{I}_T$

For the decoding matrix $\tilde{\mathbf{a}}_{[I]_{s+1}} \in \{0, 1\}^{\frac{nM}{k} \times \frac{M}{k}}$ constructed by Algorithm 4, we use Algorithm 1 as a subroutine in order to determine which congruence class I of worker indices forms a complete residue system, in the inner **if** statement. We could directly use the indicator-vector $\text{rec}_{\mathcal{I}}$, though working with $\mathbf{a}_{\mathcal{I}}$ is preferred. This also reveals how the decoding is similar to that of our GCS. By our assumptions, $\tilde{\mathbf{B}}$ and $\tilde{\mathbf{a}}_{[I]_{s+1}}$ are both of size $M(s+1) \times M$.

Algorithm 4: Decoding Matrix $\tilde{\mathbf{a}}_{[I]_{s+1}}$ — CMM-2

Input: decoding vector $\mathbf{a}_{\mathcal{I}}$, by invoking Algorithm 1, and design parameters k, s and $T = M/k$

Output: $\tilde{\mathbf{a}}_{[I]_{s+1}} \in \{0, 1\}^{M(s+1) \times M}$

Initialize: $\tilde{\mathbf{a}} \leftarrow \{0, 1\}^{k(s+1) \times k}$

for $j = 1$ **to** $s + 1$ **do**

 | **if** $(\mathbf{a}_{\mathcal{I}})_j = 1$ **then**

 | $I \leftarrow j - 1$

 | **end**

end

for $j = 1$ **to** k **do**

 | $\tilde{\mathbf{a}}_{\mathcal{I}}[(j-1) \cdot (s+1) + (I+1), j] = 1$

end

return $\tilde{\mathbf{a}}_{[I]_{s+1}} \leftarrow \tilde{\mathbf{a}}_{\mathcal{I}} \otimes \mathbf{I}_T$

Similar to GC where $\mathbf{a}_{\mathcal{I}}$ is constructed such that $\mathbf{a}_{\mathcal{I}}^T \mathbf{B} = \mathbf{1}_{1 \times k}$, we now construct $\tilde{\mathbf{a}}_{[I]_{s+1}}$ to satisfy $\tilde{\mathbf{a}}_{[I]_{s+1}}^T \tilde{\mathbf{B}} = \mathbf{I}_M$. By this, the above pair $(\tilde{\mathbf{a}}_{[I]_{s+1}}, \tilde{\mathbf{B}}_{\mathcal{I}})$ yields

$$\tilde{\mathbf{a}}_{[I]_{s+1}}^T (\tilde{\mathbf{B}}_{\mathcal{I}} C^T) = \mathbf{I}_M C^T = C^T, \quad (29)$$

which implies that our CMM construction works as expected. A numerical example is depicted in Appendix B-B.

D. CMM-3 — Inner-Product of Submatrices

As pointed out, CMM-1 and CMM-2 suffer respectively in terms of communication load; and storage at the worker nodes. To alleviate these issues, we work with submatrices of both matrices A and B . In contrast to CMM-1, we now partition A along its rows and B along its columns, as was done for the Polynomial codes in [34]. That is

$$A = \left[\bar{A}_1^T \ \cdots \ \bar{A}_{k_1}^T \right]^T \quad \text{and} \quad B = \left[\bar{B}_1 \ \cdots \ \bar{B}_{k_2} \right], \quad (30)$$

where $\bar{A}_j \in \mathbb{R}^{\frac{L}{k_1} \times N}$ and $\bar{B}_j \in \mathbb{R}^{N \times \frac{M}{k_2}}$. Again, to simplify the presentation of our scheme, we consider the case where $k_1 | L$ and $k_2 | M$. The product C of the two matrices under this partitioning is equal to

$$\begin{pmatrix} \boxed{\bar{A}_1 \bar{B}_1} & \boxed{\bar{A}_1 \bar{B}_2} & \cdots & \boxed{\bar{A}_1 \bar{B}_{k_2-1}} & \boxed{\bar{A}_1 \bar{B}_{k_2}} \\ \boxed{\bar{A}_2 \bar{B}_1} & \ddots & & & \boxed{\bar{A}_2 \bar{B}_{k_2}} \\ \vdots & & \ddots & & \vdots \\ \boxed{\bar{A}_{k_1-1} \bar{B}_1} & & & \ddots & \boxed{\bar{A}_{k_1-1} \bar{B}_{k_2}} \\ \boxed{\bar{A}_{k_1} \bar{B}_1} & \boxed{\bar{A}_{k_1} \bar{B}_2} & \cdots & \boxed{\bar{A}_{k_1} \bar{B}_{k_2-1}} & \boxed{\bar{A}_{k_1} \bar{B}_{k_2}} \end{pmatrix}$$

where we denote each product submatrix by $\bar{C}_{(i-1)k_2+j} := \bar{A}_i \bar{B}_j \in \mathbb{R}^{\frac{L}{k_1} \times \frac{M}{k_2}}$. There are now a total of $k_1 k_2$ many submatrices \bar{C}_l we need to retrieve. For coherence we let $k = k_1 k_2$, i.e., each submatrix corresponds to a distinct subtask.

In the encoding matrix \mathbf{B} each column now corresponds to a pair (\bar{A}_i, \bar{B}_j) , and the l^{th} worker is requested to compute $|\mathcal{J}_l|$ many submatrices \bar{C}_l . In the decoding step, we again need to concatenate the computed tasks, which are received as a matrix

$$\mathbf{X}_l = (\bar{C}_l)_{l \in \mathcal{J}_l} \in \mathbb{R}^{k_2 L \times \frac{M}{k_2}}. \quad (31)$$

This is a more general augmentation scenario which also incorporates the one utilized in CMM-2.

We point out that in previous works the partitions are done in such a way that the submatrices \bar{C}_l are all of the same size, and due to the encoding and decoding steps, there does not exist a straightforward way around this limitation. For CMM-3, the analyses from Sections III and IV carry over, thus we can drop the assumption that the submatrix-partitioning of A and B all have the same number of rows and columns respectively.

E. Comparison between CMM-1, CMM-2, CMM-3

We present the trade-offs, in terms of communication, storage, and computational operations required by each worker for our CMMSs in Table I. Each scheme may have different uses in practice, in which one is preferable to the others. In certain applications, one may even be easier to implement compared to the others. Also, depending on the limitations and the parameters of the system employing the matrix-matrix multiplications and the underlying application, a different CMMS may be more suitable. If plain matrix-matrix is to be carried out, CMM-3 could be made superior to CMM-1 and CMM-2 in terms of communication, computation and storage, with an appropriate selection of parameters.

Trade-Offs Between Our Three CMM Schemes			
	Communication	Computation	Storage
CMM-1	LM	$LMN/k \cdot \mathcal{J}_i $	$\tau(L+M) \cdot \mathcal{J}_i $
CMM-2	$LM/k \cdot \mathcal{J}_i $	$LMN/k \cdot \mathcal{J}_i $	$NL + M\tau \cdot \mathcal{J}_i $
CMM-3	$\frac{LM}{k_1 k_2} \cdot \mathcal{J}_i $	$\frac{LMN}{k_1 k_2} \cdot \mathcal{J}_i $	$N(\frac{L}{k_1} + \frac{M}{k_2}) \cdot \mathcal{J}_i $

TABLE I

COMPARISON OF THE COMMUNICATION, COMPUTATION AND STORAGE REQUIRED BY THE WORKERS IN EACH OF OUR SCHEMES.

A benefit of CMM-1 and CMM-2 is that they have been applied in other coded computing schemes, in which CMM-3 cannot be utilized. Namely, CMM-1 was used for approximate matrix-multiplication [33] and CMM-2 for matrix inversion [48]. We briefly explain these applications next.

Theorem 7 and CMM-1 was incorporated in a *weighted CMM* approximation scheme [48]. The idea behind the weighting is that each outer-product matrix, which is requested to be computed, is scaled by an integer factor corresponding to an importance

sampling distribution on the submatrix pairs $\{(\tilde{A}_j, \tilde{B}_j)\}_{j=1}^k$. The fact that the workers in CMM-1 compute the outer-products of column-row submatrix pairs, permits us to combine this approach with CR -multiplication; a randomized technique which produces a low-rank approximate product of minimum variance [51]–[53], as both CMM-1 and CR -multiplication leverage (26). This procedure resulted in an approximate CMM with reduced storage and number of operations at the workers.

The approach of CMM-2 was used in [33], as a basis to approximate the inverse and pseudoinverse of a matrix in the presence of stragglers. The analogy which takes place is that instead of the products $A\tilde{B}_i$, the workers in the matrix inversion scheme communicate back

$$\left[\hat{B}^{((s+1)i+1)} \dots \hat{B}^{((s+1)(i+1))} \right] \in \mathbb{R}^{N \times \frac{N}{k}}, \quad (32)$$

for $i = 0, 1, \dots, k-1$ and $k = N/(s+1)$. Matrix \hat{B} is the approximation of the inverse of $A \in \mathbb{R}^{N \times N}$, i.e., $A\hat{B} \approx \mathbf{I}_N$, whose columns are estimated by the workers; who approximate the solutions to the regression problems

$$\hat{B}^{(l)} = \arg \min_{\mathbf{b} \in \mathbb{R}^N} \{ \|\mathbf{A}\mathbf{b} - \mathbf{e}_l\|_2^2 \}, \quad (33)$$

for each of the columns of \hat{B} requested by them, by using an iterative method of their choice.

VI. COMPARISON TO PRIOR WORKS

In this section we briefly review some related work, which we compare our schemes to. We review a polynomial based GC, and three polynomial CMM approaches. We compare and contrast each of the CMM approaches to one of ours, which are in fact the closest line of work we could find to each of our proposed schemes. Generally speaking, the communication, storage and computation required by our CMMSs is the same with the respective one we compare it to.

The advantage of the CMM polynomial schemes we will discuss is in terms of the recovery threshold. These schemes achieve a better threshold, as they encode linear combinations of submatrices of one or both the matrices, and then carry out the computation on the encoded submatrices, from which a fraction of all the assigned tasks they then decode to retrieve the matrix product. As in GC, in our CMMSs we first carry out the computations and then encode them locally at the worker nodes, e.g., (25) and (28). Our CMMSs meet the optimal recovery threshold known for GC, as they are derived from a GCS. However, our schemes are superior in terms of encoding and decoding complexity. Furthermore, since the encodings are binary matrices consisting only of 0's and 1's, they introduce no numerical instability.

We also draw connections with weighted GC, distributed storage systems, and LDPC codes.

A. Reed-Solomon Scheme and Weighted Gradient Coding

First, we compare our proposed GCS with the one introduced in [15], which provides improvements in terms of the decoding complexity to [14] and, to the best of authors' knowledge, is the first work to consider constructing the decoding vector $\mathbf{a}_{\mathcal{I}}$ online; instead of the matrix comprised of all possible $\mathbf{a}_{\mathcal{I}}$ decoding vectors.

The main idea in [15] is to use balanced Reed-Solomon codes [54], which are evaluation polynomial codes. Each column of the encoding matrix \mathbf{B} corresponds to a partition \mathcal{D}_i and is associated with a polynomial that evaluates to zero at the respective workers who have not been assigned that partition part. The properties of balanced Reed-Solomon codes imply the decomposition $\mathbf{B}_{\mathcal{I}} = \mathbf{G}_{\mathcal{I}}\mathbf{T}$, where $\mathbf{G}_{\mathcal{I}}$ is a Vandermonde matrix over certain roots of unity, and the entries of \mathbf{T} corresponds to the coefficients of polynomials; constructed such that their constant term is 1, i.e., $\mathbf{T}_{(1)} = \mathbf{1}_{1 \times k}$. The decoding vector $\mathbf{a}_{\mathcal{I}}^T$ is the first row of $\mathbf{G}_{\mathcal{I}}^{-1}$, for which $\mathbf{a}_{\mathcal{I}}^T \mathbf{G}_{\mathcal{I}} = \mathbf{e}_1^T$. A direct consequence of this is that $\mathbf{a}_{\mathcal{I}}^T \mathbf{B}_{\mathcal{I}} = \mathbf{e}_1^T \mathbf{T} = \mathbf{T}_{(1)}$, thus $\mathbf{a}_{\mathcal{I}}^T (\mathbf{B}_{\mathcal{I}}\mathbf{g}) = g^T$.

A drawback of this construction is that it works over the complex numbers and requires an inversion, which introduces numerical instability. Each decoding vector $\mathbf{a}_{\mathcal{I}}$ can be computed in time $O((n-s)^2)$, while the decoding vector proposed in this paper is constructed in time $O(n+s)$.

The Reed-Solomon based scheme was also used as a basis for *weighted gradient coding* [28]. The idea behind the weighting is similar to that of the weighted CMMS [48] described in V-E. In *weighted GC* the goal is not to recover the sum of the partial gradients, but a weighted linear combination according to some predetermined weight vector $\mathbf{w} \in \mathbb{Z}_+^{1 \times k}$. This has many applications in signal processing and statistics. Note also that our proposed binary gradient code $(\mathbf{B}, \mathbf{a}_{\mathcal{I}})$ can be turned into a weighted scheme $(\tilde{\mathbf{B}}, \mathbf{a}_{\mathcal{I}})$ by the simple modification of \mathbf{B} :

$$\tilde{\mathbf{B}}_{ij} = \begin{cases} \mathbf{w}_j & \text{if } \mathbf{B}_{ij} = 1 \\ 0 & \text{if } \mathbf{B}_{ij} = 0 \end{cases}. \quad (34)$$

B. CMM MatDot Codes

The proposed CMM-1 described in V-A is in nature, close to the ‘‘MatDot Codes’’ from [38], [39], which work with the rank- τ outer-products. In the MatDot procedure, a polynomial of the submatrices \tilde{A}_i and \tilde{B}_i is evaluated, i.e.,

$$p_A(x) = \sum_{j=1}^k \tilde{A}_j x^{j-1} \quad \text{and} \quad p_B(x) = \sum_{j=1}^k \tilde{B}_j x^{k-j}, \quad (35)$$

over arbitrary distinct elements x_1, \dots, x_n of a finite field \mathbb{F}_q for some $q > n$. The i^{th} worker receives the evaluations $p_A(x_i)$ and $p_B(x_i)$, i.e., the evaluations of the polynomials at the evaluation point corresponding to the worker; x_i . Each worker is requested to communicate back the computation $P(x_i) = p_A(x_i)p_B(x_i)$, which is a polynomial of degree $2(k-2)$. The sum of all the outer-products is the coefficient of x^{k-1} of the polynomial $p_A(x)p_B(x)$. Once any $2k-1$ evaluations of the polynomial $P(x)$ on distinct points are received, polynomial interpolation of Reed-Solomon decoding can be applied in order to retrieve the product AB [38], [39].

The MatDot procedure in [38], [39] is described for A and B both being square matrices of size $N \times N$, though there is no reason why it should not work for non-square matrices. The overall encoding complexity for each worker if both matrices considered are squares; is $O(N^2n)$. The overall decoding complexity per worker is $O(k \log^2 k)$ for each entry [55], thus; the overall decoding complexity is $O(N^2k \log^2 k)$.

The communication cost per worker of the MatDot scheme is the same as CMM-1. A drawback is the storage required at the central server, which was overcome for our scheme through the alternative decoding process of Algorithm 2.

C. CMM Polynomial Codes

The ‘‘Polynomial Codes’’ proposed in [34] follow a similar approach in terms of computational tasks and concatenation as the proposed CMM-2 and CMM-3, though a different encoding and decoding procedure is considered. The Polynomial Codes CMMS partitions both the matrices, A into k_2 submatrices across its rows; and B into k_2 submatrices across its columns. The encodings which take place are similar to those of MatDot Codes, and the workers are requested to compute the product between an encoding of the submatrices A and of the submatrices B . Once k_1k_2 workers respond, the decoding involves the inversion of a Vandermonde matrix; which is not numerically stable, in order to retrieve the submatrices of C each of size $\frac{L}{k_1} \times \frac{M}{k_2}$, which are then concatenated.

A restriction of the Polynomial Codes, which cannot be altered if we want to have a recovery threshold of k_1k_2 , is the fact that the resulting products of the encoded submatrices all need to have the same size, therefore requiring that $k_1|L$ and $k_2|M$. From the analysis we carried for homogeneous workers of our GCS, the partitions of A and B for our CMM-3 do not all need to have the same number of columns.

An extension of the Polynomial codes in [36] does the same augmentation argument after the decoding step, though their encodings take place over submatrices of A and B , where the partitions are carried out for both matrices across the rows and columns.

D. Connection to Distributed Storage Systems

A central theme of this paper was relaxing the condition that $(s+1) | n$, in order to design a GCS for a pair of integers (s, n) where $0 \leq s < n$ for which $(s+1) \nmid n$. The main idea behind this condition is that the k partitions can be appropriately grouped together and the workers will all get the same number of partitions. This is what is referred to as uniform, defined in Definition 2. If $d_s(\mathbf{B}) = 0$, the assignment is balanced, according to the terminology in [14]. The arithmetic is easier to work with under this assumption, which is also why our construction results in a block diagonal matrix \mathbf{B} ; when $(s+1) | n$. This is a permutation of the rows of the fractional repetition scheme from [14].

The aforementioned assumption prevails in the construction of *distributed storage systems* as well, which use similar techniques, including replication and block coding to provide reliability. Specifically, in the design of *locally repairable codes* (LRCs) [56]. We relate these two applications; of GC and distributed storage, by indicating how this assumption translates from LRCs to GC schemes, by discussing an analog of [56, Remark 2] in this context. The reader is referred to [56] and the references therein for further details on LRCs.

Remark 8. *Observe that when $(s+1) | n$, we can partition the set of k disjoint parts of \mathcal{D} into $\frac{n}{s+1}$ disjoint $(s+1)$ -groups. The method used in [14] to prove the lower bound $\|\mathbf{B}_{(i)}\|_0 \geq \frac{k}{n}(s+1)$ of [14, Theorem 1], relies on the fact that at least one encoding of all of the $(s+1)$ -groups need be collected, in order for the scheme to be resilient to any s stragglers. The construction of their code meets this bound with equality, as does ours; under the given assumption. That is, the constructions gives an achievability proof for the case of $(s+1) | n$. Furthermore, we show that the pair-wise disjoint parts \mathcal{D} is one of the possibly many arrangements of repair groups that leads to optimal constructions (Theorem 3), as we can rearrange any of the allocation of the parts among each congruence class of workers. This is done in such a way that each partition is allocated to exactly one worker per class.*

E. Connection to LDPC Codes

In terms of error-correcting codes, Theorem 4 suggests an analogy between permutations of the task allocations per congruence class \mathbf{B} of our encoding matrix \mathbf{B} , and parity check matrices of LDPC codes. Specifically, \mathbf{B} matches the definition of an irregular LDPC parity check matrix \mathbf{H} [57]–[59], since along the columns of \mathbf{B} and \mathbf{B} we have a balanced load, and along the rows we have an unbalanced load when $(s+1) \nmid n$. That is, \mathbf{B} suggested by our construction and Theorem 4 is a valid \mathbf{H} , with the additional constraint that any two rows corresponding to the same congruence class $\text{mod}(s+1)$ have disjoint supports. It is intriguing to see what can be inferred from the constructions and theory of our binary encoding to that of LDPC codes and vice versa, and if further connections can be established.

APPENDIX C
PROOFS OF SECTION IV

In this appendix we present proofs of Theorems 3 and 4, and Corollary 5. We also provide a histogram of emulated computations of tasks from the same server, for parameters not satisfying the constraint $(s+1)|n$. This gives empirical evidence that there is variation in the completion times between tasks of the same size when homogeneous servers are used, and that the allocated tasks of different sizes in our schemes are close in completion times. Hence, the cost we pay in practice for dropping the aforementioned constraint is not too severe.

Proof. [Theorem 3] To simplify the presentation of the proof, we restrict to the case where $n = k$. To meet this assumption we can incorporate instances of the data point $(\mathbf{0}_{p \times 1}, 0)$ until N' points total are considered; such that $n|N'$, and let $k = n$.

Firstly, in the simplest case where $(s+1)|n$; we have $\|\mathbf{B}_{(i)}\|_0 = \frac{k}{n}(s+1) = \frac{k}{\ell}(s+1) = s+1$ for all $i \in \mathbb{N}_n$. This results in \mathbf{B} being block diagonal, which is a permutation of the fractional repetition scheme presented in [14], for which $d_s(\mathbf{B}) = 0$. The minimum value of the function d_s is therefore attained.

By $\mathbf{B}|_{[c]_{s+1}}$ we denote the restriction of \mathbf{B} to the rows with indices corresponding to the congruence class of $c \pmod{s+1}$. For $(s+1) \nmid n$; equivalently $r > 0$, where r is specified in (6), the proof is split into two cases, one corresponding to each of the Algorithms 5 and 6. For each Algorithm, it suffices to show that for a single class, say $[0]_{s+1}$ and $[r]_{s+1}$ respectively, the following hold:

$$d_s\left(\mathbf{B}|_{[0]_{s+1}}\right) = \sum_{i \in [0]_{s+1}} \left| \|\mathbf{B}_{(i)}\|_0 - (s+1) \right| \quad (36)$$

$$= \sum_{j=0}^{\ell+1} \left| \|\mathbf{B}_{(j \cdot (s+1))}\|_0 - (s+1) \right|, \quad (37)$$

and

$$d_s\left(\mathbf{B}|_{[r]_{s+1}}\right) = \sum_{i \in [r]_{s+1}} \left| \|\mathbf{B}_{(i)}\|_0 - (s+1) \right| \quad (38)$$

$$= \sum_{j=0}^{\ell} \left| \|\mathbf{B}_{(j \cdot (s+1) + r)}\|_0 - (s+1) \right|, \quad (39)$$

since the encoding vectors are identical between the respective classes corresponding to \mathcal{C}_1 and \mathcal{C}_2 . Therefore

$$d_s\left(\mathbf{B}|_{[c_1]_{s+1}}\right) = d_s\left(\mathbf{B}|_{[0]_{s+1}}\right), \quad (40)$$

and

$$d_s\left(\mathbf{B}|_{[c_2]_{s+1}}\right) = d_s\left(\mathbf{B}|_{[r]_{s+1}}\right), \quad (41)$$

for all $c_1 \in \{0, \dots, r-1\}$ and all $c_2 \in \{r, \dots, s\}$. Hence, as long as the minimum value of d_s is attained at one of the congruence classes of \mathcal{C}_1 and \mathcal{C}_2 , the solution of (IP) is attained by $\mathbf{B}_{\mathcal{C}_1}$ and $\mathbf{B}_{\mathcal{C}_2}$ respectively.

The superposition of the row vectors corresponding to the same class results in $\mathbf{1}_{1 \times k}$. If one changes the allocations such that the value of d_s remains the same, we simply have a permutation of the task allocations. On the other hand, if the value of d_s changes; we show that it cannot be reduced⁴, which is the main idea behind our construction and the proof. By a similar argument, one can show using induction that any additional alterations, would only further increase the valuation of d_s . We show this separately for $\mathbf{B}_{\mathcal{C}_1}$ and $\mathbf{B}_{\mathcal{C}_2}$.

Encoding Matrix $\mathbf{B}_{\mathcal{C}_1}$: Recall that Algorithm 5 can be reduced to only include the **else if** statement, as when $\ell > s - r$ we have $\lambda = s$ and $\tilde{r} = \ell + r - s > 0$. Thus, the two **if** loops are equivalent for $\ell > s - r$. It therefore suffices to only consider the **else if** statement of the algorithm.

Suppose that we have $\tilde{r} - 1$ workers who are assigned $\lambda + 1$ tasks, and $\ell - \tilde{r}$ workers who are assigned λ tasks. We have two more workers within the congruence class of \mathcal{C}_1 we are considering, one who is assigned $\lambda + 2$ tasks, and the other is assigned $\lambda - 1$ tasks. For this new task allocation matrix \mathbf{B}' , define the submatrix of \mathbf{B}' which corresponds to the congruence class $[c_1]_{s+1}$ by $\mathbf{B}'|_{[c_1]_{s+1}}$. It follows that the difference between the two valuations of d_s is:

$$\Delta = d_s\left(\mathbf{B}'|_{[c_1]_{s+1}}\right) - d_s\left(\mathbf{B}|_{[c_1]_{s+1}}\right) \quad (42)$$

$$= |\lambda - s + 1| + |\lambda - s - 2| - (|\lambda - s| + |\lambda - s - 1|). \quad (43)$$

⁴That is, if $d_s(\mathbf{B}') \neq d_s(\mathbf{B})$ for \mathbf{B} the encoding matrix of the altered job allocations; then $d_s(\mathbf{B}') > d_s(\mathbf{B})$.

It can be observed that $\Delta = 2$ for all values of λ . By this, we conclude that

$$d_s \left(\mathbf{B} \Big|_{[c_1]_{s+1}} \right) < d_s \left(\mathbf{B}' \Big|_{[c_1]_{s+1}} \right) \quad (44)$$

for the simplest alteration on $\mathbf{B} \Big|_{[c_1]_{s+1}}$.

Encoding Matrix $\mathbf{B}_{\mathcal{C}_2}$: Consider $\mathbf{B}' \Big|_{[c_2]_{s+1}}$ an alteration of $\mathbf{B} \Big|_{[c_2]_{s+1}}$, like the one described above. In the case where $q = 0$, it is straightforward that

$$\Delta = d_s \left(\mathbf{B}' \Big|_{[c_2]_{s+1}} \right) - d_s \left(\mathbf{B} \Big|_{[c_2]_{s+1}} \right) = \ell \cdot t - \ell \cdot t = 0. \quad (45)$$

By (7) and noting that $q = 0$ and $r > 0$, we have $t > 0$. Hence, we are considering the congruence classes of \mathcal{C}_2 . If this modification is applied $(t + 1)$ times, we obtain $\Delta = 2$.

The same conclusions hold for the case where $q > 0$, by following the same argument. This experiment shows that there is no reduction in the valuation of d_s on $\mathbf{B}_{\mathcal{C}_2}$ when it is modified no more than t times, though the summands $\left| \|(\mathbf{B}_{\mathcal{C}_2})_{(l)}\|_0 - \frac{k}{n}(s+1) \right|$ of $d_s(\mathbf{B}_{\mathcal{C}_2})$ for $l \in \{r, \dots, s\}$ each increase by one, which l 's correspond to the individual rows that are being modified. This implies that the computational load of the respective workers becomes *less uniform*, i.e., the summands of d_s would increase by one, and the load assignments are less balanced.

It remains to show that the constraint on the nonzero entries is met. By straightforward computations we have

$$\sum_{i=1}^n \|\mathbf{B}_{(i)}\|_0 = \sum_{j=1}^{r \cdot (\ell+1)} \|(\mathbf{B}_{\mathcal{C}_1})_{(j)}\|_0 + \sum_{l=1}^{\ell \cdot (s+1-r)} \|(\mathbf{B}_{\mathcal{C}_2})_{(l)}\|_0 \quad (46)$$

$$= (\ell + 1) \cdot r \cdot (s + 1) + (\ell + 1) \cdot (s + 1 - r) \cdot (s + 1) \quad (47)$$

$$= (\ell \cdot (s + 1) + r) \cdot (s + 1) \quad (48)$$

$$= n \cdot (s + 1) = k \cdot (s + 1), \quad (49)$$

which completes the proof. \square

Proof. [Theorem 4] Assume condition 1) holds. By our construction of $\mathbf{a}_{\mathcal{I}}$, we consider each congruence class separately. The superposition of the rows corresponding to a complete residue system $[i]_{s+1}$, is equal to the sum of these rows over \mathbb{R} . We denote this superposition for the i^{th} congruence class by $\bar{\mathbf{b}}_{[i]}$, i.e.,

$$\bar{\mathbf{b}}_{[i]} := \left(\sum_{\iota \in [i]_{s+1}} \bar{\mathbf{B}}_{(\iota)} \right), \quad (50)$$

for which $\mathbf{a}_{\mathcal{I}}^T \bar{\mathbf{B}} = \bar{\mathbf{b}}_{[i]}$ if $\{\iota : \iota \in [i]_{s+1}\} \subsetneq \mathcal{I}$. Since the vectors are binary, the superposition results in $\mathbf{1}_{1 \times k}$ only when 1 appears in each position in a single row of this congruence class. This is precisely condition 2); for $\bar{\mathbf{B}}$ satisfying 1).

Now, assume condition 2) holds. For binary rows $\{\bar{\mathbf{B}}_{(j)}\}_{j=1}^n$, condition 1) ensures that the cardinality of each of these vectors is equal to that of the corresponding row $\mathbf{B}_{(j)}$, i.e., the same number of partitions are allocated to the j^{th} worker through both \mathbf{B} and $\bar{\mathbf{B}}$. Therefore, for $\bar{\mathbf{B}}$ satisfying 1), we get

$$\bar{\mathbf{b}}_{[i]} = \left(\sum_{\iota \in [i]_{s+1}} \mathbf{B}_{(\iota)} \right) = k. \quad (51)$$

for all $i \in \{0, \dots, s\}$. Under the assumption that 2) is satisfied, we have $(\bar{\mathbf{b}}_{[i]})_l \in \{0, 1\}$ for all $l \in \mathbb{N}_k$, thus $\bar{\mathbf{b}}_{[i]} = \mathbf{1}_{1 \times k}$.

We conclude that if 1) and 2) are simultaneously satisfied, the above statement holds. This completes the proof. \square

Proof. [Corollary 5] We saw that for $\bar{\mathbf{B}} \in \{0, 1\}^{n \times k}$ satisfying condition 2), we have $\bar{\mathbf{b}}_{[i]} \in \{0, 1\}^k$ for all $i \in \{0, \dots, s\}$. When condition 1) is also satisfied, we then have $\bar{\mathbf{b}}_{[i]} = \mathbf{a}_{\mathcal{I}}^T \bar{\mathbf{B}} = \mathbf{1}_{1 \times k}$ for i such that $\{\iota : \iota \in [i]_{s+1}\} \subsetneq \mathcal{I}$.

Condition 1) ensures that $d_s(\mathbf{B}) = d_s(\bar{\mathbf{B}})$, as a permutation on the entries of the rows $\{\mathbf{B}_{(i)}\}_{i=1}^n$ does not change the value of d_s . Since \mathbf{B} is a solution to (IP), and $d_s(\mathbf{B}) = d_s(\bar{\mathbf{B}})$, it follows that $\bar{\mathbf{B}}$ is also a solution to (IP). Therefore, conditions 1) and 2) are sufficient for $\bar{\mathbf{B}}$ to be a solution to (IP).

Assume that $\text{supp}(\bar{\mathbf{B}}_{(i)}) \cap \text{supp}(\bar{\mathbf{B}}_{(j)}) \supseteq \{l\}$. Then

$$(\bar{\mathbf{b}}_{[i]})_l = \left(\sum_{\iota \equiv i \pmod{s+1}} \bar{\mathbf{B}}_{(\iota)} \right)_l > 1. \quad (52)$$

This implies that $\mathbf{a}_{\mathcal{I}}^T \bar{\mathbf{B}} \neq \mathbf{1}_{1 \times k}$ for $\mathcal{I} \ni i$ and $\mathbf{a}_{\mathcal{I}}$ binary. Therefore, condition 2) is necessary.

Assume for a contradiction that condition 1) is not necessary. Following a similar approach to our proof of Theorem 3, assume w.l.o.g. that

- (a) $\|\bar{\mathbf{B}}_{(1)}\|_0 = \|\mathbf{B}_{(1)}\|_0 + 1$
- (b) $\|\bar{\mathbf{B}}_{(s+2)}\|_0 = \|\mathbf{B}_{(s+2)}\|_0 - 1$.

If (a) holds; then (b) is necessary, in order to satisfy condition 2) and $\mathbf{a}_T^T \bar{\mathbf{B}} = \mathbf{1}_{1 \times k}$. Similarly, if (b) holds; then (a) is necessary. We then have $d_s(\bar{\mathbf{B}}) = d_s(\mathbf{B}) + 2$, which is not an optimal solution to (IP). Hence, 1) is also necessary.

Condition 2) guarantees that $\|\bar{\mathbf{B}}^{(i)}\|_0 \leq s + 1$ for all i . Since we are applying a permutation on each set of rows corresponding to complete residue system separately, we get that $\|\bar{\mathbf{B}}^{(i)}\|_0 \geq \|\mathbf{B}^{(i)}\|_0$, and by our construction of \mathbf{B} , we are guaranteed that $\|\mathbf{B}^{(i)}\|_0 = s + 1$ for all i . By antisymmetry, it is clear that $\|\bar{\mathbf{B}}^{(i)}\|_0 = s + 1$ for all i . \square

A. Emulated Computations for Unbalanced Loads

In Figure 1 we provide a histogram of emulated computations of different tasks from the same server, for the loads we get as a result of applying our scheme. This shows that the overall allocated tasks are close in completion times. For the emulations we considered the case where $n = k = 200$ and $s = 20$, for which our scheme requires loads of size 20, 22 and 23. Each load corresponds to a partition of size 300×50 , i.e., $N/k = 300$, and $p = 50$, thus $N = k \cdot 300 = 60000$. Note that we only have one load size for \mathbf{B}_{e_1} , as $\ell + r = s = 20$. The task considered was computing the encoded partial gradients of a linear regression problem.

A total of 110 workers are assigned a job load corresponding to 20 blocks, while 70 and 20 workers are assigned jobs corresponding to loads of 22 and 23 blocks respectively. The average computation time of the workers with loads of 22 and 23 blocks were almost the same. The average computation time of the workers with a load of 20 was slightly higher. From the histogram we observe that the majority of the times are concentrated around 0.01 seconds for all three groups, while the majority of the outliers correspond to the 20 stragglers our design permits. The computation time of the slowest non-stragglers was 0.105 seconds.

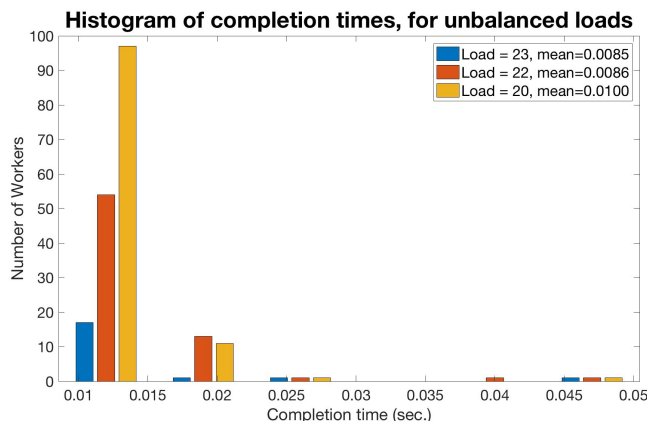


Fig. 1. Histogram of emulated completion times.

Note that here we are only considering the computation time. In real distributed systems additional times need be considered, e.g., scheduling and queuing time. In fact, these factors make the difference in workloads of homogeneous workers less crucial, when making the assumption that the workers have similar response times.

APPENDIX D NUMERICAL EXPERIMENTS

In this appendix we present two numerical experiments, one comparing the numerical stability of our GCS with that of the Fractional Repetition Coding (FRC) scheme from [14] in D-A, and a second which presents a concrete example of the task allocation derived from the analysis of IV-B, for heterogeneous workers in D-B.

A. Numerical Stability Experiment

The main motivation for using the binary matrices for our GCS, was the numerical instability introduced in the FRC scheme of [14] in the decoding step. Another drawback of this decoding step, is the fact that it constructs and stores a matrix \mathbf{A} of size $n \times \binom{n}{s}$; which is comprised of the decoding vectors corresponding to each of the possible index sets \mathcal{I} . Searching through \mathbf{A} to find the corresponding \mathbf{a}_T is also prohibitive; as it is exponentially large in the number of workers n .

In this experiment, we compare the error $\|g - \tilde{g}\|_2$ for g the gradient computed by a single server without any encoding or decoding taking place, and \tilde{g} the gradient computed by the two competing GC schemes. We consider the case where $n = k = 18$,

$s = 5$, and the gradient and partial gradients are of dimension $p = 100$; with varying norm $\|g\|_2$. For these parameters, we have $\mathbf{A} \in \mathbb{R}^{8568 \times 18}$.

Our GCS introduces no error through the encoding and decoding steps, i.e., $\|g - \tilde{g}\|_2 = 0$. This is due to the fact that no multiplication or division takes place by scalars, and that the decoding step turns out to be an addition of the exact partial gradients⁵. For the FRC scheme, we considered a binary encoding matrix \mathbf{B} whose construction is deterministic, which introduces no error. The construction of matrix \mathbf{A} , solves $\binom{n}{s}$ linear systems of the form $\mathbf{B}_{\mathcal{I}}^T \cdot y_{\mathcal{I}} = \mathbf{1}_{f \times k}$; for $\mathbf{B}_{\mathcal{I}} \in \{0, 1\}^{f \times k}$ the submatrix of \mathbf{B} corresponding to \mathcal{I} . This is done using matlab's backslash operation, which computes the decoding vector $\mathbf{a}_{\mathcal{I}} \leftarrow y_{\mathcal{I}} = (\mathbf{B}_{\mathcal{I}}^T)^{\dagger} \cdot \mathbf{1}_{1 \times k}$ for each \mathcal{I} .

For this simple case where $n = k = 18$ and $s = 5$, out of the 8568 index sets \mathcal{I} , the condition number $\kappa_2(\mathbf{B}_{\mathcal{I}}) := \frac{\sigma_{\max}(\mathbf{B}_{\mathcal{I}})}{\sigma_{\min}(\mathbf{B}_{\mathcal{I}})}$ of 596 submatrices $\mathbf{B}_{\mathcal{I}}$ is greater than matlab's finite floating-point number of 1.7977×10^{308} . The remaining 7972 $\mathbf{B}_{\mathcal{I}}$ submatrices had a condition number ranging between 1.7121×10^{50} and 2.4610×10^{276} . Each of the systems $\mathbf{B}_{\mathcal{I}}^T \cdot y_{\mathcal{I}} = \mathbf{1}_{s \times k}$ are therefore ill-conditioned. On the other hand, the construction of our decoding vectors is an addition of standard basis vectors (9), which does not require solving a linear system.

In Figure 2 we show how the error introduced by the FRC scheme relates to the norm of the gradient. In machine learning applications where p is large and many samples are considered; it is expected to have a large $\|g\|_2$, which results in larger error when the FRC scheme is deployed. Our scheme introduced no error, as shown in Figure 3.

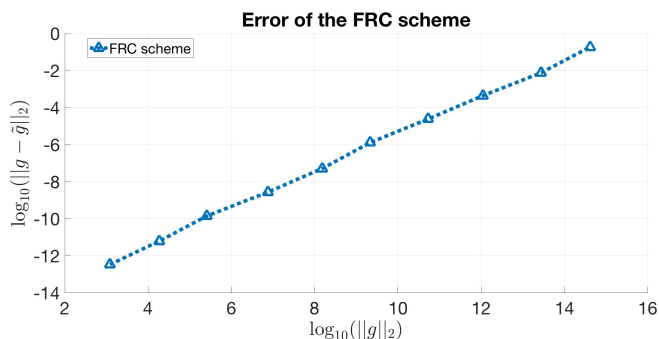


Fig. 2. Propagation of error introduced by the FRC scheme, in log-scale.

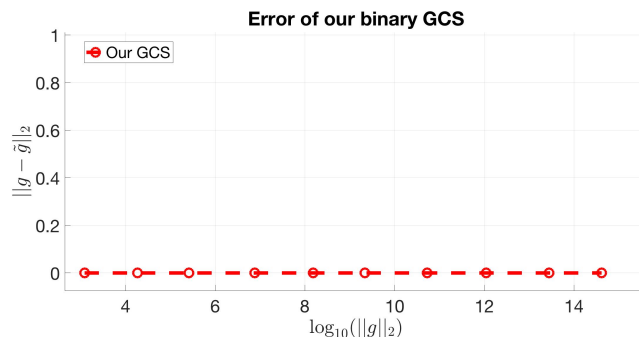


Fig. 3. Error plot of our GCS.

B. Experiment with Heterogeneous Workers

In the following experiment we considered the analysis of IV-B, to allocate the jobs of a matrix multiplication where we used CMM-1 for two different groups of machines. We considered $\tau_1 = 10$ machines of the group \mathcal{T}_1 which had one core, and $\tau_2 = 20$ machines of the group \mathcal{T}_2 which had two cores, thus $n = 30$, $\alpha = 1$ and $\beta = 2$. We considered matrices $A \in \mathbb{R}^{L \times N}$ and $B \in \mathbb{R}^{N \times M}$ with $N = 6400$ and $L = M = 10^4$, which we partitioned across the respective dimension N into $k = 320$ parts. That is, each partition was of size $\tau = \frac{N}{k} = 20$. Before carrying out the experiment, we estimated

- 1) $t_1 = \mathbb{E} \left[\text{time for } \mathcal{T}_1 \text{ to compute } \tilde{A}_j \tilde{B}_j \right] \approx 0.8913$
- 2) $t_2 = \mathbb{E} \left[\text{time for } \mathcal{T}_2 \text{ to compute } \tilde{A}_j \tilde{B}_j \right] \approx 0.4511$

⁵By *exact* we mean g_j as computed by a single server.

thus $t_1 \approx 2 \cdot t_2$, as was expected. The straggler parameter was set to $s = 10$. Substituting the above parameters into (18) and (19), we concluded that $|\mathcal{J}_{\mathcal{T}_1}| \approx 70$ and $|\mathcal{J}_{\mathcal{T}_2}| \approx 140$.

The resulting distributed computation completion times of the workers in the above experiment, are depicted in Figure 4. Anything above the black dotted lines correspond to stragglers. We had 2 stragglers from \mathcal{T}_1 and 8 stragglers from \mathcal{T}_2 , which correspond to approximately $\frac{71}{n}$ and $\frac{72}{n}$ workers from each of \mathcal{T}_1 and \mathcal{T}_2 respectively. The average completion times were respectively 7.042 and 7.242.

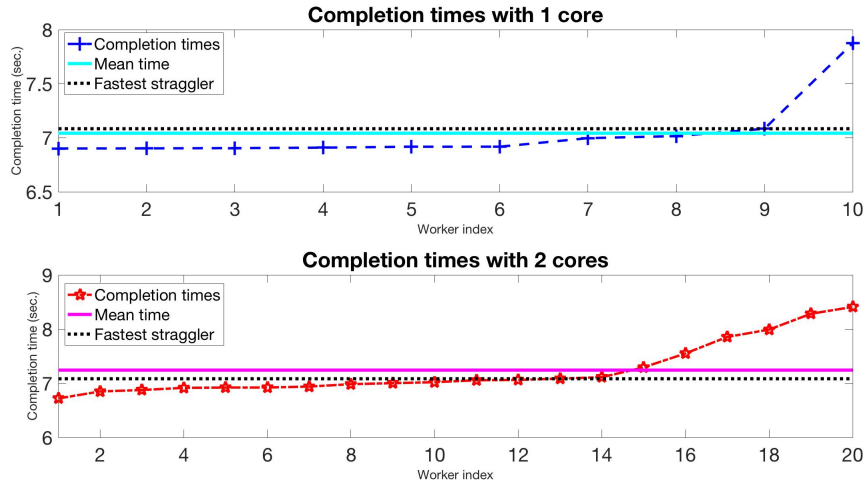


Fig. 4. Completion times for the two group of workers.

It is also evident from the plots that the majority of the completion times across the two groups are close to each other. Thus, the expected response time is almost the same for all the workers of the coded computing network.

APPENDIX E

APPLICATION OF CMM TO DISTRIBUTED GRADIENT DESCENT FOR FROBENIUS-NORM MINIMIZATION

In this appendix we first review gradient descent, and then focus on gradient descent for Frobenius-norm minimization problems, as defined in (56); for the objective function L_F defined in (54). We briefly describe the following motivating problems which try to solve (56) or similar optimization problems: nonnegative matrix factorization (NMF), k -SVD, low rank matrix approximation, sparse coding and the best k -rank approximation; which relates to principal component analysis. This is not an exhaustive list of where the objective function L_F has been utilized, since many more applications do exist.

Recall that in gradient descent, we consider a minimization problem with a convex differentiable objective function $L: \mathcal{C} \rightarrow \mathbb{R}$ over an open constrained set $\mathcal{C} \subseteq \mathbb{R}^p$. Then, given an initial $\theta^{[0]} \in \mathcal{C}$; the following update is performed at iteration $t + 1$:

$$\theta^{[t+1]} \leftarrow \theta^{[t]} - \xi_t \cdot \nabla_{\theta} L(\mathcal{D}; \theta^{[t]}), \quad \text{for } t = 1, 2, 3, \dots \quad (53)$$

until a specified termination criterion is met. The parameter ξ_t is the step-size, which may be adaptive or fixed. Note that GC is only concerned with computing the gradient at each step and hence, selecting an appropriate step-size was not discussed in this paper.

In the literature regarding gradient descent for coded computing thus far, only the case where the gradient of the objective function (1) is a vector has been considered or discussed. In order to tie together Sections II and III with Section V, we discuss the case where the gradient is a matrix, e.g.

$$L_F(\mathbf{X}, \mathbf{Y}; \Theta) := \|\mathbf{X}\Theta - \mathbf{Y}\|_F^2 = \sum_{i=1}^m \overbrace{\|\mathbf{X}\Theta^{(i)} - \mathbf{Y}^{(i)}\|_2^2}^{L_{ols}(\mathbf{X}, \mathbf{Y}^{(i)}; \Theta^{(i)})}, \quad (54)$$

for $\mathbf{X} \in \mathbb{R}^{N \times p}$, $\Theta \in \mathbb{R}^{p \times m}$ and $\mathbf{Y} \in \mathbb{R}^{N \times m}$. The gradient is

$$\nabla_{\Theta} L_F(\mathbf{X}, \mathbf{Y}; \Theta) = 2\mathbf{X}^T(\mathbf{X}\Theta - \mathbf{Y}), \quad (55)$$

which is computed in order to approximate the solution to

$$\Theta^* = \arg \min_{\Theta \in \mathbb{R}^{p \times m}} \{L_F(\mathbf{X}, \mathbf{Y}; \Theta)\} \quad (56)$$

via gradient descent. Similar to the ordinary least squares objective function L_{ols} , (56) has the closed-form solution:

$$\Theta^* = \mathbf{X}^\dagger \mathbf{Y} = (\mathbf{X}^T \mathbf{X})^{-1} \mathbf{X}^T \mathbf{Y}, \quad (57)$$

which is intractable for large N . In practice, it is often preferred to approximate Θ^* .

A motivating application is if we have measurements $\{\mathbf{Y}^{(i)}\}_{i=1}^m$ from m different sensors in different locations or from different sources, for the same corresponding \mathbf{X} , and we want to interpolate the corresponding optimal models $\{\theta_i\}_{i=1}^m$ for each sensor or source.

More generally, the goal of most nonlinear regression problems is to solve the problem

$$\min_{\kappa \in \mathcal{H}} \left\{ \sum_{i=1}^N (\kappa(\mathbf{x}_i) - y_i)^2 \right\}, \quad (58)$$

where κ comes from a hypothesis class \mathcal{H} that fits the training data, for which one can use the kernel trick to solve efficiently. What we present can be applied also to regression problems of this type, as well as kernel regression problems [60].

Throughout the gradient descent process, the second summand $2\mathbf{X}^T \mathbf{Y}$ is constant. Hence, at every iteration we only need to compute the matrix product $\hat{\mathbf{X}}\Theta$, where $\hat{\mathbf{X}} = 2\mathbf{X}^T \mathbf{X}$ is also a constant matrix. Then, depending on which matrix multiplication scheme we decide to use, the workers will receive the entire matrix $\hat{\mathbf{X}}$ or a submatrix of it at the beginning of the distributed computation process, and a submatrix of Θ 's update

$$\Theta^{[t+1]} \leftarrow \Theta^{[t]} - \xi_t \cdot \nabla_{\Theta} L_F(\mathbf{X}, \mathbf{Y}; \Theta^{[t]}) \quad (59)$$

at each iteration. In an iterative process, it is preferred to reduce the total communication cost as much as possible. Hence, we prefer to communicate only part of Θ when possible.

Solving for the loss function L_{Θ} may also be viewed as solving multiple linear regression problems simultaneously. This is due to its decomposition into a summation of m separate least squares objective functions, with the same data matrix \mathbf{X} . For $\Theta^{(i)} = \theta_i$, it follows that

$$\Theta^* = \begin{pmatrix} \left| \theta_1^* \right. & \left| \theta_2^* \right. & \dots & \left| \theta_m^* \right. \\ \left| \right. & \left| \right. & & \left| \right. \end{pmatrix} \in \mathbb{R}^{p \times m}, \quad (60)$$

for θ_i^* being the minimal solution to $L_{ols}(\mathbf{X}, \mathbf{Y}^{(i)}; \Theta^{(i)})$, for each $i \in \mathbb{N}_m$. To guarantee convergence for all θ_i , we can fix $\xi_t = 2/\sigma_{\max}(\mathbf{X})^2$ for all iterations.

We point out that the above problem could indeed be solved by using regular GC, as we have

$$\|\mathbf{A}\|_F^2 = \left\| \left[(\mathbf{A}^{(1)})^T \dots (\mathbf{A}^{(m)})^T \right]^T \right\|_2^2, \quad (61)$$

for any real-valued matrix \mathbf{A} comprised of m columns. We also note that the least squares regression problem in the presence of stragglers, was studied in [50].

A. Nonnegative Matrix Factorization

The NMF problem deals with decomposing a matrix $A \in \mathbb{R}_{\geq 0}^{L \times M}$ with nonnegative entries into two matrices $U \in \mathbb{R}_{\geq 0}^{L \times N}$ and $V \in \mathbb{R}_{\geq 0}^{N \times M}$, by attempting to solve

$$\min_{\substack{U \in \mathbb{R}_{\geq 0}^{L \times N} \\ V \in \mathbb{R}_{\geq 0}^{N \times M}}} \{ \|A - UV\|_F^2 \} \quad (62)$$

for U, V with the appropriate dimensions. In [61] a multiplicative update algorithm is proposed:

$$V \leftarrow V \cdot \frac{U^T A}{U^T U V} \quad \text{and} \quad U \leftarrow U \cdot \frac{A V^T}{U V V^T}, \quad (63)$$

where the division is done element-wise. Multiple multiplications are required for these updates, and the matrices can be quite large, e.g., when dealing with recommender systems. Multiple distributive multiplications are required at each iteration, which makes this process a lot more cumbersome. Therefore, speeding up this process is even more crucial. Further details on this algorithm and how to incorporate gradient methods to solve NMF can be found in [62]–[64].

B. Low-Rank Approximation

Consider the problem of finding a low-rank approximation of a matrix $A \in \mathbb{R}^{L \times M}$. That is, for an approximation of rank k or less we want to find $B = U_B V_B$ for $U_B \in \mathbb{R}^{L \times k}$ and $V_B \in \mathbb{R}^{k \times M}$, which can be done by solving the problem

$$\min_{\substack{B \in \mathbb{R}^{L \times M} \\ \text{rank}(B) \leq k}} \{ \|A - B\|_F^2 \} = \min_{\substack{U_B \in \mathbb{R}^{L \times k} \\ V_B \in \mathbb{R}^{k \times M}}} \{ \|A - U_B V_B\|_F^2 \}, \quad (64)$$

where it is easier to work with $B = U_B V_B$ in the case where both L and M are large, e.g., in terms of storage and computations.

The objective function of (64) is bi-convex. A common alternating minimization approach fixes one of the matrices and optimizes the other, and then alternates.

It is well known that the best k -rank approximation for many norms, including the Euclidean and Frobenius norms, can be computed through the truncated singular value decomposition (SVD). By the Eckart–Young theorem [65]

$$A_k = U\Sigma_k V^T = \sum_{i=1}^k \sigma_i U^{(i)} (V^{(i)})^T \quad (65)$$

solves (64). The SVD takes $O(LM \cdot \min\{L, M\})$ time itself to compute, which is cumbersome. To avoid computing the SVD, we can resort to approximating A_k by solving

$$\min_{\substack{U \in \mathbb{R}^{L \times k} \\ U^T U = \mathbf{I}_k}} \{ \|A - UU^T A\|_F^2 \} = \min_{\substack{U \in \mathbb{R}^{L \times k} \\ U^T U = \mathbf{I}_k}} \{ -\text{tr}(U^T A A^T U) \} \quad (66)$$

through gradient descent, where the gradient with respect to U is $-AA^T U$. Hence, at each iteration we distributively compute $AA^T U^{[t]}$ [60], [66]. For \hat{U} our final solution to the above minimization problem, our k -rank approximation of A will be $\hat{U}\hat{U}^T A$, which is an approximation of A_k . For U^* being the exact solution, we have $A_k = U^*(U^*)^T A$.

Other problems in which CMM could be utilized in distributed gradient methods are the weighted low-rank matrix approximation [67] and the k -SVD algorithm [68]. These involve similar objective functions, whose gradients have a matrix form which require at least one matrix-matrix multiplication. Thus, the process would be accelerated if these were to be computed distributively.

REFERENCES

- [1] K. Lee, M. Lam, R. Pedarsani, D. Papailiopoulos, and K. Ramchandran, "Speeding up distributed machine learning using codes," *IEEE Transactions on Information Theory*, vol. 64, no. 3, pp. 1514–1529, 2018.
- [2] S. Li, M. A. Maddah-Ali, and A. S. Avestimehr, "A unified coding framework for distributed computing with straggling servers," *arXiv preprint arXiv:1609.01690*, 2016.
- [3] A. Reiszadeh, S. Prakash, R. Pedarsani, and S. Avestimehr, "Coded computation over heterogeneous clusters," in *2017 IEEE International Symposium on Information Theory (ISIT)*, 2017, pp. 2408–2412.
- [4] S. Li, M. A. Maddah-Ali, and A. S. Avestimehr, "Coded distributed computing: Straggling servers and multistage dataflows," in *54th Annual Allerton Conference*. IEEE, 2016, pp. 164–171.
- [5] —, "Coding for distributed fog computing," *IEEE Commun. Mag.*, vol. 55, no. 4, pp. 34–40, 2017.
- [6] Y. Yang, P. Grover, and S. Kar, "Computing linear transformations with unreliable components," *IEEE Trans. Inf. Theory*, vol. 63, no. 6, pp. 3729–3756, 2017.
- [7] A. Vulimiri, P. B. Godfrey, R. Mittal, J. Sherry, S. Ratnasamy, and S. Shenker, "Low latency via redundancy," in *Proceedings of the ninth ACM conference on Emerging networking experiments and technologies*. ACM, 2013, pp. 283–294.
- [8] S. Wang, J. Liu, and N. Shroff, "Coded sparse matrix multiplication," *arXiv preprint arXiv:1802.03430*, 2018.
- [9] A. Mallick, M. Chaudhari, and G. Joshi, "Rateless codes for near-perfect load balancing in distributed matrix-vector multiplication," *arXiv preprint arXiv:1804.10331*, 2018.
- [10] A. Ramamoorthy, L. Tang, and P. O. Vontobel, "Universally decodable matrices for distributed matrix-vector multiplication," *arXiv preprint arXiv:1901.10674*, 2019.
- [11] Q. Yu, S. Li, N. Raviv, S. M. M. Kalan, M. Soltanolkotabi, and S. Avestimehr, "Lagrange coded computing: Optimal design for resiliency, security and privacy," *arXiv preprint arXiv:1806.00939*, 2018.
- [12] M. Rudow, K. Rashmi, and V. Guruswami, "A locality-based approach for coded computation," *arXiv preprint arXiv:2002.02440*, 2020.
- [13] M. Soleymani, H. Mahdaviifar, and A. S. Avestimehr, "Analog Lagrange Coded Computing," *IEEE Journal on Selected Areas in Information Theory*, vol. 2, no. 1, pp. 283–295, 2021.
- [14] R. Tandon, Q. Lei, A. G. Dimakis, and N. Karampatziakis, "Gradient coding: Avoiding stragglers in distributed learning," in *International Conference on Machine Learning*, 2017, pp. 3368–3376.
- [15] W. Halbawi, N. Azizan, F. Salehi, and B. Hassibi, "Improving distributed gradient descent using Reed-Solomon codes," in *2018 IEEE International Symposium on Information Theory (ISIT)*. IEEE, 2018, pp. 2027–2031.
- [16] N. Raviv, I. Tamo, R. Tandon, and A. G. Dimakis, "Gradient coding from cyclic MDS codes and expander graphs," *arXiv preprint arXiv:1707.03858*, 2017.
- [17] E. Ozfatura, D. Gunduz, and S. Ulukus, "Gradient coding with clustering and multi-message communication," *arXiv preprint arXiv:1903.01974*, 2019.
- [18] N. Charalambides, H. Mahdaviifar, and A. O. Hero, "Numerically stable binary gradient coding," in *2020 IEEE International Symposium on Information Theory (ISIT)*, 2020, pp. 2622–2627.
- [19] M. Ye and E. Abbe, "Communication-computation efficient gradient coding," *arXiv preprint arXiv:1802.03475*, 2018.
- [20] Z. Charles and D. Papailiopoulos, "Gradient coding via the stochastic block model," *arXiv preprint arXiv:1805.10378*, 2018.
- [21] Z. Charles, D. Papailiopoulos, and J. Ellenberg, "Approximate gradient coding via sparse random graphs," *arXiv preprint arXiv:1711.06771*, 2017.
- [22] H. Wang, Z. Charles, and D. Papailiopoulos, "Erasurehead: Distributed gradient descent without delays using approximate gradient coding," *arXiv preprint arXiv:1901.09671*, 2019.
- [23] R. Bitar, M. Wootters, and S. El Rouayheb, "Stochastic gradient coding for flexible straggler mitigation in distributed learning."
- [24] S. Wang, J. Liu, and N. Shroff, "Fundamental limits of approximate gradient coding," *arXiv preprint arXiv:1901.08166*, 2019.
- [25] S. Kadhe, O. Ozan Koyluoglu, and K. Ramchandran, "Gradient coding based on block designs for mitigating adversarial stragglers," *arXiv preprint arXiv:1904.13373*, 2019.
- [26] S. Horii, T. Yoshida, M. Kobayashi, and T. Matsushima, "Distributed stochastic gradient descent using ldgm codes," *arXiv preprint arXiv:1901.04668*, 2019.
- [27] L. Chen, H. Wang, Z. Charles, and D. Papailiopoulos, "Draco: Byzantine-resilient distributed training via redundant gradients," *arXiv preprint arXiv:1803.09877*, 2018.
- [28] N. Charalambides, M. Pilanci, and A. O. Hero, "Weighted gradient coding with leverage score sampling," in *ICASSP 2020-2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2020, pp. 5215–5219.
- [29] M. Zaharia, A. Konwinski, A. D. Joseph, R. H. Katz, and I. Stoica, "Improving mapreduce performance in heterogeneous environments."

- [30] S. El Rouayheb and K. Ramchandran, "Fractional repetition codes for repair in distributed storage systems," in *2010 48th Annual Allerton Conference on Communication, Control, and Computing (Allerton)*. IEEE, pp. 1510–1517.
- [31] M. V. Jamali, M. Soleymani, and H. Mahdavi, "Coded distributed computing: Performance limits and code designs," in *2019 IEEE Information Theory Workshop (ITW)*, 2019, pp. 1–5.
- [32] S. Li and S. Avestimehr, "Coded computing," *Foundations and Trends® in Communications and Information Theory*, vol. 17, no. 1, pp. 1–148, 2020. [Online]. Available: <http://dx.doi.org/10.1561/0100000103>
- [33] N. Charalambides, M. Pilanci, and A. O. Hero III, "Straggler robust distributed matrix inverse approximation," *arXiv preprint arXiv:2003.02948*, 2020.
- [34] Q. Yu, M. Maddah-Ali, and S. Avestimehr, "Polynomial codes: an optimal design for high-dimensional coded matrix multiplication," in *Advances in Neural Information Processing Systems*, 2017, pp. 4403–4413.
- [35] K. Lee, C. Suh, and K. Ramchandran, "High-dimensional coded matrix multiplication," in *IEEE Int. Symp. Inf. Theory (ISIT)*. IEEE, 2017, pp. 2418–2422.
- [36] Q. Yu, M. A. Maddah-Ali, and A. S. Avestimehr, "Straggler mitigation in distributed matrix multiplication: Fundamental limits and optimal coding," *IEEE Transactions on Information Theory*, vol. 66, no. 3, pp. 1920–1933, 2020.
- [37] Q. Yu and A. S. Avestimehr, "Entangled polynomial codes for secure, private, and batch distributed matrix multiplication: Breaking the "cubic" barrier," *arXiv preprint arXiv:2001.05101*, 2020.
- [38] M. Fahim, H. Jeong, F. Haddadpour, S. Dutta, V. Cadambe, and P. Grover, "On the optimal recovery threshold of coded matrix multiplication," in *2017 55th Annual Allerton Conference on Communication, Control, and Computing (Allerton)*. IEEE, 2017, pp. 1264–1270.
- [39] S. Dutta, M. Fahim, F. Haddadpour, H. Jeong, V. Cadambe, and P. Grover, "On the optimal recovery threshold of coded matrix multiplication," *IEEE Transactions on Information Theory*, vol. 66, no. 1, pp. 278–301, 2019.
- [40] M. Fahim and V. R. Cadambe, "Numerically stable polynomially coded computing," in *2019 IEEE International Symposium on Information Theory (ISIT)*. IEEE, 2019, pp. 3017–3021.
- [41] A. M. Subramaniam, A. Heidarzadeh, and K. R. Narayanan, "Random khatri-rao-product codes for numerically-stable distributed matrix multiplication," in *2019 57th Annual Allerton Conference on Communication, Control, and Computing (Allerton)*. IEEE, 2019, pp. 253–259.
- [42] B. Tegin, E. Hernandez, S. Rini, T. M. Duman *et al.*, "Straggler mitigation through unequal error protection for distributed approximate matrix multiplication," *arXiv preprint arXiv:2103.02928*, 2021.
- [43] S. Dutta, V. Cadambe, and P. Grover, "Short-dot: Computing large linear transforms distributedly using coded short dot products," in *Advances In Neural Information Processing Systems*, 2016, pp. 2100–2108.
- [44] F. Haddadpour and V. R. Cadambe, "Codes for distributed finite alphabet matrix-vector multiplication," in *2018 IEEE International Symposium on Information Theory (ISIT)*. IEEE, 2018, pp. 1625–1629.
- [45] B. Bartan and M. Pilanci, "Polar coded distributed matrix multiplication," *arXiv preprint arXiv:1901.06811*, 2019.
- [46] N. S. Ferdinand and S. C. Draper, "Anytime coding for distributed computation," in *2016 54th Annual Allerton Conference on Communication, Control, and Computing (Allerton)*. IEEE, 2016, pp. 954–960.
- [47] T. Jahani-Nezhad and M. A. Maddah-Ali, "Codedsketch: Coded distributed computation of approximated matrix multiplication," in *2019 IEEE International Symposium on Information Theory (ISIT)*. IEEE, 2019, pp. 2489–2493.
- [48] N. Charalambides, M. Pilanci, and A. O. Hero, "Approximate Weighted CR Coded Matrix Multiplication," in *ICASSP 2021 - 2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2021, pp. 5095–5099.
- [49] B. Tegin, E. Hernandez, S. Rini, T. M. Duman *et al.*, "Straggler mitigation through unequal error protection for distributed approximate matrix multiplication," *arXiv preprint arXiv:2103.02928*, 2021.
- [50] S. Li, S. M. M. Kalan, Q. Yu, M. Soltanolkotabi, and A. S. Avestimehr, "Polynomially coded regression: Optimal straggler mitigation via data encoding," *arXiv preprint arXiv:1805.09934*, 2018.
- [51] P. Drineas and R. Kannan, "Fast monte-carlo algorithms for approximate matrix multiplication," in *Proceedings of the 42nd IEEE symposium on Foundations of Computer Science*, 2001, p. 452.
- [52] P. Drineas, R. Kannan, and M. W. Mahoney, "Fast monte carlo algorithms for matrices i: Approximating matrix multiplication," *SIAM Journal on Computing*, vol. 36, no. 1, pp. 132–157, 2006.
- [53] —, "Fast monte carlo algorithms for matrices ii: Computing a low-rank approximation to a matrix," *SIAM Journal on computing*, vol. 36, no. 1, pp. 158–183, 2006.
- [54] W. Halbawi, Z. Liu, and B. Hassibi, "Balanced Reed-Solomon codes," in *2016 IEEE International Symposium on Information Theory (ISIT)*. IEEE, 2016, pp. 935–939.
- [55] H. T. Kung, "Fast evaluation and interpolation," 1973.
- [56] D. S. Papailiopoulos and A. G. Dimakis, "Locally repairable codes," *IEEE Transactions on Information Theory*, vol. 60, no. 10, pp. 5843–5855, 2014.
- [57] R. G. Gallager, "Low-density parity-check codes," *IRE Trans. Inf. Theory*, vol. 8, no. 1, pp. 21–28, 1962. [Online]. Available: <https://doi.org/10.1109/TIT.1962.1057683>
- [58] D. MacKay and R. Neal, "Near shannon limit performance of low density parity check codes," *Electronics Letters*, vol. 32, no. 18, pp. 1645–1646, 1996.
- [59] T. J. Richardson, A. Shokrollahi, and R. L. Urbanke, "Design of capacity-approaching irregular low-density parity-check codes," *IEEE Trans. Inform. Theory*, vol. 47, no. 2, pp. 619–637, 2001.
- [60] S. Shalev-Shwartz and S. Ben-David, *Understanding machine learning: From theory to algorithms*. Cambridge university press, 2014.
- [61] D. D. Lee and H. S. Seung, "Algorithms for non-negative matrix factorization," in *Advances in neural information processing systems*, 2001, pp. 556–562.
- [62] C.-J. Lin, "On the convergence of multiplicative update algorithms for nonnegative matrix factorization," *IEEE Transactions on Neural Networks*, vol. 18, no. 6, pp. 1589–1596, 2007.
- [63] —, "Projected gradient methods for nonnegative matrix factorization," *Neural computation*, vol. 19, no. 10, pp. 2756–2779, 2007.
- [64] N. B. Erichson, A. Mendible, S. Wihlbom, and J. N. Kutz, "Randomized nonnegative matrix factorization," *arXiv preprint arXiv:1711.02037*, 2017.
- [65] C. Eckart and G. M. Young, "The approximation of one matrix by another of lower rank," *Psychometrika*, vol. 1, pp. 211–218, 1936.
- [66] M. M. Kamani, F. Haddadpour, R. Forsati, and M. Mahdavi, "Efficient fair principal component analysis," *arXiv preprint arXiv:1911.04931*, 2019.
- [67] F. Ban, D. Woodruff, and R. Zhang, "Regularized weighted low rank approximation," in *Advances in Neural Information Processing Systems*, 2019, pp. 4059–4069.
- [68] M. Aharon, M. Elad, and A. Bruckstein, " k -SVD: An algorithm for designing overcomplete dictionaries for sparse representation," *IEEE Transactions on signal processing*, vol. 54, no. 11, pp. 4311–4322, 2006.