

A Simple Approach to Jointly Rank Passages and Select Relevant Sentences in the OBQA Context

Man Luo

Arizona State University
mluo26@asu.edu

Shuguang Chen

University of Houston
schen52@uh.edu

Chitta Baral

Arizona State University
chitta@asu.edu

Abstract

In the open question answering (OBQA) task, how to select the relevant information from a large corpus is a crucial problem for reasoning and inference. Some datasets (e.g., HotpotQA) mainly focus on testing the model’s reasoning ability at the sentence level. To overcome this challenge, many existing frameworks use a deep learning model to select relevant passages and then answer each question by matching a sentence in the corresponding passage. However, such frameworks require long inference time and fail to take advantage of the relationship between passages and sentences. In this work, we present a simple yet effective framework to address these problems by jointly ranking passages and selecting sentences. We propose consistency and similarity constraints to promote the correlation and interaction between passage ranking and sentence selection. In our experiments, we demonstrate that our framework can achieve competitive results and outperform the baseline by 28% in terms of exact matching of relevant sentences on the HotpotQA dataset.

1 Introduction

Open book question answering (OBQA) task aims to answer questions with respect to a given set of open book facts and common knowledge. This task has led to many useful and practical Natural Language Processing (NLP) applications such as search engines (Kwiatkowski et al., 2019) and dialogue systems (Reddy et al., 2019; Choi et al., 2018). Among several OBQA datasets (Dhingra et al., 2017; Mihaylov et al., 2018; Khot et al., 2020), HotpotQA (Yang et al., 2018) is more challenging because it requires 1) deeper reasoning with linguistic understanding across multiple passages, and 2) a system to output supporting facts to reach the answer.

To address this challenge, previous work (Fang et al., 2020; Tu et al., 2019; Groeneveld et al., 2020)

Question: The football manager who recruited David Beckham managed Manchester United during what timeframe?

Passage1, 1995–96 Manchester United F.C. season: The 1995–96 season was Manchester United’s fourth season in the Premier League, and their 21st consecutive season in the top division of English football. United finished the season by becoming the first English team to win the Double (league title and FA Cup) twice. *Their triumph was made all the more remarkable by the fact that Alex Ferguson had sold experienced players Paul Ince, Mark Hughes and Andrei Kanchelskis before the start of the season, and not made any major signings. Instead, he had drafted in young players like Nicky Butt, David Beckham, Paul Scholes and the Neville brothers, Gary and Phil.*

passage2, Alex Ferguson: *Sir Alexander Chapman Ferguson, CBE (born 31 December 1941) is a Scottish former football manager and player who managed Manchester United from 1986 to 2013. He is regarded by many players, managers and analysts to be one of the greatest and most successful managers of all time.*

Answer: from 1986 to 2013

Supporting facts: [{"1995-96 Manchester United F.C.season",2}, {"1995-96 Manchester United F.C. season",3}, {"AlexFerguson",0}]

Figure 1: An example from the HotpotQA dataset, where the question should be answered by combining supporting facts (SP) from two passages. In the SP, the first string refers to the title of passage, and the second integer means the index of the sentence.

mainly focuses on how to select the most relevant sentences with a two-step pipeline: identify the most relevant passage and then match each question with a single sentence in the corresponding passage. This approach requires long inference time and neglects the relationship between passages and sentences. Intuitively, the passage ranking and selecting relevant sentences affect each other. If a passage has a high score, then some sentences in the passage should be selected as relevant. On the other hand, if a passage is scored low, then all sentences in the passage should be classified as irrelevant.

In this paper, we describe a Two-in-One frame-

work that aims to promote the correlation and interaction between passages and sentences. We use both passage ranking and sentence selection to jointly train the model. More specifically, the model, based on the transformer (Vaswani et al., 2017) structure, generates passage representations and sentence representation simultaneously. Such representations are then fed to a passage ranker and sentence classifier, respectively. Then we promote the interaction between passage ranking and sentence classification using consistency and similarity constraints. The consistency constraint is to enforce that the relevant passage includes relevant sentences, while the similarity constraint enables the model to represent relevant passages based on the relevant sentence instead of irrelevant ones. By conducting experiments on the HotpotQA datasets, we demonstrate that our framework, with a single model and fewer parameters, can achieve competitive results and boost the performance of baselines by 28%.

To summarize, we make the following contributions:

1. We study the joint learning of passage ranking and sentence selection with consistency and similarity constraints to model the relationship between passages and sentences.
2. We conduct experiments on the HotpotQA datasets and demonstrate the effectiveness of our approach for deeper reasoning in the context of the OBQA task.

2 Related Work

HotpotQA Systems A straightforward way to solve the HotpotQA challenge is to build a hierarchical system (?), meaning a system first ranks relevant passages and then identifies relevant sentences from the selected passages. Such a hierarchical system involves multiple models thus requires long inference time. More importantly, such a system only leverages the impact of passage ranking on sentence selection but ignores the influence of the sentence selection on the passage ranking. Our framework achieves these two tasks by one model and facilitates the interaction by two constraints. Groeneveld et al. (2020) proposes a pipeline based on three BERT models (Devlin et al., 2019) to solve the HotpotQA challenge. The system first selects relevant sentences and then detects the answer span, finally, identifies the relevant sentences according to the answer span. Though the pipeline is strong,

the way it solves the problem is opposite to human beings. We, humans, identify the relevant sentences, and then give the answer span. Many existing works demonstrate the effectiveness of graph neural networks(GNN) on HotpotQA challenge (Fang et al., 2020; Tu et al., 2019). Since GNN is out of the scope of this work, we do not compare it with these frameworks.

Joint Model for QA Joint learning has been studied in Question Answering Tasks. Deng et al. (2020) proposes a joint model to tackle community question answering such that the model can simultaneously select the set of correct answers from candidates and generate an abstractive summary for each selected answer. Sun et al. (2019) proposes a generative collaborative network to answer questions and generate questions. The main difference between our work and previous ones are in two sense (1) our proposed model uses the shared encoder to tackle two classification tasks (2) besides the loss function to optimize individual tasks, we also propose two constraints that utilize the relation between these two tasks.

3 HotpotQA Dataset

HotpotQA dataset (Yang et al., 2018) is designed for multi-hop reasoning question answering tasks, i.e. to reason over multiple documents and answer questions (see Figure 1). Particularly, HotpotQA challenge requires reasoning over two passages. Furthermore, to guide the system to perform meaningful and explainable reasoning, the dataset also provides supporting facts(SP) that reach the answer to the question. HotpotQA provide two challenging settings: in **Fullwiki setting**, a system needs to rank passage from the entire wiki corpus; in **Distractor setting**, 10 distracting passages (including relevant ones) are given for each question. In this work, we mainly focus on the latter setting. From the training set, we find that 70.4% questions have exactly two supporting facts (SP), and 60.0% of SP are the first sentence of passages.

4 Method

4.1 Task Formulation

We aim to jointly conduct two tasks, passage ranking and supporting facts selection for HotpotQA. Given a question Q , the goal is to simultaneously rank the set of candidates $A = \{a_1, \dots, a_i\}$ and iden-

tify the supporting facts for the TopK¹ passages.

4.2 Model: Two-in-One Framework

We introduce the proposed joint model for passage ranking and support fact selection, Two-in-One, which uses state-of-the-art transformer-based model (Vaswani et al., 2017) to encode questions and contexts. In this work, we use RoBERTa (Liu et al., 2019), however, any other variants like ELECTRA (Clark et al., 2020) can be applied in this framework. The model architecture is given in Figure 2. On top of the encoder, there are two MLP layers to score passages and sentences, respectively. In details, given a question and a passage, we firstly create an input to feed through RoBERTa (Liu et al., 2019) by concatenating the question and the passage as follows, $\langle s \rangle Q \langle /s \rangle S_1 \langle /s \rangle S_2 \dots \langle /s \rangle S_k \langle /s \rangle$ where $\langle s \rangle$ and $\langle /s \rangle$ are special tokens in RoBERTa, S_i is the i^{th} sentence from a passage. We take $\langle s \rangle$ as the contextual representation for passage ranking and the $\langle /s \rangle$ in front of each sentence for sentence selection. The passage ranker and the sentence classifier have identical structure but different weights, which are two-layer Multiple-Layer Perceptron(MLP) with the last layer predicting a logit.

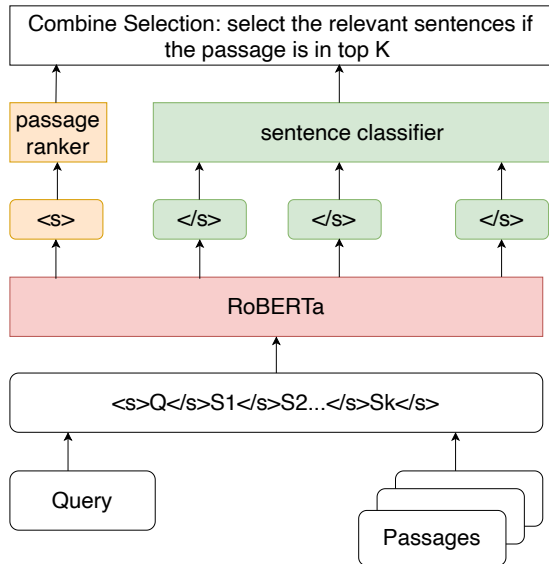


Figure 2: The architecture of Two-in-One model for passage ranking and relevant sentence selection. For HotpotQA dataset, K is two.

The model is jointly trained by passage loss and sentence loss. In detail, during the training time,

¹The value of K depends on the task, and for HotpotQA, K is 2.

we assign the relevant passages and sentences with ground truth score 1 while irrelevant passages and sentences with ground truth score -1. Then, Mean Square Error(MSE) loss is applied to calculate the passage and sentence loss as follows,

$$\begin{aligned} \mathcal{L}^{pass} &= (\hat{y} - y)^2, \\ \mathcal{L}^{sent} &= \sum_{i=1}^K (\hat{x}_i - x_i)^2, \\ \mathcal{L}^{joint} &= \mathcal{L}^{pass} + \mathcal{L}^{sent}, \end{aligned} \quad (1)$$

where \hat{y} is the predicted passage score, y is the ground truth score of the passage, \hat{x}_i and x_i are the predicted sentence score and ground truth score of S_i , respectively, and K is the total number of sentences in the passage. We simply sum up the passage loss and sentence loss to jointly update model parameters.

During the inference time, passages are ranked based on the logits given by the passage ranker. For the sentence classification, we take 0² as the threshold to classify the relevance of each sentence: if the logit given by the sentence classifier is larger than 0, then it is relevant; otherwise, irrelevant.

Next, we introduce two constraints to facilitate the interaction between these two tasks.

4.3 Consistency Constraint

Intuitively, if a passage is relevant to the question, then there are some sentences from the passages that are relevant; on the other hand, if a passage is not relevant to the answer, then there should not be relevant sentences inside the passage. Thus, we propose a consistency constraint over the passage ranker and sentence classifier to minimize the gap between the passage score and the maximum sentence score. The loss function is as follows:

$$\mathcal{L}^{con} = (\hat{y} - \max(\mathbf{x}))^2, \quad (2)$$

where $\mathbf{x} = [\hat{x}_1 \dots \hat{x}_n]$ denotes a stack of predicted sentence scores.

4.4 Similarity Constraint

As we have shown at the beginning of this section, the $\langle s \rangle$ is used to get the passage score, and each $\langle /s \rangle$ is used to get the sentence score. Intuitively, the similarity between $\langle s \rangle$ of a relevant passage is more close to $\langle /s \rangle$ of a relevant sentence than to

²The reason for threshold “0” is that it is the middle value of 1 and -1, which are labels for relevant and irrelevant sentences in the training time.

$\langle /s \rangle$ of any irrelevant sentence. To enforce this constraint, we use triplet as follows:

$$\mathcal{L}^{sim} = \frac{1}{N \cdot M} \sum_{i=1}^N \sum_{j=1}^M (\max\{d(v^p, v_i^r) - d(v^p, v_j^n) + m, 0\}), \quad (3)$$

where $d(\cdot, \cdot)$ is the Euclidian similarity, N is the number of relevant sentences, M is the number of irrelevant sentences, v^p, v^r, v^n is the vector representation of the relevant passage, relevant sentence, and irrelevant sentence respectively. In practice, we set the margin m at 1 and find optimum results. We train our model in an end-to-end fashion by combining \mathcal{L}^{joint} , \mathcal{L}^{con} and \mathcal{L}^{dis} .

5 Experiment

In this section, we first describe the training setup, and then introduce two baselines. We evaluate the two baselines and our proposed joint model on the HotpotQA dataset. Yang et al. (2018) provides two metrics for supporting facts evaluation, exact matching (EM) and F1 score. We also present the precision and recall of SP, and the exact matching of passages for detailed comparison. Meanwhile, we compare our model with the QUARK system (Groeneveld et al., 2020). Lastly, we conduct an ablation study to show the effectiveness of the proposed similarity loss and consistent loss.

5.1 Experiment Setup

We use Huggingface (Wolf et al., 2020) and Pytorch (Paszke et al., 2019) libraries to implement each model. For all experiments, we use 4 TX1080 and V100 NVIDIA, and all models are trained in 5 epochs with a learning rate of 1e-5, batch size of 32. We set the maximum input length in training to be 512. We use 1 GPU to test models with a batch size of 16, and use the maximum length as training to encode the input.

5.2 Baseline

To have comparable size of the model, two baselines have similar structure as our Two-in-One model. Specifically, Two-in-One model has two classification heads, whereas each of the baselines has only one classification head. One baseline is to select relevant sentences, and the other one is to rank passages.

Sentence Selection Baseline The first baseline is to select relevant sentence, and particularly, we use a RoBERTa-large with an additional MLP trained on question and a single sentence: $\langle s \rangle Q \langle /s \rangle S \langle /s \rangle$, where Q is a question and S is a sentence. Although this model can not predict the relevant passage directly, based on the assumption that relevant passages include relevant sentences, we pick up two relevant passages based on the top2 sentence scores. When the top1 and the top2 sentences are from the same passage, we continue searching based on the ranking sentence scores until the second document comes up. Then the supporting facts are those sentences from the relevant documents with a score larger than 0.

Passage Selection Baseline In the second baseline, again, we use RoBERTa-large but with the goal of passage selection. The input to the model is a question and a passage: $\langle s \rangle Q \langle /s \rangle P \langle /s \rangle$. Since such a model can not predict sentence relevancy score, based on the statistic of HotpotQA that majority of training set has two supporting facts and the most of them are the first sentences in a paragraph (see Section 3), we select supporting facts by the first sentence of the top1 and top2 passages.

5.3 Result

As we see from Table 1, Two-in-One framework outperforms two baselines with large-margin improvement in all metrics, especially we see a significant improvement on the EM of SP. Our framework outperforms the Sentence Selection Baseline by 20% and 4.5% improvement on the precision and recall of SP, respectively, which demonstrates that jointly learning is beneficial for sentence classification. Also, jointly learning benefits for the passage ranking by comparing Two-in-One with Passage Selection Baseline on the EM of passage. Besides, we also compare Two-in-One with QUARK (Groeneveld et al., 2020), a framework involving three BERT models, (roughly three times larger than ours). Two-in-One achieves comparable results in terms of F1 and EM of SP regardless of much less parameters in our system. Notice that we do not have the other three values because they are not presented in their original paper.

5.4 Ablation

To evaluate the impacts of the consistency constraint and the similarity constraint, we conduct experiments with and without constraints. From

Model	# Parameters	SP Precision	SP Recall	SP F1	SP EM	Passage EM
Sentence Selection Baseline	~330M	67.96	81.05	72.02	28.12	69.70
Passage Selection Baseline	~330M	66.43	56.55	60.20	27.30	90.44
Two-in-One + sim	~330M	88.06	85.68	85.82	59.17	91.11
QUARK	~1020M*	N/A	N/A	86.97	60.72	N/A

Table 1: The Results for two baselines and Two-in-One model with similarity constraint on dev set of HotpotQA distracting dataset. The last row, QUARK (Groeneveld et al., 2020), is the result of a framework with 3 BERT models. SP stands for supporting facts and EM for Exact Match. * refers to estimation.

Model	SP F1	SP EM	Passage EM
Two-in-One	85.52	58.67	90.93
Two-in-One + con	85.55	58.98	90.29
Two-in-One + sim	85.82	59.17	91.11
Two-in-One + con + sim	85.63	58.74	90.78

Table 2: The results for Two-in-One model with or without consistency and similarity constraints.

Table 2, we see that both consistency constraint and similarity constraint improve F1 and EM of SP and the similarity constraint also improves the EM of passages. We found that without any constraint, though the model can rank the passages well, it suffers from distinguishing between close sentences. The similarity constraint addresses this issue in some sense by maximizing the distance between relevant and irrelevant sentences.

To better understand the impact of consistency constraint, we analyze the consistency between the passage score and the sentence score. The prediction of a model is consistent if the passage score agrees with the sentence scores and the agreement can be measured by the gap between the passage score and the maximum sentence score among all sentences in that passage. We observe that by adding the consistency constraint, the gap between the passage score and the sentence score is much smaller than without the consistency constraint as shown in Table 3. It demonstrates that the constraint is beneficial for consistent prediction.

Model	Mean Gap
Two-in-One	0.11
Two-in-One + con	0.03

Table 3: The comparison between the mean gap of passage score and sentence score.

6 Discussion

In this work, we only evaluate the Two-in-One model on HotpotQA dataset since to our knowledge, it is the only publicly available dataset that

provides supporting facts to a question. Nevertheless, evaluation on one dataset limits the generalization capacity of our model. A potential solution to address the dataset issue is selecting the supporting facts based on the answer. Specifically, given a passage, a question, and an answer, if any sentence in the passage contains the answer, then it is a supporting fact, otherwise, it is not. With this assumption, we can evaluate Two-in-One models on more QA datasets such as NaturalQuestions (Kwiatkowski et al., 2019).

7 Conclusion

In this work, we present a Two-in-One framework to answer questions with factoid knowledge in the task of the OBQA. By jointly training with passage ranking and sentence selection, the model is capable of capturing the correlation between passages and sentences and reasoning over complex context with a deeper linguistic understanding. We show the effectiveness of our proposed framework by evaluating the model performance on the HotpotQA datasets, concluding that jointly modeling passage ranking and sentence selection is beneficial for the task of OBQA. Compared to the existing QA systems, our framework, with fewer parameters, can achieve competitive results. In the future, we will explore the relationship among passages, supporting sentences, and answers in modeling and generalize our method on more datasets.

References

- Eunsol Choi, He He, Mohit Iyyer, Mark Yatskar, Wentaou Yih, Yejin Choi, Percy Liang, and Luke Zettlemoyer. 2018. [QuAC: Question answering in context](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2174–2184, Brussels, Belgium. Association for Computational Linguistics.
- Kevin Clark, Minh-Thang Luong, Quoc V. Le, and Christopher D. Manning. 2020. [ELECTRA: pre-training text encoders as discriminators rather than](#)

- generators. In *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net.
- Yang Deng, Wai Lam, Yuexiang Xie, Daoyuan Chen, Yaliang Li, Min Yang, and Ying Shen. 2020. [Joint learning of answer selection and answer summary generation in community question answering](#). In *The Thirty-Fourth AAAI Conference on Artificial Intelligence, AAAI 2020, The Thirty-Second Innovative Applications of Artificial Intelligence Conference, IAAI 2020, The Tenth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2020, New York, NY, USA, February 7-12, 2020*, pages 7651–7658. AAAI Press.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Bhuvan Dhingra, Kathryn Mazaitis, and William W. Cohen. 2017. [Quasar: Datasets for question answering by search and reading](#). *ArXiv preprint*, abs/1707.03904.
- Yuwei Fang, Siqi Sun, Zhe Gan, Rohit Pillai, Shuhang Wang, and Jingjing Liu. 2020. [Hierarchical graph network for multi-hop question answering](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 8823–8838, Online. Association for Computational Linguistics.
- Dirk Groeneveld, Tushar Khot, Mausam, and Ashish Sabharwal. 2020. [A simple yet strong pipeline for HotpotQA](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 8839–8845, Online. Association for Computational Linguistics.
- Tushar Khot, Peter Clark, Michal Guerquin, Peter Jansen, and Ashish Sabharwal. 2020. [QASC: A dataset for question answering via sentence composition](#). In *The Thirty-Fourth AAAI Conference on Artificial Intelligence, AAAI 2020, The Thirty-Second Innovative Applications of Artificial Intelligence Conference, IAAI 2020, The Tenth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2020, New York, NY, USA, February 7-12, 2020*, pages 8082–8090. AAAI Press.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, Kristina Toutanova, Llion Jones, Matthew Kelcey, Ming-Wei Chang, Andrew M. Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. 2019. [Natural questions: A benchmark for question answering research](#). *Transactions of the Association for Computational Linguistics*, 7:452–466.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. [Roberta: A robustly optimized bert pretraining approach](#). *ArXiv preprint*, abs/1907.11692.
- Todor Mihaylov, Peter Clark, Tushar Khot, and Ashish Sabharwal. 2018. [Can a suit of armor conduct electricity? a new dataset for open book question answering](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2381–2391, Brussels, Belgium. Association for Computational Linguistics.
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Köpf, Edward Yang, Zachary DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. 2019. [Pytorch: An imperative style, high-performance deep learning library](#). In *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pages 8024–8035.
- Siva Reddy, Danqi Chen, and Christopher D. Manning. 2019. [CoQA: A conversational question answering challenge](#). *Transactions of the Association for Computational Linguistics*, 7:249–266.
- Yibo Sun, Duyu Tang, Nan Duan, Tao Qin, Shujie Liu, Zhao Yan, Ming Zhou, Yuanhua Lv, Wenpeng Yin, Xiaocheng Feng, et al. 2019. [Joint learning of question answering and question generation](#). *IEEE Transactions on Knowledge and Data Engineering*, 32(5):971–982.
- Ming Tu, Kevin Huang, Guangtao Wang, Jing Huang, X. He, and Bowen Zhou. 2019. [Select, answer and explain: Interpretable multi-hop reading comprehension over multiple documents](#). *ArXiv preprint*, abs/1911.00484.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. [Attention is all you need](#). In *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, pages 5998–6008.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. 2020. [Transformers: State-of-the-art natural language processing](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45, Online. Association for Computational Linguistics.

Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. 2018. [HotpotQA: A dataset for diverse, explainable multi-hop question answering](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2369–2380, Brussels, Belgium. Association for Computational Linguistics.