

Space-Time Tradeoffs for Answering Boolean Conjunctive Queries

Shaleen Deep

Department of Computer Sciences, University of Wisconsin-Madison, Madison, Wisconsin, USA
shaleen@cs.wisc.edu

Xiao Hu

Department of Computer Sciences, Duke University, Durham, North Carolina, USA
xh102@cs.duke.edu

Paraschos Koutris

Department of Computer Sciences, University of Wisconsin-Madison, Madison, Wisconsin, USA
paris@cs.wisc.edu

Abstract

In this paper, we investigate space-time tradeoffs for answering boolean conjunctive queries. The goal is to create a data structure in an initial preprocessing phase and use it for answering (multiple) queries. Previous work has developed data structures that trade off space usage for answering time and has proved conditional space lower bounds for queries of practical interest such as the path and triangle query. However, most of these results cater to only those queries, lack a comprehensive framework, and are not generalizable. The isolated treatment of these queries also fails to utilize the connections with extensive research on related problems within the database community. The key insight in this work is to exploit the formalism of relational algebra by casting the problems as answering join queries over a relational database. Using the notion of boolean *adorned queries* and *access patterns*, we propose a unified framework that captures several widely studied algorithmic problems. Our main contribution is three-fold. First, we present an algorithm that recovers existing space-time tradeoffs for several problems. The algorithm is based on an application of the *join size bound* to capture the space usage of our data structure. We combine our data structure with *query decomposition* techniques to further improve the tradeoffs and show that it is readily extensible to queries with negation. Second, we falsify two conjectures proposed in the existing literature that relates to the space-time lower bound for path queries and triangle detection by proposing an unexpectedly better algorithm. This result opens a new avenue for improving several algorithmic results that have so far been assumed to be (conditionally) optimal. Finally, we prove new conditional space-time lower bounds for star and path queries.

1 Introduction

Recent work has made remarkable progress in developing data structures and algorithms for answering set intersection problems [13], reachability oracles and directed reachability [4, 3, 10], histogram indexing [7, 19], and problems related to document retrieval [2, 21]. This class of problems splits an algorithmic task into two phases: the *preprocessing phase*, which computes a space-efficient data structure, and the *answering phase*, which uses the data structure to answer the requests to minimize the answering time. A fundamental algorithmic question related to these problems is the tradeoff between the space S necessary for data structures and the answering time T for requests.

For example, consider the 2-Set Disjointness problem: given a universe of elements U and a collection of m sets $C_1, \dots, C_m \subseteq U$, we want to create a data structure such that for any pair of integers $1 \leq i, j \leq m$, we can efficiently decide whether $C_i \cap C_j$ is empty or not. Previous work [10, 13] has shown that the space-time tradeoff for 2-Set Disjointness is captured by the equation $S \cdot T^2 = N^2$, where N is the total size of all sets. The data structure obtained is conjectured to be optimal [13], and its optimality was used to develop



© S. Deep, X. Hu and P. Koutris;
 licensed under Creative Commons License CC-BY

Leibniz International Proceedings in Informatics

LIPICs Schloss Dagstuhl – Leibniz-Zentrum für Informatik, Dagstuhl Publishing, Germany

conditional lower bounds for other problems, such as approximate distance oracles [4, 3]. Similar tradeoffs have been independently established for other data structure problems as well. In the k -Reachability problem [13, 9] we are given as an input a directed graph $G = (V, E)$, an arbitrary pair of vertices u, v , and the goal is to decide whether there exists a path of length k between u and v . In the edge triangle detection problem [13], we are given an input undirected graph $G = (V, E)$, the goal is to develop a data structure that takes space S and can answer in time T whether a given edge $e \in E$ participates in a triangle or not. Each of these problems has been studied in isolation and, as a result, the algorithmic solutions are not generalizable due to a lack of comprehensive framework.

In this paper, we cast many of the above problems into answering *Conjunctive Queries* (CQs) over a relational database. CQs are a powerful class of relational queries with widespread applications in data analytics and graph exploration [33, 32, 11]. For example, by using the relation $R(x, y)$ to encode that element x belongs to set y , 2-Set Disjointness can be captured by the following CQ: $\varphi(y_1, y_2) = \exists_x R(x, y_1) \wedge R(x, y_2)$. As we will see later, k -Reachability can also be naturally captured by a CQ.

The insight of casting data structure problems into CQs over a database allows for a unified treatment for developing algorithms within the same framework, which in turn allows for improved algorithms and data structures. In particular, we can leverage the techniques developed by the data management community through a long line of research on efficient join evaluation [34, 25, 24], including worst-case optimal join algorithms [24] and tree decompositions [14, 28]. The use of these techniques has been a subject of previous work [1, 15, 11, 26, 18, 17] for enumerating query results under static and dynamic settings. In this paper, we build upon the aforementioned techniques to develop a framework that allows us to obtain general space-time tradeoffs for any Boolean CQ (a Boolean CQ is one that outputs only true or false). As a consequence, we recover state-of-the-art tradeoffs for several existing problems (e.g., 2-Set Disjointness as well as its generalization k -Set Disjointness and k -Reachability) as special cases of the general tradeoff. We can even obtain improved tradeoffs for some specific problems, such as edge triangles detection, thus falsifying existing conjectures.

Our Contribution. We summarize our main technical contributions below.

1. **A Comprehensive Framework.** We propose a unified framework that captures several widely-studied data structure problems. More specifically, we resort to the formalism of CQs and the notion of *Boolean adorned queries*, where the values of some variables in the query are fixed by the user (denoted as an *access pattern*), and aim to evaluate the Boolean query. We then show how this framework captures the 2-Set Disjointness and k -Reachability problems. Our first main result (**Theorem 7**) is an algorithm that builds a data structure to answer any Boolean CQ under a specific access pattern. Importantly, the data structure can be tuned to trade off space for answering time, thus capturing the full continuum between optimal space and answering time. At one extreme, the data structure achieves constant answering time by explicitly storing all possible answers. At the other extreme, the data structure stores nothing, but we execute each request from scratch. We show how to recover existing and new tradeoffs using this general framework. The first main result may sometimes lead to suboptimal tradeoffs since it does not take into account the structural properties of the query. Our second main result (**Theorem 13**) combines tree decompositions of the query structure with access patterns to improve space efficiency. We then show how this algorithm can handle Boolean CQs with negation.
2. **Improved Algorithms.** In addition to the main result above, we explicitly improve the best-known space-time tradeoff for the k -Reachability problem for $k \geq 4$. For any $k \geq 2$,

the tradeoff of $S \cdot T^{2/(k-1)} = O(|E|^2)$ was conjectured to be optimal by [13], where $|E|$ is the number of edges in the graph, and was used to conditionally prove other lower bounds on space-time tradeoffs. We show that for a regime of answer time T , it can be improved to $S \cdot T^{2/(k-2)} = O(|E|^2)$, thus breaking the conjecture. To the best of our knowledge, this is the first non-trivial improvement for the k -Reachability problem. We also refute a lower bound conjecture for the edge triangles detection problem established by [13].

3. **Conditional Lower Bounds.** Finally, we show a reduction between lower bounds for the problem of k -Set Disjointness for different values of k , which generalizes the 2-Set Disjointness to computing the intersection between k given sets, for $k \geq 2$.

Organization. We introduce the basic terminology and problem definition in Section 2 and Section 3. We present our main results for Boolean adorned queries in Section 4 and our improved result for path queries in Section 5. We discuss the lower bounds and related work in Section 6 and Section 7, and finally conclude in Section 8 with promising future research directions and open problems.

2 Preliminaries

In this section we present the basic notation and terminology.

Data Model. A schema $\mathbf{x} = (x_1, \dots, x_n)$ is a non-empty ordered set of distinct variables. Each variable x_i has a discrete domain $\mathbf{dom}(x_i)$. A tuple t over schema \mathbf{x} is an element from $\mathbf{dom}(\mathbf{x}) = \mathbf{dom}(x_1) \times \dots \times \mathbf{dom}(x_n)$. A relation R over schema \mathbf{x} (denoted $R(\mathbf{x})$) is a function $R : \mathbf{dom}(\mathbf{x}) \rightarrow \mathbb{Z}$ such that the multiplicity $R(t)$ is non-zero for finitely many t . A tuple t exists in R , denoted by $t \in R$, if $R(t) > 0$. The size of relation R , denoted as $|R|$, is the size of set $\{t \mid t \in R\}$. A database D is a set of relations and the size of the database $|D|$ is the sum of sizes of all its relations. Given a tuple t over schema \mathbf{x} and a set of variables $\mathbf{s} \subseteq \mathbf{x}$, $t[\mathbf{s}]$ denotes the restriction of t to \mathbf{s} and the values of $t[\mathbf{s}]$ follows the same variable ordering as \mathbf{s} . We also define the *selection* operator $\sigma_{\mathbf{s}=t}(R) = \{u \in R \mid u[\mathbf{s}] = t\}$ and *projection* operator $\pi_{\mathbf{s}}(R) = \{u[\mathbf{s}] \mid u \in R\}$.

Conjunctive Queries. A *Conjunctive Query* (CQ) is an expression of the form

$$\varphi(\mathbf{y}) = \exists_{\mathbf{z}} R_1(\mathbf{x}_1) \wedge R_2(\mathbf{x}_2) \wedge \dots \wedge R_n(\mathbf{x}_n).$$

Expressions $\varphi(\mathbf{y}), R_1(\mathbf{x}_1), R_2(\mathbf{x}_2), \dots, R_n(\mathbf{x}_n)$ are called *atoms* or *relations*. The atom $\varphi(\mathbf{y})$ is the *head* of the query, while the atoms $R_i(\mathbf{x}_i)$ form the *body*. Here $\mathbf{vars}(\varphi)$ is the set of all variables occurring in φ , i.e. $\mathbf{y} \cup \mathbf{z} \cup \mathbf{x}_1 \cup \dots \cup \mathbf{x}_n$. The *existential* quantified variables \mathbf{z} is the set of variables $\mathbf{vars}(\varphi) \setminus \mathbf{y}$. Throughout the paper, we will omit the existential quantified part whenever \mathbf{y} and \mathbf{x}_i are mentioned in the query. A CQ is *full* if every variable in the body appears also in the head (a.k.a. *quantifier-free*), and *Boolean* if the head contains no variables, i.e. it is of the form $\varphi()$ (a.k.a. *fully-quantified*). We will typically use the symbols x, y, z, \dots to denote variables, and a, b, c, \dots to denote constants. Given an input database D , we use $\varphi(D)$ to denote the result of the query φ over the database. In this paper, we will consider CQs that have no constants and no repeated variables in the same atom. Such a query can be represented equivalently as a *hypergraph* $\mathcal{H}_\varphi = (\mathcal{V}_\varphi, \mathcal{E}_\varphi)$, where \mathcal{V}_φ is the set of variables, and for each hyperedge $F \in \mathcal{E}_\varphi$ there exists a relation R_F with variables F .

► **Example 1.** Suppose that we have a directed graph G that is represented through a binary relation $R(x, y)$: this means that there exists an edge from node x to node y . We can compute the pairs of nodes that are connected by a directed path of length k using the following CQ, which we call a *path query*: $P_k(x_1, x_{k+1}) = R(x_1, x_2) \wedge R(x_2, x_3) \wedge \dots \wedge R(x_k, x_{k+1})$.

A CQ with negation, denoted as CQ^\neg , is a CQ where some of the atoms can be negative, i.e., $\neg R_i(\mathbf{x}_i)$ is allowed. For $\varphi \in CQ^\neg$, we denote by φ^+ the conjunction of the positive atoms in φ . A CQ^\neg is said to be *safe* if every variable appears in at least some positive atom. In this paper, we restrict our scope to class of safe CQ^\neg , a standard assumption [31, 23] ensuring that query results are well-defined and do not depend on domains.

Join Size Bounds. Let $\mathcal{H} = (\mathcal{V}, \mathcal{E})$ be a hypergraph. A weight assignment $\mathbf{u} = (u_F)_{F \in \mathcal{E}}$ is called a *fractional edge cover* of $S \subseteq \mathcal{V}$ if (i) for every $F \in \mathcal{E}$, $u_F \geq 0$ and (ii) for every $x \in S$, $\sum_{F: x \in F} u_F \geq 1$. The *fractional edge cover number* of S , denoted by $\rho_{\mathcal{H}}^*(S)$ is the minimum of $\sum_{F \in \mathcal{E}} u_F$ over all fractional edge covers of S . We write $\rho^*(\mathcal{H}) = \rho_{\mathcal{H}}^*(\mathcal{V})$. In a celebrated result, Atserias, Grohe and Marx [5] proved that for every fractional edge cover \mathbf{u} of \mathcal{V} , the size of join result is bounded by the *AGM inequality*:

$$|\bowtie_{F \in \mathcal{E}} R_F| \leq \prod_{F \in \mathcal{E}} |R_F|^{u_F}$$

The above bound is constructive [25, 24]: there exists an algorithm that computes the result of $\bowtie_{F \in \mathcal{E}} R_F$ in $O(\prod_{F \in \mathcal{E}} |R_F|^{u_F})$ time for every fractional edge cover \mathbf{u} of \mathcal{V} .

Tree Decompositions. Let $\mathcal{H} = (\mathcal{V}, \mathcal{E})$ be a hypergraph of a CQ φ . A *tree decomposition* of \mathcal{H} is a tuple $(\mathcal{T}, (\mathcal{B}_t)_{t \in V(\mathcal{T})})$ where \mathcal{T} is a tree, and every \mathcal{B}_t is a subset of \mathcal{V} , called the *bag* of t , such that

- Each edge in \mathcal{E} is contained in some bag; and
- For each variable $x \in \mathcal{V}$, the set of nodes $\{t \mid x \in \mathcal{B}_t\}$ form a connected subtree of \mathcal{T} .

The *fractional hypertree width* of a decomposition is defined as $\max_{t \in V(\mathcal{T})} \rho^*(\mathcal{B}_t)$, where $\rho^*(\mathcal{B}_t)$ is the minimum fractional edge cover of the vertices in \mathcal{B}_t . The fractional hypertree width of a query φ , denoted $\mathbf{fhw}(\varphi)$, is the minimum fractional hypertree width among all tree decompositions of its hypergraph. We say that a query is *acyclic* if $\mathbf{fhw}(\varphi) = 1$.

Computational Model. To measure the running time of our algorithms, we will use the uniform-cost RAM model [16], where data values and pointers to databases are of constant size. Throughout the paper, all complexity results are with respect to data complexity, where the query is assumed fixed. Each relation R over schema \mathbf{x} is implemented via a data structure that stores all entries $t \in R$ in $O(|R|)$ space, which supports look-up, insertion, and deletion entries in $O(1)$ time. For a schema $\mathbf{s} \subseteq \mathbf{x}$, we use an index structure that for some t defined over \mathbf{s} can (i) check if $t \in \pi_{\mathbf{s}}(R)$; and (ii) return $|\sigma_{\mathbf{s}=t}(R)|$ in constant time.

3 Framework

In this section, we discuss the concept of adorned queries and present our framework.

3.1 Adorned Queries

In order to model different access patterns, we will use the concept of *adorned queries* introduced by [30]. In an adorned query, each variable in the head of the query is associated with a binding type, which can be either *bound* (b) or *free* (f). We denote this as $\varphi^\eta(x_1, \dots, x_k)$, where $\eta \in \{\mathbf{b}, \mathbf{f}\}^k$ is called the *access pattern*. The access pattern tells us for which variables the user must provide a value as input. Concretely, let x_1, x_2, \dots, x_ℓ be the bound variables. An instantiation of the bound variables to constants, such as $\{x_i \leftarrow a_i : i \in \{1, 2, \dots, \ell\}\}$, is an *access request*: we need to return the query results where we have replaced each bound variable x_i with the corresponding constant a_i . In the next few examples, we demonstrate how to capture several data structure problems by adorned queries.

► **Example 2** (Set Disjointness and Set Intersection). In the set disjointness problem, we are given m sets S_1, \dots, S_m drawn from the same universe U . Let $N = \sum_{i=1}^m |S_i|$ be the total size of input sets. Each access request is a pair of indexes (i, j) , $1 \leq i, j \leq m$, for which we need to decide whether $S_i \cap S_j$ is empty or not. To cast this problem as an adorned query, we encode the family of sets as a binary relation $R(x, y)$, such that element x belongs to set y . Note that the relation will have size N . Then, the set disjointness problem corresponds to:

$$\varphi^{\text{bb}}(y, z) = R(x, y) \wedge R(x, z).$$

An access request in this case specifies two sets $y = S_i, z = S_j$, and issues the (Boolean) query $\varphi() = R(x, S_i) \wedge R(x, S_j)$.

In the related set intersection problem, given a pair of indexes (i, j) for $1 \leq i, j \leq m$, we instead want to enumerate the elements in the intersection $S_i \cap S_j$, which can be captured by the following adorned query: $\varphi^{\text{bbf}}(y, z, x) = R(x, y) \wedge R(x, z)$.

► **Example 3** (k -Set Disjointness). The k -set disjointness problem is a generalization of 2-set disjointness problem, where each request asks whether the intersection between k sets is empty or not. Again, we can cast this problem into the following adorned query:

$$\varphi^{\text{b...b}}(y_1, \dots, y_k) = R(x, y_1) \wedge R(x, y_2) \wedge \dots \wedge R(x, y_k)$$

► **Example 4** (k -Reachability). Given a direct graph G , the k -reachability problem asks, given a pair vertices (u, v) , to check whether they are connected by a path of length k . Representing the graph as a binary relation $S(x, y)$ (which means that there is an edge from x to y), we can model this problem through the following adorned query:

$$\varphi^{\text{bb}}(x_1, x_{k+1}) = S(x_1, x_2) \wedge S(x_2, x_3) \wedge \dots \wedge S(x_k, x_{k+1})$$

Observe that we can also check whether there is a path of length at most k by combining the results of k such queries (one for each length $1, \dots, k$).

► **Example 5** (Edge Triangles Detection). Given a graph $G = (V, E)$, this problem asks, given an edge (u, v) as the request, whether (u, v) participates in a triangle or not. This task can be expressed as the following adorned query

$$\varphi_{\Delta}^{\text{bb}}(x, z) = R(x, y) \wedge R(y, z) \wedge R(x, z)$$

In the reporting version, the goal is to enumerate all triangles participated by edge (x, z) , which can also be expressed by the following adorned query $\varphi_{\Delta}^{\text{bbf}}(x, z, y) = R(x, y) \wedge R(y, z) \wedge R(x, z)$.

We say that an adorned query is *Boolean* if every head variable is bound. In this case, the answer for every access request is also Boolean, i.e., true or false.

3.2 Problem Statement

Given an adorned query φ^η and an input database D , our goal is to construct a data structure, such that we can answer any access request that conforms to the access pattern η as fast as possible. In other words, an algorithm can be split into two phases:

- **Preprocessing phase:** we compute a data structure using space S .
- **Answering phase:** given an access request, we compute the answer using the data structure built in the preprocessing phase, within time T .

In this work, our goal is to study the relationship between the space of the data structure S and the answering time T for a given adorned query φ^η . We will focus on Boolean adorned queries, where the output is just true or false.

4 General Space-Time Tradeoffs

4.1 Space-Time Tradeoffs via Worst-case Optimal Algorithms

Let φ^n be an adorned query, and let $\mathcal{H} = (\mathcal{V}, \mathcal{E})$ be the corresponding hypergraph. Let \mathcal{V}_b denote the bound variables in the head of the query. For any fractional edge cover \mathbf{u} of \mathcal{V} , we define the *slack* of \mathbf{u} as: $\alpha(\mathbf{u}) := \min_{x \in \mathcal{V} \setminus \mathcal{V}_b} (\sum_{F: x \in F} u_F)$. In other words, the slack is the maximum factor by which we can scale down the fractional cover \mathbf{u} so that it remains a valid edge cover of the non-bound variables in the query¹. Hence $\{u_F/\alpha(\mathbf{u})\}_{F \in \mathcal{E}}$ is a fractional cover of the nodes in $S = \mathcal{V} \setminus \mathcal{V}_b$. We always have $\alpha(\mathbf{u}) \geq 1$.

► **Example 6.** Consider $\varphi^{b \dots b}(y_1, \dots, y_k) = R_1(x, y_1) \wedge R_2(x, y_2) \wedge \dots \wedge R_k(x, y_k)$ with the optimal fractional edge cover \mathbf{u} , where $u_i = 1$ for $i \in \{1, \dots, k\}$. The slack is $\alpha(\mathbf{u}) = k$, since the fractional edge cover $\hat{\mathbf{u}}$, where $\hat{u}_i = u_i/k = 1/k$ covers the only non-bound variable x .

We can now state our first main theorem.

► **Theorem 7.** *Let φ^n be a Boolean adorned query with hypergraph $(\mathcal{V}, \mathcal{E})$. Let \mathbf{u} be any fractional edge cover of \mathcal{V} . Then, for any input database D , we can construct a data structure that answers any access request in time $O(T)$ and takes space*

$$S = O\left(|D| + \prod_{F \in \mathcal{E}} |R_F|^{u_F/T^\alpha}\right)$$

We should note that **Theorem 7** applies when the relation sizes are different; this gives us sharper upper bounds compared to the case where each relation is bounded by the total size of the input. Indeed, if using $|D|$ as an upper bound on each relation, we obtain a space requirement of $O(|D|^{\rho^*}/T^\alpha)$ for achieving answering time $O(T)$, where ρ^* is the fractional edge cover number. Since $\alpha \geq 1$, this gives us at worst a linear tradeoff between space and time, i.e., $S \cdot T = O(|D|^{\rho^*})$. For cases where $\alpha \geq 1$, we can obtain much better tradeoff.

► **Example 8.** Continue the example in this section $\varphi^{b \dots b}(y_1, \dots, y_k) = R_1(x, y_1) \wedge R_2(x, y_2) \wedge \dots \wedge R_k(x, y_k)$. We obtain an improved tradeoff: $S \cdot T^k = O(|D|^k)$. Note that this result matches the best-known space-time tradeoff for the k -Set Disjointness problem [13]. (Note that all atoms use the same relation symbol R , so $|R_i| = |D|$ for every $i = 1, \dots, k$.)

We next present a few more applications of **Theorem 7**.

► **Example 9 (Edge Triangles Detection).** For the Boolean version, it was shown in [13] that – conditioned on the strong set disjointness conjecture – any data structure that achieves answering time T needs space $S = \Omega(|E|^2/T^2)$. A matching upper bound can be constructed by using a fractional edge cover $\mathbf{u}(R, S, T) = (1, 1, 0)$ with slack $\alpha = 2$. Thus, **Theorem 7** can be applied to achieve answering time T using space $S = O(|E|^2/T^2)$. Careful inspection reveals that a different fractional edge cover $\mathbf{u}(R, S, T) = (1/2, 1/2, 1/2)$ with slack $\alpha = 1$, achieves a better tradeoff. Thus, **Theorem 7** can be applied to obtain the following corollary.

► **Corollary 10.** *For a graph $G = (V, E)$, there exists a data structure of size $S = O(|E|^{3/2}/T)$ that can answer the edge triangles detection problem in $O(T)$ time.*

¹ We will omit the parameter \mathbf{u} from the notation of α whenever it is clear from the context.

The data structure implied by [Theorem 7](#) is always better when $T \leq \sqrt{|E|}$ ², thus refuting the conditional lower bound in [13]. We should note that this does not imply that the strong set disjointness conjecture is false, as we have observed an error in the reduction used by [13].

► **Example 11** (Square Detection). Beyond triangles, we consider the edge square detection problem, which checks whether a given edge belongs in a square pattern in a graph $G = (V, E)$, $\varphi_{\square}^{\text{bb}}(x_1, x_2) = R_1(x_1, x_2) \wedge R_2(x_2, x_3) \wedge R_3(x_3, x_4) \wedge R_4(x_4, x_1)$. Using the fractional edge cover $\mathbf{u} = (1/2, 1/2, 1/2, 1/2)$ with slack $\alpha = 1$, we obtain a tradeoff $S = O(|E|^2/T)$.

4.2 Space-Time Tradeoffs via Tree Decompositions

[Theorem 7](#) does not always give us the optimal tradeoff. For the k -reachability problem with the adorned query $\varphi^{\text{bb}}(x_1, x_{k+1}) = R_1(x_1, x_2) \wedge \dots \wedge R_k(x_k, x_{k+1})$, [Theorem 7](#) gives a tradeoff $S \cdot T = |D|^{\lceil (k+1)/2 \rceil}$, by taking the optimal fractional edge covering number $\rho^* = \lceil (k+1)/2 \rceil$ and slack $\alpha = 1$, which is far from efficient. In this section, we will show how to leverage tree decompositions to further improve the space-time tradeoff in [Theorem 7](#).


Again, let φ^n be an adorned query, and let $\mathcal{H} = (\mathcal{V}, \mathcal{E})$ be the corresponding hypergraph. Given a set of nodes $C \subseteq \mathcal{V}$, a C -connex tree decomposition of \mathcal{H} is a pair (\mathcal{T}, A) , where (i) \mathcal{T} is a tree decomposition of \mathcal{H} , and (ii) A is a connected subset of the tree nodes such that the union of their variables is exactly C . For our purposes, we choose $C = \mathcal{V}_b$. Given a \mathcal{V}_b -connex tree decomposition, we orient the tree from some node in A . We then define the bound variables for the bag t , \mathcal{V}_b^t as the variables in \mathcal{B}_t that also appear in the bag of some ancestor of t . The free variables for the bag t are the remaining variables in the bag, $\mathcal{V}_f^t = \mathcal{B}_t \setminus \mathcal{V}_b^t$.

► **Example 12.** Consider the 5-path query $\varphi^{\text{bb}}(x_1, x_6) = R_1(x_1, x_2) \wedge \dots \wedge R_5(x_5, x_6)$. Here, x_1 and x_6 are the bound variables. [Figure 1](#) shows the unconstrained decomposition as well as the C -connex decomposition for $\varphi^{\text{bb}}(x_1, x_6)$, where $C = \{x_1, x_6\}$. The root bag contains the bound variables x_1, x_6 . Bag \mathcal{B}_{t_2} contains x_1, x_6 as bound variables and x_2, x_5 as the free variables. Bag \mathcal{B}_{t_3} contains x_2, x_5 as bound variables for \mathcal{B}_{t_3} and x_3, x_4 as free variables.

Next, we define a parameterized notion of width for the \mathcal{V}_b -connex tree decomposition. The width is parameterized by a function δ that maps each node t in the tree to a non-negative number, such that $\delta(t) = 0$ whenever $t \in A$. The intuition here is that we will spend $O(|D|^{\delta(t)})$ in the node t while answering the access request. The parameterized width of a bag \mathcal{B}_t is now defined as: $\rho_t(\delta) = \min_{\mathbf{u}} (\sum_F u_F - \delta(t) \cdot \alpha)$ where \mathbf{u} is a fractional edge cover of the bag \mathcal{B}_t , and α is the slack (on the bound variables of the bag). The δ -width of the decomposition is then defined as $\max_{t \notin A} \rho_t(\delta)$. Finally, we define the δ -height as the maximum-weight path from the root to any leaf, where the weight of a path P is $\sum_{t \in P} \delta(t)$. We now have all the necessary machinery to state our second main theorem.

► **Theorem 13.** *Let φ^n be a Boolean adorned query with hypergraph $\mathcal{H} = (\mathcal{V}, \mathcal{E})$. Consider any \mathcal{V}_b -connex tree decomposition of \mathcal{H} . For some parametrization δ of the decomposition, let f be its δ -width, and h be its δ -height. Then, for any input database D , we can construct a data structure that answers any access request in time $T = O(|D|^h)$ in space $S = O(|D| + |D|^f)$.*

² All answering times $T > \sqrt{|E|}$ are trivial to achieve using linear space by using the data structure for $T' = \sqrt{|E|}$ and holding the result back until time T has passed. However, in certain practical settings such as transmitting data structure over a network, it is beneficial to construct a sublinear sized structures. In those settings, $T > \sqrt{|E|}$ is useful.

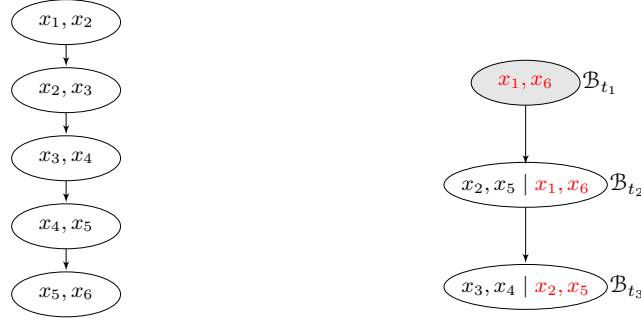

■ **Figure 1** The hypergraph \mathcal{H} for a length-5 path query, along with two tree decompositions: the left is unconstrained, and the right is a C -connex one with $C = \{x_1, x_6\}$. Bound variables are colored red. Nodes in A are colored grey.


The function δ allows us to trade off between time and space. If setting $\delta(t) = 0$ for every node t in the tree, then the δ -height becomes $O(1)$, while the δ -width equals to the fractional hypertree width of the decomposition. As we increase the values of δ in each bag, the δ -height increases while the δ -width decreases, i.e., the answer time T increases while the space decreases. Additionally, we note that the tradeoff from [Theorem 13](#) is at least as good as the one from [Theorem 7](#). Indeed, we can always construct a tree decomposition where all variables reside in a single node of the tree. In this case, we recover exactly the tradeoff from [Theorem 7](#). Due to a lack of space, we refer the reader to [Appendix B](#) for details.

▶ **Example 14.** We continue with the 5-path query. Since $\mathcal{B}_{t_1} = \{x_1, x_6\} \in A$, we assign $\delta(t_1) = 0$. For $\mathcal{B}_{t_2} = \{x_1, x_2, x_5, x_6\}$, the only valid fractional edge cover assigns weight 1 to both R_1, R_5 and has slack 1. Hence, if we assign $\delta(t_2) = \tau$ for some parameter τ , the width is $2 - \tau$. For $\mathcal{B}_{t_3} = \{x_2, x_3, x_4, x_5\}$, the only fractional cover also assigns weight 1 to both R_2, R_4 , with slack 1 again. Assigning $\delta(t_3) = \tau$, the width becomes $2 - \tau$ for t_3 as well. Hence, the δ -width of the tree decomposition is $2 - \tau$, while the δ -height is 2τ . Plugging this to [Theorem 13](#), it gives us a tradeoff with answering time $T = O(|E|^{2\tau})$ and space usage $S = O(|E| + |E|^{2-\tau})$, which matches the state-of-the-art result in [\[13\]](#). The above argument can be generalized to k -path query with answering time $T = O(|E|^{(k-1)/2\tau})$ and space usage $S = O(|E| + |E|^{2-\tau})$.

▶ **Example 15.** Consider a variant of the square detection problem: given two vertices, the goal is to decide whether they occur in two opposite corners of a square, which can be captured by the following adorned query:

$$\varphi^{\text{bb}}(x_1, x_3) = R_1(x_1, x_2) \wedge R_1(x_2, x_3) \wedge R_3(x_3, x_4) \wedge R_4(x_4, x_1).$$

[Theorem 7](#) gives a tradeoff with answering time $O(T)$ and space $O(|E|^2/T)$. But we can obtain a better tradeoff using [Theorem 13](#). Indeed, consider the tree decomposition where we have a root bag t_1 with $\mathcal{B}_{t_1} = \{x_1, x_3\}$, and two children of t_1 with Boolean $\mathcal{B}_{t_2} = \{x_1, x_2, x_3\}$ and $\mathcal{B}_{t_3} = \{x_1, x_3, x_4\}$. For \mathcal{B}_{t_2} , we can see that if assigning a weight of 1 to both hyperedges, we get a slack of 2. Hence, if $\delta(t_2) = \tau$, the δ -width is $2 - 2\tau$. Similarly for t_3 , we assign $\delta(t_3) = \tau$, for a δ -width with $2 - 2\tau$. Applying [Theorem 13](#), we obtain a tradeoff with time $T = O(\tau)$ (since both root-leaf paths have only one node), and space $S = O(|E| + |E|^{2-2\tau})$. So the space usage can be improved from $O(|E|^2/T)$ to $O(|E|^2/T^2)$.

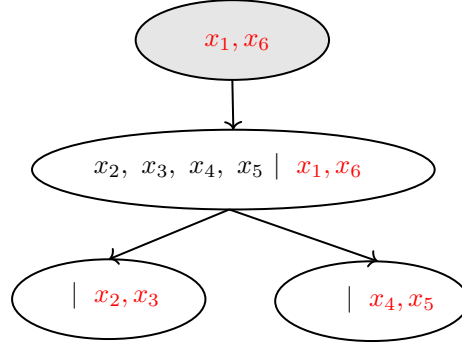

■ **Figure 2** C -connex decomposition for [Example 16](#).

4.3 Extension to CQs with Negation

In this section, we present a simple but powerful extension of our result to adorned Boolean CQs with negation. Given a query $\varphi \in CQ^-$, we build the data structure from [Theorem 13](#) for φ^+ but impose two constraints on the decomposition: (i) no leaf node(s) contains any free variable, (ii) for every negated relation R^- , all variables of R^- must appear together as bound variables in some leaf node(s). In other words, there exists a leaf node such that $\text{vars}(R^-)$ are present in it. It is easy to see that such a decomposition always exists. Indeed, we can fix the root bag to be $C = \mathcal{V}_b$, its child bag with free variables as $\text{vars}(\varphi^+) \setminus C$ and bound variables as C , and the leaf bag, which is connected to the child of the root, with bound variables as $\text{vars}(\varphi^-)$ without free variables. Observe that the bag containing $\text{vars}(\varphi^+)$ free variables can be covered by only using the positive atoms since φ is safe. The intuition is the following: during the query answering phase, we wish to find the join result over all variables \mathcal{V}_f before reaching the leaf nodes; and then, we can check whether there the tuples satisfy the negated atoms or not, in $O(1)$ time. The next example shows the application of the algorithm to adorned path queries containing negation.

► **Example 16.** Consider the query $Q^{\text{bb}}(x_1, x_6) = R(x_1, x_2) \wedge \neg S(x_2, x_3) \wedge T(x_3, x_4) \wedge \neg U(x_4, x_5) \wedge V(x_5, x_6)$. Using the decomposition in [Figure 2](#), we can now apply [Theorem 13](#) to obtain the tradeoff $S = O(|D|^3/\tau)$ and $T = O(\tau)$. Both leaf nodes only require linear space since a single atom covers the variables. Given an access request $x_1 \leftarrow a, x_6 \leftarrow b$, we check whether the answer for this request has been materialized or not. If not, we proceed to the query answering phase and find at most $O(\tau)$ answers after evaluating the join in the middle bag. For each of these answers, we can now check in constant time whether the tuples formed by values for x_2, x_3 and x_4, x_5 are not present in relations S and U respectively.

For adorned queries where $\mathcal{V}_b \subseteq \text{vars}(\varphi^-)$, we can further simplify the algorithm. In this case, we no longer need to create a constrained decomposition since the check to see if the negated relations are satisfied or not can be done in constant time at the root bag itself. Thus, we can directly build the data structure from [Theorem 13](#) using the query φ^+ .

► **Example 17 (Open Triangle Detection).** Consider the query $\varphi^{\text{bb}}(x_2, x_3) = R_1(x_1, x_2) \wedge \neg R_2(x_2, x_3) \wedge R_3(x_1, x_3)$, where φ^- is $\neg R_2(x_2, x_3)$ and φ^+ is $R_1(x_1, x_2) \wedge R_3(x_1, x_3)$ with the adorned view as $\varphi^{+\text{bb}}(x_2, x_3) = R_1(x_1, x_2) \wedge R_3(x_1, x_3)$. Observe that $\{x_2, x_3\} \subseteq \text{vars}(\varphi^-)$. We apply [Theorem 13](#) to obtain the tradeoff $S = O(|E|^2/\tau^2)$ and $T = O(\tau)$ with root bag $C = \{x_2, x_3\}$, its child bag with $\mathcal{V}_b = C$ and $\mathcal{V}_f = \{x_1\}$, and the leaf bag to be $\mathcal{V}_b = C$ and $\mathcal{V}_f = \emptyset$. Given an access request $x_2 \leftarrow a, x_3 \leftarrow b$, we check whether the answer for this

request has been materialized or not. If not, we traverse the decomposition and evaluating the join to find if there exists a connecting value for x_1 . For the last bag, we simply check whether (a, b) exists in R_2 or not in $O(1)$ time.

A note on optimality. It is easy to see that the algorithm obtained for Boolean CQs with negation is conditionally optimal assuming the optimality of [Theorem 13](#). Indeed, if all negated relations are empty, the join query is equivalent to φ^+ and the algorithm now simply applies [Theorem 13](#) to φ^+ . In example [Example 17](#), assuming relation R_2 is empty, the query is equivalent to set intersection whose tradeoffs are conjectured to be optimal.

5 Path Queries

In this section, we present an algorithm for the adorned query $P_k^{\text{bb}}(x_1, x_{k+1}) = R_1(x_1, x_2) \wedge \dots \wedge R_k(x_k, x_{k+1})$ that improves upon the conjectured optimal solution. Before diving into the details, we first state the upper bound on the tradeoff between space and query time.

► **Theorem 18** (due to [\[13\]](#)). *There exists a data structure for solving $P_k^{\text{bb}}(x_1, x_{k+1})$ with space S and answering time T such that $S \cdot T^{2/(k-1)} = O(|D|^2)$.*

Note that for $k = 2$, the problem is equivalent to [SetDisjointness](#) with the space/time tradeoff as $S \cdot T^2 = O(N^2)$. [\[13\]](#) also conjectured that the tradeoff is essentially optimal.

► **Conjecture 19** (due to [\[13\]](#)). *Any data structure for $P_k^{\text{bb}}(x_1, x_{k+1})$ with answering time T must use space $S = \tilde{\Omega}(|D|^2/T^{2/(k-1)})$.*

If k is not a constant, [Conjecture 19](#) implies that $\Theta(|D|^2)$ space is needed for achieving $O(1)$ answering time. Building upon [Conjecture 19](#), [\[13\]](#) also showed a result on the optimality of approximate distance oracles. Our results implies that [Theorem 18](#) can be improved further, thus refuting [Conjecture 19](#). The first observation is that the tradeoff in [Theorem 18](#) is only useful when $T \leq |D|$. Indeed, we can always answer any boolean path query in linear time using breadth-first search. Surprisingly, it is also possible to improve [Theorem 18](#) for the regime of small answering time as well. In what follows, we will show the improvement for paths of length 4; we will generalize the algorithm for any length in the next section.

5.1 Length-4 Path

► **Lemma 20.** *There exists a parameterized data structure for solving $P_4^{\text{bb}}(x_1, x_5)$ that uses space S and answering time $T \leq \sqrt{|D|}$ that satisfies the tradeoff $S \cdot T = O(|D|^2)$.*

For $k = 4$, [Theorem 18](#) gives us the tradeoff $S \cdot T^{2/3} = O(|D|^2)$ which is always worse than the tradeoff in [Lemma 20](#). We next present our algorithm in detail.

Preprocessing Phase. Consider $P_4^{\text{bb}}(x_1, x_5) = R(x_1, x_2) \wedge S(x_2, x_3) \wedge T(x_3, x_4) \wedge U(x_4, x_5)$. Let Δ be a degree threshold. We say that a constant a is *heavy* if its frequency on attribute x_3 is greater than Δ in both relations S and T ; otherwise, it is *light*. In other words, a is heavy if $|\sigma_{x_3=a}(S)| > \Delta$ and $|\sigma_{x_3=a}(T)| > \Delta$. We distinguish two cases based on whether a constant for x_3 is heavy or light. Let $\mathcal{L}_{\text{heavy}}(x_3)$ denote the unary relation that contains all heavy values, and $\mathcal{L}_{\text{light}}(x_3)$ the one that contains all light values. Observe that we can compute both of these relations in time $O(|D|)$ by simply iterating over the active domain of variable x_3 and checking the degree in relations S and T . We compute two views:

$$\begin{aligned} V_1(x_1, x_3) &= R(x_1, x_2) \wedge S(x_2, x_3) \wedge \mathcal{L}_{\text{heavy}}(x_3) \\ V_2(x_3, x_5) &= \mathcal{L}_{\text{heavy}}(x_3) \wedge T(x_3, x_4) \wedge U(x_4, x_5) \end{aligned}$$

We store the views as a hash index that, given a value of x_1 (or x_5), returns all matching values of x_3 . Both views take space $O(|D|^2/\Delta)$. Indeed, $|\mathcal{L}_{\text{heavy}}| \leq |D|/\Delta$. Since we can construct a fractional edge cover for V_1 by assigning a weight of 1 to R and $\mathcal{L}_{\text{heavy}}$, this gives us an upper bound of $|D| \cdot (|D|/\Delta)$ for the query output. The same argument holds for V_2 . We also compute the following view for light values: $V_3(x_2, x_4) = S(x_2, x_3) \wedge \mathcal{L}_{\text{light}}(x_3) \wedge T(x_3, x_4)$. This view requires space $O(|D| \cdot \Delta)$, since the degree of the light constants is at most Δ . We can now rewrite the original query as $P_4^{\text{bb}}(x_1, x_5) = R(x_1, x_2) \wedge V_3(x_2, x_4) \wedge U(x_4, x_5)$.

The rewritten query is a three path query. Hence, we can apply [Theorem 7](#) to create a data structure with answering time $T = O(|D|/\Delta)$ and space $S = O(|D|^2/(|D|/\Delta)) = O(|D| \cdot \Delta)$.

Query Answering. Given an access request, we first check whether there exists a 4-path that goes through some heavy value in $\mathcal{L}_{\text{heavy}}(x_3)$. This can be done in time $O(|D|/\Delta)$ using the views V_1 and V_2 . Indeed, we obtain at most $O(|D|/\Delta)$ values for x_3 using the index for V_1 , and $O(|D|/\Delta)$ values for x_3 using the index for V_3 . We then intersect the results in time $O(|D|/\Delta)$ by iterating over the $O(|D|/\Delta)$ values for x_3 and checking if the bound values for x_1 and x_5 from a tuple in V_1 and V_2 respectively. If we find no such 4-path, we check for a 4-path that uses a light value for x_3 . From the data structure we have constructed in the preprocessing phase, we can do this in time $O(|D|/\Delta)$.

Tradeoff Analysis. From the above, we can compute the answer in time $T = O(|D|/\Delta)$. From the analysis in the preprocessing phase, the space needed is $S = O(|D|^2/\Delta + |D| \cdot \Delta)$. Thus, whenever $\Delta \geq \sqrt{|D|}$, the space becomes $S = O(|D| \cdot \Delta)$, completing our analysis.

5.2 General Path Queries

We can now use the algorithm for the 4-path query to improve the space-time tradeoff for general path queries of length greater than four.

► **Theorem 21.** *Let D be an input instance. For $k \geq 4$, there is a data structure for $P_k^{\text{bb}}(x_1, x_{k+1})$ with space $S = O(|D| \cdot \Delta)$ and answer time $T = O\left(\left(\frac{|D|}{\Delta}\right)^{\frac{k-2}{2}}\right)$ for $\Delta \geq \sqrt{|D|}$.*

Proof. Fix some $\Delta \geq \sqrt{|D|}$. We construct the data structure for a path of length k recursively. The base case is when $k = 4$, with answer time $T_4 = |D|/\Delta$ and space $S_4 = |D| \cdot \Delta$.

In the recursive step, similar to the previous section, we set $\sqrt{\frac{|D|}{\Delta}}$ as the degree threshold for any constant that variables x_1 and x_{k+1} can take. Let $\mathcal{L}_{\text{heavy}}^1, \mathcal{L}_{\text{heavy}}^{k+1}$ be unary relations that store the heavy values for x_1, x_{k+1} respectively. We compute and store the result of

$$V(x_1, x_{k+1}) = \mathcal{L}_{\text{heavy}}^1(x_1) \wedge R_1(x_1, x_2) \wedge \cdots \wedge R_k(x_k, x_{k+1}), \mathcal{L}_{\text{heavy}}^{k+1}(x_{k+1}).$$

This view has size bounded by $\left(|D| \cdot \sqrt{\frac{\Delta}{|D|}}\right)^2 = |D| \cdot \Delta$. We consider the following queries:

$$V_1^{\text{bb}}(x_2, x_{k+1}) = R_2(x_2, x_3) \wedge \cdots \wedge R_k(x_k, x_{k+1}).$$


$$V_2^{\text{bb}}(x_1, x_k) = R_1(x_1, x_2) \wedge \cdots \wedge R_{k-1}(x_{k-1}, x_k).$$

both of which correspond to the $(k-1)$ -path, so we can recursively apply the data structure here. Let S_k, T_k be the space and time for k -path. For space, we have following observation:

$$S_k = |D| \cdot \Delta + S_{k-1}$$

As $S_4 = |D| \cdot \Delta$, we obtain $S_k = O(|D| \cdot \Delta)$.

XX:12 Space-Time Tradeoffs for Answering Boolean Conjunctive Queries

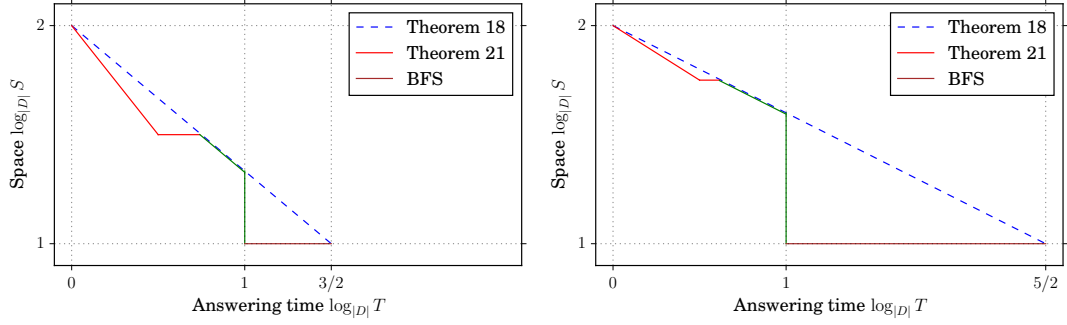

(a) Tradeoff for $P_4^{bb}(x_1, x_5)$

(b) Tradeoff for $P_6^{bb}(x_1, x_7)$

Figure 3 Space/time tradeoffs for path query of length $k = 4, 6$. The line in blue (dashed) shows the tradeoff obtained from [Theorem 18](#). The highlighted portion in brown shows the improved tradeoff using BFS. The red curve is the new tradeoff obtained using [Theorem 21](#). The green portion of the original curve is still the best possible when [Theorem 21](#) is not applicable.

Given an access request, we answer it by distinguishing two cases. If x_1, x_{k+1} is heavy, we probe the stored view $V(x_1, x_{k+1})$ in time $O(1)$. If one of them is light (say w.l.o.g. x_1), we call recursively the data structure V_1 for every one of the $\leq \sqrt{|D|/\Delta}$ values connected with x_1 . This gives us the following recurrence formula for answer time:

$$T_k = (|D|/\Delta)^{1/2} \cdot T_{k-1}$$

Solving the recursive formula gives us $T_k = (|D|/\Delta)^{(k-2)/2}$. \blacktriangleleft

The space-time tradeoff obtained from [Theorem 21](#) is $S \cdot T^{2/(k-2)} = O(|D|^2)$, but only for $T \leq |D|^{(k-2)/4}$. To compare it with the tradeoff of $S \cdot T^{2/(k-1)} = O(|D|^2)$ obtained from [Theorem 18](#), it is instructive to look at [Figures 3a](#) and [3b](#), which plot the space-time tradeoffs for $k = 4$ and $k = 6$ respectively. For $k = 4$, we can see that the new tradeoff is better for $T \leq |D|^{1/2}$. Once T exceeds $|D|^{1/2}$, it is still better to use the data structure from [Theorem 21](#) until [Theorem 18](#) takes over. For $k = 6$, the switch point also happens at $T = |D|^{1/2}$ but requires more space. In general, as k grows, the new tradeoff line becomes flatter and approaches [Theorem 18](#).

6 Lower Bounds

In this section, we study the lower bounds for adorned star and path queries. We first present conditional lower bounds for the k -Set Disjointness problem using the conditional optimality of ℓ -Set Disjointness where $\ell < k$. First, we review the known results from [\[13\]](#) starting with the conjecture for k -Set Disjointness .

► **Conjecture 22** (due to [\[13\]](#)). *Any data structure for k -Set Disjointness problem that answers queries in time T must use space $S = \Omega(|D|^k/T^k)$.*

[Conjecture 22](#) was shown to be conditionally optimal based on conjectured lower bound for the $(k+1)$ -Sum Indexing problem, however, it was subsequently showed to be false [\[20\]](#), which implies that [Conjecture 22](#) is still an open problem. [Conjecture 22](#) can be further generalized to the case when input relations are of unequal sizes as follows.

► **Conjecture 23**. *Any data structure for $\varphi_*^{b\dots b}(y_1, \dots, y_k) = R_1(x, y_1) \wedge \dots \wedge R_k(x, y_k)$ that answers queries in time T must use space $S = \Omega(\prod_{i=1}^k |R_i|/T^k)$.*

We now state the main result for star queries.

► **Theorem 24.** *Suppose that any data structure for $\varphi_*^{b\dots b}(y_1, \dots, y_k)$ with answering time T must use space $S = \Omega(\prod_{i=1}^k |R_i|/T^k)$. Then, any data structure for $Q_*^{b\dots b}(y_1, \dots, y_\ell)$ with answering time T must use space $S = \Omega(\prod_{i=1}^\ell |R_i|/T^\ell)$, for $2 \leq \ell < k$.*

Proof. Let $\Delta = T$ be the degree threshold for the k bound variables y_1, \dots, y_k . If any of the k variables is light (i.e. $|\sigma_{y_i=a[y_i]} R_i(y_i, x)| \leq \Delta$), then we can check whether the intersection between k sets is empty or not in time $O(T)$ by indexing all relations in a linear time preprocessing phase. The remaining case is when all k variables are heavy. We now create ℓ views V_1, \dots, V_ℓ by arbitrarily partitioning the k relations into the ℓ views followed by materializing the join of all relations in each view. Let view V_i contain the join of k_i relations. Then, $|V_i| = O(\prod_{R \in J_i} |R|/T^{k_i-1})$ where J_i is the set of all relations assigned to view V_i .

We have now reduced the k -star query where all k variables are heavy into an instance of ℓ -star query where the input relations are V_1, \dots, V_ℓ . Suppose that there exists a data structure that can answer queries in time T using space $S = o(\prod_{i=1}^\ell |V_i|/T^\ell)$. Then, we can use such a data structure for answering the original query where all variables are heavy. The space used by this oracle is

$$\begin{aligned} S &= o(\prod_{i=1}^\ell |V_i|/T^\ell) = o(\prod_{i=1}^\ell \prod_{R \in J_i} |R|/T^{k_i-1}) \cdot (1/T^\ell) \\ &= o(\prod_{i=1}^k |R_i|/T^{k-\ell}) \cdot (1/T^\ell) = o(\prod_{i=1}^k |R_i|/T^k) \end{aligned}$$

which contradicts the space lower bound for k -star. ◀

Theorem 24 creates a hierarchy for k -Set Disjointness, where the optimality of smaller set disjointness instances depends on larger set disjointness instances. Next, we show conditional lower bounds on the space requirement of path queries. We begin by proving a simple result for optimality of P_2^{bb} (equivalent to 2-Set Disjointness) assuming the optimality of P_3^{bb} query.

► **Theorem 25.** *Suppose that any data structure for P_3^{bb} that answers queries in time T , uses space S such that $S \cdot T = \Omega(|D|^2)$. Then, for P_2^{bb} , it must be the case that any data structure that uses space $S = O(|D|^2/T^2)$, the answering time is $\Omega(T)$.*

Proof. Let $\Delta = T$ be the degree threshold for all vertices. If both bound variables in P_3^{bb} are heavy, then we can answer the query in constant time using space $\Theta(|D|^2/T^2)$ by materializing the answers to all heavy-heavy queries. In the remaining cases, at least one of the bound valuations is light. Without loss of generality, suppose x_1 is light. Then, we can make Δ calls to the oracle for query $P_2^{bb}(x_2, x_4) = R_2(x_2, x_3), R_3(x_3, x_4)$.

Suppose that there exists a data structure with space $O(|D|^2/T^2)$ for $P_2^{bb}(x_2, x_4)$ and answering time $o(T)$. Then, we can answer P_3^{bb} with light x_1 in time $o(T^2)$. This improves the tradeoff for P_3^{bb} since the product of space usage and answering time is $o(|D|^2)$ for any non-constant T , coming to a contradiction. ◀

Using a similar argument, it can be shown that the conditional optimality of **Theorem 21** for $k = 4$ implies that $S \cdot T = \Omega(|D|^2)$ tradeoff for P_3^{bb} is also optimal (but only for the range $T \leq \sqrt{|D|}$ when the result is applicable).

7 Related Work

The study of fine-grained space/time tradeoffs for query answering is a relatively recent effort in the algorithmic community. The study of distance oracles over graphs was first initiated

by [27] where lower bounds are shown on the size of a distance oracle for sparse graphs based on a conjecture about the best possible data structure for a set intersection problem. [10] also considered the problem of set intersection and presented a data structure that can answer boolean set intersection queries which is conditionally optimal [13]. There also exist another line of work that looks at the problem of approximate distance oracles. Agarwal et al. [4, 3] showed that for stretch-2 and stretch-3 oracles, we can achieve $S \times T = O(|D|^2)$ and $S \times T^2 = O(|D|^2)$. They also showed that for any integer k , a stretch- $(1 + 1/k)$ oracle exhibits $S \times T^{1/k} = O(|D|^2)$ tradeoff. Unfortunately, no lower bounds are known for non-constant query time. [13] used [Theorem 18](#) to conjecture that the tradeoff $S \times T^{2/(k-1)} = O(|D|^2)$ is optimal which would also imply that stretch- $(1 + 1/k)$ oracle tradeoff is also optimal. A different line of work has considered the problem of enumerating query results of a non-boolean query. [10] presented a data structure to enumerate the intersection of two sets with guarantees on the total answering time. This result was generalized to incorporate *full* adorned views over CQs [11]. Our work extends the results to the setting where the join variables are projected away from the query result (i.e. the adorned views are *non-full*) and makes the connection between several different algorithmic problems that have been studied independently. Further, we also consider boolean CQs that may contain negations. In the non-static setting, [6] initiated the study of answering conjunctive query results under updates. More recently, [17] presented an algorithm for counting the number of triangles under updates. There have also been some exciting developments in the space of enumerating query results with delay for a proper subset of CQs known as *hierarchical queries*. [18] presented a tradeoff between preprocessing time and delay for enumerating the results of any (not necessarily full) hierarchical queries under static and dynamic settings. It remains an interesting problem to find improved algorithms for more restricted set of CQs such as hierarchical queries. Prior work in the space of differential privacy [12, 22, 29, 8] also require repeated querying and may benefit from the techniques in this paper.

8 Conclusion

In this paper, we investigated the tradeoffs between answering time and space required by the data structure to answer boolean queries. Our main contribution is a unified algorithm that recovers the best known results for several boolean queries of practical interests. We then apply our main result to improve upon the state-of-the-art algorithms to answer boolean queries over the four path query which is subsequently used to improve the tradeoff for all path queries of length greater than four and show conditional lower bounds. There are several questions that remain open. We describe the problems that are particularly engaging.

Unconditional lower bounds. It remains an open problem to prove unconditional lower bounds on the space requirement for answering boolean star and path queries in the RAM model. For instance, *2-Set Disjointness* can be answered in constant time by materializing all answers using $\Theta(|D|^2)$ space but there is no lower bound to rule out if this can be achieved using sub-quadratic space.

Improved approximate distance oracles. It would be interesting to investigate whether our ideas can be applied to existing algorithms for constructing distance oracles to improve their space requirement.

More general space-time bounds. The first question is to study the tradeoff between space vs answering time (and delay guarantees) for arbitrary non-boolean hierarchical queries and path queries. Using some of our techniques, it may be possible to smartly materialize a certain subset of joins that could be used to achieve better answering time guarantees.

References

- 1 M. Abo Khamis, P. G. Kolaitis, H. Q. Ngo, and D. Suciu. Decision problems in information theory. In *ICALP*, 2020.
- 2 P. Afshani and J. A. S. Nielsen. Data structure lower bounds for document indexing problems. In *ICALP*, 2016.
- 3 R. Agarwal. The space-stretch-time tradeoff in distance oracles. In *ESA*, pages 49–60. Springer, 2014.
- 4 R. Agarwal, P. B. Godfrey, and S. Har-Peled. Approximate distance queries and compact routing in sparse graphs. In *INFOCOM*, pages 1754–1762. IEEE, 2011.
- 5 A. Atserias, M. Grohe, and D. Marx. Size bounds and query plans for relational joins. *SIAM Journal on Computing*, 42(4):1737–1767, 2013.
- 6 C. Berkholz, J. Keppeler, and N. Schweikardt. Answering conjunctive queries under updates. In *proceedings of the 36th ACM SIGMOD-SIGACT-SIGAI symposium on Principles of database systems*, pages 303–318. ACM, 2017.
- 7 T. M. Chan and M. Lewenstein. Clustered integer 3sum via additive combinatorics. In *STOC*, pages 31–40, 2015.
- 8 A. R. Chowdhury, T. Rekatsinas, and S. Jha. Data-dependent differentially private parameter learning for directed graphical models. In *International Conference on Machine Learning*, pages 1939–1951. PMLR, 2020.
- 9 H. Cohen and E. Porat. Fast set intersection and two-patterns matching. *Theoretical Computer Science*, 411(40-42):3795–3800, 2010.
- 10 H. Cohen and E. Porat. On the hardness of distance oracle for sparse graph. *arXiv preprint arXiv:1006.1117*, 2010.
- 11 S. Deep and P. Koutris. Compressed representations of conjunctive query results. In *PODS*, pages 307–322. ACM, 2018.
- 12 W. Dong and K. Yi. Residual sensitivity for differentially private multi-way joins. In *Proceedings of the 2021 International Conference on Management of Data*, pages 432–444, 2021.
- 13 I. Goldstein, T. Kopelowitz, M. Lewenstein, and E. Porat. Conditional lower bounds for space/time tradeoffs. In *WADS*, pages 421–436. Springer, 2017.
- 14 G. Gottlob, G. Greco, and F. Scarcello. Treewidth and hypertree width. *Tractability: Practical Approaches to Hard Problems*, 1, 2014.
- 15 G. Greco and F. Scarcello. Structural tractability of enumerating csp solutions. *Constraints*, 18(1):38–74, 2013.
- 16 J. E. Hopcroft, J. D. Ullman, and A. Aho. The design and analysis of computer algorithms, 1975.
- 17 A. Kara, H. Q. Ngo, M. Nikolic, D. Olteanu, and H. Zhang. Counting triangles under updates in worst-case optimal time. In *ICDT*, 2019.
- 18 A. Kara, M. Nikolic, D. Olteanu, and H. Zhang. Trade-offs in static and dynamic evaluation of hierarchical queries. In *PODS*, pages 375–392, 2020.
- 19 T. Kociumaka, J. Radoszewski, and W. Rytter. Efficient indexes for jumbled pattern matching with constant-sized alphabet. In *ESA*, pages 625–636. Springer, 2013.
- 20 T. Kopelowitz and E. Porat. The strong 3sum-indexing conjecture is false. *arXiv preprint arXiv:1907.11206*, 2019.
- 21 K. G. Larsen, J. I. Munro, J. S. Nielsen, and S. V. Thankachan. On hardness of several string indexing problems. *Theoretical Computer Science*, 582:74–82, 2015.
- 22 C. Meehan, A. R. Chowdhury, K. Chaudhuri, and S. Jha. A shuffling framework for local differential privacy. *arXiv preprint arXiv:2106.06603*, 2021.
- 23 A. Nash and B. Ludäscher. Processing unions of conjunctive queries with negation under limited access patterns. In *EDBT*, pages 422–440. Springer, 2004.
- 24 H. Q. Ngo, E. Porat, C. Ré, and A. Rudra. Worst-case optimal join algorithms. In *PODS*, pages 37–48. ACM, 2012.

XX:16 Space-Time Tradeoffs for Answering Boolean Conjunctive Queries

- 25 H. Q. Ngo, C. Ré, and A. Rudra. Skew strikes back: new developments in the theory of join algorithms. *SIGMOD Record*, 42(4):5–16, 2013.
- 26 D. Olteanu and M. Schleich. Factorized databases. *ACM SIGMOD Record*, 45(2):5–16, 2016.
- 27 M. Patrascu and L. Roditty. Distance oracles beyond the thorup-zwick bound. In *FOCS*, pages 815–823. IEEE, 2010.
- 28 N. Robertson and P. D. Seymour. Graph minors. ii. algorithmic aspects of tree-width. *Journal of algorithms*, 7(3):309–322, 1986.
- 29 A. Roy Chowdhury, C. Wang, X. He, A. Machanavajjhala, and S. Jha. Crypte: Crypto-assisted differential privacy on untrusted servers. In *Proceedings of the 2020 ACM SIGMOD International Conference on Management of Data*, pages 603–619, 2020.
- 30 J. D. Ullman. An approach to processing queries in a logic-based query language. In *On knowledge base management systems*, pages 147–164. Springer, 1986.
- 31 F. Wei and G. Lausen. Containment of conjunctive queries with safe negeuration. In *ICDT*, pages 346–360. Springer, 2003.
- 32 K. Xirogiannopoulos and A. Deshpande. Extracting and analyzing hidden graphs from relational databases. In *Proceedings of the 2017 ACM International Conference on Management of Data*, pages 897–912. ACM, 2017.
- 33 K. Xirogiannopoulos, U. Khurana, and A. Deshpande. Graphgen: Exploring interesting graphs in relational data. *Proceedings of the VLDB Endowment*, 8(12):2032–2035, 2015.
- 34 M. Yannakakis. Algorithms for acyclic database schemes. In *VLDB*, volume 81, pages 82–94, 1981.

A Missing Proofs

Proof of Theorem 7. Let $\mathcal{V}_b = \{x_1, \dots, x_k\}$. Recall that an access request $\mathbf{a} = (a_1, \dots, a_k)$ corresponds to the query $\varphi[a_1/x_1, \dots, a_k/x_k]$; in other words, we substitute each occurrence of a bound variable x_i with the constant a_i . Define the hypergraph $\mathcal{H}_b = (\mathcal{V}_b, \mathcal{E}_b)$, where $\mathcal{E}_b = \{F \cap \mathcal{V}_b \mid F \in \mathcal{E}\}$. We say that an access request \mathbf{a} is *valid* if it is an answer for the query φ_b corresponding to \mathcal{H}_b , i.e. $\mathbf{a} \in \varphi_b(D)$. We can construct hash indexes of linear size $O(|D|)$ during the preprocessing phase so that we can check whether any access request is valid in constant time $O(1)$.

For every relation R_F in the query, let $R_F(\mathbf{a}) = \sigma_{x_i=a_i \mid x_i \in \mathcal{V}_b \cap F}(R_F)$. In other words, $R_F(\mathbf{a})$ is the subrelation that we obtain once we filter out the tuples that satisfy the selection condition implied by the access request.

If α is the slack for the fractional edge cover \mathbf{u} , define $\hat{u}_F = u_F/\alpha$ for every $F \in \mathcal{E}$. As we have discussed earlier, $\hat{\mathbf{u}} = \{\hat{u}_F\}_{F \in \mathcal{E}}$ is a fractional edge cover for the query $\varphi[a_1/x_1, \dots, a_k/x_k]$: indeed, it is necessary to cover only the non-bound variables, since all bound variables are replaced by constants in the query. Hence, using a worst-case optimal join algorithm, we can compute the access request $\varphi[a_1/x_1, \dots, a_k/x_k]$ with running time

$$T(\mathbf{a}) = \prod_{F \in \mathcal{E}} |R_F(\mathbf{a})|^{u_F/\alpha}.$$

We can now describe the preprocessing phase and the data structure we build. The data structure simply creates a hash index. Let J be the set of valid access requests such that $T(\mathbf{a}) > T$. For every $\mathbf{a} \in J$, we add to the hash index a key-value entry, where the key is \mathbf{a} and the value the (boolean) answer to the access request $Q[a_1/x_1, \dots, a_k/x_k]$.

We claim that the answer time using the above data structure is at most $O(T)$. Indeed, we first check whether \mathbf{a} is valid, which we can do in constant time. If it is not valid, we simply output no. If it is valid, we probe the hash index. If \mathbf{a} exists in the hash index, we obtain the answer in time $O(1)$ by reading the value of the corresponding entry. Otherwise, we know that $T(\mathbf{a}) < T$ and hence we can compute the answer to the access request in time $O(T)$.

It remains to bound the size of the data structure we constructed during the preprocessing phase. Since the size is $O(|J|)$, we will bound the size of J . Indeed, we have:

$$\begin{aligned} T \cdot |J| &\leq \sum_{\mathbf{a} \in J} T(\mathbf{a}) = \sum_{\mathbf{a} \in J} \prod_{F \in \mathcal{E}} |R_F(\mathbf{a})|^{u_F/\alpha} \\ &= \sum_{\mathbf{a} \in J} 1^{1-1/\alpha} \cdot \left(\prod_{F \in \mathcal{E}} |R_F(\mathbf{a})|^{u_F} \right)^{1/\alpha} \\ &\leq \left(\sum_{\mathbf{a} \in J} 1 \right)^{1-1/\alpha} \cdot \left(\sum_{\mathbf{a} \in J} \prod_{F \in \mathcal{E}} |R_F(\mathbf{a})|^{u_F} \right)^{1/\alpha} \\ &\leq |J|^{1-1/\alpha} \cdot \prod_{F \in \mathcal{E}} |R_F|^{u_F/\alpha} \end{aligned}$$

Here, the first inequality follows directly from the definition of the set J . The second inequality is Hölders inequality. The third inequality is an application of the query decomposition lemma from [25]. By rearranging the terms, we can now obtain the desired bound. \blacktriangleleft

Proof of Theorem 13. We introduce some new notation. Let $\mathcal{T} = (\mathcal{T}, A)$ denote the \mathcal{V}_b -connex tree decomposition with f as its δ -width, and h as its δ -height. For each node

$t \in \mathcal{T} \setminus A$, we denote by $\text{anc}(t)$ the union of all the bags for the nodes that are the ancestors of t , $\mathcal{V}_b^t = \mathcal{B}_t \cap \text{anc}(t)$ and $\mathcal{V}_f^t = \mathcal{B}_t \setminus \mathcal{V}_b^t$. Intuitively, $\mathcal{V}_b^t(\mathcal{V}_f^t)$ are the bound (resp. free) variables for the bag t as we traverse the tree top-down. For example, in **Figure 1(b)**, $A = \mathcal{B}_{t_1}$, $\text{anc}(t_2) = \{x_1, x_6\}$, $\mathcal{V}_b^t = \{x_1, x_6\}$ and $\mathcal{V}_f^t = \{x_1, x_5\}$. For node t_3 , $\text{anc}(t_3) = \{x_2, x_5, x_1, x_6\}$, $\mathcal{V}_b^t = \{x_2, x_5\}$ and $\mathcal{V}_f^t = \{x_3, x_4\}$

Data Structure Construction

We apply **Theorem 7** to each bag (except the root bag) in \mathcal{T} with the following parameters: (i) $\mathcal{H}^t = (\mathcal{V}^t, \mathcal{E}^t)$ where $\mathcal{V}^t = \mathcal{B}_t$ and $\mathcal{E}^t = \mathcal{E}_{\mathcal{B}_t}$; (ii) bound variables are $\mathcal{V}_b^t = \text{anc}(t) \cap \mathcal{B}_t$; and (iii) fractional edge cover \mathbf{u} corresponding to bag \mathcal{B}_t . The space requirement for the data structure corresponding to bag \mathcal{B}_t is $S = O(|D| + |D|^{\rho_t(\delta)}) \leq O(|D| + |D|^f)$. This follows directly from the definition of $\delta(t)$ width of bag t which is assumed to be at most f . Recall that the data structure stores a list of all access requests \mathbf{a} defined over the schema \mathcal{V}_b^t such that answering time $T > O(|D|^f)$. Let us call this stored list as $\mathcal{L}(t)$.


Query Answering

We now describe the query answering algorithm. Let $C = \{x_1, \dots, x_k\}$ and access request $\mathbf{a} = (a_1, \dots, a_k)$. We first need to check whether \mathbf{a} is valid. If the request is not valid, we can simply output no. This can be done in constant time after creating hash indexes of size $O(|D|)$ during the preprocessing phase. If the access request is valid, the second step is to check whether $Q(\mathbf{a})$ is true or false. Let \mathcal{P} denote the set of bags that are children of root bag. Then, for each bag $\mathcal{B}_t \in \mathcal{P}$, we check whether $\pi_{\mathcal{V}_b^t}(\mathbf{a}) \in \mathcal{L}(t)$. If it is stored, it means that that running time of $\pi_{\mathcal{V}_b^t}(\mathbf{a})$ is greater than $O(|D|^{\delta(t)})$. If the entry for $\pi_{\mathcal{V}_b^t}(\mathbf{a})$ is false in the data structure, we can output false immediately since we know that no output tuple can be formed by the subtree rooted at bag \mathcal{B}_t .

If there is no entry for $\pi_{\mathcal{V}_b^t}(\mathbf{a})$ in $\mathcal{L}(t)$, this means that answering time of evaluating the join at node t is $T \leq O(|D|^{\delta(t)})$. Thus, we can evaluate the join for the bag by fixing \mathcal{V}_b^t as $\pi_{\mathcal{V}_b^t}(\mathbf{a})$ using any worst-case optimal join algorithm, which guarantees that the total running time is at most $O(|D|^{\delta(t)})$. If no output is generated, the algorithm outputs false since no output tuple can be formed by subtree rooted at \mathcal{B}_t . If there is output generated, then there can be at most $O(|D|^{\delta(t)})$ tuples. For each of these tuples, we recursively proceed to the children of bag \mathcal{B}_t and repeat the algorithm. Each fixing of variables at bag t acts as the bound variables for the children bag. In the worst case, all bags in \mathcal{T} may require join processing. Since the query size is a constant, it implies that the number of root to leaf paths are also constant. Thus, the answering time is dominated by the longest root to leaf path, i.e the δ -height of the decomposition. Thus, $T = O(|D|^{\sum_{t \in \mathcal{P}} \delta(t)}) = O(|D|^h)$. ◀

B Optimizing Tree Decompositions

In this section, we discuss two key optimizations that lead to improved tradeoffs. The first optimization relates to the space usage of the root bag. Observe that the space requirement of **Theorem 13** was defined as the maximum over all bags except A (which is the connected subset of tree nodes whose union is exactly equal to C). Our key observation is that if the space budget $S = O(|D|^{\max_{t \in A} \rho_t^*})$, then we can achieve an answering time of $T = O(1)$. This is because we have materialized all possible valid access requests (and their true/false answer) and similar to the query answering phase, given an access request, we can check in constant time whether the request is valid and find its boolean answer.

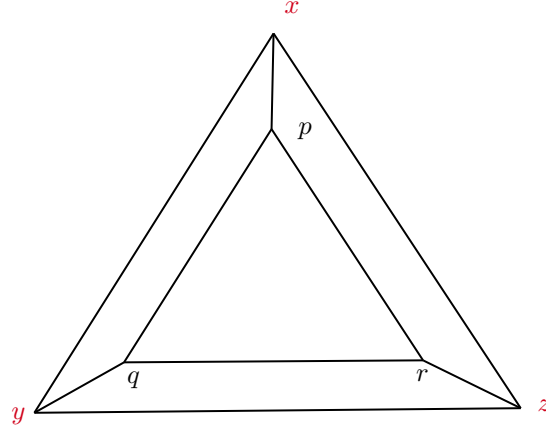

■ **Figure 4** Query graph with all relations of size $|E|$. x, y, z are the bound variables.

► **Example 26.** Consider the query $\varphi^{\text{bbb}}(x, y, z) = R(x, y) \wedge S(y, z) \wedge T(x, z) \wedge U(p, q) \wedge V(q, r) \wedge W(p, r) \wedge D(x, p) \wedge E(y, p) \wedge F(r, z)$ as shown in **Figure 4**. Applying our main result on this query gives a tradeoff $S = O(|E|^3/\tau)$ and $T = O(\tau)$ by assigning an edge cover of $1/2$ to the relations forming the two triangles. The C -connex decomposition will consist of the root bag containing variables $C = \{x, y, z\}$ and a child bag containing free variables p, q, r and bound variables x, y, z . However, note that materializing the root bag which consists of relation R, S, T takes space only $|E|^{3/2}$. Thus, the tradeoff is only useful when $S = O(|E|^3/\tau) \leq |E|^{3/2}$.

Our second optimization relates to complete materialization of all tuples over free variables in a bag. Consider a bag $t \notin A$ in the C -connex decomposition. **Theorem 13** sets space usage of t as $S = O(|D|^{\rho_t(\delta)})$ and answering time of $T = O(|D|^{\delta(t)})$. The key observation is that one can achieve $S = O(|D|^{\rho_t^*(\mathcal{V}_t^t)})$ and $T = O(|D|^{\rho_t^*(\mathcal{V}_t^t)})$, where $\rho_t^*(\mathcal{V}_t^t)$ is the fractional edge cover number over the free variables in t , by materializing the join over free variables of bag t and storing a bit that tells whether a tuple s participates in some join for the bags below it in the decomposition. Thus, in the query answering phase, we can check whether some tuple s is true/false by iterating over all materialized tuples and return the answer. We demonstrate this with the following example.

► **Example 27.** Consider the query $\varphi^{\text{bbb}}(x_1, x_2, x_3, x_4) = R(x_1, y) \wedge S(x_2, y) \wedge T(y, z) \wedge U(x_3, z) \wedge V(x_4, z)$. The C -connex decomposition contains two bags: the root bag with variables $C = \{x_1, x_2, x_3, x_4\}$ and a child bag containing free variables y, z and bound variables x_1, x_2, x_3, x_4 . The tradeoff obtained is $S = O(|E|^4/\tau^2)$ (note that slack $\alpha = 2$) and $T = O(\tau)$. However, applying our optimization here, we observe that the fractional edge cover number for free variables y, z is 1. Thus, during the query answering phase, given an access request, we can iterate over all $O(|E|)$ tuples in relation T and check whether the access request and some tuple $s \in T$ join or not, a constant time operation for each s . Thus, we can achieve answering time $T = O(|E|)$ using linear space $S = O(|E|)$, which is an improvement over the tradeoff obtained directly from **Theorem 13**.

Thus, for each bag $t \notin A$, we can set $\rho_t(\delta) = \rho_t^*(\mathcal{V}_t^t)$ and $\delta(t) = \rho_t^*(\mathcal{V}_t^t)$ to achieve the best possible width and height for the decomposition.