

Clustering with Respect to the Information Distance*

Andrei Romashchenko
LIRMM — Univ Montpellier CNRS
and IITP RAS

December 16, 2021

Abstract

We discuss the notion of a dense cluster with respect to the information distance and prove that all such clusters have an extractable core that represents the mutual information shared by the objects in the cluster.

1 Introduction

In the seminal paper [3] Bennett et al. introduced the notion of *information distance* based on Kolmogorov complexity. Loosely speaking, the distance between individual finite object is defined as the length of the shortest program that can translate these objects to each other. A surprising result proven in [3] claims that the length of such a program (that performs the translation of the given objects to each other, in both directions) is substantially equal to the minimum of the lengths of two separate programs translating the objects to each other. The optimal lengths of the programs depend, of course, on the choice of the programming language. Such a choice may look arbitrary. However, the framework of Kolmogorov complexity (see [1]) provides us with an *optimal* programming language where the required programs have the minimum (up to an additive constant) possible length.

The notion of information distance attracted attention of theoretical computer scientists and also inspired many experimental works, where various practical approximations of the information distance were computed for real world data. This technique was typically used to clusterize and classify the data of some specific type (texts, music recording, genetic codes, and so on). In such experiments, the revealed clusters (groups of objects with small pairwise information distances) consist of the data having something in common: texts written in the same language, music pieces of the same genre, genetic information of closely related species, and so on (see, e.g, [10, 11, 12]). In the studied

*The work is supported in part by a grant RSCF 20-11-20203.

practical examples it can be usually observed that the revealed dense clusters have some core (e.g., the language vocabulary, characteristics of a particular music genre, the genetic information of the common predecessor of several biological species), even if providing an explicit description of such a core is not immediate.

In this paper we study a similar phenomenon in a purely theoretical setting. We show that the *only* reason why a large set of objects may form a dense cluster with respect to the information distance is that these objects share some *common information* in the sense of Gács and Körner, [2]. In other words, there must exist a *core* that is simple conditional on each object of the cluster and that represents in some sense the mutual information shared by all these objects. Such results were used (more or less explicitly) as technical tools in [8, 9, 14]. We believe that the observed phenomenon is interesting in its own rights, and we want to draw more attention to this issue. In this paper we propose a self-contained explanation of the mentioned result using a simplified definition of a cluster proposed by Alexander Shen, [16]. The proofs of the main results follow the arguments suggested in [8, 9].

Notation. In what follows we use the standard notation $C(x)$ for Kolmogorov complexity of a string x and $C(x|y)$ for Kolmogorov complexity of a string x conditional on a string y (see, e.g., [13]). Mutual information and conditional mutual information is denoted $I(x : y) := C(y) - C(y|x)$ and $I(x : y|z) := C(y|z) - C(y|x, z)$ respectively.

2 Clusters with respect to the information distance


The *information distance* between x and y can be defined as

$$\text{dist}(x, y) = \max(C(x|y), C(y|x)).$$

(It is not a distance in the proper sense since the triangle inequality is true only up to logarithmic terms.) Speaking informally, information distance measures the amount of information needed to obtain one of the strings given another one. This value captures the intuition of “similarity” between two strings.

We can consider clusters defined in the sense of this information distance, i.e., large sets of strings with small diameters. Roughly speaking, a cluster is a set of strings of cardinality at least 2^m and diameter at most m . As it is usual in the theory of Kolmogorov complexity, we should admit a minor imprecision (say, logarithmic in m) of the parameters. The formal definition of a cluster involves two parameters, the diameter and the logsize (logarithm of the cardinality):

Definition 1. A set of strings S is a *cluster* with the diameter m and the logsize ℓ if for all $x_1, x_2 \in S$ we have $\text{dist}(x, y) \leq m$ and $\#S \geq 2^\ell$. We will say for brevity that such a cluster has parameters (m, ℓ) .

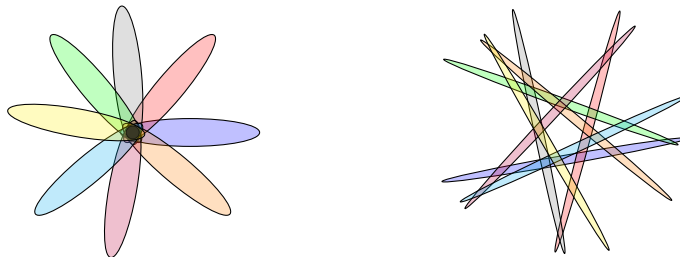

(a) A bunch of intersecting sets having a common core. (b) A bunch of pairwise intersecting sets with no common core.

Figure 1: Geometric representation of clusters.

The “density” of a cluster can be measured by the difference between the diameter and the logsize: the closer they are to each other, the denser is the cluster. In the arguments below this difference is usually bounded by $O(\log m)$.

First of all, do the clusters exist? The answer to this question is yes. Indeed, for every string z we may consider a *canonical cluster* that consists of strings x such that

$$C(z|x) \approx 0, C(x|z) \lesssim m$$

(in what follows we make more specific the approximate equality and inequality used in this informal definition). This is indeed a cluster. From the definition it follows that for all x_1, x_2 from this set we have $\text{dist}(x_1, x_2) \lesssim m$. The cardinality of this set is at least 2^m since it contains all pairs $\langle z, t \rangle$ with t of complexity less than m . We say that z is the *base* of this canonical cluster.

A canonical cluster of strings intuitively resembles a “sunflower” — a family of 2^m pairwise intersecting sets (so that the mutual information of every two strings corresponds to the size of the intersection between two sets) such that all these sets have a common part (the core), as shown in Fig. 1a, and the size of each “petal” (outside the core) is at most m . However, a naive parallelism between the mutual information and intersections of sets can be deceiving. Indeed, Gács and Körner showed that the mutual information of two strings may not correspond to any material object (see [2]). Moreover, even if the mutual information of each pair of objects can be “materialized,” it seems possible that pairwise intersecting objects do not share any common core, as in the example in Fig. 1b.

So a natural question arises: do there exist clusters substantially different from the canonical ones? Rather surprisingly, it turns out that there is no other dense clusters besides the canonical ones and their subsets. We can say informally that all dense clusters (in the sense of information distance) resemble Fig. 1a and not Fig. 1b. This is the main result of this paper.

Main Result (informal version). *Every cluster in the sense of information distance is a subset of some canonical cluster.*

Observe that every (large enough) subset of a cluster is still a cluster (of high enough density). Thus, this theorem may be interpreted as a description of all dense enough clusters as sufficiently large parts of canonical ones.

Now we proceed with a more formal statement.

Theorem 1 (the formal version). *Let S be a set of strings such the $C(x|x') < m$ for every two strings $x, x' \in S$. Assume that $\log \#S > m - d$ for some d . Then there exists a string z such that*

$$C(z|x) \leq O(d + \log m) \text{ and } C(x|z) \leq m + O(d + \log m)$$

for all $x \in S$.

Proof. We start the proof with the following lemma.

Lemma 1 (Many paths $x - y - z$ imply one shorter path $x - z$). *Assume that for given strings x, z and for given numbers u, v, w there are at least 2^u strings y such that*

$$C(y|x) < v \quad \text{and} \quad C(z|y) < w.$$

Then $C(z|x) \leq v + w - u + O(\log(v + w))$.

Proof of Lemma 1. Given x, v, w , we can enumerate all z for which there exists y with the required properties. There are at most 2^{v+w} paths of length 2 and at least 2^u of these paths should lead to such a z . So there are at most 2^{v+w-u} different z , and this implies the bound for $C(z|x)$. \square

The previous lemma can be used to merge clusters, as the following statement shows:

Lemma 2 (Merging clusters). *If S and S' are two clusters of diameter m that have at least 2^{m-d} common elements, then their union is a cluster of diameter at most $m + d + O(\log m)$.*

Proof of Lemma 2. If x and x' are elements from S and S' respectively, then there are at least 2^{m-d} paths of length $2m$ that connect them, so $\text{dist}(x, x') \leq 2m - m + d + O(\log m) = m + d + O(\log m)$. \square

More specifically, we will need the following version of cluster merging:

Lemma 3 (Merging with a canonical cluster). *Assume that a cluster S of diameter at most $m + d_1$ and logsize at least $m - d_2$ has at least 2^{m-d_3} common elements with a canonical cluster with a base z that has parameters $(m + d_4, m - d_5)$. Then S is contained in the canonical cluster with the same base z with the parameters*

$$(m + O(\sum_i d_i + \log m), m - O(\sum_i d_i + \log m)).$$

Proof. The bound for the distances between z and elements of S follows from Lemma 1. \square

To prove the theorem it is enough to find a canonical cluster that has large intersection with a given cluster S . We do it as follows. The property of being a cluster with given parameters is enumerable. So we can run a process enumerating all clusters with diameter less than m and logsize greater than $m - d$. We do not restrict the length or complexity of strings in the clusters, so the enumeration will be infinite. As any other cluster with the same parameters, our cluster S will be enumerated at some stage of this process.

Let us fix some threshold d' (that will be slightly greater than d , see below). We say that two clusters S_1, S_2 have a *large* intersections if $\#(S_1 \cap S_2) > 2^{m-d'}$. To make the enumeration procedure defined above more economic, we will drop some clusters from this enumeration. We will keep only the ones that do not have large intersections with one of the clusters enumerated (and not dropped) earlier. We call the clusters that are not skipped *referential clusters* and number them as soon as they appear in the enumeration. (Again, there could be infinitely many referential clusters, this does not matter.) We will see that either S itself or some cluster that has a large intersection with S will become a referential cluster, and we plan to take its ordinal number in the enumeration as the base z of the canonical cluster that we are looking for.

We argue that that every referential cluster is a part of a canonical cluster with the parameters

$$(m + O(d + \log m), m - O(d + \log m)).$$

Let S_i be the referential cluster with number i . We start with the observation that every element $x \in S_i$ can be determined if we know i and the ordinal number of x in some standard ordering of S_i . To organize the process of enumeration of the referential clusters we also need to know the number m , which requires $O(\log m)$ bits. Therefore, $C(x|i) \leq m + O(\log m)$ for all $x \in S_i$. We want to show that S_i is a part of a canonical cluster with base i . To this end, we show that $C(i|x) \approx 0$ for all $x \in S_i$. We use the following lemma saying that (under some conditions on the parameters) the multiplicity of the family S_i is small, i.e., every x can be covered by only a small number of S_i . Then, to reconstruct i given x , we need only the ordinal number of S_i in the list of referential clusters containing x (and also the number m , as before).

Lemma 4 (Multiplicity bound). *Assume that $d' > 2d + 1$. Then every string x can be covered by at most 2^{d+1} referential clusters.*

Proof of Lemma 4. Assume that some string x is covered by N referential clusters. Each cluster S_i has size at least 2^{m-d} , and the intersection of every two clusters is at most $2^{m-d'}$ (otherwise the second cluster could not be selected as a referential one). Note also that all elements of all clusters that contain x have conditional complexity at most m conditional on x . Therefore, the union of them has size at most 2^{m+1} .

We use the following combinatorial claim:

Claim. *Let ε be the inverse of a positive integer number¹. If there are N events of probability greater than ε , and all pairwise intersections have probability less than $\varepsilon^2/2$, then $N < 2/\varepsilon$.*

(The bounds in the claim are pretty tight: $1/\varepsilon$ events of probability ε could be disjoint, and any number of independent events of probability ε have intersection ε^2 .)

Proof. Indeed, assume that we have $N = 2/\varepsilon$ events (decreasing N if needed). Then by the inclusion-exclusion formula the probability of the union of these events is at least

$$N \cdot \varepsilon - \frac{N^2}{2} \cdot \frac{\varepsilon^2}{2} = 2 - \frac{4}{2\varepsilon^2} \cdot \frac{\varepsilon^2}{2} > 1,$$

a contradiction. □

We consider the union of clusters covering x as the probability space with equiprobable points, where each cluster is an event. To apply this claim, we note that each cluster has a probability at least $\varepsilon := 2^{-d}$, and the intersections are of probability at most $2^{-d'}$. So we need $d' > 2d + 1$ to apply the claim and get the bound 2^{d+1} for the number of clusters covering x . Thus, assuming $d' > 2d + 1$ we obtain

$$C(x|i) \leq m + O(\log m) \quad \text{and} \quad C(i|x) \leq d + O(\log m)$$

for every element x of every referential cluster S_i . Therefore, the referential cluster is a part of a canonical cluster with diameter $m + O(d + \log m)$ and logsize at least $m - O(d + \log m)$. □

Now we bind together all parts of the argument. Assume that we have a cluster S of logsize at least $m - d$ and diameter m . We let $d' = 2d + 2$ (so the condition of Lemma 4 is true) and start the process of enumeration of referential clusters using d' for small intersection threshold. The construction guarantees that S is one of the referential clusters or at least it has a large intersection with some referential cluster S_i , and that S_i is canonical with parameters $(m - O(d + \log m), m + O(d + \log m))$. Therefore, we can apply Lemma 3 and conclude that S is a part of a canonical cluster with the parameters

$$(m + O(d + \log m), m - O(d + \log m)),$$

and the theorem is proven. □

¹A similar claim is true for all $\varepsilon > 0$. The assumption that $1/\varepsilon$ is an integer number slightly simplifies the calculations since we can ignore rounding.

3 Clusters and the mutual information of a triple

In this section we discuss an application of Theorem 1 motivated the definition of “bunches” proposed in [8] (similar to the definition of clusters discussed in the previous section).

Theorem 2 ([8, 9]). *For every triple of strings x, y, z there exists a string w such that*

$$C(w) = I(x : y : z) + O(\varepsilon + \log C(x, y, z))$$

and

$$\max(C(w|x), C(w|y), C(w|z)) = O(\varepsilon + \log C(x, y, z)),$$

where $\varepsilon := \max(I(x : y|z), I(x : z|y), I(y : z|x))$ and

$$I(x : y : z) := C(x) + C(y) + C(z) - C(x, y) - C(x, z) - C(y, z) + C(x, y, z).$$

In particular, if the three values of conditional mutual informations $I(x : y|z)$, $I(x : z|y)$, $I(y : z|x)$ are negligibly small (say, logarithmic in $C(x, y, z)$) as shown in Fig. 2, then the mutual information shared by x, y, z can be materialized in the sense of *common information* of Gács and Körner, [2].

Proof. For each triple of strings (x, y, z) we call by its *complexity profile* the tuple of seven complexity quantities

$$(C(x), C(y), C(z), C(x, y), C(x, z), C(y, z), C(x, y, z)).$$

For every precision parameter (an integer number) δ we define the set \mathcal{C}_δ of δ -clones of z conditional on (x, y) as the set of all z' such that the complexity profile of (x, y, z') differs in each component from the complexity profile of (x, y, z) by at most δ .

A simple counting argument implies (see, e.g., [6]) that there exists a constant D such that for all x, y, z the set of δ -clones of z conditional on (x, y) with $\delta = D \log C(x, y, z)$ consists of $2^{C(z|x, y) - O(\delta)}$ strings z' . In what follows we fix such a δ .

We claim that \mathcal{C}_δ is a cluster. To prove this fact we need the following inequality, where z' and z'' are two arbitrary elements from \mathcal{C}_δ :

$$\begin{aligned} I(x : y) &\leq I(x : y|z') + I(x : y|z'') + I(z' : z'') \\ &\quad + I(x : y|z) + I(x : z|y) + I(y : z|x) + O(\log C(x, y, z)). \end{aligned}$$

This inequality² is valid for all strings x, y, z, z', z'' , see [7]. Since z' and z'' are clones of z conditional on x, y , the inequality rewrites to

$$I(x : y) \leq I(z' : z'') + O(\varepsilon + \log C(x, y, z)).$$

²This inequality is non Shannon type, i.e., it cannot be represented as a linear combination of several instances of inequalities representing non negativity of conditional Kolmogorov complexity, or mutual information, or conditional mutual information. The very first example of a non Shannon type linear inequality for Shannon’s entropy was proven by Zhang and Yeung in [4]. It is known, see [5], that exactly the same linear inequalities are true for Shannon’s entropy and for Kolmogorov complexity. The inequality used in our proof is a little generalization of the inequality discovered by Zhang and Yeung, see [7] for details.

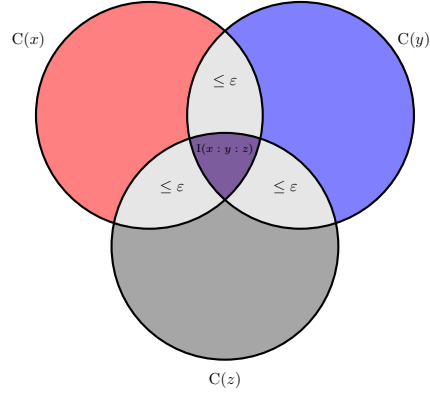


Figure 2: A Venn-like diagram representing information quantities for a triplet (x, y, z) . The area of each circle represents the value of Kolmogorov complexity of x , y , and z respectively. The areas of the unions of each two circle represent Kolmogorov complexity of pairs, and the area of the union of all three circles represents Kolmogorov complexity of the triple. Accordingly, the intersections of every two circles represent the mutual information of pairs, and the intersection of all three circles represent the value $I(x : y : z)$. The areas shown in light gray represent the values of the three conditional mutual information $I(x : y|z)$, $I(x : z|y)$, $I(y : z|x)$. Theorem 2 claims: if the three values of conditional mutual information are negligibly small, then the mutual information of the triple $I(x : y : z)$ (which is in this case ε -close to each of the values $I(x : y)$, $I(x : z)$, and $I(y : z)$) can be materialized.

It follows that

$$\begin{aligned}
C(z''|z') &= C(z'') - I(z' : z'') \\
&\leq C(z) - I(x : y) + O(\varepsilon + \log C(x, y, z)) \\
&= C(z|x, y) + O(\varepsilon + \log C(x, y, z)).
\end{aligned}$$

Therefore, \mathcal{C}_δ is a cluster with the parameters

$$(C(z|x, y) + O(\delta + \log C(x, y, z)), C(z|x, y) - O(\delta + \log C(x, y, z))).$$

Theorem 1 implies that there exists a string w (the base of the cluster) such that $C(w|\hat{z}) = O(\varepsilon + \log C(x, y, z))$ and $C(\hat{z}|w) = C(z|x, y) + O(\varepsilon + \log C(x, y, z))$ for all $\hat{z} \in \mathcal{C}_\delta$ (including the original string z). It is easy to compute Kolmogorov complexity of w :

$$C(w) = I(z : (x, y)) + O(\varepsilon + \log C(x, y, z)) = I(x : y : z) + O(\varepsilon + \log C(x, y, z)).$$

It remains to observe that due to Lemma 1

$$C(w|x) = O(\varepsilon + \log C(x, y, z)) \text{ and } C(w|y) = O(\varepsilon + \log C(x, y, z))$$

(it is enough to count the number of chains $x - \hat{z} - w$ and $y - \hat{z} - w$ with $\hat{z} \in \mathcal{C}_\delta$). \square

4 Conclusion

We mention in conclusion that in applications we may need some variations of the notion of a cluster (in the sense of the information distance), see [14]. An interesting variant of the definition was proposed by S. Epstein in [15], where the principal parameter is not the *maximum* but the *average* distance between elements of a cluster. Epstein argues that the density of a cluster is connected with the mutual information between this cluster and the *halting sequence* (characterizing the stopping Turing machine in the universal enumeration).

Acknowledgments. The author is grateful to Alexander Shen and Marius Zimand for fruitful discussions.

References

- [1] A. Kolmogorov, Three approaches to the quantitative definition of information, *Problems of Information Transmission*, **1**(1), 3–11 (1965).
- [2] P. Gács and J. Körner, Common information is far less than mutual information. *Problems of Control and Information Theory*, **2**(2), 149–162 (1973).
- [3] C.H. Bennett, P. Gács, M. Li, P.M. Vitányi, and W.H. Zurek, Information distance. *IEEE Transactions on information theory*, **44**(4), 1407–1423 (1998).
- [4] Z. Zhang and R.W. Yeung, On characterization of entropy function via information inequalities. *IEEE Transactions on Information Theory*, **44**(4), 1440–1452 (1998).
- [5] D. Hammer, A. Romashchenko, A. Shen, and N. Vereshchagin. Inequalities for Shannon entropy and Kolmogorov complexity. *Journal of Computer and System Sciences*, **60**(2), 442–464 (2000).
- [6] A. Romashchenko, Pairs of Words with Nonmaterializable Mutual Information. *Problems of Information Transmission*, **36**(1), 3–20 (2000).
- [7] K. Makarychev, Yu. Makarychev, A. Romashchenko, N. Vereshchagin, A new class of non-Shannon-type inequalities for entropies. *Communications in Information and Systems*, **2**(2), 147–166 (2002).
- [8] A. Romashchenko, Extracting the mutual information for a triple of binary strings. In *Proc. 18th IEEE Annual Conference on Computational Complexity*, 221–229 (2003).
- [9] A. Romashchenko, A Criterion for Extractability of Mutual Information for a Triple of Strings. *Problems of information transmission*, **39**(1), 148–157 (2003).

- [10] M. Li, X. Chen, X. Li, B. Ma, and P.M. Vitányi, The similarity metric. *IEEE Transactions on Information Theory*, **50**(12), 3250–3264 (2004).
- [11] R. Cilibrasi, P. Vitányi, and R. De Wolf, Algorithmic clustering of music. In *Proc. Fourth International Conference on Web Delivering of Music*, 110–117 (2004).
- [12] R. Cilibrasi and P.M. Vitányi, Clustering by compression. *IEEE Transactions on Information theory*, **51**(4), 1523–1545 (2005).
- [13] M. Li and P. Vitányi. *An Introduction to Kolmogorov Complexity and its Applications*. New York: Springer, 2008.
- [14] An.A. Muchnik, A.E. Romashchenko, Stability of properties of Kolmogorov complexity under relativization. *Problems of Information Transmission*, **46**(1), 38–61 (2010).
- [15] S. Epstein, On the Conditional Complexity of Sets of Strings. arXiv:1907.01018 (2019).
- [16] Alexander Shen, Personal communication, (2021).