

Adversarial Robustness Verification and Attack Synthesis in Stochastic Systems

Lisa Oakley Alina Oprea Stavros Tripakis

Khoury College of Computer Sciences, Northeastern University

Abstract


Probabilistic model checking is a useful technique for specifying and verifying properties of stochastic systems including randomized protocols and the theoretical underpinnings of reinforcement learning models. However, these methods rely on the assumed structure and probabilities of certain system transitions. These assumptions may be incorrect, and may even be violated in the event that an adversary gains control of some or all components in the system.

In this paper, motivated by research in adversarial machine learning on adversarial examples, we develop a formal framework for adversarial robustness in systems defined as discrete time Markov chains (DTMCs). We base our framework on existing probabilistic verification frameworks for probabilistic temporal logic properties. We also extend our framework to include deterministic, memoryless policies acting in Markov decision processes (MDPs). Our framework includes a flexible approach for specifying several adversarial models with different capabilities to manipulate the system. We outline a class of threat models under which adversaries can perturb system transitions, constrained by an ϵ ball around the original transition probabilities and define four specific instances of this threat model. Notably, we consider the situation where the adversary can only modify transitions which existed in the original DTMC, as well as the more powerful case where the adversary can modify the structure of the DTMC by adding transitions.


We define three main DTMC adversarial robustness problems: adversarial robustness verification, maximal δ synthesis, and worst case attack synthesis. We present two optimization-based solutions to these three problems, leveraging traditional and parametric probabilistic model checking techniques. We then evaluate our solutions on two stochastic protocols and a collection of GridWorld case studies, which model an agent acting in an environment described as an MDP. We find that the parametric solution results in fast computation for small parameter spaces. In the case of less restrictive (stronger) adversaries, the number of parameters increases, and directly computing property satisfaction probabilities is more scalable. We demonstrate the usefulness of our definitions and solutions by comparing system outcomes over various properties, threat models, and case studies.

1 Introduction


Specification and verification of stochastic systems including discrete time Markov chains (DTMCs) and Markov decisions processes (MDPs) can be used to analyze a large class of probabilistic systems and algorithms [1–4]. A promising recent line of research has also used probabilistic model checking to verify properties of deep reinforcement learning [5, 6]. The majority of work on property verification on these systems considers fixed, known probabilities of transitions between states. In real-world scenarios, these assumed transition probabilities may be incorrect or manipulated by an adversary who gains control of some or all of the components of the system.




(a) Original DTMC $\mathcal{C} = (\mathcal{S}, s_0, \mathbf{P})$.




(b) Worst case SPSS attack with vulnerable state 1.

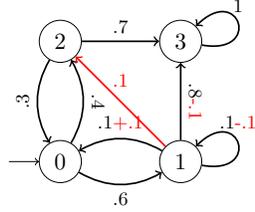

(c) Worst case SS attack with vulnerable state 1.

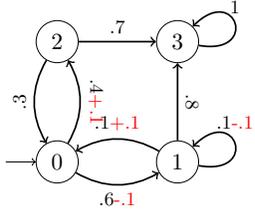

(d) Worst case SPST attack with transitions between states 0, 1, 2 vulnerable.

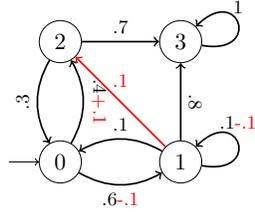

(e) Worst case ST attack with transitions between states 0, 1, 2 vulnerable.

Figure 1: Worst case attack on DTMC \mathcal{C} with respect to $\varphi = ((s \neq 2)\mathbf{U}^{\leq 10}(s = 3))$ over four ε, \max -bounded threat models, with perturbation budget $\varepsilon = .1$. Selected states (SS) and structure-preserving selected states (SPSS) adversaries may perturb transition probabilities which come from a set of “vulnerable states”. Selected transition (ST) and structure-preserving selected transition (SPST) adversaries may only may perturb transition probabilities in some pre-defined set of transitions. SS and ST adversaries can add transitions within their vulnerability sets, and SPSS and SPST adversaries can only perturb transitions which existed in the original DTMC.

In the past, work has been done to address the issue of uncertain transition probabilities in DTMCs. The majority of these works focus on uncertainty in models with small parameter spaces, considering only a limited set of properties [7–9]. In the past few years, improvements have been made to these techniques making probabilistic model checking in the presence of uncertainty more feasible for large-scale systems with many uncertainties [10, 11]. However, most existing work considers only non-adversarial uncertainty, and does not account for situations in which an adversary may gain control of certain system components in order to intentionally reduce utility of the system. Specifically, most analysis and evaluation has assumed uncertainties which preserve the structure of the original DTMC. Since the model probabilities are often generated by observation of the system, they do not account for unexplored malicious transitions.

In this paper, we use existing frameworks for verification of stochastic systems to develop a formal definition for adversarial robustness in systems defined as DTMCs with respect to a wide variety of properties [9, 12, 13]. We were inspired by research in adversarial machine learning

that defines adversarial examples as small perturbations of legitimate data samples generated by an adversary to evade a neural network [14, 15]. We define the equivalent notion of adversarial examples for DTMCs: an adversary generates bounded perturbations on an DTMC or MDP with the goal of decreasing the satisfaction probability of certain properties. We model the constraints on the perturbation matrix as adversarial perturbation sets, creating a flexible framework to define threat models. We specify a class of ε, d -bounded threat models for further evaluation. Fig. 1 shows examples of attacks on a 4-state DTMC.

We go on to define three main adversarial robustness problems. In the *DTMC adversarial robustness verification* problem, we must determine whether a given DTMC satisfies adversarial robustness with respect to a given property, bound, and adversarial model. In the *maximal δ synthesis* problem, we are given a DTMC, property, and adversarial model, and must find the maximal bound δ for which the DTMC is adversarially robust. In the *worst-case attack synthesis* problem, we are given a DTMC, property, and adversarial model, and must find a perturbation to the original DTMC which results in the largest δ between the probability the original and perturbed DTMCs satisfy the property. We refer to these problems collectively as the *DTMC adversarial robustness problems*. We also extend the robustness definitions to deterministic, memoryless policies acting in MDPs. These problems are important because they allow a system designer to audit their systems from an adversarial perspective, highlighting vulnerabilities and providing feedback on which components are most impactful when under attack.

To position our problem definitions in the context of other literature, we compare to the uncertain Markov chain (UMC) model checking problem [16]. We show that DTMC adversarial robustness *verification* can be reduced to the UMC model checking problem for interval-valued discrete time Markov chains (IDTMC) in the case of ε, max -bounded threat models and PCTL properties. Our definitions support more properties, including PCTL*, and our worst case adversary synthesis and maximal δ synthesis problems provide the added benefit of explaining which adversarial perturbation is a counterexample to robustness.

After defining our problem space, we outline two optimization-based solutions which use the Sequential Least Squares (SLSQP) minimization algorithm [17] and leverage existing probabilistic model checking techniques for explicit and parametric DTMCs. In particular, we use the Prism [18] probabilistic model checker for computing explicit property satisfaction probabilities, and the PARAM [13] parametric model checking tool to compute a closed form, symbolic representation of the property satisfaction probability. We evaluate these solutions on two protocols modeled as DTMCs [4, 19] and one GridWorld MDP [20]. We find that symbolic methods work well when the parameter space is small, but that direct computation of property satisfaction probabilities is faster for larger parameter spaces. In our evaluation, we show how our methods can be useful in determining which system components and transitions are most important to preserving robustness of the system across many properties and threat models. We also compare various threat models for different case studies and properties.

We have four main contributions in this paper. First, we define adversarial robustness for DTMCs with a flexible threat model definition including structure-preserving and non-structure preserving adversaries. Second, we propose three DTMC adversarial robustness problems and provide two solutions to these problems based on existing probabilistic model checking techniques. Third, we provide theoretical reduction to the UMC model checking problem [16] for our proposed verification problem with ε, max -bounded threat models. Finally, we evaluate these definitions and solutions on three case studies and compare adversarial models with different capabilities.

2 Background

We start with a brief background on probabilistic model checking, including the definitions of discrete time Markov chains (DTMCs), Markov decision processes (MDPs), parametric DTMCs (pDTMCs) and the PCTL* property specification language [4, 19]. These modeling tools will be useful in our definitions of robustness, as well as the evaluation of different model checking techniques. We also point out the relationship between a policy, an MDP, and the resulting composed DTMC.

2.1 Probabilistic Models

DTMCs are transition systems where transitions between states are represented by probability distributions. MDPs are transition systems which can model both probabilistic transitions and nondeterminism. An MDP composed with a deterministic, memoryless policy results in a DTMC, as the policy resolves all nondeterminism in the system.

Definition 1 (DTMC). A discrete time Markov chain (DTMC) is a 5-tuple

$$\mathcal{C} = (\mathcal{S}, s_0, \mathbf{P}, AP, L)$$

where \mathcal{S} is a finite set of states with $s_0 \in \mathcal{S}$ the initial state, AP a set of atomic propositions, and $L : \mathcal{S} \rightarrow 2^{AP}$ a labeling function. \mathbf{P} is an $|\mathcal{S}| \times |\mathcal{S}|$ matrix where $0 \leq \mathbf{P}_{s,s'} \leq 1$ indicates the probability that the system transitions from state s to s' . $\forall s \in \mathcal{S}, \sum_{s' \in \mathcal{S}} \mathbf{P}_{s,s'} = 1$ (all rows in \mathbf{P} sum to 1).

Definition 2 (MDP). A Markov decision process (MDP) is a 6-tuple

$$\mathcal{M} = (\mathcal{S}, s_0, \mathcal{A}, T, AP, L)$$

where \mathcal{S}, \mathcal{A} are finite sets of states and actions respectively, $s_0 \in \mathcal{S}$ is the initial state, AP a set of atomic propositions, and $L : \mathcal{S} \rightarrow 2^{AP}$ a labeling function. $T : \mathcal{S} \times \mathcal{A} \times \mathcal{S} \rightarrow [0, 1]$ is a transition function where $T(s, a, s')$ represents the probability that the system transitions from s to s' , given action a .

Definition 3 (DTMC of an MDP). The DTMC of an MDP, $\mathcal{M} = (\mathcal{S}, s_0, \mathcal{A}, T, AP, L)$, induced by a policy σ is

$$\mathcal{M}_\sigma = (\mathcal{S}, s_0, \mathbf{P}, AP, L)$$

where $\mathbf{P}_{s,s'} = T(s, \sigma(s), s') \forall s, s' \in \mathcal{S}$, and $\sigma : \mathcal{S} \rightarrow \mathcal{A}$ is a memoryless, deterministic policy.

In some cases, we will need to consider a DTMC for which some or all of the transitions are of unspecified probability. To do so, we consider a parametric DTMC which describes some transition probabilities in the system symbolically, rather than with an explicit value [4].

Definition 4 (Parametric DTMC (pDTMC)). A (labeled) parametric DTMC of formal parameter set X can be described as a 5-tuple

$$\mathcal{C}_X = (\mathcal{S}, s_0, \mathbf{P}^X, AP, L) \tag{1}$$

Where \mathcal{S} is a set of states, s_0 an initial state, AP a set of atomic propositions, $L : \mathcal{S} \rightarrow 2^{AP}$ a labeling function, and \mathbf{P}^X a probability matrix such that $\mathbf{P}_{s,s'}^X$ indicates the probability that the system transitions from state s to s' .

In a parametric DTMC, the entries of \mathbf{P}^X can be rational numbers, members of X , or expressions formed from the former two categories. For a parametric DTMC to be valid, there must exist an instantiation function $\kappa : \mathbb{Q} \cup X \rightarrow [0, 1]$ such that $\forall q \in \mathbb{Q} \kappa(q) = q$ and $\forall s \in \mathcal{S} \sum_{s' \in \mathcal{S}} \kappa(\mathbf{P}_{s,s'}^X) = 1$. The resulting DTMC of applying κ to the variables is called an *instance* DTMC.

2.2 Property Specification

In our analysis, we will primarily consider properties specified in PCTL*, an extension of Probabilistic Computation Tree Logic (PCTL), which is a formal logic that defines probabilistic properties on DTMCs. The PCTL* syntax is as follows [19].

Definition 5 (Syntax of PCTL*). *PCTL* state formulae over the set AP of atomic propositions are formed according to the following grammar:*

$$\Phi ::= true \mid a \mid \Phi_1 \wedge \Phi_2 \mid \neg\Phi \mid \mathbb{P}_J(\varphi) \quad (2)$$

where $a \in AP$, φ is a path formula, and $J \subseteq [0, 1]$ is an interval with rational bounds. PCTL* path formulae are formed according to the following grammar:

$$\varphi ::= \Phi \mid \varphi_1 \wedge \varphi_2 \mid \neg\varphi \mid \bigcirc\varphi \mid \varphi_1 \mathbf{U}\varphi_2 \mid \varphi_1 \mathbf{U}^{\leq k}\varphi_2 \quad (3)$$

where Φ is a PCTL* state formula.

Using this syntax, we can derive the eventually ($\diamond\Phi = true\mathbf{U}\Phi$) and bounded eventually ($\diamond^{\leq k}\Phi = true\mathbf{U}^{\leq k}\Phi$) operators, as well as many other useful operators, like the global or always true operator ($\square\Phi = \neg\diamond\neg\Phi$). We note that PCTL* subsumes PCTL whose definition is similar, but requires that any temporal operator be followed by a state formula, and restricts boolean combinations of path formulae. We omit the details of these definitions and refer the reader to Chapter 10 of [19] for more details.

2.3 Computing Property Satisfaction Probabilities

PCTL* introduces a probabilistic operator $\mathbb{P}_J(\varphi)$ where φ is a path formula and $J \subseteq [0, 1]$ is a probability interval. Semantically, given a state s of a Markov chain \mathcal{C} , we have that

$$s \models_{\mathcal{C}} \mathbb{P}_J(\varphi) \iff Pr(s \models_{\mathcal{C}} \varphi) \in J \quad (4)$$

where $Pr(s \models_{\mathcal{C}} \varphi)$ denotes the probability that s satisfies φ in \mathcal{C} . We refer to this measure as the *satisfaction probability of φ at s* . The satisfaction probability is defined by considering the set S of all infinite traces starting from s that satisfy φ , and then taking the probability measure of S .

Because we are analyzing the adversarial robustness of a system, we are interested in the extent to which small changes in the environment affect the utility of the system. In our case, the utility of the system is the probability that a property is satisfied by the paths starting in the initial state, s_0 . Therefore, rather than focusing on the binary question of whether the PCTL* property is satisfied by the DTMC, we are interested in the satisfaction probabilities of certain path formulae. In the remainder of the paper, we utilize the direct computation of $Pr(s \models_{\mathcal{C}} \varphi)$. State of the art probabilistic model checkers including PRISM [18], ISCASM [21] and Storm [12] are capable of computing this probability directly.

Parametric model checkers including PARAM [13] and PROPhESY [9] are able to determine these probabilities for parametric DTMCs with respect to a given PCTL by solving the *symbolic solution function synthesis* problem [4, 13, 22, 23].

Problem 1 (Symbolic Solution Function Synthesis). *Given parameter set X , a pDTMC \mathcal{C}_X with rational state transitions, and a PCTL property, φ , find the rational function f over parameters in X such that*

$$f_{\varphi}(X) = Pr(s_0 \models_{\mathcal{C}_X} \varphi). \quad (5)$$

We denote the instantiation of the symbolic solution function to be $\kappa(f_\varphi(X))$, which indicates the probability that φ is satisfied by the instance DTMC resulting from applying instantiation function κ to each variable in \mathcal{C}_X .

3 Adversarial Robustness in DTMCs

In this section, we introduce a general definition of adversarial robustness for DTMCs and discuss in detail a class of ε, d -bounded threat models. We also present three DTMC adversarial robustness problems and extend these definitions to include deterministic, memoryless policies acting in MDPs. Additionally, we provide a reduction to the Uncertain Markov Chain (UMC) model checking problem [16] for ε, \max -bounded threat models.

3.1 Robustness Definition

We introduce a general definition of *DTMC adversarial robustness* with respect to a given property. In a real-world scenario, adversaries are restricted in how much they can alter a given system, both by physical limitations and in order to avoid detection. We model an adversary who can modify the system within some predetermined constraints.

To model this system perturbation, we introduce the *perturbation space*, $\mathcal{PS}^{\mathcal{C}}$ of DTMC $\mathcal{C} = (\mathcal{S}, s_0, \mathbf{P}, AP, L)$ which consists of all DTMCs of the form $(\mathcal{S}, s_0, \mathbf{P}', AP, L)$. In other words, DTMCs in the perturbation space have the same states (with the same labeling and initial state) as the original DTMC, but vary in their transition probability matrix. We refer to subsets $PS \subseteq \mathcal{PS}^{\mathcal{C}}$ as *perturbation sets*. Any transition which has more than one possible value in PS is considered a *vulnerable transition*. All perturbation sets must include the original DTMC, and the minimal perturbation set for \mathcal{C} is $\{\mathcal{C}\}$. These perturbation sets provide constraints on the adversary’s ability to modify the transitions in the system. Using this notion of perturbation constraints, we can now define general adversarial robustness for a DTMC.

Definition 6 (DTMC Adversarial Robustness). *Given $0 \leq \delta \leq 1$, DTMC \mathcal{C} , perturbation set $PS \subseteq \mathcal{PS}^{\mathcal{C}}$, and some PCTL* path formula φ , \mathcal{C} is adversarially robust with respect to PS , φ , δ if*

$$Pr(s_0 \models_{\mathcal{C}'} \varphi) \geq Pr(s_0 \models_{\mathcal{C}} \varphi) - \delta \tag{6}$$

for all $\mathcal{C}' \in PS$.

We choose to define DTMC adversarial robustness as (6) because it highlights the relationship between the satisfaction probability in the original DTMC and perturbed DTMC. It can also be written as a PCTL* satisfaction relation.

Remark 1. *Inequality (6) is semantically equivalent to $s_0 \models_{\mathcal{C}'} \mathbb{P}_{\geq(p-\delta)}(\varphi)$ where $p = Pr(s_0 \models_{\mathcal{C}} \varphi)$ for all $\mathcal{C}' \in PS$.*

3.2 Threat Models

The power of Definition 6 lies in the ability to specify an adversarial perturbation set which represents a threat model. There are many potential methods to restrict the adversary, for example, in a *structure-preserving* threat model, the adversary is only able to perturb probabilities of transitions which exist in the original system. Formally this can be expressed as $\forall \mathcal{C}' \in PS \subseteq \mathcal{PS}^{\mathcal{C}}, \mathbf{P}_{s,s'} = 0 \implies \mathbf{P}'(s, s') = 0$.

This definition begets a natural class of threat models for which the perturbation set is described as a ball around the probability matrix of the original DTMC. We will call this class the ε, d -bounded threat models. An adversary acting under an ε, d -bounded threat model has a fixed budget, ε , which bounds the distance between the original and perturbed DTMCs, measured by a distance function d over the transition probability matrices. Formally, we say $\forall \mathcal{C}' \in PS \subseteq \mathcal{PS}^{\mathcal{C}}, d(\mathbf{P}, \mathbf{P}') \leq \varepsilon$.

Because of this modular definition, explicit threat models can be defined using combinations of these restrictions. This allows the system designer to evaluate many different potential attacks in a methodical manner. For the purposes of this paper, we focus our evaluation on threat models which are bounded with respect to the entry-wise *max* distance defined as

$$\|\mathbf{X} - \mathbf{X}'\|_{max} = \max_{i,j} (|\mathbf{X}_{ij} - \mathbf{X}'_{ij}|). \quad (7)$$

This norm is equivalent to the ℓ_{∞} norm over the vector representation of matrix \mathbf{X} . The following four perturbation set definitions are examples of these ε, max -bounded threat models.

3.2.1 Selected transitions (ST) threat model

The ST threat model permits adversaries to perturb only selected transitions. For this threat model, we specify a set $\mathcal{T} \subseteq \mathcal{S} \times \mathcal{S}$ of vulnerable transitions, and define the perturbation set to be

$$PS_{\varepsilon, max, \mathcal{T}} = \{\mathcal{C}' : \|\mathbf{P} - \mathbf{P}'\|_{max} \leq \varepsilon \text{ and} \quad (8)$$

$$\forall (s, s') \notin \mathcal{T}, \mathbf{P}'_{s,s'} = \mathbf{P}_{s,s'}\}.$$

3.2.2 Structure-preserving selected transitions (SPST) threat model

The SPST threat model is a more restrictive version of the ST threat model. SPST adversaries may perturb transitions from a vulnerable set whose values in the original DTMC are non-zero. In other words, adversaries under this threat model may attack any transition in the vulnerable set, but may not add transitions to the DTMC. For this threat model, we specify a set $\mathcal{T} \subseteq \mathcal{S} \times \mathcal{S}$ of vulnerable transitions, and define the perturbation set to be

$$PS_{\varepsilon, max, \mathcal{T}, pres} = \{\mathcal{C}' : \|\mathbf{P} - \mathbf{P}'\|_{max} \leq \varepsilon \text{ and} \quad (9)$$

$$\forall (s, s') \notin \mathcal{T} \mathbf{P}'_{s,s'} = \mathbf{P}_{s,s'} \text{ and}$$

$$\forall s, s' \in \mathcal{S}, \mathbf{P}_{s,s'} = 0 \implies \mathbf{P}'_{s,s'} = 0\}.$$

3.2.3 Selected states (SS) threat model

A real-world adversary may be able to gain control of certain states in a system, and therefore it is useful to model an adversary by the states they can control. The SS threat model is a special case of ST threat model, wherein the vulnerable transitions are defined to be those emanating from a set of vulnerable states. For this threat model, we specify a set $\mathcal{V} \subseteq \mathcal{S}$ of vulnerable states, and define the perturbation set to be

$$PS_{\varepsilon, max, \mathcal{V}} = \{\mathcal{C}' : \|\mathbf{P} - \mathbf{P}'\|_{max} \leq \varepsilon \text{ and} \quad (10)$$

$$\forall s \notin \mathcal{V}, s' \in \mathcal{S}, \mathbf{P}'_{s,s'} = \mathbf{P}_{s,s'}\}.$$

3.2.4 Structure-preserving selected states (SPSS) threat model

The SPSS threat model is a special case of the SPST threat model. Here, adversaries are permitted to attack transitions emanating from a set of vulnerable states, but may not add transitions to the original DTMC. For this threat model, we specify a set $\mathcal{V} \subseteq \mathcal{S}$ of vulnerable states, and define the perturbation set to be

$$PS_{\varepsilon, \max, \mathcal{V}, \text{pres}} = \{C' : \|P - P'\|_{\max} \leq \varepsilon \text{ and} \quad (11)$$

$$\forall s \notin \mathcal{V}, s' \in \mathcal{S}, P'_{s,s'} = P_{s,s'} \text{ and}$$

$$\forall s, s' \in \mathcal{S}, P_{s,s'} = 0 \implies P'_{s,s'} = 0\}.$$

3.3 Verification and Synthesis Problems

We now present three main problem definitions related to verification of robustness and attack synthesis in DTMCs.

Problem 2 (Verification of Adversarial Robustness). *Given $0 \leq \delta \leq 1$, DTMC \mathcal{C} , PCTL* path formula φ , $PS \subseteq \mathcal{PS}^C$, determine whether \mathcal{C} is adversarially robust with respect to PS , φ , δ .*

This definition leads to two immediate results.

Remark 2 (Zero Case). *Adversarial robustness with an ε, d -bounded adversary always holds for $\varepsilon = 0$, $\delta = 0$.*

Remark 3 (Monotonicity). *If DTMC \mathcal{C} is adversarially robust with an ε, d -bounded adversary, it is adversarially robust with respect to an equivalently defined ε', d -bounded adversary (varying only in the value of ε) for $\varepsilon' \leq \varepsilon$.*

Problem 3 (Maximal δ Synthesis). *Given DTMC \mathcal{C} , PCTL* path formula φ , and perturbation set $PS \subseteq \mathcal{PS}^C$, synthesize the maximal δ for which \mathcal{C} is adversarially robust with respect to PS , φ , δ .*

In order to solve Problems 2 and 3 we solve a more general synthesis problem for a worst-case attack. This attack provides meaningful information on the transition probabilities which have the most impact on robustness. This feedback can be used to determine which elements of a system are most important to maintain overall utility and are thereby the most critical to be secured.

Problem 4 (Worst Case Attack Synthesis). *Given DTMC $\mathcal{C} = (\mathcal{S}, s_0, P, AP, L)$, PCTL* path formula φ , and perturbation set $PS \subseteq \mathcal{PS}^C$, find perturbation matrix \mathbf{X} such that $\mathcal{C}^* = (\mathcal{S}, s_0, P + \mathbf{X}, AP, L)$ satisfies $Pr(s_0 \models_{\mathcal{C}^*} \varphi) \leq Pr(s_0 \models_{\mathcal{C}'} \varphi) \forall \mathcal{C}' \in PS$.*

It follows immediately that Problems 2 and 3 reduce to Problem 4 because the result of Problem 4 is a minimizing attack perturbation.

Lemma 1 (Problem 2 reduces to Problem 4). *For \mathcal{C}^* which is the solution to Problem 4 with given \mathcal{C} , φ , PS , $Pr(s_0 \models_{\mathcal{C}^*} \varphi) \geq Pr(s_0 \models_{\mathcal{C}} \varphi) - \delta$ for a given $0 \leq \delta \leq 1$ if and only if \mathcal{C} is adversarially robust with respect to PS , φ , δ .*

Lemma 2 (Problem 3 reduces to Problem 4). *For \mathcal{C}^* which is the solution to Problem 4 with given \mathcal{C} , φ , PS ,*

$$\delta^* ::= Pr(s_0 \models_{\mathcal{C}} \varphi) - Pr(s_0 \models_{\mathcal{C}^*} \varphi) \quad (12)$$

is the maximal δ for which \mathcal{C} is adversarially robust with respect to PS , φ , δ .

3.4 Reduction to the UMC Model Checking Problem

The uncertain Markov chain (UMC) model checking problem is to check whether all DTMCs in an infinite set defined by an interval on the entries of the transition probability matrix satisfy a PCTL state formula [16]. In this section we show that one of our three problems (DTMC adversarial robustness verification, Problem 2) reduces to the uncertain Markov chain (UMC) model checking problem for ε, \max -bounded threat models and PCTL properties. We first revisit background on interval-valued Markov chains and the UMC model checking problem [16].

Definition 7 (Interval-Valued Discrete Time Markov Chain (IDTMC)). *An interval-valued discrete time Markov chain is a tuple*

$$\mathcal{I} = (\mathcal{S}, s_0, \check{\mathbf{P}}, \hat{\mathbf{P}}, AP, L) \quad (13)$$

where \mathcal{S} is a finite set of states with s_0 initial state. $\check{\mathbf{P}}$ is a transition probability matrix for which $\check{\mathbf{P}}_{s,s'}$ gives the lower bound of the transition probability from state s to state s' . $\hat{\mathbf{P}}$ similarly is the upper bound transition probability matrix. AP is a set of atomic propositions and $L : \mathcal{S} \rightarrow 2^{AP}$ is a labeling function.

$[\mathcal{I}]$ is the infinite set of DTMCs $(\mathcal{S}, s_0, \mathbf{P}, AP, L)$ such that $\check{\mathbf{P}}_{s,s'} \leq \mathbf{P}_{s,s'} \leq \hat{\mathbf{P}}_{s,s'} \forall s, s' \in \mathcal{S}$. For the uncertain Markov chain semantics of IDTMC \mathcal{I} , we assume that an external environment non-deterministically picks a single DTMC from $[\mathcal{I}]$ at the beginning. Now we revisit the UMC model checking problem [16].

Problem 5 (UMC Model Checking Problem). *Given a IDTMC \mathcal{I} and PCTL state formula Φ , $s_0 \models_{\mathcal{I}} \Phi$ if and only if, $\forall \mathcal{C} \in [\mathcal{I}], s_0 \models_{\mathcal{C}} \Phi$.*

In other words, $[\mathcal{I}]$ does not satisfy Φ if there exists a DTMC \mathcal{C} in $[\mathcal{I}]$ such that \mathcal{C} does not satisfy Φ .

We now examine how the adversarial robustness verification problem (Problem 2) relates to the UMC model checking problem (Problem 5).

Lemma 3. *Given DTMC \mathcal{C} , ε, \max -bounded perturbation set PS , and $0 \leq \delta \leq 1$, we can define IDTMC \mathcal{I} , such that, for the DTMC \mathcal{C} ,*

$$\mathcal{C} \in [\mathcal{I}] \iff \mathcal{C} \in PS \quad (14)$$

Proof. Assume we have DTMC $\mathcal{C} = (\mathcal{S}, s_0, \mathbf{P}, AP, L)$, $0 \leq \delta \leq 1$, and ε, \max -bounded perturbation set $PS \subseteq \mathcal{PS}^{\mathcal{C}}$ with $0 \leq \varepsilon \leq 1$ and set of vulnerable transitions $\mathcal{V} \subseteq \mathcal{S} \times \mathcal{S}$. We then construct IDTMC $\mathcal{I} = (\mathcal{S}, s_0, \check{\mathbf{P}}, \hat{\mathbf{P}}, AP, L)$ where $\hat{\mathbf{P}}_{s,s'} = \mathbf{P}_{s,s'} + \min(\varepsilon, 1 - \mathbf{P}_{s,s'})$ and $\check{\mathbf{P}}_{s,s'} = \mathbf{P}_{s,s'} - \min(\varepsilon, \mathbf{P}_{s,s'})$ for all $(s, s') \in \mathcal{V}$, and $\hat{\mathbf{P}}_{s,s'} = \check{\mathbf{P}}_{s,s'} = \mathbf{P}_{s,s'}$ for all $(s, s') \notin \mathcal{V}$. Consider $\mathcal{C}' = (\mathcal{S}, s_0, \mathbf{P}', AP, L) \in [\mathcal{I}^*]$. By definition, $\|\mathbf{P} - \mathbf{P}'\|_{\max} \leq \varepsilon$ and $\mathbf{P}' = \mathbf{P}_{s,s'} = \mathbf{P}_{s,s'} \forall (s, s') \notin \mathcal{V}$. By definition of \mathcal{I}^* , we also have that $\forall s \in \mathcal{S}, \sum_{s' \in \mathcal{S}} \mathbf{P}'_{s,s'} = 1$ and $\forall s, s' \in \mathcal{S}, 0 \leq \mathbf{P}'_{s,s'} \leq 1$. By the definition of the ε, \max -bounded threat model, we have that $\mathcal{C}' \in PS$

Now consider $\mathcal{C}' = (\mathcal{S}, s_0, \mathbf{P}' = \mathbf{P} + \mathbf{X}, AP, L) \in PS$. Since $PS \subseteq \mathcal{PS}^{\mathcal{C}}$, we know that $\forall s \in \mathcal{S}, \sum_{s' \in \mathcal{S}} \mathbf{P}'_{s,s'} = 1$. $PS \subseteq \mathcal{PS}^{\mathcal{C}}$ also implies that $0 \leq \mathbf{P}'_{s,s'} \leq 1 \forall s, s' \in \mathcal{S}$. Because $\mathcal{C}' \in PS$ where PS is an ε, \max -bounded perturbation matrix, \mathbf{X}' is a valid perturbation matrix. We also have that $\check{\mathbf{P}}_{s,s'} \leq \mathbf{P}'_{s,s'} \leq \hat{\mathbf{P}}_{s,s'} \forall s, s' \in \mathcal{S}$. By definition of \mathcal{I}^* we have that $\mathcal{C}' \in [\mathcal{I}^*]$ \square

Theorem 1. *Verification of DTMC adversarial robustness for an ε, \max -bounded adversary and a PCTL path formula, reduces to the Uncertain Markov Chain model checking problem.*

Proof. Assume we have $0 \leq \delta \leq 1$, DTMC $\mathcal{C} = (\mathcal{S}, s_0, \mathbf{P}, AP, L)$, PCTL path formula φ , and ε , *max*-bounded threat model. Assume also we have algorithm A which takes as input IDTMC \mathcal{I} and PCTL state formula Φ and returns $s_0 \models_{\mathcal{I}} \Phi$.

Using Lemma 3, we define IDTMC \mathcal{I}^* such that $\mathcal{C} \in [\mathcal{I}^*] \iff \mathcal{C} \in PS$. We also define PCTL state formula $\Phi^* = \mathbb{P}_{\geq(p-\delta)}(\varphi)$ where $p = Pr(s_0 \models_{\mathcal{C}} \varphi)$. We run algorithm A on \mathcal{I}^*, Φ^* . If $A(\mathcal{I}^*, \Phi^*) = true$, we know that $\nexists \mathcal{C} \in [\mathcal{I}^*]$ such that $s_0 \models_{\mathcal{C}} \Phi^*$. If $A(\mathcal{I}^*, \Phi^*) = false$, we know that $\exists \mathcal{C} \in [\mathcal{I}^*]$ such that $s_0 \models_{\mathcal{C}} \Phi^*$. Therefore, by Remark 1 and Lemma 3, we have that \mathcal{C} is adversarially robust with respect to PS, φ, δ if and only if $A(\mathcal{I}^*, \Phi^*)$. \square

3.5 Policy Robustness in MDPs

Our definition of adversarial robustness for DTMCs is easily extended to deterministic, memoryless policies acting in MDPs. In this case, the adversary is able to perturb the transition probabilities in the underlying MDP, with the goal of decreasing the satisfaction probability of the DTMC formed by composing the policy and MDP. In this case we define the perturbation space, $\mathcal{PS}^{\mathcal{M}}$ of MDP $\mathcal{M} = (\mathcal{S}, s_0, \mathcal{A}, T, AP, L)$ to be the set of all MDPs of the form $(\mathcal{S}, s_0, \mathcal{A}, T', AP, L)$. This extension is useful when considering systems modeled as agents acting in probabilistic environments, as is the case for reinforcement learning.

Definition 8 (Policy Adversarial Robustness). *Given $0 \leq \delta \leq 1$, MDP \mathcal{M} , perturbation set $PS \subseteq \mathcal{PS}^{\mathcal{M}}$, and some PCTL* path formula φ , a policy σ is adversarially robust in \mathcal{M} with respect to PS, φ, δ if, for the DTMC \mathcal{M}_{σ} ,*

$$Pr(s_0 \models_{\mathcal{M}'_{\sigma}} \varphi) \geq Pr(s_0 \models_{\mathcal{M}_{\sigma}} \varphi) - \delta \quad (15)$$

for all $\mathcal{M}' \in PS$.

We similarly define the three DTMC adversarial robustness problems from Section 3.3 for policies acting in MDPs. Though the adversary may modify any vulnerable transition in the MDP, the adversary should only perturb the transition probabilities which correspond to the possible transitions in the resulting DTMC. It is enough to consider the state transition probabilities in the underlying MDP which are present in the composed DTMC. Therefore, $\mathcal{PS}^{\mathcal{M}}$ and $\mathcal{PS}^{\mathcal{M}_{\sigma}}$ are equivalent with respect to policy adversarial robustness for given \mathcal{M}, σ .

Lemma 4 (Robustly Equivalent MDPs). *Given a deterministic, memoryless policy σ , $\mathcal{M} = (\mathcal{S}, s_0, T, AP, L)$, perturbation set $PS \subseteq \mathcal{PS}^{\mathcal{M}}$, PCTL* path formula φ , and $\mathcal{M}^* = (\mathcal{S}, s_0, T^*, AP, L)$ such that $T(s, a, s') = T^*(s, a, s')$ for all $a \in \mathcal{A}, s \in \mathcal{S}$ where $\sigma(s) = a$, we have that σ is adversarially robust in \mathcal{M} with respect to PS, φ, δ if and only if it is adversarially robust in \mathcal{M}^* with respect to PS, φ, δ .*

Proof. Assume we have deterministic, memoryless policy σ , $\mathcal{M} = (\mathcal{S}, s_0, T, AP, L)$, perturbation set $PS \subseteq \mathcal{PS}^{\mathcal{M}}$, PCTL* path formula φ , and $\mathcal{M}^* = (\mathcal{S}, s_0, T^*, AP, L)$ such that $T(s, a, s') = T^*(s, a, s')$ for all $a \in \mathcal{A}, s \in \mathcal{S}$ where $\sigma(s) = a$. By Definition 3, $\mathcal{M}_{\sigma}^* = \mathcal{M}_{\sigma}$. Therefore, we have that σ is robust in \mathcal{M} with respect to PS, φ, δ if and only if it is robust in \mathcal{M}^* with respect to PS, φ, δ . \square

It immediately follows that the three adversarial robustness problems for policies acting in MDPs reduce to the three adversarial robustness problems for DTMCs, respectively.

4 Optimization Solutions to the DTMC Adversarial Robustness Problems

In the following subsections, we reformulate the worst-case attack synthesis problem (Problem 4) as an optimization and provide two methods to solve the optimization using existing probabilistic model checking tools. We define these methods as *optimization with direct computation* and *optimization with symbolic solution function*. Due to the reductions in Lemmas 1 and 2, these methods will additionally solve the other two DTMC robustness problems (Problems 2 and 3). In Section 5 we evaluate and compare the two approaches over case studies of varying state size and number of parameters.

4.1 Perturbation Matrix Synthesis as an Optimization

We present a constrained optimization over the perturbation matrix \mathbf{X} to find the worst case attack.

Problem 6 (Perturbation Matrix Synthesis). *Given DTMC $\mathcal{C} = (\mathcal{S}, s_0, \mathbf{P}, AP, L)$, perturbation set $PS \subseteq \mathcal{PS}^{\mathcal{C}}$, and some PCTL* path formula φ , find a perturbation matrix \mathbf{X}^* which solves*

$$\begin{aligned} & \underset{\mathbf{X}}{\operatorname{argmin}} \Pr(s_0 \models_{\mathcal{C}'} \varphi) & (16) \\ & \text{subject to } \mathcal{C}' = (\mathcal{S}, s_0, \mathbf{P} + \mathbf{X}, AP, L) \in PS \end{aligned}$$

Lemma 5. *Given DTMC $\mathcal{C} = (\mathcal{S}, s_0, \mathbf{P}, AP, L)$, perturbation set $PS \subseteq \mathcal{PS}^{\mathcal{C}}$, and some PCTL* path formula φ , \mathbf{X}^* which solves Problem 6 is the worst case attack for \mathcal{C} with respect to PS , φ .*

Proof. Assume DTMC \mathcal{C} , perturbation set $PS \subseteq \mathcal{PS}^{\mathcal{C}}$, and PCTL* path formula φ . By definition, \mathbf{X}^* which solves Problem 6 for \mathcal{C} , PS , and φ is the worst case attack for \mathcal{C} with respect to PS , φ . \square

It follows from Lemmas 1 and 2 that the solution to the attack synthesis optimization can also be used to solve Problems 2 and 3.

We note that the form of the objective function (16) is dependent on the property φ . For example, the objective is linear with respect to next step properties (reachability in exactly one time step), quadratic with respect to next next step properties (reachability in exactly two time steps), and is non-convex in general. Similarly, the form of the constraints are dependent on the threat model. For example, the constraints corresponding to the ε, \max -bounded threat models described in Section 3.2 are linear. This means that the techniques available for solving this optimization can change based on the property and threat model.

4.2 Solutions to the DTMC Adversarial Robustness Problems for ε, \max -bounded threat models

We propose two solutions to the optimization problem for ε, \max -bounded threat models: *optimization with direct computation* and *optimization with symbolic solution function*. Because the constraints are linear, but the shape of the objective depends on the property, both solutions use the Sequential Least Squares Programming (SLSQP) [17] algorithm to search the parameter space for the minimal value. The SLSQP algorithm performs an iterative search of the space to find a minimum. The main difference between the two solutions is the technique used to compute the objective at each iteration. The first method performs a model-checking procedure at every function call. The second method constructs a pDTMC from the original DTMC before the optimization begins, and then simply instantiates this function at each call to the objective.

4.2.1 Optimization with Direct Computation

In the optimization with direct computation solution, we solve the optimization presented in Problem 6 using the SLSQP iterative algorithm. At each iteration, we construct the perturbed DTMC, $\mathcal{C}' = (\mathcal{S}, s_0, \mathbf{P}, AP, L)$, and use existing model checking techniques to compute $Pr(s_0 \models_{\mathcal{C}'} \varphi)$ directly. This solution is beneficial because computing $Pr(s_0 \models_{\mathcal{C}'} \varphi)$ for a DTMC is solved for many logics including PCTL and PCTL*. Tools such as Prism [18] and Storm [12] compute these probabilities efficiently for large state spaces.

4.2.2 Optimization with Symbolic Solution Function

In the optimization with symbolic solution function approach, we construct a pDTMC \mathcal{C}_X from the original DTMC \mathcal{C} , replacing vulnerable transitions with parameters. In some cases, like when considering PCTL properties, we can then find the symbolic solution function for $Pr(s_0 \models_{\mathcal{C}_X} \varphi)$ (as described in eqn. (5)). We then run the SLSQP algorithm for searching the parameter space to find the minimum. This eliminates the need to perform model checking at each iteration. In Algorithm 1, we describe this procedure in detail.

Algorithm 1 Symbolic Objective Approach

Input: DTMC $\mathcal{C} = (\mathcal{S}, s_0, \mathbf{P}, AP, L)$, $PS \subseteq \mathcal{PS}^{\mathcal{C}}$, PCTL path formula φ

Output: perturbation matrix \mathbf{X}^*

- 1: $X \leftarrow \emptyset, \mathbf{P}^X \leftarrow \mathbf{P}$
 - 2: **for** (s, s') which is a vulnerable transition in PS **do**
 - 3: add $v_{(s,s')}$ to X
 - 4: $\mathbf{P}^X \leftarrow v_{(s,s')}$
 - 5: **end for**
 - 6: $\mathcal{C}_X \leftarrow (\mathcal{S}, s_0, \mathbf{P}^X, AP, L)$
 - 7: generate symbolic solution function $f_{\varphi}(X)$ for \mathcal{C}_X
 - 8: $\kappa^* \leftarrow \operatorname{argmin}_{\kappa} \kappa(f_{\varphi}(X))$ subject to $\kappa(\mathcal{C}_X) \in PS$
 - 9: **return** $\kappa^*(\mathbf{P}^X) - \mathbf{P}$
-

State-of-the-art parametric model checking tools such as PARAM [13], Storm [12], PROPHESY [9], and PRISM [18] can generate the symbolic solution function efficiently for few parameters on subsets of PCTL. Generating this function can become expensive, however, as the number of parameters in the constructed pDTMC (and complexity of the symbolic function) increases. This method therefore becomes less desirable under less restrictive threat models with many vulnerable transitions. Additionally, there is no known process for generating the symbolic solution function for all PCTL* properties. We perform an in-depth comparison of these two methods over case studies of various sizes with different threat models in Section 5.3.

5 Case Studies and Evaluation

In the following sections we evaluate the two optimization solutions to our three adversarial robustness problems, as described in Section 4.1. We implement both the direct computation method and the symbolic solution function approach. We compare the two approaches over different parameter and state sizes. We then use these solutions to demonstrate the flexibility and utility of our definitions over three case studies.

5.1 Case Studies

We perform our evaluation on two protocol DTMCs, and one DTMC defined by an agent acting according to a policy in an MDP.

5.1.1 Simple Communication Protocol

We first show our technique works on the simple communication protocol from [19], described in Fig. 2. In this protocol, a sent message can be delivered or lost. When it is lost, the sender re-sends the message infinitely many times until it is delivered. The goal of the system is to deliver the message quickly. In this system, we model a structure-preserving selected states (SPSS) adversary who can attack the “try” state by modifying the probability that a message is lost or delivered.

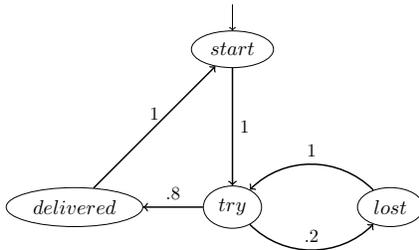


Figure 2: Simple Communication Protocol from [19].

5.1.2 IPv4 ZeroConf Protocol

The IPv4 Zeroconf Protocol is a network protocol that is commonly used to evaluate model-checking approaches [16]. Here we consider the DTMC representing the procedure for a new host joining the network as described in Fig. 3. In this procedure, we assume a fixed number of m hosts already on the network. When a new host joins the network, they immediately generate a random address from a predetermined set of $K = 65024$ possible addresses and broadcasts it to the existing hosts. With probability m/K , this address is a collision. The host then waits a predetermined n time ticks to get a response from the network. Assuming there is a collision, at each time tick there is some probability p that the new host learns of this mistake and is able to re-generate their address. In this case, the goal of the host is to successfully join the network with a unique address, in as little time as possible.

In this case, the adversary attempts to prevent existing hosts from notifying the new host of the collision. We model this attack by a structure-preserving selected states (SPSS) threat model, allowing the adversary to reduce the probability at certain time ticks (states in $\{1, \dots, n\}$). In prior work on pDTMCs, the IPv4 protocol was analyzed by varying the parameter p [16]. Our threat model is more expressive, allowing the adversary to attack some, but not all of the transition probabilities.

5.1.3 GridWorld

We consider the $n \times m$ GridWorld [20] class of case studies in which an agent navigates an $n \times m$ grid by moving up, down, left, and right according to a memoryless, deterministic policy. The GridWorld environment is modeled as an MDP. We assume the policy is fixed, and use the policy adversarial robustness definition from Section 3.5 to reason about the composed DTMC. In each

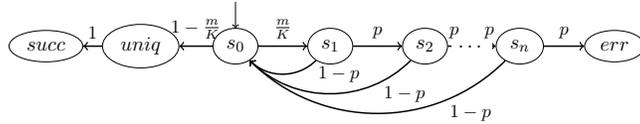


Figure 3: IPv4 Zeroconf Protocol [16]. Our model is a DTMC with initial state s_0 and states s_1 through s_n indicating the number of time ticks the new host has waited to hear from existing hosts regarding a collision. State err indicates the new host erroneously chooses a colliding address. In state $uniq$ the host has found a unique address and in state $succ$ the host has used that address to successfully join the network.

state of the composed DTMC, there is some probability that the agent “slips” and does not go in their intended direction. We consider an adversary who is able to increase and decrease the probability that the agent “slips”, within constraints defined by an ε , max -bounded threat model. Adversaries to this model can use any of the four threat models defined in Section 3.2.

States in GridWorld grids are indexed sequentially from left to right then bottom to top. For some experiments, we generate randomized $n \times m$ GridWorld examples for a given n, m , and transition structure. We accomplish this by generating a random probability distribution over adjacent states in the transition structure, for each state in the DTMC. In other words, the structure of each DTMC is fixed, but the probabilities are randomized.

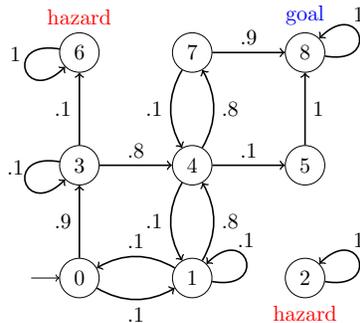


Figure 4: Example 3×3 GridWorld DTMC [20]. Note that hazard state 2 is unreachable. Under a threat model that does not preserve structure, this hazard state can become reachable and affect the performance of the agent.

5.2 Experiment Setup

For our optimizations, we use the SciPy optimize package [17] with the Sequential Least Squares Programming (SLSQP) algorithm. When directly computing $Pr(s_0 \models_C \varphi)$, we use the PRISM Java API and the Py4J python package [18, 24]. When computing the symbolic solution function, we use the PARAM parametric probabilistic model checker [13]. All experiments were run on a computer with an Intel Xeon Silver 4114 2.20GHz processor and 187GB RAM.

5.3 Comparing Solutions

In Section 4.2, we presented two optimization solutions for the worst-case attack synthesis problem. In Table 1, we present results comparing the two techniques over randomized 5×5 , 10×10 , and

Property	# States	# Params	Method	Total Duration (in seconds)
P=? [s!=5 U s=24]	25	5	Direct Computation	0.354
P=? [s!=5 U s=24]	25	5	Symbolic Soln. Func.	0.052 + 0.076 = 0.128
P=? [s!=5 U s=24]	25	10	Direct Computation	2.445
P=? [s!=5 U s=24]	25	10	Symbolic Soln. Func.	124.316 + 0.98 = 125.296
P=? [s!=5 U s=24]	25	20	Direct Computation	4.884
P=? [s!=5 U s=24]	25	20	Symbolic Soln. Func.	TO
P=? [s!=10 U s=99]	100	5	Direct Computation	12.19
P=? [s!=10 U s=99]	100	5	Symbolic Soln. Func.	2.006 + 1.089 = 3.095
P=? [s!=10 U s=99]	100	10	Direct Computation	23.69
P=? [s!=10 U s=99]	100	10	Symbolic Soln. Func.	717.126 + 2.792 = 719.918
P=? [s!=10 U s=99]	100	20	Direct Computation	67.616
P=? [s!=10 U s=99]	100	20	Symbolic Soln. Func.	TO
P=? [s!=15 U s=224]	225	5	Direct Computation	59.32
P=? [s!=15 U s=224]	225	5	Symbolic Soln. Func.	TO
P=? [s!=15 U s=224]	225	10	Direct Computation	134.714
P=? [s!=15 U s=224]	225	10	Symbolic Soln. Func.	TO
P=? [s!=15 U s=224]	225	20	Direct Computation	290.201
P=? [s!=15 U s=224]	225	20	Symbolic Soln. Func.	TO


Table 1: Comparison between objective computation methods for 5×5 , 10×10 , and 15×15 GridWorld DTMCs with 5, 10, and 20 vulnerable transitions (parameters). For symbolic solution, results are presented as “symbolic solution function generation duration” + “optimization duration”. Pre-computing the symbolic solution function improves the optimization run-time, but the pre-computation step quickly becomes unmanageable as the number of parameters increases.

15×15 GridWorld DTMCs. We use an ST threat model with 5, 10, and 20 vulnerable transitions (parameters). We see that the symbolic solution improves the optimization time when compared to direct computation. As the number of parameters increases, however, the symbolic solution function quickly becomes expensive to generate, especially with larger state spaces. For example, in a 25 and 100 state GridWorld with 5 parameters, the symbolic computation is significantly faster. Once the number of parameters is greater than or equal to 10, the direct computation is always faster. For 225 state GridWorld and more than 10 parameters, the symbolic solution times out. Therefore, in cases of many vulnerable transitions, the direct computation method is preferred.


5.4 Attack Performance

In Fig. 5, we show the property satisfaction probability for each of our three case studies against different properties and ε, max -bounded threat models of varying budget (indicated by ε). In the simple communication protocol, we only have one available attack state (*try*). We plot its performance over increasing ε for $\varphi = \diamond^{\leq 10} delivered$. As we increase ε , the property satisfaction probability decreases.


For the IPv4 Zeroconf Protocol we set $n = 10$ and $m = 50,000$ and measure satisfaction probability for $\varphi = \diamond^{\leq 30} success$. We consider three instances of the structure-preserving selected states (SPSS) threat models vulnerable state sets $\{1, \dots, 5\}$, $\{6, \dots, 10\}$, and $\{1, \dots, 10\}$. We see that attacking the network at earlier time ticks is more effective than later, but attacking the network at all time ticks is most effective. As we increase ε , we see that all attacks decrease the property

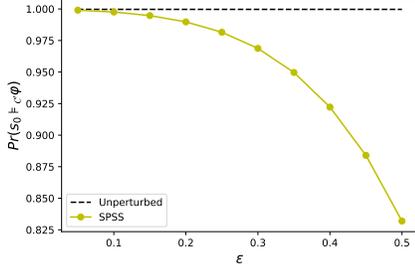


(a) Simple communication protocol satisfaction probabilities under attack with $\varphi = \diamond^{\leq 10} delivered$.

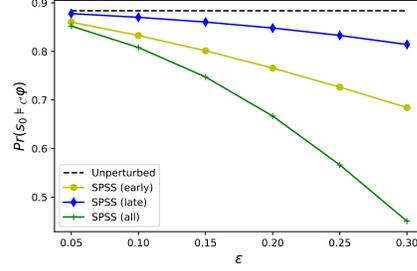

(b) Zeroconf IPv4 Protocol satisfaction probabilities under attack with $n = 10$, $\varphi = \diamond^{\leq 30} success$ and structure-preserving selected states (SPSS) threat models with vulnerable state sets $\{1, \dots, 5\}$ (*early*), $\{6, \dots, 10\}$ (*late*), and $\{1, \dots, 10\}$ (*all*).

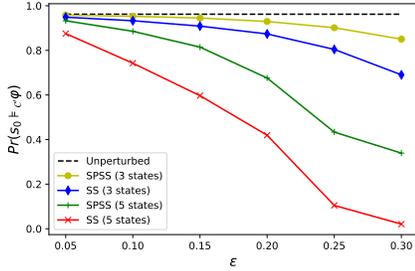

(c) 5×5 GridWorld satisfaction probabilities under attack with selected states (SS) and structure-preserving selected states (SPSS) threat models for vulnerable state sets $\{1, 3, 10\}$, and $\{1, 3, 10, 12, 19\}$ and $\varphi = \diamond^{\leq 200} goal$.

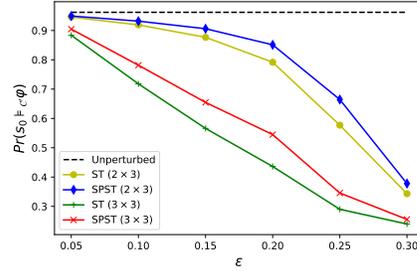

(d) 5×5 GridWorld satisfaction probabilities under attack with selected transitions (ST) and structure-preserving selected transitions (SPST) threat models attacking all adjacent transitions between the bottom right 3×3 states, and bottom right 2×3 states for $\varphi = \diamond^{\leq 200} goal$.

Figure 5: Property satisfaction probability over attack budget (indicated by ε) over various case studies, threat models, and properties.

satisfaction probability, however the *early* and *all* attacks decrease this probability more quickly than the *late* attack.

For the randomized 5×5 GridWorld DTMCs we measure satisfaction probability for $\varphi = \diamond^{\leq 200} goal$, where the *goal* state is in the top right corner of the grid. Here, we consider all four ε , *max*-bounded threat models: selected states (SS), structure-preserving selected states (SPSS), selected transitions (ST), and structure-preserving selected transitions (SPST). We compare SS and SPSS attackers with vulnerable state sets $\{1, 3, 10\}$, and $\{1, 3, 10, 12, 19\}$, and ST and SPST attackers who can target all adjacent transitions in the bottom right 3×3 states, and bottom right 2×3 states. ST attackers can additionally add diagonally adjacent transitions in their respective regions. We see in Fig. 5c and 5d, as the attacker is able to control more states and transitions, the property satisfaction probability decreases more dramatically. In the case of $\varepsilon = .3$ and a non-structure-preserving attacker who controls 20% of the states in the system, the property satisfaction probability drops from above 95% to close to 0%. In contrast, a structure-preserving attacker who

controls 12% of states in the system can only decrease the property satisfaction probability to 85%.

In all case studies, increasing ε causes the property satisfaction probability to decrease, confirming Remark 3. Additionally, we see that, under the same class of case study, structure-preserving attacks are less effective than attacks which can add transitions to the system. Furthermore, threat models with more vulnerable transitions perform better than those with less.

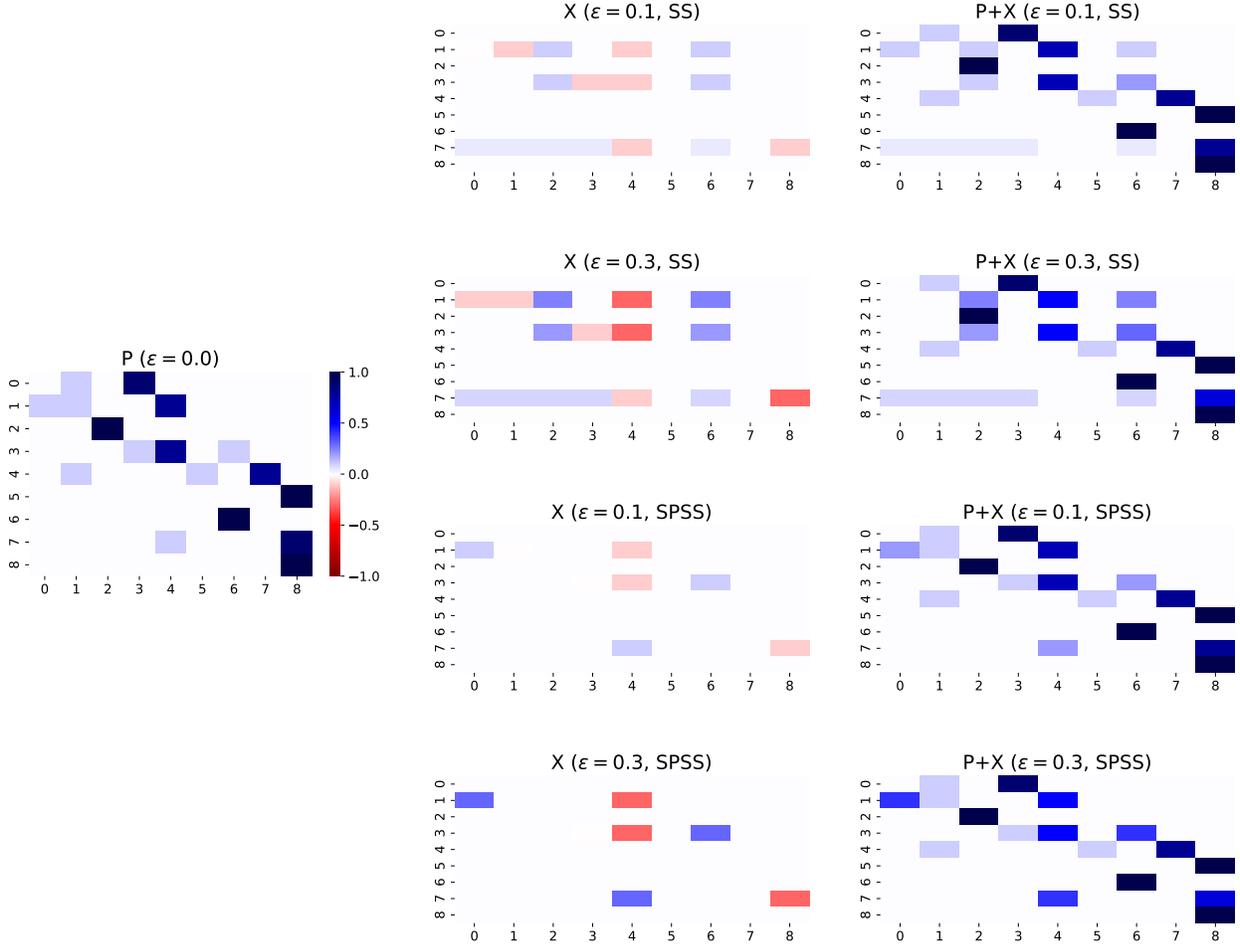


Figure 6: Transition probability matrix for the original DTMC (left), perturbation matrices for various threat models (middle) and perturbed DTMCs (right) with respect to $\varphi = (\neg hazard)U^{\leq 6}goal$. Specifically, selected states (SS) and structure-preserving selected states (SPSS) threat models with vulnerable states 1, 3, and 7 for $\varepsilon = 0.1, 0.3$. In general, perturbations increase probabilities of transitioning to hazard states and decrease probability of transitioning to the goal state. In the SS case, the previously unreachable hazard state becomes reachable after attack. Only rows 1, 3, and 7 of the perturbation matrices have non-zero entries.

5.5 Attack Synthesis across Threat Models

Using the 3×3 GridWorld DTMC in Fig. 4, we analyze the specific perturbations favored by attacks under the selected state (SS) threat model and structure-preserving selected state (SPSS) threat model with vulnerable state set $\mathcal{V} = \{1, 3, 7\}$. In Fig. 6 we present the worst-case adversarial perturbations under each threat model for $\varepsilon = 0.1$ and $\varepsilon = 0.3$ with respect to $\varphi = (\neg hazard)U^{\leq 6}goal$

as heatmaps of the perturbation matrix \mathbf{X} . Similarly to adversarial examples to neural networks, we see that small perturbations to the environment can lead to large changes in the system properties. Under all threat models, the attacker decreases the probability of jumping from state 7 to state 8, and redistributes those probabilities to states closer to the start. Attacks do not increase probability of reaching state 5, as it transitions to the goal state with probability 1. Under attacks which do not preserve structure, we see that the worst case attack adds transitions to hazard state 2, making it reachable from the start state, which was not the case in the original DTMC. All rows of the perturbation matrices which are not in the vulnerable state set have zero entries, as they cannot be modified. We infer that an attacker gets different success depending on the exact state they control in the system.

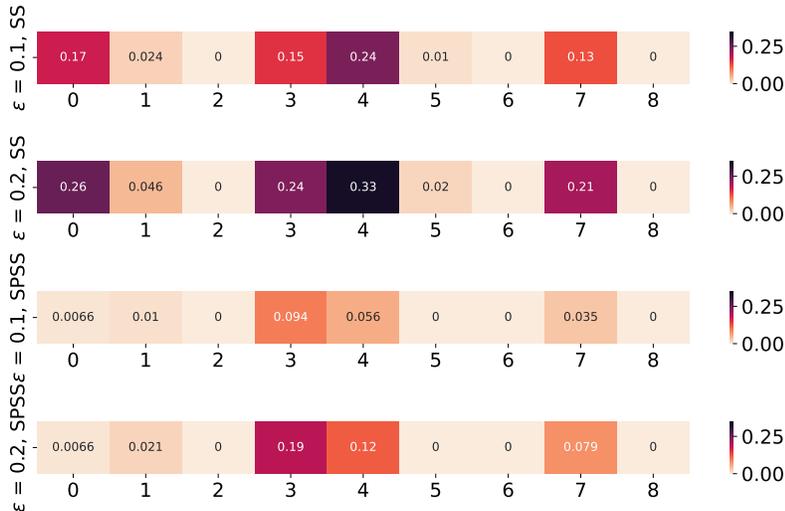


Figure 7: Horizontal axis indicates a unique state of the 9 state GridWorld DTMC from Fig. 4. Each row represents a different threat model and attack budget (indicated by ϵ). Darker colors indicate large δ between original and perturbed property satisfaction probability for the selected state (SS) or structure preserving selected state (SPSS) threat model with single vulnerable state for $\varphi = \neg hazard U^{\leq 6} goal$. Attacking certain states provides significantly more loss of utility than others. For example, state 3 is near a hazard state, and attacking it causes a drop in utility across all threat models. State 1 is less valuable to the structure-preserving threat model than its counterpart. State 4 is central to the system and is valuable in both cases. Hazard and goal states are not valuable to the system with respect to φ , as being in these states means the property has already been satisfied or violated.

5.6 Component Analysis

Our robustness definitions are useful in determining which components of a system are important with respect to a specific property. In Fig. 7, we compare δ between original and perturbed property satisfaction probability for SS and SPSS attackers with $\epsilon = 0.1$ and $\epsilon = 0.2$. For each threat model, we consider a set of one vulnerable attack state $\mathcal{V} = \{s\}$ for each state s in a 3×3 GridWorld DTMC from Fig. 4. Under structure-preserving threat models, states with transitions to hazards and the goal are valuable. Under non structure-preserving threat models, the start state is also valuable.

6 Related Work

Recently, formal methods have been used for verifying adversarial robustness of machine learning models [25–29] and systems with machine learning components [30, 31]. In the past few years, methods have been developed which utilize probabilistic model checking to verify properties of reinforcement learning models [5, 6]. Our approach is motivated by research in adversarial machine learning on adversarial examples to neural networks [14, 15].

Our problem definition is closely related to perturbation analysis of DTMCs [16, 22, 32–34]. There are many papers which explore different aspects of perturbation analysis in the non-adversarial case, focusing evaluation on simple PCTL or reachability properties and small parameter spaces. In [22], Bartocci *et. al* define the model repair problem where, given a property φ and model M which does not satisfy φ , the goal is to find a “repaired” model M' which satisfies φ and minimizes the cost of the perturbation from M to M' . In [32], Chen *et. al* provide theoretical analysis of the maximal and minimal reachability probabilities for Markov chains within a bounded distance of one another. In [16], Sen *et. al* define a model checking problem over interval DTMCs for PCTL properties. In Section 3.4 we provide a reduction to this problem for ε , *max*-bounded adversaries in the restricted PCTL setting. In [33] Su and Rosenblum analyze systems using empirical distribution parameters, and in [34] Calinescu *et. al* provide methods to compute confidence intervals for pDTMC properties. Perturbation analysis has also been studied in non-probabilistic systems [35, 36].

Our proposed solutions are based on explicit and symbolic DTMC model checking techniques [4, 12, 18, 19, 21, 37–39]. Explicit probabilistic specification and model checking is well-researched, and there are many tools such as PRISM [18], Storm [12], ISCASM [21] and others which implement efficient algorithms for checking DTMCs on temporal logic properties [19, 37]. Symbolic property satisfaction function synthesis is a newer problem, originally addressed by Lanotte *et. al*, who provided theoretical assurances for pDTMCs with 1-2 parameters, and Daws, who provides a state-elimination algorithm for pDTMCs with non-nested PCTL properties [4, 38]. More recent methods have been developed to improve this computation, and these techniques have been implemented in tools such as PARAM, Prism, Storm, and PROPhESY [9, 10, 12, 13, 18, 40, 41].

Another related area of study is in parameter synthesis for pDTMCs [7–11]. The parameter synthesis problem takes a pDTMC and temporal logic property, and attempts to partition the parameter space into accepting and non-accepting regions. Early work in this area primarily concerned reachability properties, and could only handle small parameter spaces [7–9]. In the past few years, new approaches have improved these methods to handle larger parameter spaces and more PCTL properties [10, 11].

We also note the area of robust policy synthesis and verification in uncertain MDPs. In these problems, given a temporal logic property and parametric MDP, the goal is to synthesize a policy which can satisfy the property for all instantiations of the parametric MDP within some constraints. Several solutions have been developed which solve this problem for various logics and parameter spaces [39, 42–45].

7 Conclusion

In this paper, we used existing probabilistic modeling and verification approaches to develop a formal framework of adversarial robustness in stochastic systems, including DTMCs and agents acting in MDPs. Our framework allows to formally define various threat models. Specifically, we provide four threat models under which an adversary can perturb the transition probabilities in an

ε ball around the original system transitions. Two of these threat models preserve the structure of the underlying system, while the remaining two lift the structure-preserving assumption.

We use this notion of adversarial robustness to define three DTMC adversarial robustness problems: adversarial robustness verification, maximal δ synthesis, and worst case attack synthesis. We provide two optimization solutions. The first uses direct computation of the property satisfaction probability at each iteration of the optimization. The second pre-computes a symbolic representation of the property satisfaction probability and then uses that as the objective to the optimization. We found that utilizing symbolic model checking techniques can result in fast optimization time for small numbers of states and parameters, however as the parameter space increases in size, the symbolic solution becomes unmanageable. In the case of less restrictive adversarial models (and thus larger parameter spaces), direct computation of the property satisfaction probabilities is more scalable than the symbolic method.

Our framework and solutions are useful to determine system robustness and to determine which components and transitions in a system are most critical to protect. We consider three case studies (two DTMCs and one composed DTMC from a policy and MDP), and compare attacks synthesized under each of the four threat models with respect to various PCTL* properties. We analyze in detail the resulting attack strategies, and provide component analysis of a system using our framework.

Future work can solve the problem of synthesizing robust systems with respect to these robustness definitions. Additionally, a potential line of future work is to use these definitions of adversarial robustness to verify systems with machine learning components including deep reinforcement learning.

Acknowledgment

This work has been supported by the National Science Foundation under NSF SaTC awards CNS-1717634 and CNS-1801546.

References

- [1] M. Kwiatkowska, G. Norman, and D. Parker, “Probabilistic verification of Herman’s self-stabilisation algorithm,” *Formal Aspects of Computing*, vol. 24, no. 4, pp. 661–670, 2012.
- [2] M. Duflot, M. Kwiatkowska, G. Norman, and D. Parker, “A formal analysis of Bluetooth device discovery,” *Int. Journal on Software Tools for Technology Transfer*, vol. 8, no. 6, pp. 621–632, 2006.
- [3] M. Kwiatkowska and G. Norman, “Verifying randomized Byzantine agreement,” in *Proc. Formal Techniques for Networked and Distributed Systems (FORTE’02)*, ser. LNCS, D. Peled and M. Vardi, Eds., vol. 2529. Springer, 2002, pp. 194–209.
- [4] C. Daws, “Symbolic and Parametric Model Checking of Discrete-Time Markov Chains,” in *Theoretical Aspects of Computing - ICTAC 2004*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2005, vol. 3407, pp. 280–294, series Title: Lecture Notes in Computer Science. [Online]. Available: http://link.springer.com/10.1007/978-3-540-31862-0_21
- [5] R. Gu, “Demonstration of TAMAA,” Jan. 2020, publisher: Zenodo. [Online]. Available: <https://zenodo.org/record/3614128>

- [6] T. P. Gros, H. Hermanns, J. Hoffmann, M. Klauck, and M. Steinmetz, “Deep Statistical Model Checking,” in *Formal Techniques for Distributed Objects, Components, and Systems*, A. Gotsman and A. Sokolova, Eds. Cham: Springer International Publishing, 2020, vol. 12136, pp. 96–114, series Title: Lecture Notes in Computer Science. [Online]. Available: http://link.springer.com/10.1007/978-3-030-50086-3_6
- [7] T. Winkler, S. Junges, G. A. Pérez, and J.-P. Katoen, “On the Complexity of Reachability in Parametric Markov Decision Processes,” p. 17 pages, 2019, artwork Size: 17 pages Medium: application/pdf Publisher: Schloss Dagstuhl - Leibniz-Zentrum fuer Informatik GmbH, Wadern/Saarbruecken, Germany Version Number: 1.0. [Online]. Available: <http://drops.dagstuhl.de/opus/volltexte/2019/10916/>
- [8] T. Quatmann, C. Dehnert, N. Jansen, S. Junges, and J.-P. Katoen, “Parameter Synthesis for Markov Models: Faster Than Ever,” *arXiv:1602.05113 [cs]*, May 2016, arXiv: 1602.05113. [Online]. Available: <http://arxiv.org/abs/1602.05113>
- [9] C. Dehnert, S. Junges, N. Jansen, F. Corzilius, M. Volk, H. Bruintjes, J.-P. Katoen, and E. Ábrahám, “PROPhESY: A PRObabilistic ParamETER SYnthesis Tool,” in *Computer Aided Verification*. Cham: Springer International Publishing, 2015, vol. 9206, pp. 214–231, series Title: Lecture Notes in Computer Science. [Online]. Available: http://link.springer.com/10.1007/978-3-319-21690-4_13
- [10] S. Junges, E. Ábrahám, C. Hensel, N. Jansen, J.-P. Katoen, T. Quatmann, and M. Volk, “Parameter synthesis for markov models,” *arXiv preprint arXiv:1903.07993*, 2019.
- [11] M. Cubuktepe, N. Jansen, S. Junges, J.-P. Katoen, and U. Topcu, “Synthesis in pMDPs: A Tale of 1001 Parameters,” *arXiv:1803.02884 [cs, math]*, Jul. 2018, arXiv: 1803.02884. [Online]. Available: <http://arxiv.org/abs/1803.02884>
- [12] C. Dehnert, S. Junges, J.-P. Katoen, and M. Volk, “A storm is coming: A modern probabilistic model checker,” in *Computer Aided Verification*, R. Majumdar and V. Kunčák, Eds. Cham: Springer International Publishing, 2017, pp. 592–600.
- [13] E. M. Hahn, H. Hermanns, B. Wachter, and L. Zhang, “PARAM: A Model Checker for Parametric Markov Models,” in *Computer Aided Verification*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2010, vol. 6174, pp. 660–664, series Title: Lecture Notes in Computer Science. [Online]. Available: http://link.springer.com/10.1007/978-3-642-14295-6_56
- [14] B. Biggio, I. Corona, D. Maiorca, B. Nelson, N. Šrndić, P. Laskov, G. Giacinto, and F. Roli, “Evasion attacks against machine learning at test time,” in *Joint European conference on machine learning and knowledge discovery in databases*. Springer, 2013, pp. 387–402.
- [15] C. Szegedy, W. Zaremba, I. Sutskever, J. Bruna, D. Erhan, I. Goodfellow, and R. Fergus, “Intriguing properties of neural networks,” *arXiv preprint arXiv:1312.6199*, 2013.
- [16] K. Sen, M. Viswanathan, and G. Agha, “Model-Checking Markov Chains in the Presence of Uncertainties,” in *Tools and Algorithms for the Construction and Analysis of Systems*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2006, vol. 3920, pp. 394–410, series Title: Lecture Notes in Computer Science. [Online]. Available: http://link.springer.com/10.1007/11691372_26

- [17] P. Virtanen, R. Gommers, T. E. Oliphant, M. Haberland, T. Reddy, D. Cournapeau, E. Burovski, P. Peterson, W. Weckesser, J. Bright, S. J. van der Walt, M. Brett, J. Wilson, K. J. Millman, N. Mayorov, A. R. J. Nelson, E. Jones, R. Kern, E. Larson, C. J. Carey, Í. Polat, Y. Feng, E. W. Moore, J. VanderPlas, D. Laxalde, J. Perktold, R. Cimrman, I. Henriksen, E. A. Quintero, C. R. Harris, A. M. Archibald, A. H. Ribeiro, F. Pedregosa, P. van Mulbregt, and SciPy 1.0 Contributors, “SciPy 1.0: Fundamental Algorithms for Scientific Computing in Python,” *Nature Methods*, vol. 17, pp. 261–272, 2020.
- [18] M. Kwiatkowska, G. Norman, and D. Parker, “PRISM 4.0: Verification of probabilistic real-time systems,” in *Proc. 23rd International Conference on Computer Aided Verification (CAV’11)*, ser. LNCS, G. Gopalakrishnan and S. Qadeer, Eds., vol. 6806. Springer, 2011, pp. 585–591.
- [19] C. Baier and J.-P. Katoen, *Principles of model checking*. MIT press, 2008.
- [20] M. L. Littman, A. R. Cassandra, and L. P. Kaelbling, “Learning policies for partially observable environments: Scaling up,” in *Machine Learning Proceedings 1995*. Elsevier, 1995, pp. 362–370.
- [21] E. M. Hahn, Y. Li, S. Schewe, A. Turrini, and L. Zhang, “iscas m c: a web-based probabilistic model checker,” in *International Symposium on Formal Methods*. Springer, 2014, pp. 312–317.
- [22] E. Bartocci, R. Grosu, P. Katsaros, C. R. Ramakrishnan, and S. A. Smolka, “Model Repair for Probabilistic Systems,” in *Tools and Algorithms for the Construction and Analysis of Systems*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2011, vol. 6605, pp. 326–340, series Title: Lecture Notes in Computer Science. [Online]. Available: http://link.springer.com/10.1007/978-3-642-19835-9_30
- [23] S. Junges, E. Abraham, C. Hensel, N. Jansen, J.-P. Katoen, T. Quatmann, and M. Volk, “Parameter Synthesis for Markov Models,” *arXiv:1903.07993 [cs]*, Mar. 2019, arXiv: 1903.07993. [Online]. Available: <http://arxiv.org/abs/1903.07993>
- [24] “Py4j - a bridge between python and java.” <https://www.py4j.org/>, 2021.
- [25] G. Katz, C. Barrett, D. L. Dill, K. Julian, and M. J. Kochenderfer, “Reluplex: An efficient smt solver for verifying deep neural networks,” in *International Conference on Computer Aided Verification*. Springer, 2017, pp. 97–117.
- [26] S. Wang, K. Pei, J. Whitehouse, J. Yang, and S. Jana, “Formal security analysis of neural networks using symbolic intervals,” in *27th USENIX Security Symposium*, 2018, pp. 1599–1614.
- [27] T. Gehr, M. Mirman, D. Drachler-Cohen, P. Tsankov, S. Chaudhuri, and M. Vechev, “Ai2: Safety and robustness certification of neural networks with abstract interpretation,” in *2018 IEEE Symposium on Security and Privacy (SP)*, 2018, pp. 3–18.
- [28] Y. Kazak, C. Barrett, G. Katz, and M. Schapira, “Verifying deep-RL-driven systems,” in *Proceedings of the 2019 Workshop on Network Meets AI & ML*, ser. NetAI’19. New York, NY, USA: Association for Computing Machinery, 2019, p. 83–89. [Online]. Available: <https://doi.org/10.1145/3341216.3342218>
- [29] O. Bastani, Y. Pu, and A. Solar-Lezama, “Verifiable reinforcement learning via policy extraction,” in *Advances in Neural Information Processing Systems 31*, S. Bengio,

- H. Wallach, H. Larochelle, K. Grauman, N. Cesa-Bianchi, and R. Garnett, Eds. Curran Associates, Inc., 2018, pp. 2494–2504. [Online]. Available: <http://papers.nips.cc/paper/7516-verifiable-reinforcement-learning-via-policy-extraction.pdf>
- [30] T. Dreossi, A. Donzé, and S. A. Seshia, “Compositional falsification of cyber-physical systems with machine learning components,” *Journal of Automated Reasoning*, vol. 63, no. 4, pp. 1031–1053, 2019.
- [31] G. Anderson, S. Pailoor, I. Dillig, and S. Chaudhuri, “Optimization and abstraction: A synergistic approach for analyzing neural network robustness,” in *Proceedings of the 40th ACM SIGPLAN Conference on Programming Language Design and Implementation*, ser. PLDI 2019. New York, NY, USA: Association for Computing Machinery, 2019, p. 731–744. [Online]. Available: <https://doi.org/10.1145/3314221.3314614>
- [32] T. Chen, Y. Feng, D. S. Rosenblum, and G. Su, “Perturbation Analysis in Verification of Discrete-Time Markov Chains,” in *CONCUR 2014 – Concurrency Theory*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2014, vol. 8704, pp. 218–233, series Title: Lecture Notes in Computer Science. [Online]. Available: http://link.springer.com/10.1007/978-3-662-44584-6_16
- [33] G. Su and D. S. Rosenblum, “Perturbation analysis of stochastic systems with empirical distribution parameters,” in *Proceedings of the 36th International Conference on Software Engineering*. Hyderabad India: ACM, May 2014, pp. 311–321. [Online]. Available: <https://dl.acm.org/doi/10.1145/2568225.2568256>
- [34] R. Calinescu, K. Johnson, and C. Paterson, “FACT: A Probabilistic Model Checker for Formal Verification with Confidence Intervals,” in *Tools and Algorithms for the Construction and Analysis of Systems*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2016, vol. 9636, pp. 540–546, series Title: Lecture Notes in Computer Science. [Online]. Available: http://link.springer.com/10.1007/978-3-662-49674-9_32
- [35] C. Zhang, D. Garlan, and E. Kang, “A behavioral notion of robustness for software systems,” in *Proceedings of the 28th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering*. Virtual Event USA: ACM, Nov. 2020, pp. 1–12. [Online]. Available: <https://dl.acm.org/doi/10.1145/3368089.3409753>
- [36] F. Buccafurri, T. Eiter, G. Gottlob, and N. Leone, “Enhancing model checking in verification by AI techniques,” *Artificial Intelligence*, vol. 112, no. 1-2, pp. 57–104, Aug. 1999. [Online]. Available: <https://linkinghub.elsevier.com/retrieve/pii/S0004370299000399>
- [37] C. Courcoubetis and M. Yannakakis, “The complexity of probabilistic verification,” *Journal of the ACM*, vol. 42, no. 4, pp. 857–907, Jul. 1995. [Online]. Available: <https://dl.acm.org/doi/10.1145/210332.210339>
- [38] R. Lanotte, A. Maggiolo-Schettini, and A. Troina, “Decidability results for parametric probabilistic transition systems with an application to security,” in *Proceedings of the Second International Conference on Software Engineering and Formal Methods, 2004. SEFM 2004*. IEEE, 2004, pp. 114–121.
- [39] E. M. Hahn, T. Han, and L. Zhang, “Synthesis for pctl in parametric markov decision processes,” in *Nasa formal methods symposium*. Springer, 2011, pp. 146–161.

- [40] E. M. Hahn, H. Hermanns, and L. Zhang, “Probabilistic reachability for parametric Markov models,” *International Journal on Software Tools for Technology Transfer*, vol. 13, no. 1, pp. 3–19, Jan. 2011. [Online]. Available: <http://link.springer.com/10.1007/s10009-010-0146-x>
- [41] R. Lanotte, A. Maggiolo-Schettini, and A. Troina, “Parametric probabilistic transition systems for system design and analysis,” *Formal Aspects of Computing*, vol. 19, no. 1, pp. 93–109, 2007.
- [42] A. Nilim and L. El Ghaoui, “Robust Control of Markov Decision Processes with Uncertain Transition Matrices,” *Operations Research*, vol. 53, no. 5, pp. 780–798, Oct. 2005. [Online]. Available: <http://pubsonline.informs.org/doi/abs/10.1287/opre.1050.0216>
- [43] A. Puggelli, W. Li, A. L. Sangiovanni-Vincentelli, and S. A. Seshia, “Polynomial-Time Verification of PCTL Properties of MDPs with Convex Uncertainties,” p. 16.
- [44] E. M. Wolff, U. Topcu, and R. M. Murray, “Robust control of uncertain Markov Decision Processes with temporal logic specifications,” in *2012 IEEE 51st IEEE Conference on Decision and Control (CDC)*. Maui, HI, USA: IEEE, Dec. 2012, pp. 3372–3379. [Online]. Available: <http://ieeexplore.ieee.org/document/6426174/>
- [45] K. V. Delgado, S. Sanner, and L. N. de Barros, “Efficient solutions to factored MDPs with imprecise transition probabilities,” *Artificial Intelligence*, vol. 175, no. 9-10, pp. 1498–1527, Jun. 2011. [Online]. Available: <https://linkinghub.elsevier.com/retrieve/pii/S0004370211000026>