

SpeechT5: Unified-Modal Encoder-Decoder Pre-training for Spoken Language Processing

Junyi Ao^{1,2,*}, Rui Wang^{3,*}, Long Zhou^{4,*}, Shujie Liu⁴, Shuo Ren⁴, Yu Wu⁴,
Tom Ko¹, Qing Li², Yu Zhang^{1,5}, Zhihua Wei³, Yao Qian⁴, Jinyu Li⁴, Furu Wei⁴

¹Department of Computer Science and Engineering, Southern University of Science and Technology

²Department of Computing, The Hong Kong Polytechnic University

³Department of Computer Science and Technology, Tongji University

⁴Microsoft

⁵Peng Cheng Laboratory

Abstract

Motivated by the success of T5 (Text-To-Text Transfer Transformer) in pre-training natural language processing models, we propose a unified-modal SpeechT5 framework that explores the encoder-decoder pre-training for self-supervised speech/text representation learning. The SpeechT5 framework consists of a shared encoder-decoder network and six modal-specific (speech/text) pre/post-nets. After preprocessing the speech/text input through the pre-nets, the shared encoder-decoder network models the sequence to sequence transformation, and then the post-nets generate the output in the speech/text modality based on the decoder output. Particularly, SpeechT5 can pre-train on a large scale of unlabeled speech and text data to improve the capability of the speech and textual modeling. To align the textual and speech information into a unified semantic space, we propose a cross-modal vector quantization method with random mixing-up to bridge speech and text. Extensive evaluations on a wide variety of spoken language processing tasks, including voice conversion, automatic speech recognition, text to speech, and speaker identification, show the superiority of the proposed SpeechT5 framework.

1 Introduction

Starting with ELMo (Peters et al., 2018) and BERT (Devlin et al., 2019), substantial work has shown that pre-trained models can bring significant improvements in various tasks, including natural language processing (NLP), image recognition, and speech processing (Radford et al., 2019; Lample and Conneau, 2019; Yang et al., 2019; Dong et al., 2019; Lewis et al., 2019; Bao et al., 2021; Baevski et al., 2020). It is becoming a new principle to solve

*Equal contribution. Work in progress and is done by the first two authors during internship at Microsoft Research Asia. Correspondence to: Long Zhou (lozhou@microsoft.com)

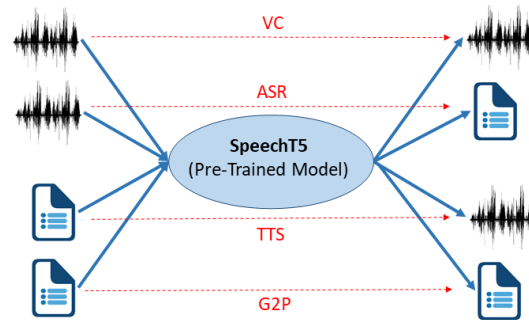


Figure 1: An illustration of the proposed SpeechT5 framework, which treats all spoken language processing tasks as a speech/text to speech/text format, including voice conversion (VC), automatic speech recognition (ASR), text to speech (TTS), grapheme to phoneme (G2P), and so on.

problems by pre-training a shared model with self-supervision tasks on a large amount of unlabeled data to learn universal representations.

Particularly, “Text-To-Text Transfer Transformer” (T5) (Raffel et al., 2019) leverages a unified text-to-text framework and achieves state-of-the-art results on a wide variety of NLP tasks, including machine translation, question answering, sentiment classification, and so on. The basic idea of T5 is to treat every NLP problem as a “text-to-text” problem, and employ transfer learning to boost the performance of downstream tasks.

Within the same period, self-supervised speech representation learning has also been investigated and shown promising results, benefiting from richly learned representations (Chung and Glass, 2018; Chuang et al., 2019; Song et al., 2019; Baevski et al., 2020; Wang et al., 2021; Hsu et al., 2021; Chung et al., 2021a). A prominent line of work has been proposed to improve acoustic encoder with speech pre-training, such as Wav2vec2 (Baevski et al., 2020), APC (Chung and Glass, 2020), MPC (Jiang et al., 2021), and Hubert (Hsu et al., 2021).

Another category of methods attempts to enhance a few spoken language understanding tasks by utilizing the speech-language pre-training (Chung et al., 2021b; Kim et al., 2021; Qian et al., 2021).

However, most of these models rely on an encoder-only model similar to BERT, and have task-specific model architectures for different tasks. How to design a unified encoder-decoder model which can take advantage of unlabeled speech and text data to improve various spoken language processing is not well explored. Inspired by the T5 method, we attempt to convert each spoken language processing task into a speech/text to speech/text problem via an encoder-decoder framework, e.g., automatic speech recognition (ASR), text-to-speech (TTS), voice conversion (VC), and speaker identification (SID), as shown in Figure 1, which enables us to use the same pre-trained model across diverse tasks.

To achieve this, we propose SpeechT5, a unified-modal encoder-decoder pre-training method for spoken language processing tasks. The proposed SpeechT5 contains an encoder-decoder backbone network and modal-specific pre-post networks. With the pre-nets, the input speech/text is embedded in a shared vector space, and the encoder-decoder backbone network models the sequence to sequence conversion, from which the model-specific post-nets generate the speech/text output. SpeechT5 is pre-trained with a denoising sequence-to-sequence method by leveraging large-scale unlabeled text and speech corpus. To align the textual and acoustic information into a unified semantic space, the proposed SpeechT5 model (1) maps text and speech representations into a shared vector quantization space, and (2) randomly mixes up the quantized latent representations and the contextual representations, which can explicitly guide the quantizer to learn the cross-modal information.

We fine-tune SpeechT5 on a wide variety of downstream spoken language processing tasks, including VC, ASR, TTS, and SID. Extensive results show that the proposed SpeechT5 model achieves a significant improvement on these spoken language processing tasks when compared with strong baselines. Specifically, the proposed SpeechT5 method performs better than the state-of-the-art voice transformer network (VTN) (Huang et al., 2021) on the VC task, and achieves the state-of-the-art result of 90.97%. It also outperforms SpeechNet (Chen et al., 2021) and pre-trained models such as SU-

PERB (Yang et al., 2021) on the SID task. Besides, SpeechT5 also obtains a gain of about 10.0% and 6.5% than the encoder-decoder based ASR model (i.e., Fairseq (Ott et al., 2019)) and some baseline model, respectively, on the ASR task, and obtains significant improvements over the strong Transformer TTS model (Li et al., 2019) by 13.4% and 5.8% in terms of the word error rate and mean opinion score on the TTS task.

The contributions of this paper are summarized as follows.

- To the best of our knowledge, this is the first work to investigate a unified encoder-decoder framework for various spoken language processing tasks.
- We propose a cross-modal joint pre-training method, which learns potential alignment between acoustic and textual representation with large-scale unlabeled speech and text data.
- Extensive experiments on spoken language processing tasks demonstrate the effectiveness and superiority of the proposed SpeechT5 method.

2 SpeechT5

In this section, we introduce the proposed SpeechT5 method, a unified-modal framework for learning joint contextual representations of speech and text based on a shared encoder-decoder model. It aims to derive generic representations for spoken and natural language via pre-training on unlabeled speech and text. In the following, We will first introduce the overall architecture of SpeechT5 and the details of individual components (i.e., Section 2.1), and then present the pre-training method (i.e., Section 2.2) and the fine-tuning method (i.e., Section 2.3) for spoken language processing tasks.

2.1 Model Architecture

All spoken language processing tasks take speech or text as the input or output. Figure 2 shows the model architecture of the proposed SpeechT5 model, which consists of an encoder-decoder module and six modal-specific pre/post networks. The pre-nets convert the input speech/text to a unified space, and the shared encoder-decoder network models the sequence to sequence conversion. Then based on the output of the decoder, the post-nets generate the output in the speech/text modality.

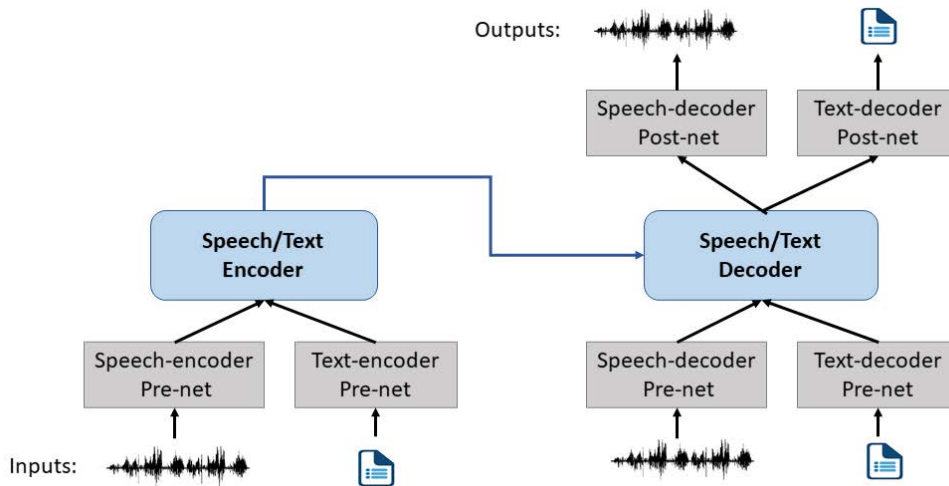


Figure 2: Model architecture of SpeechT5, which contains an encoder-decoder module and six modal-specific pre/post networks. Most spoken processing tasks can be done by concatenating the encoder-decoder module and corresponding pre-net and post-net.

Input/Output Representations To train a single model on a diverse set of spoken language processing tasks, we cast all the tasks we consider into a speech/text to speech/text format, where the input/output is a speech sequence or text sequence. The 80-dimension log-Mel filterbank feature extracted from each frame with the librosa tool¹ is treated as a token. If the output is in the speech modality, we employ the Vocoder (Kong et al., 2020) to transform the log-Mel filterbank feature into a waveform. For text, we split the text into a sequence of tokens by using a unigram language model (Kudo, 2018).

Encoder-Decoder This model is similar to the Transformer (Vaswani et al., 2017). The encoder consists of a stack of blocks, each of which comprises two subcomponents: a self-attention layer, followed by a small feed-forward network. Layer normalization (Ba et al., 2016) and residual connection (He et al., 2016) are applied to the input of each subcomponent. The decoder has a similar architecture to the encoder except that it includes a cross-attention mechanism after each self-attention layer that attends to the output of the encoder. Besides, the self-attention mechanism in the decoder also uses a form of autoregressive or causal self-attention, which only allows the model to attend to past outputs. We use simple relative position embedding (Shaw et al., 2018) to enhance the model capabilities, in which we only add the relative posi-

tion embedding to the dot-product weights of the self-attention.

Speech Pre/Post Net There are some differences between the speech-encoder pre-net and speech-decoder pre-net. In the speech-encoder pre-net, we apply two convolutional layers (via convolution strides) to downsample them and process local relationships. In the speech-decoder pre-net, the log-Mel filterbank is fed into a neural network composed of three fully connected layers with the ReLU activation. To support multi-speaker TTS and VC, the speaker embedding, which is extracted by the public x-vector (Snyder et al., 2018), is concatenated with the output of the speech-decoder pre-net. Then it is processed by a linear layer with the ReLU activation. For the speech-decoder post network, we use two different linear projections to predict the log-Mel filterbank and the stop token, respectively, and use 5-layer 1-dimensional convolutional layers to produce a residual to refine the reconstruction of the log-Mel filterbank.

Text Pre/Post Net We use shared embeddings as the text encoder pre-net and decoder pre/post networks. The pre-net transforms the token index into an embedding vector, and the post-net transforms the hidden state into the probability of token distribution, which is normalized by the softmax function. There is a shift in the input text of the decoder for the auto-regressive generation. During the inference, the decoder uses its own past predictions to predict the next token.

¹<https://librosa.org/>

2.2 Pre-training

With large scale collections of unlabeled speech and text corpus, we can pre-train the unified-modal model separately, and further align the textual and acoustic information into a unified semantic space by a joint pre-training method.

Speech Learning The goal of speech learning is to leverage unlabeled speech data to learn general speech representations for both speech understanding and generation tasks. To this end, the SpeechT5 model is trained as a unified encoder-decoder model with two types of spoken language modeling tasks: bidirectional masked prediction and sequence-to-sequence generation.

Formally, the input to the speech module is a sequence of 80-dimensional log-Mel filterbank $X = (x_1, \dots, x_n)$. The speech module, which consists of a speech-encoder pre-net and a Transformer encoder, produces hidden representations $S = (s_1, \dots, s_n)$. Similar to the masked language modeling in BERT, we follow Hubert (Hsu et al., 2021) to use the acoustic unit discovery model to provide frame-level targets² $Z = (z_1, \dots, z_n)$ for the output of the Transformer encoder. Specifically, we use span mask strategies, where $p\%$ of timesteps are randomly selected as start indices, and spans of l steps are masked. The cross-entropy computed over masked timesteps is defined as

$$\mathcal{L}_{mlm}^s = \sum_{t \in M} \log p_f(z_t | \hat{X}, t), \quad (1)$$

where \hat{X} denotes the corrupted version of X , and M denotes the set of indices to be masked for the sequence X .

Furthermore, we propose to reconstruct the original speech through the speech-decoder pre-net, Transformer decoder, and speech-decoder post-net. The decoder is autoregressive in that the output of the encoder $S = (s_1, \dots, s_n)$ and the previously generated features $y_{1:t-1}$ are considered when decoding current output y_t . Inspired by the success of modern seq2seq TTS models (Li et al., 2019), we enforce the corresponding output y_t to be close to the original frame x_t by minimizing their $L1$ -distance as

$$\mathcal{L}_1^s = \sum_{i=1}^n \|y_i - x_i\|_1. \quad (2)$$

²The target labels are generated by clustering the MFCC feature with the k -means clustering method.

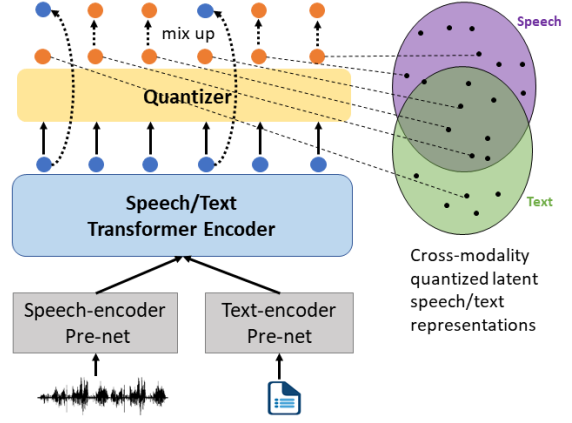


Figure 3: The joint pre-training approach. The shared quantization module over encoder representations produces cross-modality quantized latent speech/text units. Hidden states and latent units are mixed up and used as the inputs of the cross-attention module in the decoder. The model learns to share discrete tokens across modalities, creating bridges between speech and text.

Besides, we also use a binary cross-entropy (BCE) loss \mathcal{L}_{bce}^s for the stop token. To address the imbalance problem between stop tokens and normal tokens, we impose a positive weight on the tail positive stop token when calculating the BCE loss.

Text Learning The language module aims to offer contextual understanding and generation. Overall, with unlabeled text data, SpeechT5 is trained by (1) corrupting text with an arbitrary noising function with a masked span, and (2) learning to produce a corresponding target that can reconstruct the original text or masked text. For unsupervised objectives, we can use BART-style (Devlin et al., 2019) or T5-style (Raffel et al., 2019) mask strategies and target sequences. In the BART-style, the model aims to reconstruct the original text from the noisy source text. However, in the T5-style, all selected fragments are removed from the text and concatenated as the target sequence, while the remaining parts are concatenated as the source sequence. Formally, this model is trained to generate the target sequence $Y = (y_1, \dots, y_m)$ auto-regressively condition on the source sequence $X = (x_1, \dots, x_n)$ with the maximum likelihood estimation as

$$\mathcal{L}_{mle}^t = \sum_{t=1}^m \log p_f(y_t | y_{1:t-1}, X), \quad (3)$$

where the target sequence Y can be the original text or all masked text fragments.

Joint Pre-training The above pre-training methods can only leverage speech data or text data, individually, to model the acoustic information or language information. However, some spoken language tasks need to build a cross-modality mapping between speech and text, such as ASR and TTS. The alignment learning between the speech and text in pre-training will be beneficial to downstream tasks. With this motivation, we propose a unified-modal pre-training method to learn representations that capture modality invariant information with discrete vector quantization.

Specifically, our goal is to utilize vector quantized embeddings as a bridge between speech and text as well as align speech representation and text representation through a shared codebook, as shown in Figure 3. Inspired by VQ-VAE (Oord et al., 2017) and SemFace (Ren et al., 2021), we first use the quantizer to turn these dense speech or text representations s_i of the encoder output, into discrete representation c_i from a fixed size codebook C^K which contains K learnable embeddings. Formally, the nearest neighbor search is performed between the encoder output and the embedding of the latent code using the L_2 -distance metric as

$$c_i = \arg \min_{j \in [K]} \|s_i - c_j\|_2, \quad (4)$$

where c_j is j -th quantized vector in the codebook. Note that we do the same operation for the encoder output of speech and text with a shared codebook.

Then, we randomly replace a proportion of the contextual representations with quantized latent representations in the corresponding time steps, and calculate the cross-attention upon the mixed representations, which can explicitly guide the quantizer to utilize cross-modal information. To encourage sharing more codebook, the diversity loss is used by maximizing the entropy of the averaged softmax distribution as

$$\mathcal{L}_d = \frac{1}{K} \sum_{k=1}^K p_k \log p_k, \quad (5)$$

where p_k is the averaged probability of choosing the k -th code in the codebook.

The final pre-training loss with unlabeled speech and text data can be formulated as

$$\mathcal{L} = \mathcal{L}_{mlm}^s + \mathcal{L}_1^s + \mathcal{L}_{bce}^s + \mathcal{L}_{mle}^t + \mathcal{L}_d. \quad (6)$$

2.3 Fine-tuning

After pre-training, we fine-tune the encoder-decoder model with the corresponding loss of

downstream tasks. Our goal here is to measure general spoken learning abilities. As such, we study downstream performance on a diverse set of benchmarks, including ASR, TTS, VC, and SID.

Four speech processing tasks that we consider can be done by concatenating the encoder-decoder model and corresponding pre-net and post-net. For example, the speech-encoder pre-net, encoder-decoder, text-decoder pre-net, and text-decoder post-net can constitute the ASR model, and the training loss is the maximum cross-entropy loss.

3 Experiments

3.1 Dataset and Evaluation Metrics

For unsupervised speech pre-training, we use the full 960 hours of LibriSpeech audio (Panayotov et al., 2015), which is derived from the LibriVox project that contains English recordings of copyright-free audiobooks by volunteers from the Internet. For unsupervised text pre-training, we use the normalized language model training text of LibriSpeech as unlabeled data, which contains 400M sentences.³

In supervised fine-tuning, we use the commonly adopted dataset and evaluation metric for each task. We train the ASR model with LibriSpeech training data, and measure the performance of ASR by the word error rate (WER) on the standard LibriSpeech dev-other/clean and test-clean/other sets. A language model is trained by the same text data for pre-training, which is used for shallow fusion (Gulcehre et al., 2015) during ASR inference.

For TTS, we finetune the pretrained model on the 460-hours LibriTTS clean sets (Zen et al., 2019), which is a multispeaker English corpus of read English speech from the audiobooks of the LibriVox project. We trim the waveform as ESPnet recipe (Watanabe et al., 2018). We evaluate the WER using an open-source ASR model wav2vec 2.0 CTC⁴ on all test set. Moreover, we randomly select 200 fixed examples with various lengths (no overlap with training set) from our internal dataset as the evaluation set to evaluate the mean opinion score (MOS).

For VC, we use CMU Arctic (Kominek and Black, 2004) corpus, which consists of speech recordings of four speakers, such as clb (female), bdl (male), slt (female), and rms (male), reading

³<https://www.openslr.org/11/>

⁴<https://github.com/pytorch/fairseq/tree/main/examples/wav2vec>

Model	WER		MCD	
	BDL to SLT	CLB to SLT	BDL to SLT	CLB to SLT
VTN w/ ASR (Huang et al., 2021)	11.1%	10.9%	6.50	6.11
VTN w/ TTS (Huang et al., 2021)	7.6%	9.1%	6.33	6.02
Baseline	21.5%	10.8%	6.26	6.16
SpeechT5	10.1%	7.1%	6.06	5.95

Table 1: Results of VC (speech to speech). BDL, CLB, and SLT mean three different speakers. VTN (Huang et al., 2021) is the state-of-the-art voice Transformer network model, which is fine-tuned from the pretrained ASR or TTS model.

the same 1,132 phonetically balanced English utterances. We consider a many-to-many setting and use all speakers for training and evaluation. Thus, there are twelve different combinations of source and target speakers. For each speaker, the first 932, the last 100, and the rest 100 sentences of the 1,132 sentences are used for training, test, and validation, respectively. The average of MCD (Mel-Cepstral Distortion) token along the DTW (dynamic time warping) path between the output and ground-truth mel-cepstra serves as the evaluation metric of VC. The smaller MCD indicates better performance. Besides, we also use WER to evaluate the quality of generated voice with a public ASR model HuBERT Large⁵, since the WER of the test set with this ASR model is comparable to that of VTN (Huang et al., 2021).

For SID, VoxCeleb1 (Nagrani et al., 2017) is adopted in our experiments, which contains over 100,000 speech records uttered by 1,251 celebrities extracted from videos uploaded to YouTube. We use the official split of VoxCeleb1 for the speaker identification task, where the test set contains 8,251 utterances from these 1,251 celebrities. The capability of identifying speakers is assessed by classifying an utterance into the ground-truth category. The top-1 speaker classification accuracy is used as the evaluation metric of SID.

3.2 Implementation Details

Pre-training All models in this paper are implemented in Fairseq⁶ (Ott et al., 2019). The encoder-decoder model contains 12 Transformer encoder blocks and 6 Transformer decoder blocks, where the model dimension is 768, inner dimension (FFN) is 3,072 and the number of attention heads is 12. Speech-encoder pre-net is two 1-dimensional con-

volutional layers with strides [2,2], kernel size [5,5] and channel size [1024,1536], where each layer is followed by a gated linear unit (Dauphin et al., 2017). For speech-decoder pre-net and post-net, we use the same setting as the pre-net and post-net in (Shen et al., 2018), except the channel size of post-net is 256. For text-encoder/decoder pre/post-net, a shared embedding table with dimension 768 is used. For the quantization module, we use G=2 codebooks with V=100 entries for the shared codebook module, resulting in a theoretical maximum of 10k codewords.

The speech feature is a sequence of 80-dim log-Mel filterbank with 64 millisecond (ms) window, and 16 ms frame shift. It is normalized with utterance-level mean and variance when used as input data. For the text data, we combine the text of LibriSpeech (Panayotov et al., 2015) and LibriTTS (Zen et al., 2019) to get 10k unigram vocabulary (Kudo, 2018) and segment text by using SentencePiece⁷. We optimize with Adam (Kingma and Ba, 2014), warming up the learning rate for the first 10% of updates. We pretrain our model on 32 GPUs with 32 GB memory and set the update frequency to 4 for 40k steps.

Fine-tuning and Inference After pre-training, we fine-tune the learned representations on labeled data of downstream tasks. The speech and text data are preprocessed in the same way as pre-training. All fine-tuning experiments are conducted on 8 GPUs.

For ASR, we add an extra linear layer to calculate the CTC loss at the top of the encoder (Watanabe et al., 2017). The loss weight is 0.3 for CTC, and 0.7 for cross-entropy. We train our models for 200k steps with a batch size of up to 60000 tokens

⁵<https://huggingface.co/espnet>

⁶<https://github.com/pytorch/fairseq>

⁷<https://github.com/google/sentencepiece>

Models	JD	LM	dev-clean	dev-other	test-clean	test-other
Fairseq (Ott et al., 2019)	w/o	w/o	3.00	7.50	3.20	7.50
Espnet (Watanabe et al., 2018)	w/o	w/o	3.10	7.60	3.40	8.00
Baseline	w/o	w/o	2.76	7.16	3.08	7.25
	w/	w/o	2.60	7.15	2.88	7.06
	w/	w/	2.18	5.85	2.44	5.95
SpeechT5	w/o	w/o	2.74	6.94	2.88	7.07
	w/	w/o	2.51	6.79	2.73	6.76
	w/	w/	2.15	5.63	2.32	5.73

Table 2: Results of ASR (speech to text). Fairseq (Ott et al., 2019) and Espnet (Watanabe et al., 2018) are two open-source Transformer based encoder-decoder ASR models. JD and LM mean joint decoding and language model, respectively.

per GPU and a learning rate of 0.001. We train a language model for ASR inference, which contains 12 blocks of transformer encoder and set the model dimension to 1024, inner dimension to 4096, and attention heads to 16. During inference, the beam size is set to 5 for all experiments and we can also apply the joint CTC and decoder inference (Hori et al., 2017) and language model (LM) to further improve the performance.

For TTS, we add an additional attention loss (Tachibana et al., 2018) to speed up model convergence besides $L1$ loss and BCE loss. The model is updated for 300k steps with a learning rate of 0.0004, while each GPU processes up to 45000 tokens for a batch. We utilize HiFi-GAN (Kong et al., 2020) to produce the raw waveforms, which are capable of both efficient and high-fidelity TTS. We train it in a speaker-independent manner using the training data of LibriTTS.

For VC, we apply the loss function as used in the fine-tuning of TTS. The model is trained by the Adam optimizer with a batch size of 20000 tokens per GPU. We assign the learning rate based on inverse square root with the maximum learning rate of 10^{-4} within 60k steps and apply 6k warm-up steps. For the waveform synthesis module, we use Parallel WaveGAN (Yamamoto et al., 2020), which is a non-autoregressive variant of the WaveNet vocoder. We train it in a speaker-dependent manner by conditioning on our acoustic features using the same training split.

For SID, we use cross-entropy loss and fine-tune all models by the Adam optimizer with a batch size of 256 segments per GPU and the inputs of 150 frames. We assign the learning rate based on one cycle of a triangular cyclical schedule between

Model	WER	MOS
Ground Truth	2.17	3.86 ± 0.03
Baseline	1.72	3.45 ± 0.04
SpeechT5	1.49	3.65 ± 0.04

Table 3: Results of TTS (text to speech). WER is evaluated on all test data, and MOS is evaluated on 200 randomly selected fixed sentences.

10^{-8} and 5×10^{-4} in 60k steps. During inference, the whole utterance inputs to the trained model to obtain the probability distribution among the known categories, where the maximum probability indicates the predicted speaker.

3.3 Main Results

VC We show the results of VC in Table 1. In this table, we list the conversion from speaker BDL to SLT and speaker CLB to SLT, which are mainly reported in previous work. The experimental results demonstrate that the proposed SpeechT5 achieves a significant improvement than baseline model. Besides, our SpeechT5 outperforms the state-of-the-art VTN model in terms of MCD, where VTN (Huang et al., 2021) is a Transformer-based seq2seq VC model using pre-trained ASR or TTS model parameters.

ASR The performance of ASR are reported in Table 2. We also list the results of Transformer based encoder-decoder model from Fairseq (Ott et al., 2019) and Espnet (Watanabe et al., 2018). As can be seen from the table, our baseline is much stronger than previous models. Furthermore, the proposed SpeechT5 without LM achieves 3.5%,

Framework	Model	Top-1 ACC
SUPERB (Yang et al., 2021)	wav2vec 2.0 Base (Baevski et al., 2020)	75.18%
	HuBERT Base (Hsu et al., 2021)	81.42%
	HuBERT Large (Hsu et al., 2021)	90.33%
SpeechNet (Chen et al., 2021)	Single Task	86.00%
	Multi-Task with TTS	87.90%
Ours	Baseline	87.72%
	SpeechT5	90.97%

Table 4: Results of SID (speech to class). SUPERB (Yang et al., 2021) is a leaderboard to benchmark the performance of a pre-trained speech model with minimal architecture changes and labeled data. SpeechNet (Chen et al., 2021) is a universal speech model with multi-task learning framework.

6.2%, 5.2%, and 4.2% relative WER reduction with respect to baseline with same setting on dev-clean, dev-other, test-clean, and test-other, respectively, which demonstrates the effectiveness of our pre-training methods.

TTS Table 3 shows the experimental results of TTS. Our proposed SpeechT5 achieves the performance of 1.49% WER and 3.65 MOS, getting a relative reduction of 13.37% in WER and an gain of 0.2 in MOS with respect to the baseline model, respectively. It suggest the proposed pre-training technique achieves significant improvement.

SID The results of SID are shown in Table 4. We also list the scores reported in SUPERB (Yang et al., 2021) and SpeechNet (Hsu et al., 2021). In their leaderboard, wav2vec 2.0 (Baevski et al., 2020) and Hubert (Hsu et al., 2021) are two state-of-the-art pre-trained models. Experimental results demonstrate that our Speech-T5 significantly outperforms strong baseline and previous work, and achieves the state-of-the-art performance of 90.97% accuracy in SID task.

4 Related Work

Large-scale pre-training has drawn much attention in both the communities of NLP and speech, due to its strong capability of generalization and efficient usage of large-scale data. Recent pre-trained models in NLP, such as BERT (Devlin et al., 2019), RoBERTa (Liu et al., 2019), XLNet (Yang et al., 2019) and BART (Lewis et al., 2019), have achieved the state-of-the-art performance on language understanding and generation tasks. In spoken language processing, pre-trained speech models have also been applied to ASR (Hsu et al., 2021;

Baevski et al., 2020), TTS (Hayashi et al., 2019), speech translation (Li et al., 2020), VC (Huang et al., 2021), and so on.

However, the above-mentioned research effects gear towards single-modal learning, hence can only be used in either text or speech modeling. Although some speech-language pre-training work (Chung et al., 2021b; Kim et al., 2021; Qian et al., 2021) attempts to improve spoken language understanding tasks, e.g., intent detection, dialog act classification, and spoken sentiment analysis, these methods can not be used for spoken generation tasks such as TTS or text generation.

We consider our work most related to T5 (Raffel et al., 2019). The core idea of the T5 model, a unified framework for a variety of text-based language problems, is to treat every text processing problem as a “text-to-text” problem, i.e., taking the text as input and producing new text as output. Unlike T5, SpeechT5 is a cross-modal encoder-decoder framework, whose input and output are speech or text through different pre/post networks. Besides, we propose a new joint speech-text pre-training method to leverage large-scale unlabeled text and speech dataset and align the textual and phonetic information.

SpeechT5 is also related to Speech Chain (Tjandra et al., 2020), which leverages ASR model and TTS model to build a closed-loop machine speech chain and allows us to train model on the concatenation of both labeled and unlabeled data, and SpeechNet (Chen et al., 2021), which designs a universal modularized model to perform multiple speech processing tasks with multi-task learning. SpeechNet shows that it can simultaneously learn several common and important speech processing

tasks. However, there are two big differences between SpeechNet and our SpeechT5. First, SpeechNet has different encoder and decoder for different modalities (e.g., speech and text), but SpeechT5 only uses one shared encoder-decoder model for all tasks. Second, SpeechNet aims to verify the multi-task learning in several speech tasks, but our SpeechT5 attempts to pre-train and improve the universal model with large-scale unlabeled text and speech data.

Another related work is SUPERB (Yang et al., 2021), a benchmark to examine the capability of pre-trained models. SUPERB collects various tasks with limited labeled data from speech communities to align with common research interests. This paper focus on investigating a simple framework solving SUPERB tasks with a frozen, shared pre-trained model, and lightweight prediction modules finetuned for each task. In contrast, the goal of SpeechT5 is to achieve all speech tasks by fine-tuning a unified-modal encoder-decoder model which is pre-trained on unlabeled speech and text corpus.

5 Conclusion and Future Work

In this paper, we have presented SpeechT5 as a pre-trained encoder-decoder model for various spoken language tasks. We convert all spoken language processing tasks into a speech/text to speech/text format, and propose a novel joint pre-training method to utilize cross-modal information by leveraging the unlabeled speech and text data. Our unified model can support both spoken language understanding and generation tasks, such as speaker identification and voice conversion. Experiments show that SpeechT5 significantly outperforms all baselines in several spoken language processing tasks.

For future work, we plan to investigate more efficient pre-training methods, such as waveform learning representation via masked prediction like Hubert (Hsu et al., 2021), aligning text token and phoneme explicitly as unsupervised ASR (Baevski et al., 2021). Besides, we will pre-train the SpeechT5 with a larger model and more unlabeled data, and fine-tune it on more spoken language processing tasks. We are also interested in extending the proposed SpeechT5 framework to address the multilingual spoken language processing problem.

References

- Jimmy Lei Ba, Jamie Ryan Kiros, and Geoffrey E Hinton. 2016. Layer normalization. *arXiv preprint arXiv:1607.06450*.
- Alexei Baevski, Wei-Ning Hsu, Alexis Conneau, and Michael Auli. 2021. Unsupervised speech recognition. *arXiv preprint arXiv:2105.11084*.
- Alexei Baevski, Yuhao Zhou, Abdelrahman Mohamed, and Michael Auli. 2020. *wav2vec 2.0: A framework for self-supervised learning of speech representations*. In *Advances in Neural Information Processing Systems*, volume 33, pages 12449–12460. Curran Associates, Inc.
- Hangbo Bao, Li Dong, and Furu Wei. 2021. Beit: Bert pre-training of image transformers. *arXiv preprint arXiv:2106.08254*.
- Yi-Chen Chen, Po-Han Chi, Shu-wen Yang, Kai-Wei Chang, Jheng-hao Lin, Sung-Feng Huang, Da-Rong Liu, Chi-Liang Liu, Cheng-Kuang Lee, and Hung-yi Lee. 2021. Speechnet: A universal modularized model for speech processing tasks. *arXiv preprint arXiv:2105.03070*.
- Yung-Sung Chuang, Chi-Liang Liu, Hung-Yi Lee, and Lin-shan Lee. 2019. Speechbert: An audio-and-text jointly learned language model for end-to-end spoken question answering. *arXiv preprint arXiv:1910.11559*.
- Yu-An Chung and James Glass. 2018. Speech2vec: A sequence-to-sequence framework for learning word embeddings from speech. *arXiv preprint arXiv:1803.08976*.
- Yu-An Chung and James Glass. 2020. Generative pre-training for speech with autoregressive predictive coding. In *ICASSP 2020-2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 3497–3501. IEEE.
- Yu-An Chung, Yu Zhang, Wei Han, Chung-Cheng Chiu, James Qin, Ruoming Pang, and Yonghui Wu. 2021a. W2v-bert: Combining contrastive learning and masked language modeling for self-supervised speech pre-training. *arXiv preprint arXiv:2108.06209*.
- Yu-An Chung, Chenguang Zhu, and Michael Zeng. 2021b. *SPLAT: Speech-language joint pre-training for spoken language understanding*. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1897–1907, Online. Association for Computational Linguistics.
- Yann N. Dauphin, Angela Fan, Michael Auli, and David Grangier. 2017. Language modeling with gated convolutional networks. In *Proceedings of the 34th International Conference on Machine Learning - Volume 70, ICML'17*, page 933–941. JMLR.org.

- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Li Dong, Nan Yang, Wenhui Wang, Furu Wei, Xiaodong Liu, Yu Wang, Jianfeng Gao, Ming Zhou, and Hsiao-Wuen Hon. 2019. [Unified language model pre-training for natural language understanding and generation](#). In *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc.
- Caglar Gulcehre, Orhan Firat, Kelvin Xu, Kyunghyun Cho, Loic Barrault, Huihui Lin, Fethi Bougares, Holger Schwenk, and Yoshua Bengio. 2015. On using monolingual corpora in neural machine translation. *arXiv preprint arXiv:1503.03535*.
- Tomoki Hayashi, Shinji Watanabe, Tomoki Toda, Kazuya Takeda, Shubham Toshniwal, and Karen Livescu. 2019. Pre-trained text embeddings for enhanced text-to-speech synthesis. In *Proceedings of Interspeech*, pages 4430–4434.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. 2016. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778.
- Takaaki Hori, Shinji Watanabe, and John Hershey. 2017. Joint CTC/attention decoding for end-to-end speech recognition. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 518–529, Vancouver, Canada. Association for Computational Linguistics.
- Wei-Ning Hsu, Benjamin Bolte, Yao-Hung Hubert Tsai, Kushal Lakhotia, Ruslan Salakhutdinov, and Abdelrahman Mohamed. 2021. Hubert: Self-supervised speech representation learning by masked prediction of hidden units. *arXiv preprint arXiv:2106.07447*.
- Wen-Chin Huang, Tomoki Hayashi, Yi-Chiao Wu, Hirokazu Kameoka, and Tomoki Toda. 2021. Pretraining techniques for sequence-to-sequence voice conversion. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 29:745–755.
- Dongwei Jiang, Wubo Li, Ruixiong Zhang, Miao Cao, Ne Luo, Yang Han, Wei Zou, Kun Han, and Xiangang Li. 2021. A further study of unsupervised pretraining for transformer based speech recognition. In *ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 6538–6542. IEEE.
- Minjeong Kim, Gyuwan Kim, Sang-Woo Lee, and Jung-Woo Ha. 2021. St-bert: Cross-modal language model pre-training for end-to-end spoken language understanding. In *ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 7478–7482. IEEE.
- Diederik P Kingma and Jimmy Ba. 2014. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*.
- John Kominek and Alan W Black. 2004. The cmu arctic speech databases. In *Fifth ISCA workshop on speech synthesis*.
- Jungil Kong, Jaehyeon Kim, and Jaekyoung Bae. 2020. Hifi-gan: Generative adversarial networks for efficient and high fidelity speech synthesis. In *Proceedings of NeurIPS*, pages 17022–17033.
- Taku Kudo. 2018. [Subword regularization: Improving neural network translation models with multiple subword candidates](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 66–75, Melbourne, Australia. Association for Computational Linguistics.
- Guillaume Lample and Alexis Conneau. 2019. Cross-lingual language model pretraining. *arXiv preprint arXiv:1901.07291*.
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Ves Stoyanov, and Luke Zettlemoyer. 2019. Bart: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension. *arXiv preprint arXiv:1910.13461*.
- Naihan Li, Shujie Liu, Yanqing Liu, Sheng Zhao, and Ming Liu. 2019. Neural speech synthesis with transformer network. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 6706–6713.
- Xian Li, Changhan Wang, Yun Tang, Chau Tran, Yuqing Tang, Juan Pino, Alexei Baevski, Alexis Conneau, and Michael Auli. 2020. Multilingual speech translation with efficient finetuning of pre-trained models. *arXiv preprint arXiv:2010.12829*.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*.
- Arsha Nagrani, Joon Son Chung, and Andrew Senior. 2017. Voxceleb: a large-scale speaker identification dataset. *arXiv preprint arXiv:1706.08612*.
- Aaron van den Oord, Oriol Vinyals, and Koray Kavukcuoglu. 2017. Neural discrete representation learning. *arXiv preprint arXiv:1711.00937*.

- Myle Ott, Sergey Edunov, Alexei Baevski, Angela Fan, Sam Gross, Nathan Ng, David Grangier, and Michael Auli. 2019. fairseq: A fast, extensible toolkit for sequence modeling. *arXiv preprint arXiv:1904.01038*.
- Vassil Panayotov, Guoguo Chen, Daniel Povey, and Sanjeev Khudanpur. 2015. Librispeech: an asr corpus based on public domain audio books. In *2015 IEEE international conference on acoustics, speech and signal processing (ICASSP)*, pages 5206–5210. IEEE.
- Matthew E Peters, Mark Neumann, Mohit Iyyer, Matt Gardner, Christopher Clark, Kenton Lee, and Luke Zettlemoyer. 2018. Deep contextualized word representations. *arXiv preprint arXiv:1802.05365*.
- Yao Qian, Ximo Bian, Yu Shi, Naoyuki Kanda, Leo Shen, Zhen Xiao, and Michael Zeng. 2021. Speech-language pre-training for end-to-end spoken language understanding. In *ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 7458–7462. IEEE.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. 2019. Exploring the limits of transfer learning with a unified text-to-text transformer. *arXiv preprint arXiv:1910.10683*.
- Shuo Ren, Long Zhou, Shujie Liu, Furu Wei, Ming Zhou, and Shuai Ma. 2021. Semface: Pre-training encoder and decoder with a semantic interface for neural machine translation. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 4518–4527.
- Peter Shaw, Jakob Uszkoreit, and Ashish Vaswani. 2018. Self-attention with relative position representations. *arXiv preprint arXiv:1803.02155*.
- Jonathan Shen, Ruoming Pang, Ron J. Weiss, Mike Schuster, Navdeep Jaitly, Zongheng Yang, Zhifeng Chen, Yu Zhang, Yuxuan Wang, Rj Skerrv-Ryan, Rif A. Saurous, Yannis Agiomvrgiannakis, and Yonghui Wu. 2018. Natural tts synthesis by conditioning wavenet on mel spectrogram predictions. In *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 4779–4783.
- David Snyder, Daniel Garcia-Romero, Gregory Sell, Daniel Povey, and Sanjeev Khudanpur. 2018. X-vectors: Robust DNN embeddings for speaker recognition. In *Proceedings of 2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5329–5333.
- Xingchen Song, Guangsen Wang, Zhiyong Wu, Yiheng Huang, Dan Su, Dong Yu, and Helen Meng. 2019. Speech-xlnet: Unsupervised acoustic model pre-training for self-attention networks. *arXiv preprint arXiv:1910.10387*.
- Hideyuki Tachibana, Katsuya Uenoyama, and Shunsuke Aihara. 2018. Efficiently trainable text-to-speech system based on deep convolutional networks with guided attention. In *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 4784–4788. IEEE.
- Andros Tjandra, Sakriani Sakti, and Satoshi Nakamura. 2020. Machine speech chain. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 28:976–989.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *Advances in neural information processing systems*, pages 5998–6008.
- Chengyi Wang, Yu Wu, Yao Qian, Kenichi Kumatani, Shujie Liu, Furu Wei, Michael Zeng, and Xuedong Huang. 2021. Unispeech: Unified speech representation learning with labeled and unlabeled data. *arXiv preprint arXiv:2101.07597*.
- Shinji Watanabe, Takaaki Hori, Shigeki Karita, Tomoki Hayashi, Jiro Nishitoba, Yuya Unno, Nelson Enrique Yalta Soplín, Jahn Heymann, Matthew Wiesner, Nanxin Chen, et al. 2018. Espnet: End-to-end speech processing toolkit. *arXiv preprint arXiv:1804.00015*.
- Shinji Watanabe, Takaaki Hori, Suyoun Kim, John R. Hershey, and Tomoki Hayashi. 2017. [Hybrid ctc/attention architecture for end-to-end speech recognition](#). *IEEE Journal of Selected Topics in Signal Processing*, 11(8):1240–1253.
- Ryuichi Yamamoto, Eunwoo Song, and Jae-Min Kim. 2020. Parallel Wavegan: A fast waveform generation model based on generative adversarial networks with multi-resolution spectrogram. In *2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 6199–6203.
- Shu-wen Yang, Po-Han Chi, Yung-Sung Chuang, Cheng-I Jeff Lai, Kushal Lakhota, Yist Y Lin, Andy T Liu, Jiatong Shi, Xuankai Chang, Guan-Ting Lin, et al. 2021. Superb: Speech processing universal performance benchmark. *arXiv preprint arXiv:2105.01051*.
- Zhilin Yang, Zihang Dai, Yiming Yang, Jaime Carbonell, Russ R Salakhutdinov, and Quoc V Le. 2019. Xlnet: Generalized autoregressive pretraining for language understanding. *Advances in neural information processing systems*, 32.
- Heiga Zen, Viet Dang, Rob Clark, Yu Zhang, Ron J Weiss, Ye Jia, Zhifeng Chen, and Yonghui Wu. 2019. Libritts: A corpus derived from librispeech for text-to-speech. *arXiv preprint arXiv:1904.02882*.