

DS-TOD: Efficient Domain Specialization for Task Oriented Dialog

Chia-Chien Hung¹, Anne Lauscher², Simone Paolo Ponzetto¹, and Goran Glavaš^{1,3}

¹Data and Web Science Group, University of Mannheim, Germany

²MilaNLP, Bocconi University, Italy

³Center for Information and Language Processing, LMU Munich, Germany

{chia-chien, simone, goran}@informatik.uni-mannheim.de

anne.lauscher@unibocconi.it

Abstract

Recent work has shown that self-supervised dialog-specific pretraining on large conversational datasets yields substantial gains over traditional language modeling (LM) pretraining in downstream task-oriented dialog (TOD). These approaches, however, exploit general dialogic corpora (e.g., Reddit) and thus presumably fail to reliably embed domain-specific knowledge useful for concrete downstream TOD domains. In this work, we investigate the effects of domain specialization of pretrained language models (PLMs) for task-oriented dialog. Within our DS-TOD framework, we first automatically extract salient domain-specific terms, and then use them to construct DOMAINCC and DOMAINREDDIT – resources that we leverage for domain-specific pretraining, based on (i) masked language modeling (MLM) and (ii) response selection (RS) objectives, respectively. We further propose a resource-efficient and modular domain specialization by means of *domain adapters* – additional parameter-light layers in which we encode the domain knowledge. Our experiments with two prominent TOD tasks – dialog state tracking (DST) and response retrieval (RR) – encompassing five domains from the MULTIWOZ TOD benchmark demonstrate the effectiveness of our domain specialization approach. Moreover, we show that the lightweight adapter-based specialization (1) performs comparably to full fine-tuning in single-domain setups and (2) is particularly suitable for multi-domain specialization, in which, besides advantageous computational footprint, it can offer better downstream performance.

1 Introduction

Task-oriented dialog (TOD), where an agent helps the user complete a concrete task (e.g., book a flight or order food), has arguably been one of the most prominent applications in natural language processing in recent years, both in academia

(Budzianowski et al., 2018; Henderson et al., 2019b; Hosseini-Asl et al., 2020; Liu et al., 2021a, *inter alia*) and industry (e.g., Gao et al., 2018; Rashtogi et al., 2020).

Much like in most other NLP areas and tasks, fine-tuning of pretrained language models (PLMs) like BERT (Devlin et al., 2019) and GPT-2 (Radford et al., 2019) for downstream tasks pushed the state of the art in TOD (Budzianowski and Vulić, 2019; Hosseini-Asl et al., 2020), with LM pretraining at the same time alleviating the need for large labeled datasets (Ramadan et al., 2018).

More recent TOD work recognized the idiosyncrasy of dialog (i.e., the fact that a dialog is an interleaved exchange of utterances between two or more participants) and proposed a range of pretraining objectives specifically tailored for dialogic corpora (Henderson et al., 2019b; Wu et al., 2020; Bao et al., 2020, *inter alia*). For instance, the recently proposed TOD-BERT (Wu et al., 2020) model has been pretrained on the concatenation of nine human-to-human multi-turn dialog datasets. Similarly, Henderson et al. (2019b, 2020) pretrain a general-purpose dialog encoder on a large corpus of human-human conversations from Reddit by means of response-selection objectives. Encoding dialogic linguistic knowledge obtained in this way led to significant performance improvements in downstream TOD tasks.

While existing approaches impart useful dialogic linguistic knowledge, by pretraining on general dialogic corpora they fail to exploit the fact that individual downstream task-oriented dialogs typically belong to one narrow domain (e.g., *food* ordering) or, less commonly, few closely related domains (e.g., booking a *train* and *hotel*) (Budzianowski et al., 2018; Ramadan et al., 2018). Given the multitude of different downstream TOD domains (e.g., ordering *food* is quite different from booking a *flight*) it is, intuitively, unlikely that general dia-

logic pretraining reliably encodes domain-specific knowledge for all of them.

In this work, we propose **Domain Specialization for Task Oriented Dialog (DS-TOD)**, a novel domain specialization framework for pretrained language models in task-oriented dialog systems. DS-TOD, depicted in Figure 1, has three steps: (1) we extract domain-specific terms (e.g., taxi-related terms) from the training portions of a task-specific TOD corpus; (2) we use the extracted terms to obtain domain-specific data from large unlabeled corpora (e.g., Reddit); (3) we conduct intermediate training of a PLM (e.g., BERT), on the domain-specific data in order to inject the domain-specific knowledge into the encoder. As a result, we obtain a domain-specialized PLM, which can then be fine-tuned for downstream TOD tasks such as dialog state tracking or response retrieval.

Contributions. We advance the state of the art in TOD with the following contributions: **(i)** Departing from general-purpose dialogic pretraining (e.g., Henderson et al., 2019a), we leverage a simple terminology extraction method to construct resources DOMAINCC and DOMAINREDDIT for domain-specific LM and dialogic pretraining, respectively. **(ii)** We examine different objectives for injecting domain-specific knowledge into PLMs: we empirically compare Masked Language Modeling (MLM) applied on the “flat” domain dataset DOMAINCC against two different Response Selection (RS) objectives (Henderson et al., 2019b; Oord et al., 2018) applied on the dialogic (i.e., conversational) dataset DOMAINREDDIT. We demonstrate the effectiveness of our specialization on two downstream TOD tasks – dialog state tracking (DST) and response retrieval (RR) – for five domains from the MULTIWOZ dataset (Budzianowski et al., 2018; Eric et al., 2020). **(iii)** We propose modular domain specialization for TOD via *adapter* modules (Houlsby et al., 2019; Pfeiffer et al., 2020b). Additional evaluation on multi-domain dialogs reveals the advantage of adapter-based domain specialization in multi-domain TOD: combining domain-specific adapters via stacking (Pfeiffer et al., 2020b) or fusion (Pfeiffer et al., 2021), (a) performs on par with or outperforms expensive multi-domain pretraining, with (b) a much smaller computational footprint.¹

¹Assume N domains and bi-domain downstream dialogs that can encompass any two domains. With an adapter-based approach, we pretrain one adapter for each domain (complexity: N) and then downstream combine the adapters of the two

2 Data Collection

We create large-scale domain-specific corpora in two steps: given a collection of in-domain dialogs we first extract salient domain terms (§2.1); we then use these domain terms to filter contents from CCNet as a large general corpus (Wenzek et al., 2020) and Reddit as a source of dialogic data (§2.2).

2.1 Domain-Specific Ngrams

We start from a widely used Multi-domain Wizard-of-Oz TOD dataset (MultiWOZ; Budzianowski et al., 2018). Concretely, we resort to the revised version MultiWOZ 2.1 (Eric et al., 2020) and experiment with the five domains for which test portion dialogs exist: *Taxi*, *Attraction*, *Train*, *Hotel*, and *Restaurant*. We provide information on domain-specific subsets of MultiWOZ 2.1 in Table 1.

To obtain large domain-specific corpora for our intermediate training procedure, we first construct sets of domain-specific ngrams for each of the five domains. To this end, we first compute TF-IDF scores² for all $\{1,2,3\}$ -grams found in single-domain dialogs from the training portion of MultiWOZ.³ We then select N ngrams with the highest TF-IDF scores⁴ and from those manually eliminate ngrams that are not intrinsic to the domain (e.g., weekdays, named locations). Finally, since terms from MultiWOZ follow the British spelling (e.g., *centre*, *theatre*), we add the corresponding American forms (e.g., *center* and *theater*). The resulting ngram sets are given in Table 2.

2.2 Domain-Specific Corpora

We next use the extracted domain ngrams to retrieve two types of in-domain data for domain specialization: i) flat text and ii) conversational data.

DOMAINCC. For each of the five MultiWOZ domains, we create the corresponding flat text corpus for MLM-ing by filtering out 200K sentences from the English portion of CCNet (Wenzek et al.,

domains present in each bi-domain subset of dialogs; In contrast, multi-domain specialization would entail one bi-domain pretraining for each domain combination (complexity: N^2).

²TF is the total frequency of the ngram in all domain dialogs, and IDF is the inverse proportion of the domain dialogs that contain the ngram.

³E.g., for the *Taxi* domain, we collect all training dialogs that span only that domain (i.e., only taxi ordering) and omit dialogs that besides *Taxi* span across one or more other domains (e.g., taxi ordering and hotel booking in the same dialog).

⁴In all our experiments, we set $N = 80$.

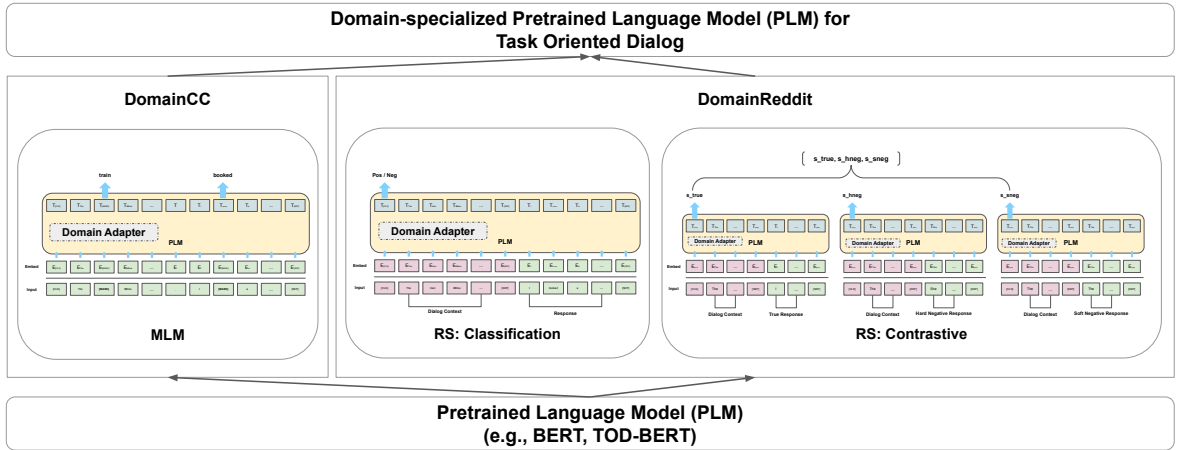


Figure 1: Overview of the DS-TOD framework. Three different specialization objectives for injecting domain-specific knowledge into PLMs (see §3.1): (1) Masked Language Modeling (MLM) on the “flat” domain corpus DOMAINCC, (2) Response Selection via Classification, and (3) Response Selection via Contrastive Learning, with RS objectives operating on a dialogic corpus DOMAINREDDIT. Domain specialization performed either via (a) full fine-tuning of the PLM or (b) adapter-based fine-tuning (see §3.2).

	Taxi	Restaurant	Hotel	Train	Attraction
Slot Names	<i>destination, departure, arriveBy, leaveAt</i>	<i>pricerange, area, day, people, food, name, time</i>	<i>pricerange, parking, internet, stars, area, type, people, day, stay, name</i>	<i>destination, departure, day, people, arriveBy, leaveAt</i>	<i>area, type, name</i>
# single domain (train, dev, test)	325, 57, 52	1197, 50, 62	513, 56, 67	275, 30, 33	127, 11, 12
# multi domain (train, dev, test)	1329, 150, 143	2616, 388, 375	2868, 360, 327	2828, 454, 461	2590, 390, 383
# total (train, dev, test)	1654, 207, 195	3813, 438, 437	3381, 416, 394	3103, 484, 494	2717, 401, 395
% single domain	24.62%	19.00%	15.21%	7.25%	3.49%

Table 1: Statistics for MultiWOZ 2.1 dataset. For each domain, we report slot names, the total number of dialogs as well as the number of single-domain and multi-domain dialogs.

2020)⁵ that contain one or more of the previously extracted domain terms. We additionally clean all DOMAINCC portions by removing email addresses and URLs, and lower-casing all terms.

DOMAINREDDIT. Being constructed from CommonCrawl, DOMAINCC portions do not exhibit any natural conversational structure, encoding of which has been shown beneficial for downstream TOD (Henderson et al., 2019b; Wu et al., 2020). We thus additionally create a dialogic corpus for each domain: we employ the Pushshift API (Baumgartner et al., 2020) to extract conversational data from Reddit.⁶ To this end, we select subreddits related to *traveling* (listed in Table 3) which we believe align well with the

⁵A high-quality collection of monolingual datasets extracted from CommonCrawl that has been used for pretraining multilingual PLMs (Conneau et al., 2020; Liu et al., 2020).

⁶We extract Reddit posts from the period 2015-2019.

content of MultiWOZ, which was created by simulating conversations between tourists and clerks in a tourist information center. Each of the subreddits contains threads composed of a series of comments, where each comment can serve as a *context* that is followed by a series of *responses*. For DOMAINREDDIT we select context-response pairs where either the context utterance or the response contains at least one of the domain-specific terms. To construct useful examples for injecting conversational knowledge, we follow Henderson et al. (2019a) and couple each true context-response pair (i.e., a comment and its immediate response) with a *false response* – a non-immediate response from the same thread. Table 4 provides an example context with its true response and one false response. Finally, we also clean DOMAINREDDIT by removing email addresses and URLs, and by filtering out

Domain	Ngrams
Taxi	<i>taxi, contact number, book a taxi, booked, time schedule, pickup, leaving, booked type, , booking completed, departing, destination, cab, completed booked, honda, ford, audi, lexus, toyota, departure, skoda, lexus contact, toyota contact, ford contact, volvo, train station, departure site, tesla, audi contact, honda contact, skoda contact, picking, departing, volkswagen</i>
Attraction	<i>museum, college, entrance, attraction, information, centre town, center town, entertainment, swimming pool, gallery, sports, nightclub, pounds, park, postcode, architecture, centre area, center area, cinema, church, trinity college, entrance free, jello gallery, post code, town centre, town center, downing college</i>
Train	<i>train station, travel time, leaving, pounds, train ticket, departing, payable, train leaving, cambridge, london, reference id, arrive, destination, kings cross, total fee, departure, arriving, book a train, booked, stansted, stansted airport, peterborough, traveling, trip, airport, booking successful, norwich</i>
Hotel	<i>hotel, nights, parking, free parking, wifi, star hotel, price range, free wifi, guesthouse, guest house, internet, guest, hotel room, star rating, expensive room, priced, rating, book room, moderately priced, moderate price, stay for, reservation, breakfast available, book people, fully booked, booking, reference</i>
Restaurant	<i>restaurant, food, price range, expensive, cheap, priced, chinese food, italian food, moderately priced, south town, book table, city, north town, serving, city centre, city center, european food, reservation, food type, phone address, food types, centre town, center town, expensive restaurant, moderate price, cuisine, restaurant center, restaurant centre, south town, expensive price, east town, cheap restaurant, indian food, asian food, british food, book people</i>

Table 2: Salient domain ngrams extracted from the single-domain training portions of MultiWOZ.

Subreddit	# Members	Domains
travel	5.8m	Taxi, Attraction, Train, Hotel, Restaurant
backpacking	2.5m	Taxi, Attraction, Train, Hotel, Restaurant
solotravel	1.7m	Taxi, Attraction, Train, Hotel, Restaurant
CasualUK	797k	Taxi, Attraction, Train, Hotel, Restaurant
unitedkingdom	553k	Taxi, Attraction, Train, Hotel, Restaurant
restaurant	81.6k	Restaurant
trains	64.8k	Train, Attraction
hotel	1.8k	Hotel
hotels	4.9k	Hotel
tourism	3.9k	Taxi, Attraction, Train, Hotel, Restaurant
uktravel	1.5k	Taxi, Attraction, Train, Hotel, Restaurant
taxi	0.6k	Taxi

Table 3: Subreddits and associated domains selected for creating DOMAINREDDIT.

Field	Example
Subreddit	restaurant
Context	<i>Hosts don't get tips? That's news to me. Most host positions in my area get at least 1% of sales; they make anywhere between 60–100 per night in tips!</i>
Response	<i>We get tips but definitely not that much (in my experience). The tip out in my restaurant is 1% split between shift leaders, food runners, and any other FOH other than servers/bartenders. Full time hosts get about 50-75 every other week</i>
False response	<i>Wow that's terrible. Then again, my restaurant is in CA, so wages and guest check averages are usually higher.</i>

Table 4: Example from DOMAINREDDIT dataset.

comments that have fewer than 10 characters. The total number of extracted Reddit examples, i.e., triples (*context, true response, false response*) we extract for MultiWOZ domains is as follows: *Taxi* – 120K; *Attraction* – 157K; *Hotel* – 229K; *Train* – 229K; and *Restaurant* – 243K.

3 Domain Specialization Methods

The next step in DS-TOD is the injection of domain-specific knowledge through intermediate training of the models on DOMAINCC and DOMAINREDDIT portions. To this end, we train a PLM (1) via Masked Language Modeling on DOMAINCC and (2) using two different Response Selection objectives on DOMAINREDDIT. Finally, for all specialization objectives, we compare full domain fine-

tuning (i.e., we update all PLM parameters) against adapter-based specialization where we freeze the PLM parameters and inject domain knowledge into new adapter layers.

3.1 Training Objectives

Masked Language Modeling (MLM). Following successful work on domain-adaptive pretraining via language modeling (Gururangan et al., 2020; Aharoni and Goldberg, 2020; Glavaš et al., 2020), we investigate the effect of running standard masked language modeling on the domain-specific portions of DOMAINCC.

Response Selection (RS). Response Selection (RS) objectives force the model to recognize the correct response utterance given the context utterance – pretraining with such objectives is particularly useful for conversational settings, including downstream TOD tasks (Henderson et al., 2019b, 2020). We consider two RS objectives. The first is a simple pairwise binary classification formulation (**RS-Class**): given a context-response pair, predict whether the response is a true (i.e., immediate) response to the context. We straightforwardly use pairs of contexts and their true responses from DOMAINREDDIT as positive training instances. Next, we create negative samples for each positive instance as follows: a) we use the crawled *false response* from DOMAINREDDIT⁷, which represents a relevant but non-consecutive response from the same thread; b) we additionally randomly sample k utterances from the same domain but different

⁷Non-immediate responses from the same thread represent the so-called *hard negatives*, introduced to prevent the model from learning simple lexical cues and similar heuristics that poorly generalize.

threads (the so-called easy negatives).⁸

The second response selection objective (**RS-Contrast**) that we adopt is a type of loss function used for contrastive model training based on the representation similarities between sampled positive and negative pairs (Oord et al., 2018). It has been used for pretraining cross-lingual language models (Chi et al., 2021) and shown to be useful in information retrieval (Reimers and Gurevych, 2021; Thakur et al., 2021). The idea is to estimate the mutual information between pairs of variables by discriminating between a positive pair and its associated N negative pairs. Given a true context-response pair and N corresponding negatives (the same as for RS-Class), the noise-contrastive estimation (NCE) loss is computed as:

$$L_{NCE} = -\log \frac{\exp(f(c, r_+))}{\sum_{i=1}^{N+1} \exp(f(c, r_i))},$$

where c is the context, r_+ is the true response and r_i iterates over all responses for the context – the true response r_+ and N false responses; a function f produces a score indicating whether the response r is a true response of the context c .

By learning to differentiate whether the response is true or false for a given context (RS-Class) or to produce a higher score for a true response than for false responses (RS-Contrast), RS objectives encourage the language model to adapt to the underlying sequential order and structural information from the conversation. By feeding only in-domain data to it, we encode domain-specific conversational knowledge into the model.

3.2 Adapter-Based Domain Specialization

Fully fine-tuning the model requires adjusting all of the models’ parameters, which can be undesirable due to the required computational effort and risk of catastrophic forgetting of the previously acquired knowledge (McCloskey and Cohen, 1989; Pfeiffer et al., 2020a). To alleviate these issues, we investigate the use of adapters (Houlsby et al., 2019), additional parameter-light modules that are injected into a PLM before fine-tuning. In task-specific fine-tuning only adapter parameters are updated while PLM’s pretrained parameters are kept frozen (and previously acquired knowledge is thus preserved). We adopt the adapter-transformer architecture proposed by Pfeiffer et al. (2021), which inserts a single adapter layer into each transformer

layer and computes the output of the adapter, a two-layer feed-forward network, as follows:

$$\text{Adapter}(\mathbf{h}, \mathbf{r}) = U \cdot g(D \cdot \mathbf{h}) + \mathbf{r},$$

with \mathbf{h} and \mathbf{r} as the hidden state and residual of the respective Transformer layer. $D \in \mathbb{R}^{m \times h}$ and $U \in \mathbb{R}^{h \times m}$ are the linear down- and up-projections, respectively (h being the Transformer’s hidden size, and m as the adapter’s bottleneck dimension), and $g(\cdot)$ is a non-linear activation function. The residual \mathbf{r} is the output of the Transformer’s feed-forward layer whereas \mathbf{h} is the output of the subsequent layer normalization. The down-projection D compresses token representations to the adapter size $m < h$, and the up-projection U projects the activated down-projections back to the Transformer’s hidden size h . The ratio h/m captures the factor by which the adapter-based fine-tuning is more parameter-efficient than full fine-tuning of the Transformer.

For multi-domain downstream TOD scenarios (i.e., dialogs that cover more than a single domain), we further experiment with combining adapters specialized for individual domains by means of: (1) sequential stacking of adapters one on top of the other (Pfeiffer et al., 2020b) and (2) adapter fusion, with the output that is the weighted average of outputs of individual adapters, with fusion weights as additional parameters to be learned in task fine-tuning (Pfeiffer et al., 2021).

4 Experiments

Evaluation Task and Measures. We evaluate our domain-specialized models and baseline on two prominent downstream TOD tasks: *dialog state tracking (DST)* and *response retrieval (RR)*. DST is treated as a multi-class classification task based on a predefined ontology, where given the dialog history, the goal is to predict the output state, i.e., (domain, slot, value) tuples. For our implementation, we follow Wu et al. (2020), and represent the dialog history as a sequence of utterances. The model then needs to predict slot values for each (domain, slot) pair at each dialog turn. We report the results in terms of *joint goal accuracy*, in which the predicted dialog states are compared to the ground truth slot values at each dialog turn. The ground truth contains slot values for all the (domain, slot) candidate pairs. A prediction is considered correct if and only if all the predicted slot values exactly match its ground truth values. RR is a ranking

⁸ k is uniformly sampled from the set $\{1, 2, 3\}$.

Model	Dialog State Tracking						Response Retrieval					
	Taxi	Restaurant	Hotel	Train	Attraction	Avg.	Taxi	Restaurant	Hotel	Train	Attraction	Avg.
BERT	23.87	35.44	30.18	41.93	29.77	32.24	23.25	37.61	38.97	44.53	48.47	38.57
TOD-BERT	30.45	43.58	36.20	48.79	42.70	40.34	45.68	57.43	53.84	60.66	60.26	55.57
BERT-MLM	23.74	37.09	32.77	40.96	36.66	34.24	31.37	53.08	45.41	51.66	52.23	46.75
TOD-BERT-MLM	29.94	43.14	36.11	47.61	41.54	39.67	41.77	55.27	50.60	55.17	54.62	51.49
TOD-BERT-RS-Class	36.39	43.38	37.89	48.82	43.31	41.96	47.01	58.21	57.05	59.70	57.72	55.94
TOD-BERT-RS-Contrast	35.03	44.81	38.74	49.04	42.73	42.07	48.04	59.82	54.49	60.06	60.63	56.61
BERT-MLM-adapter	22.52	40.49	31.90	42.17	35.05	34.43	32.84	44.01	39.15	38.43	45.05	39.90
TOD-BERT-MLM-adapter	32.06	44.06	36.74	48.84	43.50	41.04	49.08	58.18	55.55	59.46	60.26	56.51
TOD-BERT-RS-Class-adapter	33.10	42.57	38.61	49.03	42.35	41.13	49.59	61.26	56.87	58.88	60.00	57.32
TOD-BERT-RS-Contrast-adapter	34.90	44.42	37.52	48.71	42.83	41.68	47.97	58.97	55.41	59.15	61.95	56.69

Table 5: Results of domain-specialized models on two downstream TOD tasks: Dialog State Tracking (DST) and Response Retrieval (RR) with joint goal accuracy (%) as the evaluation metric for DST and $R_{100}@1$ (Henderson et al., 2020) (%) for RR.

problem, relevant for retrieval-based task-oriented dialog systems (Wu et al., 2017; Henderson et al., 2019b). Following Henderson et al. (2020); Wu et al. (2020), we adopt recall at top rank given 100 randomly sampled candidates ($R_{100}@1$) as the evaluation metric for RR.

Data. In the pretraining procedure, we use the domain-specific portions of our novel DOMAINCC and DOMAINREDDIT resources (§2). For the MLM training, we randomly sample 200K domain-specific contexts from DOMAINCC and dynamically mask 15% of the subword tokens. For RS-Class and RS-Contrast, we randomly sample 200K instances from DOMAINREDDIT. We evaluate the efficacy of the investigated methods on DST and RR using MultiWOZ 2.1 (Eric et al., 2020). Since we aim to understand the effect of the domain specialization procedure, we construct domain-specific training, development, and testing portions from the original data set by assigning them to all dialogs that belong to a domain (i.e., both single- and multi-domain dialogs) from respective overall (train, dev, test) portions.

Models and Baselines. We experiment with two PLMs: BERT (Devlin et al., 2019) and its TOD-specific sibling TOD-BERT (Wu et al., 2020).⁹ As baselines we report the performance of the non-specialized variants. We then compare the baselines against our domain-specialized PLM variants, obtained after intermediate MLM-training on DOMAINCC or RS-Class/RS-Contrast training on DOMAINREDDIT.

Hyperparameters and Optimization. During pretraining we fix the maximum sequence length

⁹We use the pretrained models `bert-base-cased` and `TODBERT/TOD-BERT-JNT-V1` from HuggingFace.

to 256 subword tokens (for RS objectives, we set both the *context* length and the *response* length to 128 tokens). We train for 30 epochs, in batches of 32 instances and search for the optimal learning rate in the following range: [1e-4, 5e-5, 1e-5, 1e-6]. We apply early stopping based on the development set performance with no improvement for 3 consecutive epochs. We optimize the parameters by minimizing the cross-entropy loss using Adam (Kingma and Ba, 2014) as the optimization algorithm.

For downstream DST and RR training, we train for 300 epochs in batches of 6 and 24 instances for DST and RR, respectively, with the learning rate fixed to 5e-5. We apply early stopping if there is no improvement of development performance over 10 consecutive training epochs.

5 Results and Discussion

Overall performance. We report downstream DST and RR results in Table 5, which is segmented in three parts: (1) at the top we show the results of baselines (BERT, TOD-BERT) without any domain specialization; (2) in the middle of the table we show results of PLMs specialized for domains via full fine-tuning; (3) the bottom of the table contains results for PLMs specialized for domains via adapter-based fine-tuning.

In both DST and RR, TOD-BERT massively outperforms BERT due to its general conversational knowledge. Domain-specialization brings performance gains for both PLMs across the board. The only exception is full MLM-based fine-tuning of TOD-BERT (i.e., TOD-BERT-MLM vs. TOD-BERT; -4% for RR and -0.8% for DST): we believe that this is an example of negative interference – while TOD-BERT is in this case learning domain knowledge, it is – because of MLM-training – for-

getting the conversational knowledge obtained in dialogic pretraining (Wu et al., 2020). This hypothesis is further supported by the fact that adapter-based MLM specialization of TOD-BERT – which prevents negative interference by design – brings slight performance gains (i.e., TOD-BERT-MLM-adapter vs. TOD-BERT; +0.8% for DST and +1.0% for RR) and is consistent with the concurrent findings of Qiu et al. (2021).

Overall, specialization via response selection seems to be more robust than that via MLM, with the two objective variants (RS-Class and RS-Contrast) exhibiting similar average performance across different settings. This points to the fact that it is important to inject both the knowledge about the conversational structure and the domain knowledge for the performance gains in downstream TOD tasks in the domain of interest.

Somewhat interestingly, the gains from domain specialization are significantly more pronounced for the *Taxi* domain than for other domains. We relate this to the proportion of the single-domain dialogs for a given domain in MultiWOZ, which is by far the largest (24%, see Table 1) among all domains. This means that the successful domain specialization for that domain is *a priori* more likely to show more substantial gains on MultiWOZ (i.e., less multi-domain staggered influence).

Another encouraging finding is that, on average, adapter-based domain specialization yields similar gains as specialization via full fine-tuning: given that adapter-based fine-tuning is substantially more efficient, this holds the promise of more sustainable domain specialization for TOD.

Size of Downstream Training Data. To further understand the effect of the injected domain-specific knowledge, we conduct an additional few-shot analysis (Figure 2) on DST. To this end, we select the *Taxi* domain, since we witnessed the largest gains for that domain. We analyse the differences in performance between baseline and domain-specialized PLMs when they are exposed to downstream training portions of different sizes, ranging from 5 to 100% of the whole training dataset.¹⁰ TOD-BERT retains a sizable performance gap over BERT for all the training settings, pointing to the power of conversational pretraining. Similarly, for all dataset sizes, the performances of the domain-specialized variants of TOD-BERT-

¹⁰Note that 5% of the training data in the *Taxi* domain amounts to 83 dialogs.

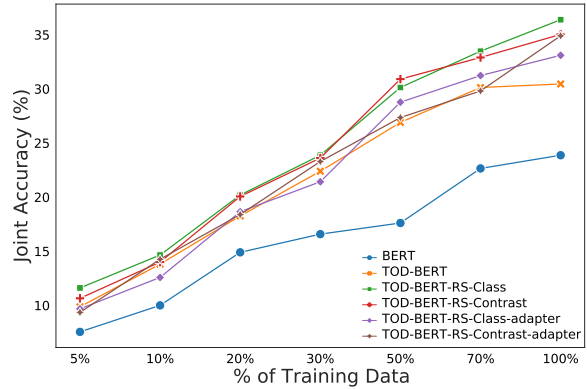


Figure 2: Different size of downstream training data performances on DST task: joint goal accuracy (%) for randomly sampled sub-portions (5%, 10%, 20%, 30%, 50%, 70%, and 100%) of the training data from the *Taxi* domain.

RS-Class and TOD-BERT-RS-Contrast surpass the one of the non-domain-specialized TOD-BERT. Even more interestingly, domain-specialized variants exposed to only 50% of the DST training data manage to surpass the performance of TOD-BERT fine-tuned on all of the training data (100%). This suggests that self-supervised domain specialization has the potential to reduce the amount of annotated TOD task data needed from reaching the same level of performance.

Multi-Domain Specialization. In many real-world scenarios, a single model needs to be able to handle multiple domains because (a) of the existence of multi-domain dialogs and (b) simultaneous deployment of and inference with multiple single-domain models may not be feasible, e.g., due to limited computational resources. To simulate this scenario, we conduct an additional analysis, in which we concatenate dialogs spanning concrete combinations of two or three domains. For these experiments, we choose three domain combinations with the largest number of multi-domain dialogs, namely the two largest two-domain combinations and the largest three-domain combination (Figure 3): *Hotel+Train*, *Attraction+Train*, and *Hotel+Taxi+Restaurant*.

As baselines, we report the performance of BERT and TOD-BERT fine-tuned on the respective multi-domain TOD training sets. We test the effect of multi-domain specialization in two variants: (1) *fully specialized model trained for multiple domains*: as RS-Class has proven to be effective in our single-domain-specialization experiments, we

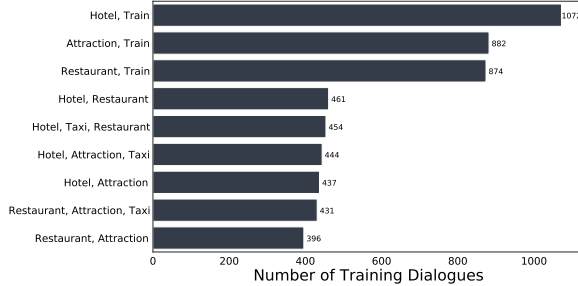


Figure 3: Number of dialogs in the MultiWOZ 2.1 training dataset when joining several domains.

run RS-Class training on the concatenation of the selected domains from DOMAINREDDIT corpora that correspond to the domains of the joint training sets. Accordingly, the training data is twice (or three times) as big as the size of the training data of single-domain specialization; (2) *composition of single domain adapters for multiple domains*: while for the full fine-tuning based approaches, a new specialization procedure is necessary for each domain combination, with adapter-based specialization we can simply combine the adapters of involved domains in downstream fine-tuning. In this setup, we combine the single-domain adapters by sequentially stacking them (AdapterStack) (Pfeiffer et al., 2020b) (AdapterStack) or by fusing them, i.e., interpolating between their outputs (AdapterFusion) (Pfeiffer et al., 2021).

The multi-domain specialization results are shown in Table 6. Interestingly, combining single-domain adapters in downstream training (via stacking or fusion) performs on a par with full-sized two-domain specialization on DOMAINREDDIT by means of RS-Class training. In contrast to TOD-BERT-RS-Class, which needs full retraining of the model on the unlabelled domain-specific corpora for each combination of the domains, combining single-domain adapters is much more efficient as it does not require any further intermediate domain training. In the three-domain setup (*Hotel+Taxi+Restaurant*), the AdapterFusion approach even outperforms full three-domain specialization (TOD-BERT-RS-Class) by 2 points.

Overall, we find that the adapter compositions provide a simple and effective way to combine information from several domain-specialized adapters, removing the need for additional multi-domain specialization in the case of multi-domain dialogs downstream.

Model	Hotel+ Train	Attraction+ Train	Hotel+Taxi+ Restaurant
BERT	42.66	45.06	37.00
TOD-BERT	46.38	46.40	42.47
TOD-BERT-RS-Class	47.39	47.33	42.39
TOD-BERT-RS-Class- AdapterStack	47.19	46.68	42.15
TOD-BERT-RS-Class- AdapterFusion	44.25	45.57	44.02

Table 6: Model performances on DST in multi-domain scenarios. We report the joint goal accuracy (%) of the fully multi-domain-specialized models (TOD-BERT-RS-Class) in comparison to models, which combine readily available single-domain adapters (TOD-BERT-RS-Class-AdapterStack and TOD-BERT-RS-Class-AdapterFusion) for three multi-domain evaluation sets: *Hotel+Train*, *Attraction+Train*, and *Hotel+Taxi+Restaurant*.

6 Related Work

Task-oriented Dialog. Task-oriented Dialog (TOD) systems aim at helping the user to accomplish a certain task in specific domains. TOD datasets can be mainly categorized into single-domain (Wen et al., 2017; Mrkšić et al., 2017) and multi-domain (Budzianowski et al., 2018; Rastogi et al., 2020) setup, where the former one is a simple setting with one domain discussed per conversation, and the latter one has been proposed recently to be more applicable to real-world scenario by solving the problem of size limitation, and task complexity compared to single domain datasets.

Dialog Pretrained Language Models. With the advantage of language models trained on massive general text such as Wikipedia and web crawled corpora (Devlin et al., 2019; Radford et al., 2019; Lewis et al., 2020), these pretrained language models have recently emerged as a key technology for achieving impressive gains in a wide variety of natural language tasks, including TOD systems. Recent research focused on two main directions for dialog pretrained language models: (1) encapsulate open-domain resources (e.g. Reddit, Twitter) conversational information for TOD downstream tasks (Henderson et al., 2019b, 2020; Zhang et al., 2020; Bao et al., 2020; Liu et al., 2021b) (2) in use of previously constructed TOD datasets to inject conversational structure on language models pre-training (Wu et al., 2020; Peng et al., 2021; Su et al., 2021). However, the above methods are mainly focusing on the generalizability without specific domain adaptation concerns.

Domain Adaptation. Recent work on domain adaptation focuses mainly on how to efficiently and effectively inject domain knowledge to NLP domain-specific downstream tasks. Intermediate training is one of the prevalent approaches, beneficial to a small subset of crawled in-domain text-based corpora during intermediate MLM training boost the performance on text classification task (Gururangan et al., 2020) and hate speech detection (Glavaš et al., 2020) task. While focusing domain adaptation on TOD, recent work showed that intermediate training on domain-specific conversational corpus via response selection (RS) objective helps to improve the performance on retrieval-based dialog system (Whang et al., 2020). For efficiency concerns, and avoiding catastrophic forgetting, adapter modules have been widely used for parameter-efficient and quick fine-tuning of a general-purpose pretrained language models to new tasks (Houlsby et al., 2019). And adapter composition is further proposed to be a non-destructive way to combine the knowledge of multiple pretrained adapters on a new downstream task (Pfeiffer et al., 2020b, 2021).

7 Conclusion

In this paper we propose a novel domain specialization framework **DS-TOD**, which is efficient and effective for task-oriented dialogs and can widely applicable to the usage of multiple domains settings. We also construct two domain-specific publicly available corpora: DOMAINCC and DOMAINRED-DIT, which can be easily extended to more domains for future needs. We hope that both the resources and the domain-specialized framework catalyzes research efforts on domain specialization techniques for task-oriented dialog systems, especially on multi-domain settings. In the future we plan to explore more domain specialization methods for efficiency concerns and also with the consideration of multilingual scenario for multi-domain task-oriented dialog systems.

References

Roei Aharoni and Yoav Goldberg. 2020. [Unsupervised domain clusters in pretrained language models](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7747–7763, Online. Association for Computational Linguistics.

Siqi Bao, Huang He, Fan Wang, Hua Wu, and Haifeng Wang. 2020. [PLATO: Pre-trained dialogue genera-](#)

[tion model with discrete latent variable](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 85–96, Online. Association for Computational Linguistics.

Jason Baumgartner, Savvas Zannettou, Brian Keegan, Megan Squire, and Jeremy Blackburn. 2020. [The pushshift reddit dataset](#). In *Proceedings of the international AAAI conference on web and social media*, volume 14, pages 830–839.

Paweł Budzianowski and Ivan Vulić. 2019. [Hello, it’s GPT-2 - how can I help you? towards the use of pre-trained language models for task-oriented dialogue systems](#). In *Proceedings of the 3rd Workshop on Neural Generation and Translation*, pages 15–22, Hong Kong. Association for Computational Linguistics.

Paweł Budzianowski, Tsung-Hsien Wen, Bo-Hsiang Tseng, Iñigo Casanueva, Stefan Ultes, Osman Ramadan, and Milica Gašić. 2018. [MultiWOZ - a large-scale multi-domain Wizard-of-Oz dataset for task-oriented dialogue modelling](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 5016–5026, Brussels, Belgium. Association for Computational Linguistics.

Zewen Chi, Li Dong, Furu Wei, Nan Yang, Saksham Singhal, Wenhui Wang, Xia Song, Xian-Ling Mao, Heyan Huang, and Ming Zhou. 2021. [InfoXLM: An information-theoretic framework for cross-lingual language model pre-training](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 3576–3588, Online. Association for Computational Linguistics.

Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020. [Unsupervised cross-lingual representation learning at scale](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8440–8451, Online. Association for Computational Linguistics.

Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.

Mihail Eric, Rahul Goel, Shachi Paul, Abhishek Sethi, Sanchit Agarwal, Shuyang Gao, Adarsh Kumar, Anuj Goyal, Peter Ku, and Dilek Hakkani-Tur. 2020. [MultiWOZ 2.1: A consolidated multi-domain dialogue dataset with state corrections and state tracking baselines](#). In *Proceedings of the 12th Language Resources and Evaluation Conference*, pages

- 422–428, Marseille, France. European Language Resources Association.
- Jianfeng Gao, Michel Galley, and Lihong Li. 2018. [Neural approaches to conversational ai](#). In *The 41st International ACM SIGIR Conference on Research & Development in Information Retrieval*, page 1371–1374. Association for Computing Machinery.
- Goran Glavaš, Mladen Karan, and Ivan Vulić. 2020. [XHate-999: Analyzing and detecting abusive language across domains and languages](#). In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 6350–6365, Barcelona, Spain (Online). International Committee on Computational Linguistics.
- Suchin Gururangan, Ana Marasović, Swabha Swayamdipta, Kyle Lo, Iz Beltagy, Doug Downey, and Noah A. Smith. 2020. [Don’t stop pretraining: Adapt language models to domains and tasks](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8342–8360, Online. Association for Computational Linguistics.
- Matthew Henderson, Paweł Budzianowski, Iñigo Casanueva, Sam Coope, Daniela Gerz, Girish Kumar, Nikola Mrkšić, Georgios Spithourakis, Pei-Hao Su, Ivan Vulić, and Tsung-Hsien Wen. 2019a. [A repository of conversational datasets](#). In *Proceedings of the First Workshop on NLP for Conversational AI*, pages 1–10, Florence, Italy. Association for Computational Linguistics.
- Matthew Henderson, Iñigo Casanueva, Nikola Mrkšić, Pei-Hao Su, Tsung-Hsien Wen, and Ivan Vulić. 2020. [ConveRT: Efficient and accurate conversational representations from transformers](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 2161–2174, Online. Association for Computational Linguistics.
- Matthew Henderson, Ivan Vulić, Daniela Gerz, Iñigo Casanueva, Paweł Budzianowski, Sam Coope, Georgios Spithourakis, Tsung-Hsien Wen, Nikola Mrkšić, and Pei-Hao Su. 2019b. [Training neural response selection for task-oriented dialogue systems](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 5392–5404, Florence, Italy. Association for Computational Linguistics.
- Ehsan Hosseini-Asl, Bryan McCann, Chien-Sheng Wu, Semih Yavuz, and Richard Socher. 2020. [A simple language model for task-oriented dialogue](#). In *Advances in Neural Information Processing Systems*, volume 33, pages 20179–20191. Curran Associates, Inc.
- Neil Houlsby, Andrei Giurgiu, Stanislaw Jastrzebski, Bruna Morrone, Quentin De Laroussilhe, Andrea Gesmundo, Mona Attariyan, and Sylvain Gelly. 2019. [Parameter-efficient transfer learning for NLP](#). In *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 2790–2799. PMLR.
- Diederik P Kingma and Jimmy Ba. 2014. [Adam: A method for stochastic optimization](#). *arXiv preprint arXiv:1412.6980*.
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020. [BART: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7871–7880, Online. Association for Computational Linguistics.
- Jiexi Liu, Ryuichi Takanobu, Jiaxin Wen, Dazhen Wan, Hongguang Li, Weiran Nie, Cheng Li, Wei Peng, and Minlie Huang. 2021a. [Robustness testing of language understanding in task-oriented dialog](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 2467–2480.
- Qi Liu, Lei Yu, Laura Rimell, and Phil Blunsom. 2021b. [Pretraining the noisy channel model for task-oriented dialogue](#). *arXiv preprint arXiv:2103.10518*.
- Yinhan Liu, Jiatao Gu, Naman Goyal, Xian Li, Sergey Edunov, Marjan Ghazvininejad, Mike Lewis, and Luke Zettlemoyer. 2020. [Multilingual denoising pre-training for neural machine translation](#). *Transactions of the Association for Computational Linguistics*, 8:726–742.
- Michael McCloskey and Neal J Cohen. 1989. [Catastrophic interference in connectionist networks: The sequential learning problem](#). In *Psychology of learning and motivation*, volume 24, pages 109–165. Elsevier.
- Nikola Mrkšić, Diarmuid Ó Séaghdha, Tsung-Hsien Wen, Blaise Thomson, and Steve Young. 2017. [Neural belief tracker: Data-driven dialogue state tracking](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1777–1788, Vancouver, Canada. Association for Computational Linguistics.
- Aaron van den Oord, Yazhe Li, and Oriol Vinyals. 2018. [Representation learning with contrastive predictive coding](#). *arXiv preprint arXiv:1807.03748*.
- Baolin Peng, Chunyuan Li, Jinchao Li, Shahin Shayan-deh, Lars Liden, and Jianfeng Gao. 2021. [Soloist: Building task bots at scale with transfer learning and machine teaching](#). *Transactions of the Association for Computational Linguistics*, 9:807–824.

- Jonas Pfeiffer, Aishwarya Kamath, Andreas Rücklé, Kyunghyun Cho, and Iryna Gurevych. 2021. [AdapterFusion: Non-destructive task composition for transfer learning](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 487–503, Online. Association for Computational Linguistics.
- Jonas Pfeiffer, Andreas Rücklé, Clifton Poth, Aishwarya Kamath, Ivan Vulić, Sebastian Ruder, Kyunghyun Cho, and Iryna Gurevych. 2020a. [AdapterHub: A framework for adapting transformers](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 46–54, Online. Association for Computational Linguistics.
- Jonas Pfeiffer, Ivan Vulić, Iryna Gurevych, and Sebastian Ruder. 2020b. [MAD-X: An Adapter-Based Framework for Multi-Task Cross-Lingual Transfer](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 7654–7673, Online. Association for Computational Linguistics.
- Yao Qiu, Jinchao Zhang, and Jie Zhou. 2021. [Different strokes for different folks: Investigating appropriate further pre-training approaches for diverse dialogue tasks](#). *arXiv preprint arXiv:2109.06524*.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. [Language models are unsupervised multitask learners](#). *OpenAI blog*, 1(8):9.
- Osman Ramadan, Paweł Budzianowski, and Milica Gašić. 2018. [Large-scale multi-domain belief tracking with knowledge sharing](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 432–437, Melbourne, Australia. Association for Computational Linguistics.
- Abhinav Rastogi, Xiaoxue Zang, Srinivas Sunkara, Raghav Gupta, and Pranav Khaitan. 2020. [Towards scalable multi-domain conversational agents: The schema-guided dialogue dataset](#). In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 8689–8696.
- Nils Reimers and Iryna Gurevych. 2021. [The curse of dense low-dimensional information retrieval for large index sizes](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 2: Short Papers)*, pages 605–611, Online. Association for Computational Linguistics.
- Yixuan Su, Lei Shu, Elman Mansimov, Arshit Gupta, Deng Cai, Yi-An Lai, and Yi Zhang. 2021. [Multi-task pre-training for plug-and-play task-oriented dialogue system](#). *arXiv preprint arXiv:2109.14739*.
- Nandan Thakur, Nils Reimers, Andreas Rücklé, Abhishek Srivastava, and Iryna Gurevych. 2021. [Beir: A heterogeneous benchmark for zero-shot evaluation of information retrieval models](#). *arXiv preprint arXiv:2104.08663*.
- Tsung-Hsien Wen, David Vandyke, Nikola Mrkšić, Milica Gašić, Lina M. Rojas-Barahona, Pei-Hao Su, Stefan Ultes, and Steve Young. 2017. [A network-based end-to-end trainable task-oriented dialogue system](#). In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 1, Long Papers*, pages 438–449, Valencia, Spain. Association for Computational Linguistics.
- Guillaume Wenzek, Marie-Anne Lachaux, Alexis Conneau, Vishrav Chaudhary, Francisco Guzmán, Armand Joulin, and Edouard Grave. 2020. [CCNet: Extracting high quality monolingual datasets from web crawl data](#). In *Proceedings of the 12th Language Resources and Evaluation Conference*, pages 4003–4012, Marseille, France. European Language Resources Association.
- Taesun Whang, Dongyub Lee, Chanhee Lee, Kisu Yang, Dongsuk Oh, and HeuiSeok Lim. 2020. [An effective domain adaptive post-training method for bert in response selection](#). In *Proc. Interspeech 2020*, pages 1585–1589.
- Chien-Sheng Wu, Steven C.H. Hoi, Richard Socher, and Caiming Xiong. 2020. [TOD-BERT: Pre-trained natural language understanding for task-oriented dialogue](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 917–929, Online. Association for Computational Linguistics.
- Yu Wu, Wei Wu, Chen Xing, Ming Zhou, and Zhoujun Li. 2017. [Sequential matching network: A new architecture for multi-turn response selection in retrieval-based chatbots](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 496–505, Vancouver, Canada. Association for Computational Linguistics.
- Yizhe Zhang, Siqi Sun, Michel Galley, Yen-Chun Chen, Chris Brockett, Xiang Gao, Jianfeng Gao, Jingjing Liu, and Bill Dolan. 2020. [DIALOGPT : Large-scale generative pre-training for conversational response generation](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics: System Demonstrations*, pages 270–278, Online. Association for Computational Linguistics.