

Good Examples Make A Faster Learner

Simple Demonstration-based Learning for Low-resource NER

Dong-Ho Lee, Mahak Agarwal, Akshen Kadakia, Jay Pujara, Xiang Ren
Department of Computer Science, University of Southern California
{dongho.lee, mahakaga, akshenhe, jpujara, xiangren}@usc.edu

Abstract

Recent advances in prompt-based learning have shown impressive results on few-shot text classification tasks by using cloze-style language prompts. There have been attempts on prompt-based learning for NER which use manually designed templates to predict entity types. However, these two-step methods may suffer from error propagation (from entity span detection), need to prompt for all possible text spans which is costly, and neglect the interdependency when predicting labels for different spans in a sentence. In this paper, we present a simple demonstration-based learning method for NER, which augments the prompt (learning context) with a few task demonstrations. Such demonstrations help the model learn the task better under low-resource settings and allow for span detection and classification over all tokens jointly. Here, we explore entity-oriented demonstration which selects an appropriate entity example per each entity type, and instance-oriented demonstration which retrieves a similar instance example. Through extensive experiments, we find empirically that showing entity example per each entity type, along with its example sentence, can improve the performance both in in-domain and cross-domain settings by 1-3 F1 score.

1 Introduction

Recent advances in deep neural models for named entity recognition (NER) have shown impressive results when sufficient human annotations are available (Lample et al., 2016; Ma and Hovy, 2016; Liu et al., 2018). However, such annotations are expensive and slow to collect, especially in specific domains (e.g., social media, financial reports, legal documents). Recent research lines of addressing label scarcity leverage pre-trained language models (PTLMs) or various types of auxiliary supervisions.

Prior works on auxiliary supervisions use distant supervisions such as entity dictionary (Peng et al.,

2019; Shang et al., 2018; Yang et al., 2018; Liu et al., 2019) and labeling rules (Safranchik et al., 2020; Jiang et al., 2020a) to augment supervisions with noisy labeled data, or incorporate meta-level information such as explanation (Lin et al., 2020; Lee et al., 2020, 2021), context (Wang et al., 2021) and prompts (Ding et al., 2021; Cui et al., 2021) to enhance supervisions. Especially, recent works on prompt-based learning show impressive performance on few-shot NER tasks.

Prompt-based learning modifies the input into cloze-style template and use PTLMs to fill the unfilled information in probabilistic, which allows PTLMs to be able to perform few-shot or even zero-shot learning. To elicit better output with prompts, there has been exploration on prompt engineering such as manual template engineering which manually creates templates in a human perspective (Petroni et al., 2019; Brown et al., 2020; Schick and Schütze, 2021) or automatic template search by paraphrasing (Yuan et al., 2021; Haviv et al., 2021), mining (Jiang et al., 2020b), and generation (Gao et al., 2021). One other simple-yet-effective prompt engineering is prompt augmentation, which is called *demonstration-based learning* (Gao et al., 2021; Liu et al., 2021). This is designed to let prompt be prefaced by a few examples before it predicts unfilled information in the template so that the model can better understand the task.

There have been recent attempts on prompt-based learning to NER tasks. (Ding et al., 2021) shows effectiveness on entity type prediction given the entity span by constructing a prompt like “[entity span] is [MASK]”. However, when the entity span is not given, we need to construct cloze-style prompts over all the entity candidates in the sentence like “[entity candidate] is [MASK]” and make a prediction which should be extremely expensive (Cui et al., 2021) (See Figure 1 (a)). These approaches show the potential of prompt-based

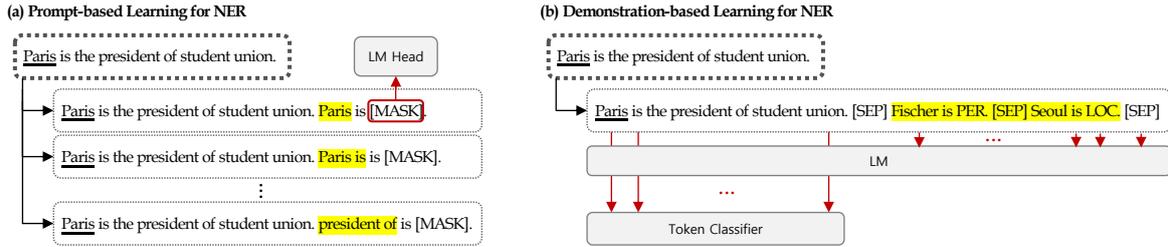


Figure 1: Prompt-based learning frameworks for NER mostly neglect entity span detection which leads a huge time cost to generate prompts over all the entity candidates in the sentence, while our demonstration-based learning framework integrates prompt into the input itself to make better input representations for the token classification.

learning in NER but still have a challenge that such cloze-style template for each text span neglects a latent relationship between token labels.

In this paper, we study *demonstration-based learning* for NER in a low-resource scenario in which domain-expert annotations are very limited due to the high cost. Here, we don't reformat the NER task into the cloze-style template but we let the model to understand the task by facing useful task demonstrations. Our *demonstration-based learning* for NER preserves the existing sequence labeling schema, which considers a latent relationship between token labels, by simply concatenating the input and task demonstration together as a new input to the PTLMs for better-contextualized representations (See Figure 1 (b)).

We investigate the effectiveness of task demonstration in two different settings: (1) In-domain low-resource setting; and (2) Low-resource Domain-adaptation setting. We first study what variants of task demonstration are useful to train an accurate and label-efficient NER model and further how to adapt the source model to target domain in fast with a small amount of target data. Here, the task demonstration is constructed in two different ways: (1) *entity-oriented demonstration* selects an entity example per each entity type from train data to construct the demonstration. It allows the model to get a better sense of entity type by showing its entity example; and (2) *instance-oriented demonstration* retrieves instance example similar to input sentence in train data. It allows the model to get a better sense of the task by showing similar instances and their entities.

We show extensive experimental results on 3 NER datasets from 2 domains over 3 templates and 5 selection/retrieval strategies for task demonstrations. For *entity-oriented demonstration*, we present 3 selection strategies to choose appropriate

entity example per each entity type: (1) *random* randomly selects entity example per each entity type; (2) *popular* selects the entity example which occurs the most per each entity type in the train data; and (3) *search* selects the entity example per each entity type that shows the best performance in the development set. And for *instance-oriented demonstration*, we present 2 retrieval strategies to choose appropriate instance example (SBERT (Reimers and Gurevych, 2019) vs. BERTScore (Zhang et al., 2020)).

We show that given a small number of training examples, (1) our strategy consistently outperforms standard fine-tuning in both low-resource in-domain and domain-adaptation settings by 1-3 F1 score; (2) *entity-oriented demonstration* becomes more effective when not only showing the entity example per each entity type, but also the corresponding instance example; (3) *instance-oriented demonstration* is worse than *entity-oriented demonstration* due to difficulty of finding an appropriate similar instance in a low resource train data; (4) *search* for the *entity-oriented demonstration* outperforms other sampling strategies which show the combination of entity example per each entity type affects the performance. Together, our simple-yet-effective approach shows strong performance by useful task demonstrations without changing the nature of the sequence labeling task.

2 Related Works

NER with additional supervision Recent attempts addressing label scarcity have explored various types of human-curated resources as auxiliary supervision. One of the research lines to exploit such auxiliary supervision is a distant-supervised learning. These methods use entity dictionaries (Peng et al., 2019; Shang et al., 2018; Yang et al., 2018; Liu et al., 2019) or labeling rules (Safra

et al., 2020; Jiang et al., 2020a) to generate noisy-labeled data for learning a NER model. Although these approaches largely reduce human efforts in annotation, the cross-entropy loss may make the model be overfitted to the wrongly labeled tokens due to noisy labels (Meng et al., 2021). Another line of research is incorporating such auxiliary supervision during training and inference in a setting of supervised learning. These approaches usually incorporate external information that is encoded including POS labels, syntactic constituents, dependency relations (Nie et al., 2020; Tian et al., 2020), explanations (Lin et al., 2020; Lee et al., 2020, 2021), retrieved context (Wang et al., 2021) and prompts (Ding et al., 2021; Cui et al., 2021).

Prompt-based Learning Prompt-based learning is a work of filling the gap between masked LM objective of PTLMs and downstream fine-tuning objective by expressing the downstream task with cloze-style objective. After the success of GPT3 (Brown et al., 2020) which uses prompts for few-shot learning in text classification tasks, manual prompts and automatic prompt search have been explored in knowledge probing and sequence classification tasks. (Petroni et al., 2019, 2020) probe knowledge of BERT by extracting relation between entities by cloze-style template in zero-shot prediction. (Schick and Schütze, 2021) reformat the input into cloze questions for text classification, and (Gao et al., 2021; Schick et al., 2020) further explore the automatic generation of template along with label words.

Recently, there have been explorations of prompt-based learning in NER tasks. (Ding et al., 2021) focuses on entity typing task which aims to predict the entity type given marked mention by cloze-style template (“*[marked mention] is [MASK]*”). (Cui et al., 2021) solves general sequence labeling task in a sequence generation manner by constructing cloze-style prompts over all the entity candidates in the sentence (“*[entity candidate] is [MASK]*”). It outperforms baseline models but inference over various prompts by different entity candidates is extremely expensive.

Demonstration-based Learning Providing a few training examples in a natural language prompt has been widely explored in autoregressive LMs (Brown et al., 2020; Zhao et al., 2021). Such prompt augmentation is called demonstration-based learning (Gao et al., 2021). This is designed

to let prompt be prefaced by a few examples before it predicts label words for *[MASK]* in the cloze-style question. Recent works on this research line explore a good selection of training examples (Gao et al., 2021) and permutation of them as demonstration (Kumar and Talukdar, 2021).

3 Problem Definition

In this section, we introduce basic concepts of named entity recognition, standard fine-tuning for sequence labeling, and domain adaptation for sequence labeling. We then formally introduce our goal – generating task demonstration and then developing a learning framework that uses them to improve NER models.

3.1 Name Entity Recognition

Here, we let $\mathbf{x} = [x^{(1)}, x^{(2)}, \dots, x^{(n)}]$ denote the sentence composed of a sequence of n words and $\mathbf{y} = [y^{(1)}, y^{(2)}, \dots, y^{(n)}]$ denote the sequence of NER tags. The task is to predict the entity tag $y^{(i)} \in \mathcal{Y}$ for each word $x^{(i)}$, where \mathcal{Y} is a pre-defined set of tags such as {B-PER, I-PER, ..., O}. In standard fine-tuning, NER model \mathcal{M} parameterized by θ is trained to minimize the cross entropy loss over token representations $\mathbf{h} = [h^{(1)}, h^{(2)}, \dots, h^{(n)}]$ which are generated from the embedder as follows:

$$\mathcal{L} = - \sum_{i=1}^n \log f_{i, y_i}(\mathbf{h}; \theta) \quad (1)$$

where f is the model’s predicted conditional probability that can be either from linear or CRF layer.

3.2 In-domain Low-resource Learning

Given a low-resource NER dataset $\mathcal{D}_{\text{train}}$, in which the number of labeled instances (sentences) is extremely limited (e.g., < 100), our goal is to train an accurate NER model with task demonstrations compared to without demonstrations and show the effectiveness of demonstration-based learning. We evaluate the trained models on a test set that is from the same domain of the training set.

3.3 Low-resource Domain Adaption

Domain adaptation has two different settings: (1) *label-sharing setting* which the label space $\mathbf{L} = \{l_1, \dots, l_{|L|}\}$ (e.g., $l_i = \text{PERSON}$) of source-domain data \mathcal{S} and target-domain data \mathcal{T} is equal; (2) *label-different setting* which \mathbf{L} is different.

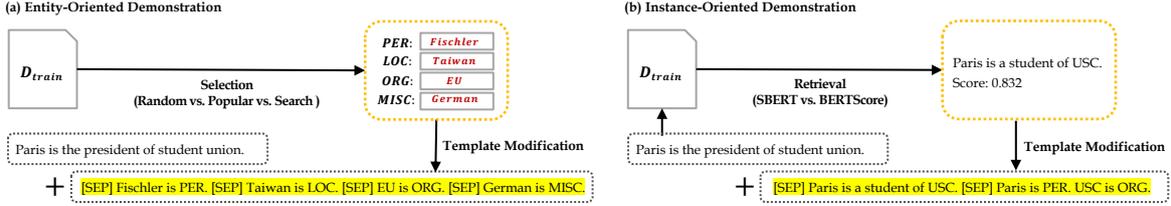


Figure 2: **Task Demonstration for NER.** (a) Entity-oriented demonstration selects an entity example per each entity type from the train data to append to the sentence; while (b) instance-oriented demonstration retrieves an instance from the train data to append to the sentence (along with the entities therein).

In domain adaptation, we first train a model \mathcal{M}_s on source-domain data \mathcal{S} . Next, we initialize the weights of the new model \mathcal{M}_t by weights of \mathcal{M}_s . Here, we can either transfer the whole model weights or only the transformer embedder from \mathcal{M}_s to \mathcal{M}_t . Then, we further tune \mathcal{M}_t on target-domain data \mathcal{T} . In our preliminary experiments, we find that transfer only the embedder from \mathcal{M}_s to \mathcal{M}_t is much more effective than transfer the whole model weights. Here, we focus on how fastly adapt to the target domain with a small amount of \mathcal{T} and task demonstration compared to without demonstration.

4 Demonstration-based NER

In this work, we focus on how to create effective task demonstration \tilde{x} to elicit better token representations for x , and then we propose an efficient learning framework that can be improved by the effect of $[x; \tilde{x}]$. This section introduces the concepts of *demonstration-based learning*, and provides details of the approach. Here, we study example sampling strategies and templates to construct the demonstration (Sec 4.1) and how we can train the NER model with the demonstration (Sec 4.2).

4.1 Task Demonstration

Task demonstration $\tilde{x} = [[\text{SEP}]; \hat{x}_1; \dots; \hat{x}_l]$ is constructed by selecting entity example e or retrieving instance example s from $\mathcal{D}_{\text{train}}$ and modifying by template T to form \hat{x}_i . The demonstration sequence \tilde{x} is then appended to the original input x to create a demonstration-augmented input $[x; \tilde{x}]$. The key challenge of constructing task demonstration is to choose appropriate e or s and template T that can be helpful to elicit better encoding for input x . As shown in Figure 2, we categorize the demonstration into (1) *entity-oriented demonstration*; and (2) *instance-oriented demonstration* by whether we choose e or s for demonstration.

Entity-oriented demonstration. Given an entity type label set $\mathbf{L} = \{l_1, \dots, l_{|\mathbf{L}|}\}$, we select an entity example e per each label l from $\mathcal{D}_{\text{train}}$. Then, we modify it using template T . To select e per each l , we first enumerate all the $e \in \mathcal{D}_{\text{train}}$ and create a mapping $\{l_i : [e_1, \dots, e_n] \mid l_i \in \mathbf{L}\}$ between l and corresponding list of entities. Then for each label l , we select e by three selection strategies: (1) *random* randomly chooses e from the list; (2) *popular* chooses e that occurs the most frequent in the list; and (3) *search* conducts grid search over possible entity candidates per each label. Here, we samples top-k frequent entities per each label, and search over combinations of entity candidates ($= k^{|\mathbf{L}|}$). We find the best combination that maximizes the F1 score on the dev set \mathcal{D}_{dev} .

Instance-oriented demonstration. Given an input x , we retrieve an instance example s that is the most relevant to the input from $\mathcal{D}_{\text{train}}$. Then, we modify the s along with its $\{e, l\} \in s$ by template T . For retrieval, we present two strategies: (1) *SBERT* (Reimers and Gurevych, 2019) retrieves semantically similar sentence using pre-trained bi-encoder. It produces CLS embeddings independently for an input x and $s \in \mathcal{D}_{\text{train}}$, and compute the cosine similarity between them to rank $s \in \mathcal{D}_{\text{train}}$; (2) *BERTScore* (Zhang et al., 2020), which is originally used as a text generation metric, retrieves token-level semantically similar sentence by computing a sum of cosine similarity between token representations of two sentences. Since the NER task aims to token classification, sentence-level similarity may retrieve a sentence that is semantically relevant but has no relevant entities.

Demonstration template. As shown in Figure 3, we present three variants of template T :

(1) *no-context* shows selected e per l with a simple template “ e is l .”, without including the specific sentence where the entities show up. Between

Input x	Paris is the president of student union.
Label space L	PER, ORG
Selected Entity e	PER: <u>Fischler</u> , ORG: <u>EU</u>
Retrieved Instance s	<u>Paris</u> is a student of <u>USC</u> .

(a) Entity-Oriented Demonstration	
no-context	<u>Fischler</u> is PER. [SEP] <u>EU</u> is ORG.
context	France backed <u>Fischler</u> 's proposal. <u>Fischler</u> is PER. [SEP] <u>EU</u> rejects German call. <u>EU</u> is ORG.
lexical	France backed <u>PER</u> 's proposal. [SEP] <u>ORG</u> rejects German.
(b) Instance-Oriented Demonstration	
context	<u>Paris</u> is a student of <u>USC</u> . <u>Paris</u> is PER. <u>USC</u> is ORG.
lexical	<u>PER</u> is a student of <u>ORG</u> .

Figure 3: **Demonstration Template T** . Given input x and label space L , entity-oriented demonstration selects entity e per each label $l \in L$ to construct three types of templates (no-context, context, lexical) while instance-oriented demonstration retrieve instance s to create two types of templates (context, lexical).

each pair of (e, l) (of different entity labels l), we concatenate with separator [SEP]. This template is only applied to the entity-oriented demonstration.

(2) context in entity-oriented demonstration shows selected e per l along with an instance sentence s that contains e as a type of l . For each triple of (e, l, s) , it is modified into " $s. e$ is l ." and concatenated with [SEP]. For instance-oriented demonstration, it shows the retrieved instance s along with all the entities mentioned in the sentence $e \in s$. It is modified into " $s. e_1$ is $l_1. \dots e_n$ is l_n ."

(3) lexical in entity-oriented demonstration shows selected e per l in instance example s and further replace the entity span e by its label string l , while instance-oriented demonstration shows retrieved s by replacing $e \in s$ with the corresponding l . We expect this template can be generalized to unseen instances like the labeling rule.

4.2 Model Training with Demonstration

Transformer-based standard fine-tuning for NER first feeds the input sentence x into a transformer-based PTLMs to get the token representations \mathbf{h} . The token representations \mathbf{h} are fed into a CRF layer to get the conditional probability $p_\theta(\mathbf{y} | \mathbf{h})$, and the model is trained by minimizing the conditional probability by cross entropy loss (Lee et al., 2021; Wang et al., 2021):

$$\mathcal{L} = - \sum_{i=1}^n \log p_\theta(\mathbf{y} | \mathbf{h}) \quad (2)$$

In our approach, we define a neural network parameterized by θ that learns from a concatenated input $[x; \tilde{x}]$. For both model training and inference, we feed the input and retrieve the representations:

$$[\mathbf{h}; \tilde{\mathbf{h}}] = [h^{(1)}, \dots, h^{(n)}, \tilde{h}^{(1)}, \dots, \tilde{h}^{(n)}] = \text{embed}([x; \tilde{x}]) \quad (3)$$

As shown in Figure 1, we then feed \mathbf{h} into the CRF layer to get predictions and train by minimizing the conditional probability $p_\theta(\mathbf{y} | \mathbf{h})$ as Equation 2.

Dataset	Label	Train Data	
		25	50
CoNLL03	PER (Person)	18.2	27.6
	LOC (Location)	18.6	33.4
	ORG (Organization)	22.0	31.8
	MISC (Miscellaneous)	14.6	18.4
Ontonotes 5.0	PER (Person)	11.2	21.6
	LOC (Location)	15.4	25.8
	ORG (Organization)	12.4	28.0
	MISC (Miscellaneous)	32.8	65.2
BC5CDR	Disease	28.2	55.8
	Chemical	34.6	62.6

Table 1: **Data statistics**. Average number of entities per each entity type over 5 different subsamples.

For domain adaptation, we first train \mathcal{M}_s with standard fine-tuning. Then, transfer the weights of embedder of \mathcal{M}_s to \mathcal{M}_t and further fine-tune \mathcal{M}_t with our approach.

5 Experimental Setup

In this section we describe datasets along with the baseline methods followed by experimental details.

5.1 Datasets

We consider three NER datasets as target tasks. We consider two datasets for a general domain: **CoNLL03** (Tjong Kim Sang, 2002) and **Ontonotes 5.0** (Weischedel et al., 2013), and one dataset for a bio-medical domain: **BC5CDR** (Li et al., 2016). **CoNLL03** is a general domain NER dataset that has 22K sentences containing four types of general named entities: LOCATION, PERSON, ORGANIZATION, and MISCELLANEOUS entities that do not belong in any of the three categories. **Ontonotes 5.0** is a corpus that has roughly 1.7M words along with integrated annotations of multiple layers of syntactic, semantic, and discourse in the text. Named entities in this corpus were tagged with a set of general 18 well-defined proper named

Demonstration	Strategy	Template	CoNLL03		Ontonotes 5.0		BC5CDR	
			25	50	25	50	25	50
No Demonstration	-	-	42.65 \pm 4.77	60.14 \pm 3.28	29.11 \pm 5.21	49.00 \pm 4.92	50.59 \pm 3.64	57.44 \pm 4.51
Instance-oriented Demonstration	SBERT	lexical	39.25 \pm 5.57	54.13 \pm 4.72	26.41 \pm 5.84	41.09 \pm 4.07	47.08 \pm 5.65	50.78 \pm 4.77
		context	41.09 \pm 5.82	59.92 \pm 4.78	30.55 \pm 6.61	48.46 \pm 5.03	51.72 \pm 5.81	57.53 \pm 4.58
	BERTScore	lexical	40.27 \pm 6.36	55.85 \pm 4.39	23.84 \pm 6.10	41.34 \pm 3.99	47.24 \pm 5.53	49.73 \pm 5.43
		context	41.42 \pm 6.5	60.65 \pm 4.64	25.79 \pm 5.74	42.21 \pm 3.23	51.85 \pm 5.87	56.68 \pm 5.31
Entity-oriented Demonstration	random	no-context	44.19 \pm 4.98	58.87 \pm 3.80	33.07 \pm 7.14	50.02 \pm 5.48	51.07 \pm 2.85	58.08 \pm 3.45
		lexical	46.83 \pm 3.69	59.94 \pm 3.82	34.52 \pm 6.58	50.69 \pm 5.64	51.72 \pm 2.75	57.62 \pm 3.33
		context	47.39 \pm 3.89	59.81 \pm 3.58	35.39 \pm 7.10	50.80 \pm 5.63	51.86 \pm 2.71	58.12 \pm 2.97
	popular	no-context	46.51 \pm 4.50	60.67 \pm 2.97	34.50 \pm 6.51	52.38 \pm 4.61	51.12 \pm 3.28	57.71 \pm 4.46
		lexical	49.92 \pm 3.52	60.75 \pm 3.29	36.99 \pm 6.11	54.56 \pm 4.59	52.23 \pm 3.56	58.53 \pm 4.64
		context	50.54 \pm 3.43	61.08 \pm 3.10	37.97 \pm 6.14	54.66 \pm 4.43	52.78 \pm 2.71	58.69 \pm 4.17
	search	no-context	47.80 \pm 3.45	60.74 \pm 3.50	34.44 \pm 6.04	53.06 \pm 4.78	51.65 \pm 2.94	58.32 \pm 4.08
		lexical	50.77 \pm 3.32	61.67 \pm 3.66	37.41 \pm 6.74	54.62 \pm 4.17	52.89 \pm 3.43	58.80 \pm 4.23
		context	51.57 \pm 3.25	62.26 \pm 2.75	38.17 \pm 6.60	54.99 \pm 4.09	53.01 \pm 3.42	59.15 \pm 3.96

Table 2: **In-domain performance comparison (F1-score)** on CoNLL03, Ontonotes 5.0, and BC5CDR by different number of training instances. We randomly sample k training instances with a constraint that sampled instances should cover all the IOBES labels in the whole dataset. Best variants are **bold** and second best ones are underlined. Scores are average of 15 runs (5 different sub-samples and 3 random seeds) and the backbone LM model is bert-base-cased.

Strategy	Template	Label Sharing		Label Different	
		CoNLL03 -> Ontonotes		CoNLL03 -> BC5CDR	
		25	50	25	50
-	-	56.40 \pm 5.57	66.67 \pm 1.97	50.61 \pm 3.88	58.79 \pm 4.08
SBERT	lexical	57.42 \pm 4.61	66.17 \pm 2.52	51.74 \pm 2.59	58.68 \pm 2.96
	context	57.16 \pm 5.65	65.41 \pm 2.38	49.96 \pm 2.72	56.71 \pm 3.35
BERTScore	lexical	56.18 \pm 4.94	65.70 \pm 2.57	52.11 \pm 2.63	58.34 \pm 3.56
	context	58.04 \pm 4.18	64.59 \pm 2.72	49.72 \pm 2.98	55.97 \pm 3.75
random	no-context	57.99 \pm 4.77	66.94 \pm 2.28	51.63 \pm 1.98	60.35 \pm 1.83
	lexical	58.00 \pm 4.94	66.97 \pm 2.02	50.96 \pm 2.15	60.05 \pm 2.27
	context	57.83 \pm 5.27	66.59 \pm 2.22	51.35 \pm 1.96	59.28 \pm 2.97
popular	no-context	57.63 \pm 4.85	67.13 \pm 2.02	50.46 \pm 3.64	59.67 \pm 2.97
	lexical	58.36 \pm 4.52	67.38 \pm 2.17	50.91 \pm 3.79	59.98 \pm 3.69
	context	57.96 \pm 4.49	67.21 \pm 2.17	51.29 \pm 3.65	60.29 \pm 3.61
search	no-context	58.59 \pm 4.49	67.99 \pm 2.17	51.56 \pm 3.56	59.91 \pm 2.77
	lexical	58.47 \pm 5.35	68.00 \pm 2.35	51.79 \pm 3.59	60.45 \pm 3.40
	context	59.13 \pm 4.79	68.39 \pm 2.16	51.84 \pm 3.78	60.71 \pm 3.31

Table 3: **Domain adaptation performance comparison (F1-score)** on Ontonotes 5.0 and BC5CDR by different number of training instances. \mathcal{M}_s is trained on CoNLL03 and \mathcal{M}_t is initialized with embedder of \mathcal{M}_s . Scores are average of 15 runs (5 different sub-samples and 3 random seeds) and the backbone LM model is bert-base-cased.

entity types. We split the data following (Pradhan et al., 2013). BC5CDR has 1,500 articles containing 15,935 CHEMICAL and 12,852 DISEASE mentions.

5.2 Experiments and Implementation Details

We implement all the baselines and our frameworks using PyTorch (Paszke et al., 2019) and HuggingFace (Wolf et al., 2020). We set the batch size and learning rate to 10 and 2e-5, respectively, and use bert-base-cased model for all the experiments. For each variant, we run 50 epochs over

5 different sub-samples and 3 random seeds with early-stopping 20 and show its average and standard deviation of F1 scores. Unlike existing sampling methods for few-shot NER (Yang and Katiyar, 2020), in which the training sample refers to one entity span in a sentence, we consider a real-world setting that humans annotate a sentence. We subsample data-points by random sampling with a constraint that sampled instances should cover all the IOBES labels in the whole dataset. For Ontonotes, we aggregate all other entity types rather than person, location, and organization into miscellaneous to set the *label sharing* setting for domain adaptation experiments. Table 1 presents statistics of average number of entities per entity type over 5 different sub-samples.

6 Results and Performance Analysis

We first compare the overall performance of all baseline models and our proposed framework. We test all models by varying the amount of training data 25 and 50 to show the impact of our approach in a low-resource scenario, assuming a task that needs to be annotated from the scratch.

6.1 In-domain Setting

In Table 2, we report the performance of the baseline approaches and our demonstration variants on three different datasets. We observe that most variants of demonstration-based learning consistently outperform the baseline by larger margin on lower

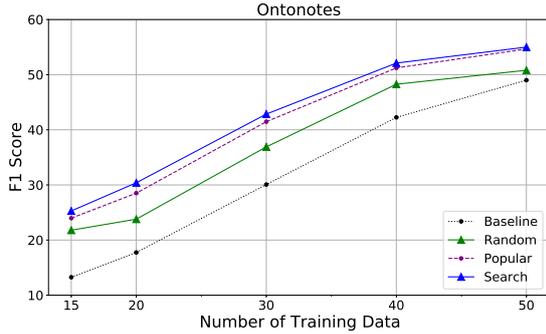


Figure 4: **Performance trend with entity-oriented demonstration (F1-score)** on Ontonotes by different numbers of train data (15, 20, 30, 40, 50).

resource. We find that *entity-oriented demonstration* is better than *instance-oriented demonstration* and *search* strategy shows the best performance.

Templates of entity-oriented demonstration. *entity-oriented demonstration* becomes more effective when not only showing the entity example per each entity type, but also the corresponding instance example as a context. *context* and *lexical* consistently outperforms *no-context*. We explore other templates as well, and these three are the best among them. We present details on Appendix A.

Entity vs. Instance-oriented demonstration. *instance-oriented demonstration* is worse than *entity-oriented demonstration* due to the difficulty of finding an appropriate similar instance in a low resource train data. In our analysis, we find that the average cosine similarity between retrieved example s and input x is less than 0.4 which shows many of the retrieved examples are not appropriate similar examples to the input.

Effectiveness of search. *search* consistently outperforms all other strategies. It shows that not only the entity selection, but also the combination of entity examples per each entity type affects the performance. To investigate whether it consistently outperforms the baseline through various low-resource data points, we present the performance trend of *entity-oriented demonstration* in Figure 2.

6.2 Domain adaptation Setting

We hypothesize that demonstration based learning will allow the source model \mathcal{M}_s to be adapted to the target domain in fast with a small amount of

target data \mathcal{T} . In Table 3, we report the performance in two different domain adaptation settings (*label-sharing* vs. *label-different*).

Effectiveness of domain adaptation in NER. In standard fine-tuning, transferring the weights of \mathcal{M}_s to \mathcal{M}_t is effective in both domain adaptation settings (First rows of Table 2 vs. Table 3). Here, we only transfer the weights of embedder. Performance gain on *label-different* can be attributed to the embedder of \mathcal{M}_s , which is already trained on NER task formats (Gururangan et al., 2020).

Entity vs. Instance-oriented demonstration. Compared to the *instance-oriented demonstration* in in-domain setting, *instance-oriented demonstration* in domain adaptation setting shows similar performance to other strategies and even shows the best performance in some data point in *label-different* setting.

Effectiveness of search. Consistent to in-domain setting, *search* outperforms all other strategies. Although the embedder of \mathcal{M}_s already knows the the NER task format, task demonstrations of target domain further help to guide the model towards the target domain.

7 Conclusion

In this paper, we propose *demonstration-based learning*, which augments the prompt with a few task demonstrations without task re-formatting into cloze style template, for named entity recognition. Here, we present *entity-oriented demonstration* which selects an appropriate entity example per each entity type, and *instance-oriented demonstration* which retrieves a similar instance example. We show that our approach successfully guides the model to make better understanding on the task in a low resource setting for domains where domain-expert annotations are extremely limited due to the high cost. We observe that *entity-oriented demonstration* is more effective than *instance-oriented demonstration*, and *search* strategy consistently outperforms all other variants. Extensive experiments on in-domain and domain adaptation show that demonstration-based learning consistently outperforms standard fine-tuning. We believe that this work opens up future works that can be extended to automatic demonstration search for few-shot named entity recognition.

References

- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. [Language models are few-shot learners](#). In *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*.
- Leyang Cui, Yu Wu, Jian Liu, Sen Yang, and Yue Zhang. 2021. [Template-based named entity recognition using BART](#). In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 1835–1845, Online. Association for Computational Linguistics.
- Ning Ding, Yulin Chen, Xu Han, Guangwei Xu, Pengjun Xie, Hai-Tao Zheng, Zhiyuan Liu, Juanzi Li, and Hong-Gee Kim. 2021. [Prompt-learning for fine-grained entity typing](#). *ArXiv preprint*, abs/2108.10604.
- Tianyu Gao, Adam Fisch, and Danqi Chen. 2021. [Making pre-trained language models better few-shot learners](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 3816–3830, Online. Association for Computational Linguistics.
- Suchin Gururangan, Ana Marasović, Swabha Swayamdipta, Kyle Lo, Iz Beltagy, Doug Downey, and Noah A. Smith. 2020. [Don't stop pretraining: Adapt language models to domains and tasks](#). In *Proceedings of ACL*.
- Adi Haviv, Jonathan Berant, and Amir Globerson. 2021. [BERTese: Learning to speak to BERT](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 3618–3623, Online. Association for Computational Linguistics.
- Chengyue Jiang, Yingong Zhao, Shanbo Chu, Libin Shen, and Kewei Tu. 2020a. [Cold-start and interpretability: Turning regular expressions into trainable recurrent neural networks](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 3193–3207, Online. Association for Computational Linguistics.
- Zhengbao Jiang, Frank F. Xu, Jun Araki, and Graham Neubig. 2020b. [How can we know what language models know?](#) *Transactions of the Association for Computational Linguistics*, 8:423–438.
- Sawan Kumar and Partha Talukdar. 2021. [Reordering examples helps during priming-based few-shot learning](#). In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 4507–4518, Online. Association for Computational Linguistics.
- Guillaume Lample, Miguel Ballesteros, Sandeep Subramanian, Kazuya Kawakami, and Chris Dyer. 2016. [Neural architectures for named entity recognition](#). In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 260–270, San Diego, California. Association for Computational Linguistics.
- Dong-Ho Lee, Rahul Khanna, Bill Yuchen Lin, Seyeon Lee, Qinyuan Ye, Elizabeth Boschee, Leonardo Neves, and Xiang Ren. 2020. [LEAN-LIFE: A label-efficient annotation framework towards learning from explanation](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics: System Demonstrations*, pages 372–379, Online. Association for Computational Linguistics.
- Dong-Ho Lee, Ravi Kiran Selvam, Sheikh Muhammad Sarwar, Bill Yuchen Lin, Mahak Agarwal, Fred Morstatter, Jay Pujara, Elizabeth Boschee, James Allan, and Xiang Ren. 2021. [Autotrigger: Named entity recognition with auxiliary trigger extraction](#). *ArXiv preprint*, abs/2109.04726.
- Jiao Li, Yueping Sun, Robin J. Johnson, Daniela Sciaky, Chih-Hsuan Wei, Robert Leaman, Allan Peter Davis, Carolyn J. Mattingly, Thomas C. Wieggers, and Zhiyong Lu. 2016. [Biocreative v cdr task corpus: a resource for chemical disease relation extraction](#). *Database : the journal of biological databases and curation*.
- Bill Yuchen Lin, Dong-Ho Lee, Ming Shen, Ryan Moreno, Xiao Huang, Prashant Shiralkar, and Xiang Ren. 2020. [TriggerNER: Learning with entity triggers as explanations for named entity recognition](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8503–8511, Online. Association for Computational Linguistics.
- Liyuan Liu, Jingbo Shang, Xiang Ren, Frank Fangzheng Xu, Huan Gui, Jian Peng, and Jiawei Han. 2018. [Empower sequence labeling with task-aware neural language model](#). In *Proceedings of the Thirty-Second AAAI Conference on Artificial Intelligence, (AAAI-18), the 30th innovative Applications of Artificial Intelligence (IAAI-18), and the 8th AAAI Symposium on Educational Advances in Artificial Intelligence (EAAI-18), New Orleans, Louisiana, USA, February 2-7, 2018*, pages 5253–5260. AAAI Press.
- Pengfei Liu, Weizhe Yuan, Jinlan Fu, Zhengbao Jiang, Hiroaki Hayashi, and Graham Neubig. 2021. [Pre-train, prompt, and predict: A systematic survey of](#)

- prompting methods in natural language processing. *ArXiv preprint*, abs/2107.13586.
- Tianyu Liu, Jin-Ge Yao, and Chin-Yew Lin. 2019. Towards improving neural named entity recognition with gazetteers. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 5301–5307, Florence, Italy. Association for Computational Linguistics.
- Xuezhe Ma and Eduard Hovy. 2016. End-to-end sequence labeling via bi-directional LSTM-CNNs-CRF. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1064–1074, Berlin, Germany. Association for Computational Linguistics.
- Yu Meng, Yunyi Zhang, Jiaxin Huang, Xuan Wang, Yu Zhang, Heng Ji, and Jiawei Han. 2021. Distantly-supervised named entity recognition with noise-robust learning and language model augmented self-training. *ArXiv preprint*, abs/2109.05003.
- Yuyang Nie, Yuanhe Tian, Yan Song, Xiang Ao, and Xiang Wan. 2020. Improving named entity recognition with attentive ensemble of syntactic information. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 4231–4245, Online. Association for Computational Linguistics.
- Giovanni Paolini, Ben Athiwaratkun, Jason Krone, Jie Ma, Alessandro Achille, Rishita Anubhai, Cicero Nogueira dos Santos, Bing Xiang, and Stefano Soatto. 2021. Structured prediction as translation between augmented natural languages. *arXiv preprint arXiv:2101.05779*.
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Köpf, Edward Yang, Zachary DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. 2019. *Pytorch: An imperative style, high-performance deep learning library*. In *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pages 8024–8035.
- Minlong Peng, Xiaoyu Xing, Qi Zhang, Jinlan Fu, and Xuanjing Huang. 2019. Distantly supervised named entity recognition using positive-unlabeled learning. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 2409–2419, Florence, Italy. Association for Computational Linguistics.
- Fabio Petroni, Patrick Lewis, Aleksandra Piktus, Tim Rocktäschel, Yuxiang Wu, Alexander H. Miller, and Sebastian Riedel. 2020. How context affects language models’ factual predictions. In *Automated Knowledge Base Construction*.
- Fabio Petroni, Tim Rocktäschel, Sebastian Riedel, Patrick Lewis, Anton Bakhtin, Yuxiang Wu, and Alexander Miller. 2019. Language models as knowledge bases? In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 2463–2473, Hong Kong, China. Association for Computational Linguistics.
- Sameer Pradhan, Alessandro Moschitti, Nianwen Xue, Hwee Tou Ng, Anders Björkelund, Olga Uryupina, Yuchen Zhang, and Zhi Zhong. 2013. Towards robust linguistic analysis using OntoNotes. In *Proceedings of the Seventeenth Conference on Computational Natural Language Learning*, pages 143–152, Sofia, Bulgaria. Association for Computational Linguistics.
- Nils Reimers and Iryna Gurevych. 2019. Sentence-BERT: Sentence embeddings using Siamese BERT-networks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 3982–3992, Hong Kong, China. Association for Computational Linguistics.
- Esteban Safranchik, Shiyong Luo, and Stephen H. Bach. 2020. Weakly supervised sequence tagging from noisy rules. In *AAAI*.
- Timo Schick, Helmut Schmid, and Hinrich Schütze. 2020. Automatically identifying words that can serve as labels for few-shot text classification. In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 5569–5578, Barcelona, Spain (Online). International Committee on Computational Linguistics.
- Timo Schick and Hinrich Schütze. 2021. Exploiting cloze-questions for few-shot text classification and natural language inference. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 255–269, Online. Association for Computational Linguistics.
- Jingbo Shang, Liyuan Liu, Xiaotao Gu, Xiang Ren, Teng Ren, and Jiawei Han. 2018. Learning named entity tagger using domain-specific dictionary. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2054–2064, Brussels, Belgium. Association for Computational Linguistics.
- Yuanhe Tian, W. Shen, Yan Song, Fei Xia, Min He, and Kenli Li. 2020. Improving biomedical named entity recognition with syntactic information. *BMC Bioinformatics*.
- Erik F. Tjong Kim Sang. 2002. Introduction to the CoNLL-2002 shared task: Language-independent named entity recognition. In *COLING-02: The 6th Conference on Natural Language Learning 2002 (CoNLL-2002)*.

Xinyu Wang, Yong Jiang, Nguyen Bach, Tao Wang, Zhongqiang Huang, Fei Huang, and Kewei Tu. 2021. [Improving named entity recognition by external context retrieving and cooperative learning](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1800–1812, Online. Association for Computational Linguistics.

Ralph Weischedel, Martha Palmer, Mitchell Marcus, Eduard Hovy, Sameer Pradhan, Lance Ramshaw, Ninwen Xue, Ann Taylor, Jeff Kaufman, Michelle Franchini, et al. 2013. Ontonotes release 5.0 ldc2013t19. *Linguistic Data Consortium, Philadelphia, PA*, 23.

Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. 2020. [Transformers: State-of-the-art natural language processing](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45, Online. Association for Computational Linguistics.

Yaosheng Yang, Wenliang Chen, Zhenghua Li, Zhengqiu He, and Min Zhang. 2018. [Distantly supervised NER with partial annotation learning and reinforcement learning](#). In *Proceedings of the 27th International Conference on Computational Linguistics*, pages 2159–2169, Santa Fe, New Mexico, USA. Association for Computational Linguistics.

Yi Yang and Arzoo Katiyar. 2020. [Simple and effective few-shot named entity recognition with structured nearest neighbor learning](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6365–6375, Online. Association for Computational Linguistics.

Weizhe Yuan, Graham Neubig, and Pengfei Liu. 2021. [Bartscore: Evaluating generated text as text generation](#).

Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q. Weinberger, and Yoav Artzi. 2020. [Bertscore: Evaluating text generation with BERT](#). In *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net.

Tony Z. Zhao, Eric Wallace, Shi Feng, Dan Klein, and Sameer Singh. 2021. [Calibrate before use: Improving few-shot performance of language models](#). *ArXiv preprint*, abs/2102.09690.

A Template Analysis

Here we present 4 other variants of templates that we have not presented on *entity-oriented demonstration*:

(1) `context-all` shows selected e per l along with an instance sentence s that contains e as a type of l . Unlike `context`, it shows all the $e \in s$. For each triple of (e, l, s) , it is modified into “ $s. e_1$ is $l_1. \dots e_n$ is $l_n.$ ” and concatenated with `[SEP]`.

(2) `lexical-all` shows selected e per l in instance example s and further replaces the entity span e by its label string l . Unlike `lexical`, it replaces all the $e \in s$ by its label string l .

(3) `structure` follows augmented natural language format, which is a structured format (Paolini et al., 2021). It shows selected e per l along with an instance sentence s that contains e as a type of l . For each triple of (e, l, s) , e in s is replaced with `[e | l]` and concatenated with `[SEP]`.

(4) `structure-all` also follows augmented natural language format, and shows selected e per l along with an instance sentence s that contains e as a type of l . Unlike `structure` it shows all the $e \in s$. For each triple of (e, l, s) , for each e_i in s it is replaced with `[e_i | l_i]` and concatenated with `[SEP]`.

Table. 4 shows that `context` and `lexical` are more effective than others.

Template	CoNLL03				Ontonotes 5.0				BC5CDR			
	50	100	150	200	50	100	150	200	50	100	150	200
-	58.51 \pm 2.99	69.44 \pm 4.40	73.94 \pm 5.69	75.83 \pm 5.61	46.34 \pm 4.46	60.36 \pm 7.52	65.69 \pm 7.41	68.81 \pm 7.52	55.68 \pm 5.33	64.24 \pm 2.79	68.37 \pm 2.55	71.09 \pm 2.84
no-context	58.23 \pm 3.09	69.52 \pm 3.32	72.99 \pm 4.63	76.33 \pm 4.49	49.63 \pm 3.49	62.10 \pm 6.53	67.48 \pm 6.20	69.68 \pm 7.00	56.04 \pm 5.34	64.32 \pm 2.63	<u>68.55</u> \pm 2.82	71.14 \pm 3.29
context	59.14 \pm 2.53	69.75 \pm 3.50	73.35 \pm 4.24	76.59 \pm 3.96	52.93 \pm 4.64	<u>63.37</u> \pm 7.02	68.05 \pm 6.40	70.23 \pm 6.28	57.10 \pm 4.55	64.42 \pm 3.14	<u>68.46</u> \pm 2.94	71.27 \pm 3.43
lexical	59.62 \pm 3.12	69.22 \pm 3.94	74.23 \pm 4.26	<u>77.01</u> \pm 4.07	52.69 \pm 4.47	62.80 \pm 7.12	67.78 \pm 6.02	70.02 \pm 6.86	<u>57.83</u> \pm 4.53	64.52 \pm 3.36	68.51 \pm 2.57	71.14 \pm 3.04
structure	60.61 \pm 2.60	68.35 \pm 3.85	73.95 \pm 4.60	<u>76.56</u> \pm 4.38	53.35 \pm 3.59	63.45 \pm 6.23	68.10 \pm 5.99	69.99 \pm 6.74	<u>57.45</u> \pm 4.79	64.72 \pm 2.79	68.32 \pm 2.77	71.55 \pm 3.20
context-all	58.82 \pm 2.01	69.22 \pm 3.37	71.22 \pm 3.45	76.07 \pm 4.53	52.85 \pm 4.23	62.80 \pm 7.40	68.22 \pm 6.18	69.87 \pm 6.63	57.92 \pm 4.58	<u>64.69</u> \pm 2.72	68.83 \pm 2.28	71.32 \pm 3.13
lexical-all	59.34 \pm 2.72	69.71 \pm 3.65	74.16 \pm 4.47	77.31 \pm 4.04	52.46 \pm 4.47	63.03 \pm 7.33	67.22 \pm 6.82	<u>70.21</u> \pm 6.68	56.76 \pm 5.01	<u>64.42</u> \pm 2.91	68.05 \pm 3.18	71.17 \pm 3.13
structure-all	59.27 \pm 2.28	69.17 \pm 3.28	<u>73.69</u> \pm 4.43	76.14 \pm 4.21	<u>53.33</u> \pm 4.39	62.69 \pm 6.48	67.99 \pm 6.08	<u>70.09</u> \pm 6.34	56.99 \pm 5.56	64.42 \pm 2.71	68.43 \pm 2.94	70.92 \pm 3.12

Table 4: **Template performance comparison (F1-score) in popular strategy** on CoNLL03, Ontonotes 5.0, and BC5CDR by different number of training instances. We randomly sample k training instances with a constraint that sampled instances should cover all the IOBES labels in the whole dataset. Best variants are **bold** and second best ones are underlined.