

Spy game: FPT-algorithm, hardness and graph products

Eurinaldo Rodrigues Costa¹, Nicolas Almeida Martins², and Rudini Sampaio^{3*}

¹ Universidade Federal do Ceará, Campus Russas, Russas, Brazil.
eurinaldo@ufc.br

² Universidade Integr. Internacional Lusofonia Afrobrasileira, Unilab, Redenção, Brazil.
nicolasam@unilab.edu.br

³ Departamento de Computação, Universidade Federal do Ceará, Fortaleza, Brazil.
rudini@dc.ufc.br

Abstract. In the (s, d) -spy game over a graph G , k guards and one spy occupy some vertices of G and, at each turn, the spy may move with speed s (along at most s edges) and each guard may move along one edge. The spy and the guards may occupy the same vertices. The spy wins if she reaches a vertex at distance more than the surveilling distance d from every guard. This game was introduced by Cohen et al. in 2016 and is related to two well-studied games: Cops and robber game and Eternal Dominating game. The guard number $gn_{s,d}(G)$ is the minimum number of guards such that the guards have a winning strategy (of controlling the spy) in the graph G . In 2018, it was proved that deciding if the spy has a winning strategy is NP-hard for every speed $s \geq 2$ and distance $d \geq 0$. In this paper, we initiate the investigation of the guard number in grids and in graph products. We obtain a strict upper bound on the strong product of two general graphs and obtain examples with King grids that match this bound and other examples for which the guard number is smaller. We also obtain the exact value of the guard number in the lexicographical product of two general graphs for any distance $d \geq 2$. From the algorithmic point of view, we prove a positive result: if the number k of guards is fixed, the spy game is solvable in polynomial XP time $O(n^{3k+2})$ for every speed $s \geq 2$ and distance $d \geq 0$. In other words, the spy game is XP when parameterized by the number of guards. This XP algorithm is used to obtain an FPT algorithm on the P_4 -fewness of the graph. As a negative result, we prove that the spy game is W[2]-hard even in bipartite graphs when parameterized by the number of guards, for every speed $s \geq 2$ and distance $d \geq 0$, extending the hardness result of Cohen et al. in 2018.

Keywords: Games on graphs, Spy game, Graph products, XP algorithm, Parameterized complexity.

1 Introduction

Given a graph $G = (V, E)$ and $v \in V$, let $N(v) = \{w \mid vw \in E\}$ denote the set of neighbors of v and let $N[v] = N(v) \cup \{v\}$.

Given integers $s \geq 2$, $d \geq 0$ and $k \geq 1$ (respectively the spy speed, the surveillance distance and the number of guards), the (s, d) -spy game is a two-player game on a finite graph G with k guards and one spy occupying vertices of G . The guards and even the spy may occupy the same vertex. One player controls the guards and the other player controls the spy. It is a full information game: any player has full knowledge of the positions of the other player. Initially, the spy is placed at some vertex of G and then the k guards are placed at some vertices of G . The game proceeds turn-by-turn: first the spy may move along at most s edges and then each guard may move along one edge. The spy wins if, after a finite number of turns (after the guards' move), she reaches a vertex at distance greater than d from every guard. Otherwise, the guards win the game: there is always at least one guard at distance at most d from the spy. From the classical Zermelo-von Neumann theorem [31], one of the two players has a winning strategy, since it is a perfect information finite game without draw. Here we can consider the spy game as a finite game since the number of possible configurations of the spy and the guards is finite in a finite graph G . For example, we may consider that the guards win the game if the spy repeats a game configuration (after her move).

* The statements of some of the results of this paper appeared in COCOON-2021.

The *guard-number* $gn_{s,d}(G)$ is the minimum number of guards such that the guards have a winning strategy in the (s, d) -spy game. From the definition, only one guard is always sufficient if the spy speed $s = 1$. For this reason, we consider $s \geq 2$.

The spy game was introduced by Cohen et al. in 2016 [14] and is closely related to the well known *Cops and robber* game [29,8]. In this game, first k cops occupy some vertices of the graph and then one robber occupies a vertex. Turn-by-turn, each player may move (the cops first and then the robber) along one edge. The cops win if one cop occupies the same vertex of the robber after a finite number of turns. The *cop-number* $cn(G)$ of a graph G is the minimum number of cops required to win in G [1].

There are many generalizations of the Cops and robber game [7,19,2,13,20]. For example, allowing a faster robber with speed $s \geq 2$. In this variant, the exact number of cops with speed one required to capture a robber with speed two is unknown even in 2-dimensional grids [18,5]. In 2010, Bonato et al. [7] introduced other variant of the cops and robber in which the game is over if a cop occupies a vertex at distance at most a given integer d from the robber. This is equivalent to the spy game with speed $s = 1$ in a variant in which the spy is placed after the guards. For speed $s \geq 2$, the equivalence is not true and the games are significantly different.

Other related well know game is the *eternal domination* game [21,22,25,26]. A set of k *defenders* occupy some vertices of a graph G . At each turn, an *attacker* chooses a vertex $v \in V$ and the defenders may move along an edge in such a way that at least one defender is at distance at most a given integer d from v . There are some variants of the eternal domination game allowing more defenders to move at each turn and to occupy the same vertex [22,25,26], which is equivalent to the spy game when the spy speed is at least the diameter of the graph.

Regarding results in the spy game, Cohen et al. [15] proved in 2018 that the guard number is NP-hard in general graphs and a directed version is PSPACE-hard even in DAGs. The authors left open the question of the PSPACE-hardness on the undirected case and the question of the spy game on grids: “*Many open questions remain such as the characterization of the guard-number in other graph classes, e.g., in grids*” [15]. Moreover, in 2020, it was proved [16] that the guard number is computable in polynomial time for trees by using Linear Programming and a fractional relaxation of the game. The authors also obtained an upper bound for the fractional guard number on the square grid $G_{n \times n}$, a parameter different from the guard number, which was proved to be equal in trees.

1.1 Our contribution

In this paper, we initiate the investigation of the spy game guard number in grids. Specifically, we study the King grid (the strong product of two path graphs) and, more generally, we obtain a strict upper bound on the strong product $G_1 \boxtimes G_2$ of general graphs G_1 and G_2 . We prove that $gn_{s,d}(G_1 \boxtimes G_2) \leq gn_{s,d}(G_1) \times gn_{s,d}(G_2)$ and obtain examples that match this upper bound and other examples for which the guard number is smaller. We also show that this upper bound of the strong product does not work in the cartesian product nor the lexicographical product of two graphs. Regarding the lexicographical product, we obtain the exact value of the guard number for any distance $d \geq 2$.

Regarding algorithmic results, we obtain positive and negative results in the spy game decision problem (the problem of deciding if the spy has a winning strategy in the (s, d) -spy game with k guards in a finite graph G). We prove that, if the number k of guards is fixed, the spy game decision problem is $O(n^{3k+2})$ -time solvable for every speed $s \geq 2$ and distance $d \geq 0$. In other words, the spy game decision problem is XP when parameterized by the number k of guards. This XP algorithm is very important in order to obtain an FPT algorithm for the spy game on the P_4 -freeness of the graph, which, in our opinion, is one of our most important results, since it solves a game on graphs for many graph classes.

As a negative result, we prove that the spy game decision problem is W[2]-hard even in bipartite graphs when parameterized by the number k of guards, for every speed $s \geq 2$ and distance $d \geq 0$. This hardness result is a generalization of the W[2]-hardness result of the spy game in general graphs [15] and follows a similar (but significantly different) structure of the reduction from Set Cover in [15]. However, the extension

to bipartite graphs brings much more technical difficulties to the reduction, making this extension a relevant and non-trivial result.

2 Spy game on King grids and graph products

Given graphs G_1 and G_2 , the strong product $G_1 \boxtimes G_2$ is the graph with vertex set $V(G_1 \boxtimes G_2) = V(G_1) \times V(G_2)$ (cartesian product) such that distinct vertices (u_1, u_2) and (v_1, v_2) are adjacent in $G_1 \boxtimes G_2$ if and only if (a) $u_1 = v_1$ and $u_2 v_2 \in E(G_2)$, or (b) $u_2 = v_2$ and $u_1 v_1 \in E(G_1)$, or (c) $u_1 v_1 \in E(G_1)$ and $u_2 v_2 \in E(G_2)$. We say that a graph G is a King grid if it is the strong product of two path graphs $G = P_n \boxtimes P_m$. Figure 1 shows the King grids $P_3 \boxtimes P_3$ and $P_5 \boxtimes P_5$. The name of the King grid is due to the king's moves in the chess game (for example, in the chess board $P_8 \boxtimes P_8$). There are many papers investigating King grids in several different problems (for example, [9,17,30]).

Our first result is a general upper bound on the guard number $gn_{s,d}(G_1 \boxtimes G_2)$ for any two graphs G_1 and G_2 and any speed $s \geq 2$ and surveillance distance $d \geq 0$.

Theorem 1. *Let $s \geq 2$ and $d \geq 0$. Given two graphs G_1 and G_2 , the guard number of the strong product of G_1 and G_2 satisfies the following inequality:*

$$gn_{s,d}(G_1 \boxtimes G_2) \leq gn_{s,d}(G_1) \times gn_{s,d}(G_2).$$

Moreover, the equality holds if $gn_{s,d}(G_1) = 1$ or $gn_{s,d}(G_2) = 1$.

Proof. Let $k_1 = gn_{s,d}(G_1)$ and $k_2 = gn_{s,d}(G_2)$. Consider a winning strategy for the guards in G_1 with k_1 guards and a winning strategy for the guards in G_2 with k_2 guards. From this, consider the following strategy for the guards in $G_1 \boxtimes G_2$. For every guard g_1 in G_1 and every guard g_2 in G_2 , let $g_1 g_2$ be a guard in $G_1 \boxtimes G_2$, resulting in a total of $k_1 \cdot k_2$ guards.

If the spy is placed initially at the vertex (u_1, u_2) of $G_1 \boxtimes G_2$, we follow the winning strategy in G_1 (resp. G_2) considering that the spy was placed at u_1 (resp. u_2) initially. If the spy goes from a vertex (v'_1, v'_2) to (v_1, v_2) at some moment of the game, we follow the winning strategy in G_1 (resp. G_2) considering that the spy goes from v'_1 to v_1 (resp. from v'_2 to v_2). The spy can do that in G_1 and G_2 from the topology of the strong product: the distance in G_1 from v'_1 to v_1 (resp. G_2 from v'_2 to v_2) is at most the distance from (v'_1, v'_2) to (v_1, v_2) in $G_1 \boxtimes G_2$, which is at most s (the speed of the spy).

These two combined winning strategies in G_1 and G_2 lead to a strategy for the guards in the spy game on $G_1 \boxtimes G_2$. If the guard g_1 of G_1 goes from w'_1 to w_1 and the guard g_2 of G_2 goes from w'_2 to w_2 , we consider that the guard $g_1 g_2$ of $G_1 \boxtimes G_2$ goes from (w'_1, w'_2) to (w_1, w_2) . The guards can do that in $G_1 \boxtimes G_2$ also from the topology of the strong product: the distance from (w'_1, w'_2) to (w_1, w_2) in $G_1 \boxtimes G_2$ is the maximum between the distance from w'_1 to w_1 in G_1 and the distance from w'_2 to w_2 in G_2 , which is at most 1.

Finally, since at any moment of the game there is always a guard g_1 and a guard g_2 at distance at most d from the spy in the games played in G_1 and in G_2 , respectively, we have that there is always a guard $g_1 g_2$ at distance at most d from the spy in the game played in $G_1 \boxtimes G_2$, as already observed from the topology of the strong product. Since this is a winning strategy for the guards in $G_1 \boxtimes G_2$, we are done.

If $gn_{s,d}(G_2) = 1$, then $gn_{s,d}(G_1 \boxtimes G_2) \leq gn_{s,d}(G_1) \cdot gn_{s,d}(G_2) = gn_{s,d}(G_1)$. Since G_1 is an induced subgraph of $G_1 \boxtimes G_2$ and the distance between any two vertices of G_1 is equal to the distance between the same vertices in $G_1 \boxtimes G_2$ (from the topology of the strong product), then $gn_{s,d}(G_1 \boxtimes G_2) = gn_{s,d}(G_1)$. Analogously, $gn_{s,d}(G_1 \boxtimes G_2) = gn_{s,d}(G_2)$ if $gn_{s,d}(G_1) = 1$. \square

From this upper bound on the guard number on the strong product of two general graphs, the natural question about the equality or the looseness of the bound arises when the guard numbers of both graphs are at least 2. In the following, we present two lemmas with general examples in King grids when the guard numbers of both graphs are exactly 2: the first with the strict inequality $gn_{s,d}(P_{2d+3} \boxtimes P_{2d+3}) \leq 2 < 4 = gn_{s,d}(P_{2d+3})^2$ and the second with the equality $gn_{s,d}(P_{2d+4} \boxtimes P_{2d+4}) = 4 = gn_{s,d}(P_{2d+4})^2$.

First we show that $gn_{s,d}(P_{2d+3} \boxtimes P_{2d+3}) \leq 2$ for any $d \geq 0$ and $s \geq 2$. Notice that $gn_{s,d}(P_{2d+3}) = 2$ for any $d \geq 0$ and $s \geq 2d + 2$, since a spy in the first vertex v_0 of the path P_{2d+3} can go to the last vertex v_{2d+2} of the path, but a guard surveilling the spy in the vertex v_d of the path P_{2d+3} cannot jump to the vertex v_{d+2} to keep surveilling the spy. Moreover, two guards in the vertices v_d and v_{d+2} are sufficient to surveil the spy. That is, $gn_{s,d}(P_{2d+3})^2 = 4$.

Lemma 1. *Let $d \geq 0$ and $s \geq 2$ be fixed integers. Then $gn_{s,d}(P_{2d+3} \boxtimes P_{2d+3}) \leq 2$.*

Proof. Let us show a guards winning strategy with two guards. Let $V = \{-(d+1), \dots, 0, \dots, (d+1)\} \subseteq \mathbb{Z}$ ($|V| = 2d+3$). Consider that the vertex set of $P_{2d+3} \boxtimes P_{2d+3}$ is $V \times V$. The guards winning strategy with two guards in $P_{2d+3} \boxtimes P_{2d+3}$ is the following: one guard is always in the vertex $(0,0)$ and the other guard is in a vertex of $\{-1, 0, 1\}^2$ surveilling the spy, which is possible since the surveilling distance is d and the maximum distance from $(0,0)$ in $P_{2d+3} \boxtimes P_{2d+3}$ is $d+1$. At any moment of the game, the guards change roles: the guard in $(0,0)$ goes to a vertex of $\{-1, 0, 1\}^2$ (surveilling the spy) and the other guard goes to $(0,0)$. Since this is a winning strategy for the guards, we are done. See examples in Figure 1. \square

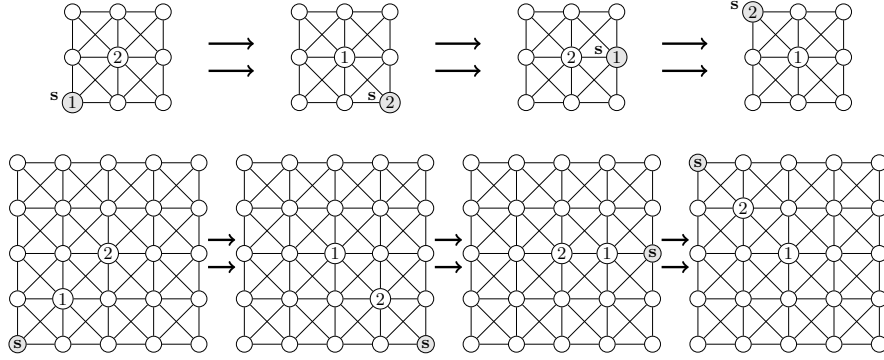


Fig. 1. Guards winning strategies with 2 guards in the King grids $P_3 \boxtimes P_3$ and $P_5 \boxtimes P_5$ with $(s, d) = (2, 0)$ and $(s, d) = (4, 1)$, respectively. The spy is represented by s and the guards by 1 and 2.

Next we show that $gn_{s,d}(P_{2d+4} \boxtimes P_{2d+4}) = 4$ for any $d \geq 0$ and $s \geq d + 2$. Notice that $gn_{s,d}(P_{2d+4}) = 2$ for any $d \geq 0$ and $s \geq d + 2$, since a spy in the first vertex v_0 of the path P_{2d+4} can go in two time steps to the last vertex v_{2d+3} of the path, but a guard surveilling the spy in the vertex v_d of the path P_{2d+3} cannot go to the vertex v_{d+3} in two time steps to keep surveilling the spy. Moreover, two guards in the vertices v_d and v_{d+3} are sufficient to surveil the spy. That is, $gn_{s,d}(P_{2d+4})^2 = 4$.

Lemma 2. *Let $d \geq 0$ be a fixed integer and let $s \geq d + 2$. Then $gn_{s,d}(P_{2d+4} \boxtimes P_{2d+4}) = 4$.*

Proof. Let us show a spy winning strategy with less than four guards. Let $G = P_{2d+4} \boxtimes P_{2d+4}$. Consider that the vertex set of G is $V \times V$, where $V = \{-(d+2), \dots, 0, \dots, d+1\} \subseteq \mathbb{Z}$ ($|V| = 2d+4$). The spy winning strategy in G is the following: initially the spy is placed at the vertex $(0,0)$ and then she chooses one of the four “corner” vertices to go: $c_1 = (-d-2, -d-2)$, $c_2 = (-d-2, d+1)$, $c_3 = (d+1, -d-2)$ or $c_4 = (d+1, d+1)$. Clearly, the spy can do that since its speed $s \geq d+2$.

It is easy to see $V(G)$ can be partitioned into four subsets $A_1 = [-d-2, -1] \times [-d-2, -1]$, $A_2 = [-d-2, -1] \times [0, d+1]$, $A_3 = [0, d+1] \times [-d-2, -1]$ and $A_4 = [0, d+1] \times [0, d+1]$ with $(d+1)^2$ vertices each. Clearly the corner vertices satisfy $c_1 \in A_1$, $c_2 \in A_2$, $c_3 \in A_3$ and $c_4 \in A_4$. Let $i \in \{1, 2, 3, 4\}$. Notice that all vertices at distance at most $d+1$ in G from the corner vertex c_i belongs to A_i . Thus, no vertex in A_j with $j \neq i$ can surveil the corner c_i in one time step. This implies that at least four guards are necessary to surveil the four corner vertices and we are done, since, from Theorem 1, four guards are sufficient. See examples in Figure 2. \square

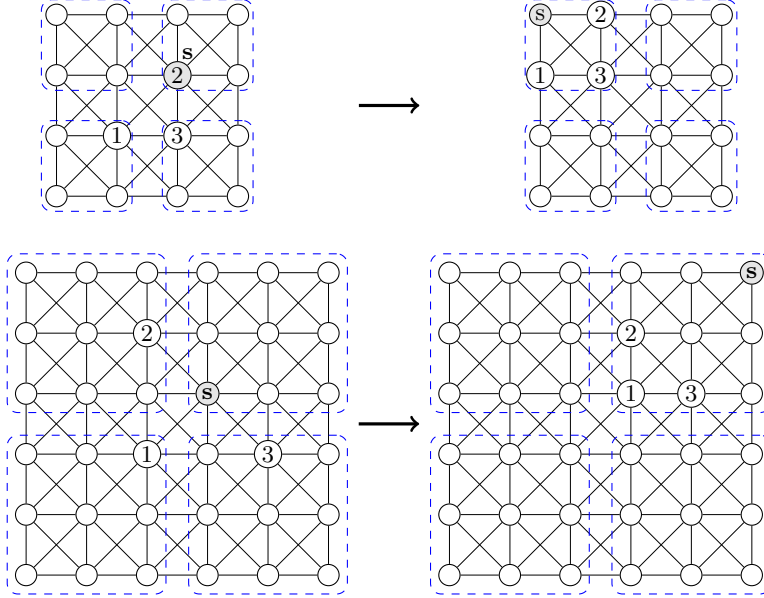


Fig. 2. Spy winning strategies with 3 guards in the King grids $P_4 \boxtimes P_4$ and $P_6 \boxtimes P_6$ with $(s, d) = (2, 0)$ and $(s, d) = (3, 1)$, respectively. The spy is represented by s and the guards by 1, 2 and 3.

The previous lemmas showed examples with few guards. We show that $gn_{s,d}(P_n \boxtimes P_n)$ can be very close to $gn_{s,d}(P_n)^2$, when many guards are necessary. More specifically, we show that $gn_{s,d}(P_n \boxtimes P_n) \geq (gn_{s,d}(P_n) - 1)^2$ in many cases where $gn_{s,d}(P_n)$ can be any positive integer.

Lemma 3. *Let $d \geq 0$ and $2 \leq k \leq 2d + 2$ be fixed integers and let $s \geq (k - 1)(2d + 3)$. Then $gn_{s,d}(P_{k(2d+3)}) = k + 1$ and $k^2 \leq gn_{s,d}(P_{k(2d+3)} \boxtimes P_{k(2d+3)}) \leq (k + 1)^2$.*

Proof. The vertex set of $P_{k(2d+3)} \boxtimes P_{k(2d+3)}$ can be partitioned into k^2 subsets of vertices which induces the King grid $P_{2d+3} \boxtimes P_{2d+3}$ each. If one of these subsets does not have a guard at some moment of the game, the spy can go to the vertex in the center of this subset and no guard can surveil the spy, which wins the game, since the distance from the center to the border is $d + 1$ in the King grid $P_{2d+3} \boxtimes P_{2d+3}$. The spy can do this since her speed is at least $(k - 1)(2d + 3)$ (notice that the diameter is $k(2d + 3) - 1$ and the maximum distance between two centers of this subsets inducing the King grid $P_{2d+3} \boxtimes P_{2d+3}$ is at most $k(2d + 3) - 1 - 2(d + 1) = (k - 1)(2d + 3)$).

Thus, at least k^2 guards are necessary. Moreover, in [15], the exact value of $gn_{s,d}(P_n)$ was determined for any triple $(s \geq 2, d \geq 0, n \geq 2)$:

$$gn_{s,d}(P_n) = \left\lceil \frac{n}{2d + 2 + \left\lfloor \frac{2d}{s-1} \right\rfloor} \right\rceil$$

With this, we have that $gn_{s,d}(P_{k(2d+3)}) = k + 1$ for any $d \geq 0$, $2 \leq k \leq 2d + 2$ and $s \geq (k - 1)(2d + 3) > 2d + 1$. Then, from Theorem 1, $(k + 1)^2$ guards are sufficient and we are done. \square

There are other well studied graph products on the vertex set $V(G_1) \times V(G_2)$, such as the cartesian product $G_1 \square G_2$ and the lexicographical products $G_1 \cdot G_2$ and $G_2 \cdot G_1$ (see [23] for a reference). In the cartesian product $G_1 \square G_2$, (u_1, u_2) and (v_1, v_2) are adjacent if and only if (a) $u_1 = v_1$ and $u_2 v_2 \in E(G_2)$ or (b) $u_2 = v_2$ and $u_1 v_1 \in E(G_1)$. In the lexicographical product $G_1 \cdot G_2$, (u_1, u_2) and (v_1, v_2) are adjacent if and only if (a) $u_1 = v_1$ and $u_2 v_2 \in E(G_2)$ or (b) $u_1 v_1 \in E(G_1)$.

It is easy to see, from the definitions, that the cartesian product $G_1 \square G_2$ is a subgraph of the strong product $G_1 \boxtimes G_2$, which is a subgraph of the lexicographical products $G_1 \cdot G_2$ and $G_2 \cdot G_1$. It is also easy to find

examples in which the upper bound of Theorem 1 fails in the cartesian product. For example, $gn_{2,0}(P_2 \square P_2) = gn_{2,0}(C_4) = 2 > 1 = gn_{2,0}(P_2)^2$. Regarding the lexicographical product, failing examples are not so easy to find. The next lemma presents an example in which the upper bound of Theorem 1 fails in both cartesian product and lexicographical product.

Lemma 4. $gn_{2,1}(P_5 \square P_5) > gn_{2,1}(P_5)^2$ and $gn_{2,1}(P_5 \cdot P_5) > gn_{2,1}(P_5)^2$.

Proof. The graph products $P_5 \square P_5$ and $P_5 \cdot P_5$ are shown in Figure 3. Consider that the vertex set of P_5 is $\{-2, -1, 0, 1, 2\}^2$. It is easy to see that $gn_{2,1}(P_5) = 1$ (one guard is sufficient): a guard positioned in the vertex 0 can go to -1 and 1 in order to surveil the vertices -2 and 2, and the spy cannot go from -2 to 2 in one time step (and vice-versa). However, in the cartesian product $P_5 \square P_5$, a spy positioned in $(0, 0)$ can go to one of the ‘‘corner’’ vertices $(-2, -2)$, $(-2, 2)$, $(2, -2)$ and $(2, 2)$ in two time steps, which are impossible to surveil by one guard.

Now consider the lexicographical product $P_5 \cdot P_5$. Let us show a spy winning strategy against one guard. Initially, the spy is positioned in the vertex $(-2, 0)$. The guard must be in a vertex $(x, 0)$ with $x \in \{-2, -1, 0, 1, 2\}$, since otherwise the spy can go to one of the vertices $(-2, -2)$ or $(-2, 2)$ in one time step and the guard cannot surveil her. Without loss of generality, assume that the guard was positioned in the vertex $(-1, 0)$. In the first turn, the spy goes to the vertex $(2, 0)$. Since the distance $d = 1$, the guard cannot surveil the spy going to a vertex $(x', 0)$ with $x' \in \{-2, -1, 0, 1, 2\}$. So, suppose w.l.g. that he goes to the vertex $(0, 1)$. Thus, in the second turn, the spy goes to the vertex $(2, -2)$, winning the game, as already observed. \square

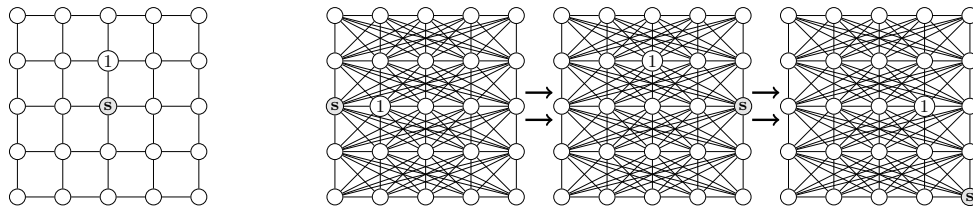


Fig. 3. The cartesian product $P_5 \square P_5$ and the lexicographical product $P_5 \cdot P_5$ with a spy winning strategy with 1 guard and $(s, d) = (2, 1)$. The spy is represented by s and the guard by 1.

Nevertheless, regarding the lexicographical product, it is possible to prove a better general upper bound if the surveilling distance $d \geq 2$. In fact, we obtain the following stronger result.

Theorem 2. *Let $s \geq 2$, $d \geq 2$ and let G_1 and G_2 be two graphs. If G_1 has no isolated vertex, then the guard number of the lexicographical product of G_1 and G_2 with surveilling distance $d \geq 2$ is the guard number of G_1 :*

$$gn_{s,d}(G_1 \cdot G_2) = gn_{s,d}(G_1).$$

Otherwise, it is the maximum among the guard numbers of G_1 and G_2 :

$$gn_{s,d}(G_1 \cdot G_2) = \max \{ gn_{s,d}(G_1), gn_{s,d}(G_2) \}.$$

Proof. Let $s \geq 2$, $d \geq 2$ and let G_1 and G_2 be two graphs. First assume that G_1 has no isolated vertex: every vertex of G_1 has a neighbor. Notice that every guard positioned in a vertex (u_1, u_2) of $G_1 \cdot G_2$ is surveilling any vertex (u_1, v_2) with $v_2 \in V(G_2)$, since the surveilling distance is at least 2 and u_1 has a neighbor v_1 , which leads to the existence of the path $(u_1, u_2) - (v_1, v_2) - (u_1, v_2)$ with length 2. Thus, the guards can follow their winning strategy in G_1 with $gn_{s,d}(G_1)$ guards in order to win the spy game in the lexicographical product $G_1 \cdot G_2$, by moving only over the vertices in $\{(v_1, b) : v_1 \in V(G_1)\}$, where b is any fixed arbitrary vertex of G_2 .

If G_1 has an isolated vertex, then $G_1 \cdot G_2$ contains a maximal connected component isomorphic to G_2 , which needs at least $gn_{s,d}(G_2)$ guards to surveil the spy. This means that, if the spy chooses a vertex in a component isomorphic to G_2 at the beginning, $gn_{s,d}(G_2)$ are necessary and sufficient to surveil the spy. Otherwise, $gn_{s,d}(G_1)$ guards are necessary and sufficient, as observed in the last paragraph. In the worst case, the maximum among the two guard numbers is necessary and sufficient. \square

There are still some open questions related to graph products. For example, determine the exact value of the guard number in the lexicographical product for $d \in \{0, 1\}$ and in the strong product and the cartesian product of two general graphs.

3 Spy game is XP parameterized by the number of guards

In this section, we prove that, if the number k of guards is fixed, the spy game is solvable in polynomial time $O(n^{3k+2})$ for any speed $s \geq 2$ and distance $d \geq 0$. For this, we first define spy and guard configurations.

Definition 1. *Given $k \geq 1$, $s \geq 2$, $d \geq 0$ and a graph G , let a configuration in G be a possible scenario of the spy game, with all k guards and the spy occupying vertices. We define two types of configurations: a spy configuration (before the spy's move) and a guard configuration (before the guards' move). A spy configuration may be identical to a guard configuration (the only difference is that the spy is the next to move). It is easy to see that there are exactly $2n^{k+1}$ configurations (2 possibilities for the next to move, n possible vertices for the spy and all k guards).*

We say that a spy configuration C_1 leads to a guard configuration C_2 if C_2 can be obtained from C_1 by moving the spy along at most s edges. We say that a guard configuration C_1 leads to a spy configuration C_2 if C_2 can be obtained from C_1 by moving the guards along at most one edge each.

Let the digraph D^ defined as follows: for every spy or guard configuration C , create an associated vertex v_C in D^* . If a configuration C_1 leads to a configuration C_2 , we add in D^* the directed edge from v_{C_1} to v_{C_2} . Clearly, D^* has exactly $2n^{k+1}$ vertices.*

Next we prove the following theorem by showing how to proceed in this constructed digraph D^* in order to solve the decision problem of the spy game: deciding if the spy has a winning strategy with k guards.

Theorem 3. *Let G be a graph with n vertices. Given $k \geq 1$, $s \geq 2$ and $d \geq 0$, it is possible to decide in XP time $O(n^{3k+2})$ if the spy has a winning strategy against k guards in the (s, d) -spy game.*

Proof. First consider the original (s, d) -spy game. The algorithm is as follows. First, we define a *spy winning configuration* as a spy configuration such that the spy is at distance more than d from every guard. Mark all vertices of D^* associated to spy winning configurations. Next, repeat the following procedure until no more vertices of D^* are marked. For every guard configuration C , mark the vertex v_C in D^* if all out-neighbors of v_C are marked (in words, any guards' move will lead to a spy winning configuration). Moreover, for every spy configuration C , mark the vertex v_C in D^* if there exists at least one marked out-neighbor of v_C (in words, there is a spy's move which leads to a spy winning configuration).

Finally, at the end, if there exists a vertex u of G such that, for every spy configuration C with the spy occupying u , v_C is marked in D^* , then the spy has a winning strategy (by occupying vertex u first). Otherwise, the guards have a winning strategy.

By applying breadth-first searches in each vertex of G as a preprocessing to check distances, we can obtain all out-neighbors of a vertex v_C in D^* in time $O(n^3)$ and consequently D^* can be constructed in time $O(n^{k+4})$.

The algorithm will make at most $2n^{k+1}$ iterations, since at least one vertex will be marked in each iteration. Moreover, since each spy configuration leads to at most n guard configurations and each guard configuration leads to at most n^k spy configurations, every iteration takes time $O(n^{k+1}n^k)$. Thus the whole algorithm takes time $O(n^{3k+2})$. \square

4 Spy game is FPT parameterized by the P_4 -fewness of the graph

A graph G is a $(q, q - 4)$ -graph for some integer $q \geq 4$ if every subset of at most q vertices induces at most $q - 4$ distinct P_4 's. For instance, cographs and P_4 -sparse graphs are exactly the $(q, q - 4)$ -graphs for $q = 4$ and $q = 5$, respectively. The P_4 -fewness $q(G)$ of a graph G is the minimum $q \geq 4$ such that G is a $(q, q - 4)$ -graph [12,10,11,27]. These graphs have received a lot of attention in the literature (under the expression “graphs with few P_4 's”), since they are on the top of a very known hierarchy of graph classes, including cographs, P_4 -reducible, P_4 -sparse and P_4 -lite graphs. They also have a nice recursive decomposition based on unions, joins, spiders and small separable p-components [4], described below.

Let $G_1 = (V_1, E_1)$ and $G_2 = (V_2, E_2)$ be two vertex disjoint graphs. The *disjoint union* of G_1 and G_2 is the graph $G_1 \cup G_2 = (V_1 \cup V_2, E_1 \cup E_2)$. The *join* of G_1 and G_2 is the graph $G_1 + G_2 = (V_1 \cup V_2, E_1 \cup E_2 \cup \{uv : u \in V_1, v \in V_2\})$. A *spider* is a graph whose vertex set has a partition (R, C, S) , where $C = \{c_1, \dots, c_p\}$ and $S = \{s_1, \dots, s_p\}$, for $p \geq 2$, are a clique and a stable set, respectively; s_i is adjacent to c_j if and only if $i = j$ (a thin spider), or s_i is adjacent to c_j if and only if $i \neq j$ (a thick spider); and every vertex of R is adjacent to each vertex of C and non-adjacent to each vertex of S .

We say that a graph is *p-connected* (path connected) if, for every nontrivial bipartition of its vertex set, there is a crossing P_4 , i.e. an induced P_4 with vertices in both parts. A *p-component* is a maximal p-connected subgraph. We say that a p-connected graph H is *separable* if its vertex set has a bipartition (H_1, H_2) such that every crossing P_4 has its endpoints in H_1 and its midpoints in H_2 . Note that, if G is a spider (R, C, S) , then $G[C \cup S]$ is a separable p-component with bipartition (C, S) .

Theorem 4. [Primeval Decomposition [4]] *If G is a $(q, q - 4)$ -graph, then one of the following holds:*

- (a) G is the disjoint union or the join of two $(q, q - 4)$ -graphs;
- (b) G is a spider (R, C, S) and $G[R]$ is a $(q, q - 4)$ -graph;
- (c) G contains a separable p-component H with $|V(H)| < q$ and bipartition (H_1, H_2) , such that $G - H$ is a $(q, q - 4)$ -graph and every vertex of $G - H$ is adjacent to every vertex of H_1 and non-adjacent to every vertex of H_2 ; or
- (d) G has at most q vertices or $V(G) = \emptyset$.

As a consequence, a $(q, q - 4)$ -graph G can be decomposed by successively applying Theorem 4 as follows: If (a) holds, apply the theorem to each component of G or \overline{G} . If (b) holds, apply the theorem to $G[R]$. Finally, if (c) holds, then apply the theorem to $G - H$. This decomposition can be obtained in linear time [6,24]. Once we have it, the spy game problem can be solved by composing the strategies of the parts obtained in each case (a)-(d).

We begin with unions and joins.

Lemma 5. *Let G_1 and G_2 be two graphs and let $s \geq 2$ and $d \geq 0$. Then*

$$gn_{s,d}(G_1 \cup G_2) = \max\{gn_{s,d}(G_1), gn_{s,d}(G_2)\}.$$

Moreover,

$$gn_{s,d}(G_1 + G_2) = \begin{cases} 1, & \text{if } d \geq 1 \text{ or } G_1 \text{ and } G_2 \text{ are complete,} \\ 2, & \text{otherwise.} \end{cases}$$

Proof. In $G_1 \cup G_2$, since the spy is the first to move, she chooses one of the graphs G_1 or G_2 and then all guards will be placed in the same graph. Thus $gn_{s,d}(G_1 \cup G_2) = \max\{gn_{s,d}(G_1), gn_{s,d}(G_2)\}$.

In $G_1 + G_2$, if $d \geq 1$, then one guard is sufficient to control the spy: if the spy is in G_1 (resp. G_2), the guard goes to G_2 (resp. G_1). If $d = 0$ and G_1 and G_2 are complete graphs, then $G_1 + G_2$ is also a complete graph and consequently one guard is sufficient: just go to the same vertex of the spy in each turn.

Now assume that $d = 0$ and w.l.g. G_1 is not complete. Let v_1 and v_2 be two non-adjacent vertices of G_1 . Then, in the game on $G = G_1 + G_2$, the spy can go from v_1 to v_2 in one step passing through a vertex of G_2 and one guard cannot keep up her (recall that $d = 0$). Then two guards are necessary. Moreover, this is sufficient: just maintain in each round one guard in the same vertex of the spy and the second guard in the other graph: G_1 (resp. G_2) if the spy is in G_2 (resp. G_1). \square

The next lemma determines the guard number on spiders.

Lemma 6. *Let G be a spider (R, C, S) . If $d \geq 1$, then $gn_{s,d}(G) = 1$. Moreover, if G is a thin spider, then*

$$gn_{s,0}(G) = \begin{cases} |C|, & \text{if } R = \emptyset, \\ |C| + 1, & \text{otherwise,} \end{cases}$$

and, if G is a thick spider, then

$$gn_{s,0}(G) = \begin{cases} 2, & \text{if } R = \emptyset, \\ 3, & \text{otherwise,} \end{cases}$$

Proof. From the definition of spider, every vertex of G has a neighbor in the clique C . Thus, if $d \geq 1$, one guard in C is sufficient: just move to a vertex also in C at distance 1 from the spy. From now on, consider surveillance distance $d = 0$.

Assume G is a thin spider. Since the spy can move in one step from a vertex of C (or R if $R \neq \emptyset$) to any vertex of S , then each vertex of S must have a distinct guard in its closed neighborhood before the spy's move. Thus, $|C| = |S|$ guards are necessary if $R = \emptyset$ and $|C| + 1$ guards are necessary if $R \neq \emptyset$. Moreover, if $R = \emptyset$, $|C|$ guards are sufficient: just maintain one guard controlling each vertex of C in its only neighbor in S . Finally, if $R \neq \emptyset$, $|C| + 1$ guards are sufficient: just maintain in all rounds every vertex of C with a guard and one guard in the same vertex of the spy. This is possible since all vertices of G has a neighbor in C .

Now assume G is a thick spider. Since the spy can move in one step from a vertex of C (or R if $R \neq \emptyset$) to any vertex of S , then each vertex of S must have a guard in its closed neighborhood before the spy's move. Thus, since every vertex of C has a non-neighbor in S , 2 guards are necessary if $R = \emptyset$ and 3 guards are necessary if $R \neq \emptyset$. Moreover, if $R = \emptyset$, 2 guards are sufficient: if the spy is in S , one guard goes to the same vertex of the spy and other guard to the only non-neighbor in C , since it dominates all other vertices of S ; if the spy is in C , both guards go to C . Finally, if $R \neq \emptyset$, 3 guards are sufficient: just maintain in all rounds two guards in distinct vertices of C and one guard in the same vertex of the spy. This is possible since any two distinct vertices of C dominates all vertices of G . \square

The next lemma determines the guard number on separable p -components.

Lemma 7. *Let G be a graph with a separable p -component H with $|V(H)| < q$ and bipartition (H_1, H_2) of H such that any vertex of $G - H$ is adjacent to every vertex of H_1 and non-adjacent to every vertex of H_2 . Then, for any $s \geq 2$ and $d \geq 0$, $gn_{s,d}(G) = gn_{s,d}(G_R) \leq q$, where G_R is the (reduced) graph obtained from G by replacing $G - H$ by two adjacent or non-adjacent vertices, depending whether $G - H$ is complete or not, respectively.*

Proof. Let v_1 and v_2 be the vertices which replaced $G - H$ in order to build G_R .

For any game on G , we can simulate it on G_R . For this, if a player (spy or guard) goes to H in the game on G , it goes to the same vertex of H in the game on G_R ; if a player goes to $G - H$ from a vertex not in $G - H$ in the game on G , it goes to v_1 or v_2 in the game on G_R (preferring the same vertex of the spy, if she is in $\{v_1, v_2\}$ in the game on G_R); if a player moves from a vertex of $G - H$ to a neighbor in $G - H$ in the game on G , it maintain the position in the game on G_R ; if the spy moves from a vertex of $G - H$ to a non-adjacent vertex of $G - H$ in the game on G , she goes from v_1 to v_2 or from v_2 to v_1 in the game on G_R .

On the other hand, for any game on G_R , we can simulate it on G . For this, if $G - H$ is not complete, let u_1 and u_2 be two non-adjacent vertices of $G - H$; otherwise, let u_1 and u_2 be vertices of $G - H$ (u_1 and u_2 may be the same vertex if $G - H$ has only one vertex). If a player (spy or guard) goes to H in the game on G_R , it goes to the same vertex of H in the game on G ; if a player goes to v_1 (resp. v_2) from a vertex not in $\{v_1, v_2\}$ in the game on G_R , it goes to u_1 (resp. u_2) in the game on G ; if a player moves from v_1 to v_2 (resp. v_2 to v_1) in the game on G_R , it goes from u_1 to u_2 (resp. u_2 to u_1) in the game on G .

With this, if the spy wins in G , she also wins in G_R . Moreover, if the guards win in G , it is easy to adapt the guards' strategy described above in G_R to guarantee a win in G_R . Therefore, there is a winning strategy in G for any winning strategy in G_R , and vice-versa, and we are done. \square

Theorem 5. *The spy game decision problem is FPT on the P_4 -fewness $q(G)$ of the graph G , with time $O(m + q^{3q+3} \cdot n)$, where $q = q(G)$ and m and n are the number of edges and vertices of G , respectively.*

Proof. From the primeval decomposition of $(q, q - 4)$ -graphs, Lemmas 5, 6 and 7 and the XP algorithm of Theorem 3 applied in the reduced graph G_R of Lemma 7 or in G itself when it has at most q vertices. \square

However, despite these positive results, it was proved in [15] that the spy game decision problem is W[2]-hard in general graphs when parameterized by the number k of guards. In the next section, we extend this hardness result to bipartite graphs for any speed $s \geq 2$ and surveilling distance $d \geq 0$.

5 Spy game is W[2]-hard in bipartite graphs

In this section, we prove that the spy game decision problem with speed s and distance d is W[2]-hard for any $s \geq 2$ and $d \geq 0$ even in bipartite graphs, when parameterized by the number k of guards.

As mentioned in the introduction, we obtain an FPT-reduction from the Set Cover problem (parameterized by the size of the solution) structurally similar to the reduction of [15] for general graphs. However, it turns out that the extension to bipartite graphs brings much more technical difficulties to the reduction and the constructed bipartite graph is significantly different from the one of [15]. In the reduction of [15], the constructed graph is highly non-bipartite: there is a very large clique (representing the sets in the Set Cover problem), which is the main place for the guards. With this, in one time step, any guard can replace the main position of the guard who is surveilling the spy. This is an important recurrent argument in the proof of [15], since a fast spy could force some guard to abandon his main position and later run to a vertex that should be surveilled by this guard. By removing the edges of this main clique in the reduction of [15], we obtain a bipartite graph. However, with this, a guard may help other guard in two time steps only, favoring the spy. Also increasing the number of guards favors the guards in some cases and the balance is not always easy to maintain. This brings some tricky timing issues, which are solved in the following theorem by dividing the problem in six cases and changing significant parts of the reduction of [15].

Theorem 6. *Let $s \geq 2$, $d \geq 0$ and $k \geq 1$ be fixed. The (s, d) -spy game decision problem with k guards is NP-hard and W[2]-hard (parameterized by the number k of guards). Moreover, the (s, d) -spy game problem of minimizing the number of guards is Log-APX-hard and $(1 - \varepsilon) \ln n$ -inapproximable in polynomial time for any constant $0 < \varepsilon < 1$, unless $P=NP$.*

The proof of the theorem obtains a reduction from the SET COVER Problem and is divided in six lemmas regarding the relation between s and d , where $r = r(s, d) = d \bmod (s - 1)$ is the remainder of the division of d by $s - 1$:

- **Case 1:** $s > 2d + 2$
- **Case 2:** $s = 2d + 2$
- **Case 3:** $d + 1 < s < 2d + 2$
- **Case 4:** $s \leq d + 1$ and $s < 2(r + 1)$
- **Case 5:** $s \leq d + 1$ and $s = 2(r + 1)$
- **Case 6:** $s \leq d + 1$ and $s > 2(r + 1)$

An instance of the SET COVER Problem is a family $\mathcal{S} = \{S_1, \dots, S_m\}$ of sets and an integer c , and the objective is to decide if there exists a subfamily $\mathcal{C} = \{S_{i_1}, \dots, S_{i_c}\} \subseteq \mathcal{S}$ such that $|\mathcal{C}| \leq c$ and $S_{i_1} \cup \dots \cup S_{i_c} = U$, where $U = S_1 \cup \dots \cup S_m$ (we say that \mathcal{C} is a set cover of U). Given an instance (\mathcal{S}, c) of Set Cover, we construct a graph $G = G_{s,d}(\mathcal{S}, c)$ and an integer $K = K_{s,d}(\mathcal{S}, c)$ such that there exists a cover $\mathcal{C} \subseteq \mathcal{S}$ of U with size at most c if and only if $g_{s,d}(G) \leq K$. Note that the reductions presented below are actually FPT-reductions and preserve approximation ratio. Therefore, since the SET COVER Problem is W[2]-hard (when parameterized by the size c of the set cover) and has no $(1 - \varepsilon) \ln(n)$ approximation polynomial algorithm for any constant $0 < \varepsilon < 1$ (unless $P=NP$) [3,28], we not only prove the NP-hardness but also the fact that the problem is W[2]-hard (when parameterized by the number of guards) and cannot be approximated in polynomial time up to some logarithmic ratio (unless $P = NP$).

Definition 2. Given $s \geq 2$ and $d \geq 0$, let $p = p(s, d) = d + \left\lceil \frac{d+1}{s-1} \right\rceil$ and

$$q(s, d) = \begin{cases} d+1, & \text{if Case 1,} \\ d, & \text{if Case 2,} \\ 0, & \text{if Case 3,} \\ 0, & \text{if Case 4,} \\ p-1, & \text{if Case 5,} \\ p, & \text{if Case 6} \end{cases}$$

Let (\mathcal{S}, c) an instance of Set Cover, where $\mathcal{S} = \{S_1, \dots, S_m\}$, and let $U = S_1 \cup \dots \cup S_m = \{u_1, \dots, u_n\}$. Let the number $K = K_{s,d}(\mathcal{S}, c)$ of guards be

$$K_{s,d}(\mathcal{S}, c) = \begin{cases} c+2, & \text{if Case 1,} \\ c+2, & \text{if Case 2,} \\ c, & \text{if Case 3,} \\ c, & \text{if Case 4,} \\ c+2, & \text{if Case 5,} \\ c+2, & \text{if Case 6} \end{cases}$$

Let $G = G_{s,d}(\mathcal{S}, c)$ be defined as follows: for every set $S_j \in \mathcal{S}$, create a new vertex S_j in G and, for every element $u_i \in U$, create a path U_i with p vertices $u_{i,1}, \dots, u_{i,p}$. If $u_i \in S_j$, add the edge $u_{i,1}S_j$ in G . Create a new vertex z_0 and add all possible edges between z_0 and $\{S_1, \dots, S_m\}$ in G . Finally, if it is not Case 3 or 4, create two paths $Z = (z_1, \dots, z_q)$ and $Z' = (z'_1, \dots, z'_{q'})$ and add the edges z_0z_1 and $z_0z'_1$, where $q' = p$ if Case 1 or 6; otherwise, $q' = p+1$.

See Figures 4-9 for examples. In the figures, the main position of the spy is indicated with an asterisk (*) and the main positions of the guards are indicated with a big dot (●). Let Z and Z' be the set of vertices of G of the form z_t and z'_t , respectively. Also recall that, given $1 \leq i \leq n$, $U_i = \{u_{i,1}, \dots, u_{i,p}\}$.

An important result from [15], which is used in the following lemmas, is stated below. As pointed out in [15], the converse of Proposition 1 is not necessarily true.

Proposition 1 ([15]). *If k guards win (by controlling the spy after a finite number of turns) in the variant of the spy game in which the spy is placed after the k guards, then k guards also win in the normal spy game.*

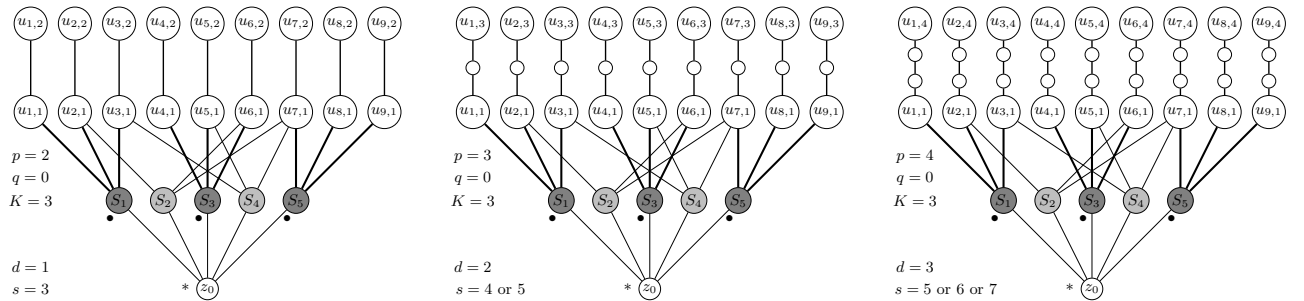


Fig. 4. Case 3 ($d+1 < s < 2d+2$). Reduction from Set Cover instance (\mathcal{S}, c) in Lemma 8 proof, where $c = 3$, $S_1 = \{1, 2, 3\}$, $S_2 = \{2, 6, 7\}$, $S_3 = \{4, 5, 6\}$, $S_4 = \{3, 5, 7\}$, $S_5 = \{7, 8, 9\}$ and $U = \{1, 2, 3, 4, 5, 6, 7, 8, 9\}$.

Let us begin with the easiest case (Case 3).

Lemma 8. *Given a graph G and an integer $K > 0$, deciding if $g_{s,d}(G) \leq K$ is NP-hard for every $s \geq 2$ and $d \geq 1$ satisfying Case 3 ($d + 1 < s < 2d + 2$).*

Proof. Reduction from SET COVER. Let (\mathcal{S}, c) be an instance of Set Cover. Recall Definition 2 and let $p = p(s, d) = d + 1$, $q = q(s, d) = 0$, $G = G_{s,d}(\mathcal{S}, c)$ and $K = K_{s,d}(\mathcal{S}, c) = c$.

First, suppose that there is no cover \mathcal{C} of U with at most c sets in \mathcal{S} . We prove that the spy wins in one step against at most $K = c$ guards, starting in z_0 . Indeed, since there are at most c guards and there is no cover of U with c sets in \mathcal{S} , then there exists some $1 \leq i \leq n$ such that there is no guard in $N[U_i]$. Thus, the spy goes to $u_{i,p}$ in one step (note that the distance from z_0 to $u_{i,p}$ is $p + 1 = d + 2 \leq s$). During the guards' step, no guard can reach a vertex of U_i , and so the spy remains at distance at least d from all guards, winning the game.

Now, suppose that there is a cover $\mathcal{C} = \{S_{j_1}, \dots, S_{j_c}\}$ of U with c sets in \mathcal{S} . For simplification, we use Proposition 1 to prove that c guards win if they are placed first. The strategy of the guards is as follows. Occupy initially the vertices S_{j_1}, \dots, S_{j_c} . Since \mathcal{C} is a cover of U , we can define for any element $u_i \in U$ an index $c(i)$ such that $u_i \in S_{c(i)} \in \mathcal{C}$. If the spy is not in $\{u_{1,p}, \dots, u_{n,p}\}$, then the guards occupy the initial vertices, controlling the spy. If the spy is in a vertex $u_{i,p}$, then the guard occupying $S_{c(i)}$ goes to $u_{i,1}$, controlling the spy since $p - 1 \leq d$. Moreover, since $s < 2d + 2$, the spy cannot go in one step from $u_{i,p}$ to other vertex $u_{j,p}$ with $j \neq i$. Thus, if the spy leaves $u_{i,p}$, the guards reoccupy the initial vertices. With this strategy, the guards win the game. \square

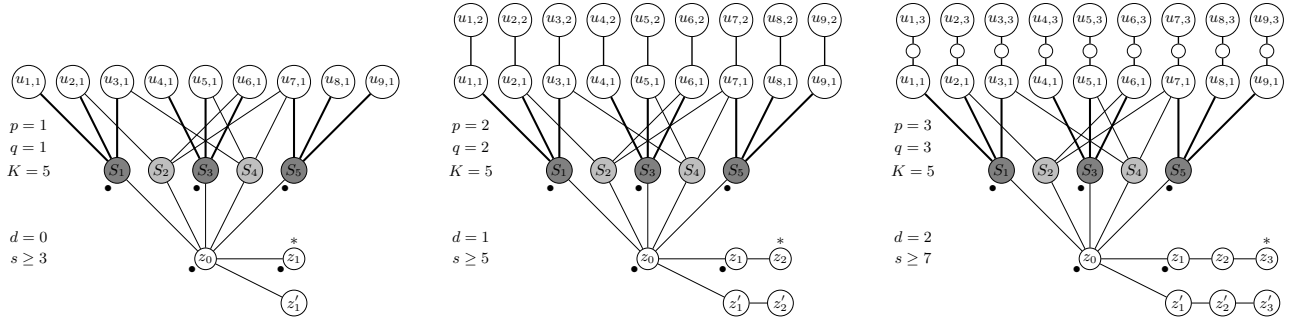


Fig. 5. Case 1 ($s \geq 2d + 3$). Reduction for Figure 4 Set Cover instance in Lemma 9 proof.

Lemma 9. *Given a graph G and an integer K , deciding if $g_{s,d}(G) \leq K$ is NP-hard for every $s \geq 2$ and $d \geq 0$ satisfying Case 1 ($s \geq 2d + 3$).*

Proof. Reduction from SET COVER. Let (\mathcal{S}, c) be an instance of Set Cover. Recall Definition 2 and let $p = p(s, d) = d + 1$, $q = q(s, d) = d + 1$, $G = G_{s,d}(\mathcal{S}, c)$ and $K = K_{s,d}(\mathcal{S}, c) = c + 2$.

First, suppose that there is no cover \mathcal{C} of U with at most c sets in \mathcal{S} . We prove that the spy wins in one step against at most $c + 2$ guards, starting in z_q . Indeed, if initially no guard occupies a vertex in $\{z_1, \dots, z_q\}$, then the spy wins immediately. Thus, we may assume w.l.g that there is a guard in z_1 . Again, if there is no guard in $\{z_0, z'_1, \dots, z'_q\}$, the spy can go to z'_q , winning the game. Thus, we may assume w.l.g that there is another guard in z_0 . Since there are $c + 2$ guards, then there is at most c guards outside $\{z_0, z_1, z'_1, \dots, z_q, z'_q\}$. Since there is no cover of U with c sets in \mathcal{S} , then there exists some $1 \leq i \leq n$ such that there is no guard in $N[U_i]$. Thus, the spy can go to $u_{i,p}$ in one step (since the distance from z_q to $u_{i,p}$ is $p + q + 1 = 2d + 3 \leq s$) and wins since no guard can reach the vertex in $u_{i,1}$.

Now, suppose that there is a cover $\mathcal{C} = \{S_{j_1}, \dots, S_{j_c}\}$ of U with c sets in \mathcal{S} . As before, we use Proposition 1 to prove that $c + 2$ guards win if they are placed first. The strategy of the guards is as follows. Occupy initially the vertices $z_0, z_0, S_{j_1}, \dots, S_{j_c}$ (two guards in z_0). Since \mathcal{C} is a cover of U , we can define for any element $u_i \in U$

an index $c(i)$ such that $u_i \in S_{c(i)} \in \mathcal{C}$. If the spy occupies a vertex not in $\{z_q, z'_q, u_{1,p}, \dots, u_{n,p}\}$, then the guards keep their initial positions, controlling the spy. If the spy occupies z_q or z'_q , then a guard in z_0 goes to z_1 or z'_1 , respectively, controlling the spy. If the spy occupies the vertex $u_{i,p}$, then the guard in $S_{c(i)}$ goes to $u_{i,1}$ (controlling the spy) and a guard in z_0 goes to $S_{c(i)}$. If the spy leaves $u_{i,p}$ and occupies a vertex $u_{j,p}$ with $c(i) = c(j)$, then the guard in $S_{c(i)}$ goes to $u_{j,1}$ (controlling the spy) and the guard in $u_{i,1}$ goes to $S_{c(i)}$. If the spy leaves $u_{i,p}$ and occupies a vertex $u_{j,p}$ with $c(i) \neq c(j)$, then the guard occupying $S_{c(j)}$ goes to $u_{j,1}$ (controlling the spy), the guard in z_0 goes to $S_{c(j)}$, the guard in $S_{c(i)}$ goes to z_0 and the guard in $u_{i,1}$ goes to $S_{c(i)}$. If the spy leaves $u_{j,p}$ to some vertex not in $\{z_q, z'_q, u_{1,p}, \dots, u_{n,p}\}$, then the guards reoccupy the initial vertices: the guard in $S_{c(j)}$ goes to z_0 and the guard in $u_{j,1}$ goes to $S_{c(j)}$. With this strategy, the guards win the game. \square

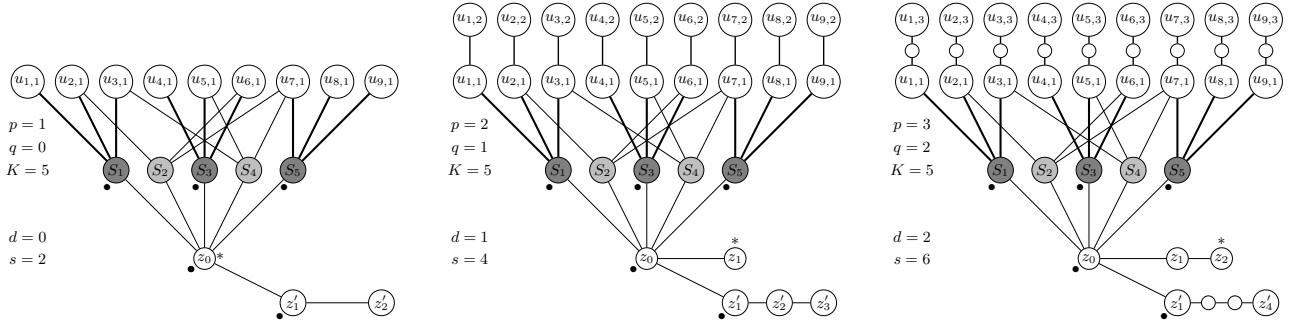


Fig. 6. Case 2 ($s = 2d + 2$). Reduction for Figure 4 Set Cover instance in Lemma 10 proof.

Lemma 10. *Given a graph G and an integer K , deciding if $g_{s,d}(G) \leq K$ is NP-hard for every $s \geq 2$ and $d \geq 0$ satisfying Case 2 ($s = 2d + 2$).*

Proof. Reduction from SET COVER. Let (\mathcal{S}, c) be an instance of Set Cover. Recall Definition 2 and let $p = p(s, d) = d + 1$, $q = q(s, d) = d$, $q' = d + 2$, $G = G_{s,d}(\mathcal{S}, c)$ and $K = K_{s,d}(\mathcal{S}, c) = c + 2$.

First, suppose that there is no cover \mathcal{C} of U with at most c sets in \mathcal{S} . We prove that the spy wins in one step against at most $c + 2$ guards, starting in z_d . We may assume w.l.g that there is a guard in z_0 (otherwise the spy wins immediately). Moreover, since the spy can go in one step to z'_{d+2} (recall that $s = 2d + 2 = p + q$), we may assume w.l.g that there is another guard in z'_1 (otherwise the spy wins in the next step). Since there are $c + 2$ guards, then there is at most c guards outside $\{z_0, z_1, z'_1, \dots\}$. Since there is no cover of U with c sets in \mathcal{S} , then there exists some $1 \leq i \leq n$ such that there is no guard in $N[U_i]$. Thus, the spy goes from z_d to $u_{i,p}$ in one step (note that the distance from z_d to $u_{i,p}$ is $p + q + 1 = 2d + 2 = s$) and wins since no guard can reach a vertex in U_i .

Now, suppose that there is a cover $\mathcal{C} = \{S_{j_1}, \dots, S_{j_c}\}$ of U with c sets in \mathcal{S} . As before, we use Proposition 1 to prove that $c + 2$ guards win if they are placed first. The strategy of the guards is as follows. Occupy initially the vertices $z_0, z'_1, S_{j_1}, \dots, S_{j_c}$. Since \mathcal{C} is a cover of U , we can define for any element $u_i \in U$ an index $c(i)$ such that $u_i \in S_{c(i)} \in \mathcal{C}$. If the spy occupies a vertex not in $\{u_{1,p}, \dots, u_{n,p}\}$, then the guards keep their initial positions, controlling the spy. If the spy is in $u_{i,p}$, then the guard in $S_{c(i)}$ goes to $u_{i,1}$ (controlling the spy), the guard in z_0 goes to $S_{c(i)}$ and the guard in z'_1 goes to z_0 . If the spy leaves $u_{i,p}$ and goes to a vertex $u_{j,p}$ with $c(i) = c(j)$, then the guard in $S_{c(i)}$ goes to $u_{j,1}$ (controlling the spy) and the guard in $u_{i,1}$ goes to $S_{c(i)}$. If the spy leaves $u_{i,p}$ and goes to a vertex $u_{j,p}$ with $c(i) \neq c(j)$, then the guard in $S_{c(j)}$ goes to $u_{j,1}$ (controlling the spy), the guard in z_0 goes to $S_{c(j)}$, the guard in $S_{c(i)}$ goes to z_0 and the guard in $u_{i,1}$ goes to $S_{c(i)}$. If the spy leaves $u_{j,p}$ to a vertex not in $\{u_{1,p}, \dots, u_{n,p}\}$, then the guards reoccupy the initial vertices: the guard in z_0 goes to z'_1 , the guard in $S_{c(j)}$ goes to z_0 and the guard in $u_{j,1}$ goes to $S_{c(j)}$. With this strategy, the guards win the game. \square

Now consider the case $2 \leq s \leq d + 1$. The next proposition from [15] will be very useful in the proofs.

Proposition 2 ([15]). *Let $s \geq 2$ and $d \geq 1$ satisfying $s \leq d + 1$. Let $p = d + \lceil \frac{d+1}{s-1} \rceil$ and $r = d \bmod (s-1)$. Let $P = (u_{-1}, u_0, u_1, \dots, u_p)$ be a path graph and consider one guard playing the game on P against a spy, which is the first to move, with speed s and surveillance distance d .*

- (a) *if the guard starts in u_{-1} , he always loses;*
- (b) *if the guard starts in u_0 , the spy wins if and only if she starts in u_i with $i \geq r + 1$.*

In the following lemmas, we use the notations $U_{i,>j} = \{u_{i,t} \in U_i : t > j\}$ and $U_{i,\leq j} = \{u_{i,t} \in U_i : t \leq j\}$, given positive integers i and j . Define analogously $Z_{\leq j}$, $Z_{>j}$, $Z'_{\leq j}$ and $Z'_{>j}$.

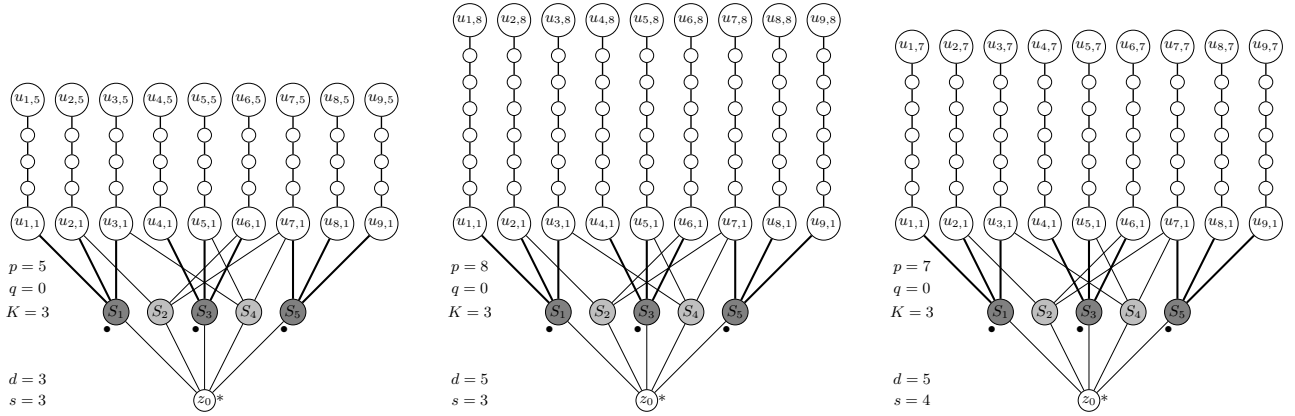


Fig. 7. Case 4 ($s \leq d + 1$ and $s < 2r + 2$). Reduction for Figure 4 Set Cover instance in Lemma 11 proof.

Lemma 11. *Given a graph G and an integer $K > 0$, deciding if $g_{s,d}(G) \leq K$ is NP-hard for every $s \geq 2$ and $d \geq 1$ satisfying Case 4 ($s \leq d + 1$ and $s < 2r + 2$), where $r = d \bmod (s - 1)$).*

Proof. Reduction from SET COVER. Let (\mathcal{S}, c) be an instance of Set Cover. Recall Definition 2 and let $p = p(s, d) = d + \lceil \frac{d+1}{s-1} \rceil$, $q = q(s, d) = 0$, $G = G_{s,d}(\mathcal{S}, c)$ and $K = K_{s,d}(\mathcal{S}, c) = c$.

First, suppose that there is no cover \mathcal{C} of U with at most c sets in \mathcal{S} . We prove that the spy wins against at most c guards, starting in z_0 . Indeed, since there are at most c guards and there is no cover of U with c sets in \mathcal{S} , then there exists some $1 \leq i \leq n$ such that there is no guard in $N[U_i]$. Thus, from Proposition 2(a), the spy can go to $u_{i,p}$, winning the game in the path $S_{c(i)} - u_{i,1} - \dots - u_{i,p}$.

Now, suppose that there is a cover $\mathcal{C} = \{S_{j_1}, \dots, S_{j_c}\}$ of U with c sets in \mathcal{S} . As before, we use Proposition 1 to prove that c guards win if they are placed first. The strategy of the guards is as follows. Occupy initially the vertices S_{j_1}, \dots, S_{j_c} . Since \mathcal{C} is a cover of U , we can define for any element $u_i \in U$ an index $c(i)$ such that $u_i \in S_{c(i)} \in \mathcal{C}$. If the spy is in a vertex of $U_{i,\leq r}$ for some i , then the guards occupy the initial vertices, controlling the spy from Proposition 2(b). If the spy moved to a vertex of $U_{i,>r}$ from a vertex not in $U_{i,>r}$, then the guard in $S_{c(i)}$ goes to $u_{i,1}$, controlling the spy in the path $u_{i,1} - \dots - u_{i,p}$ from Proposition 2(b). Moreover, since $s < 2(r + 1)$, the spy cannot go in one step from a vertex of $U_{i,>r}$ to a vertex of $U_{j,>r}$ with $i \neq j$. Then, if the spy leaves $U_{i,>r}$, then the guards reoccupy the initial vertices: the guard in $u_{i,1}$ goes to $S_{c(i)}$. With this strategy, the guards win the game. \square

Lemma 12. *Given a graph G and an integer $K > 0$, deciding if $g_{s,d}(G) \leq K$ is NP-hard for every $s \geq 2$ and $d \geq 1$ satisfying Case 6 ($s \leq d + 1$ and $s > 2r + 2$, where $r = d \bmod (s - 1)$).*

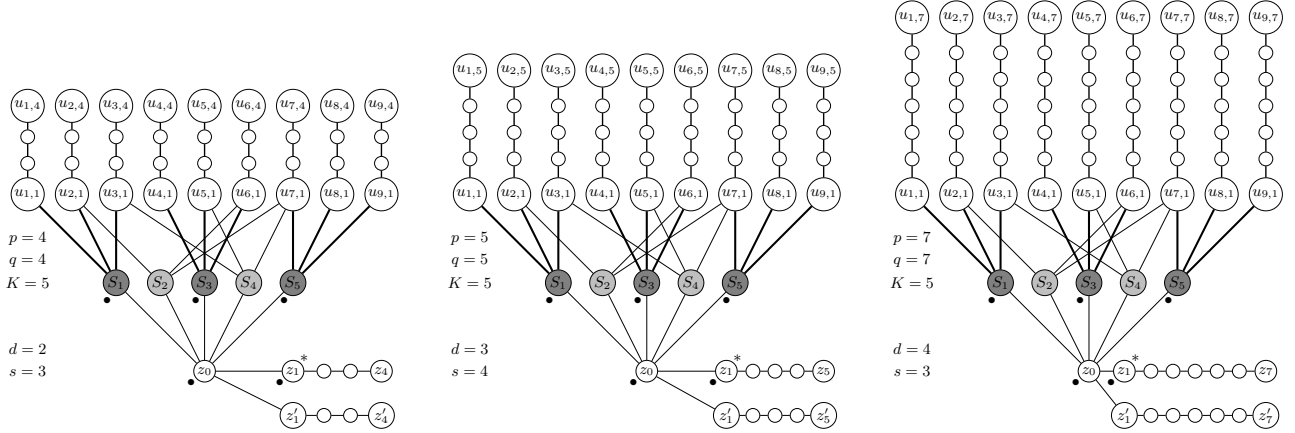


Fig. 8. Case 6 ($s \leq d + 1$ and $s > 2r + 2$). Reduction for Figure 4 Set Cover instance in Lemma 12 proof.

Proof. Reduction from SET COVER. Let (\mathcal{S}, c) be an instance of Set Cover. Recall Definition 2 and let $p = p(s, d) = d + \lceil \frac{d+1}{s-1} \rceil$, $q = q(s, d) = p$, $G = G_{s,d}(\mathcal{S}, c)$ and $K = K_{s,d}(\mathcal{S}, c) = c + 2$.

First, suppose that there is no cover \mathcal{C} of U with at most c sets in \mathcal{S} . We prove that the spy wins against at most $c + 2$ guards, starting in z_{r+1} . From Proposition 2(a) in the path $z_0 - z_q$, we may assume w.l.g. that there is a guard in z_1 . Moreover, since the spy can go to z'_{r+1} in one step, we may assume w.l.g. from Proposition 2(a) in the path $z_0 - z'_q$ that there is a guard in z_0 . Since there are $c + 2$ guards, then there is at most c guards outside $\{z_0, z_1, z'_1, \dots, z_q, z'_q\}$. Since there is no cover of U with c sets in \mathcal{S} , then there exists some $1 \leq i \leq n$ such that there is no guard in $N[U_i]$. Thus, in one step, the spy can go to $u_{i,r+1}$ (recall that $s \geq 2r + 3$), winning the game in the path $z_0 - S_{c(i)} - u_{i,1} - \dots - u_{i,p}$ from Proposition 2(b).

Now, suppose that there is a cover $\mathcal{C} = \{S_{j_1}, \dots, S_{j_c}\}$ of U with c sets in \mathcal{S} . As before, we use Proposition 1 to prove that $c + 2$ guards win if they are placed first. The strategy of the guards is as follows. Occupy initially the vertices $z_0, z_0, S_{j_1}, \dots, S_{j_c}$ (two guards in z_0). Since \mathcal{C} is a cover of U , we can define for any element $u_i \in U$ an index $c(i)$ such that $u_i \in S_{c(i)} \in \mathcal{C}$. If the spy is not in a vertex of $U_{i,>r}$, $Z_{>r}$ or $Z'_{>r}$, then the guards occupy the initial vertices, controlling the spy from Proposition 2(b). If the spy moved to a vertex of $U_{i,>r}$ from a vertex not in $U_{i,>r}$, then the guard in $S_{c(i)}$ goes to $u_{i,1}$ (controlling the spy in the path $u_{i,1} - \dots - u_{i,p}$ from Proposition 2(b)) and one guard occupying z_0 goes to $S_{c(i)}$. If the spy goes from a vertex of $U_{i,>r}$ to a vertex of $U_{j,>r}$ with $c(i) = c(j)$, then the guard in $S_{c(i)}$ goes to $u_{j,1}$ (controlling the spy) and the guard in $u_{i,1}$ goes to $S_{c(i)}$. If the spy goes from a vertex of $U_{i,>r}$ to a vertex of $U_{j,>r}$ with $c(i) \neq c(j)$, then the guard in $S_{c(j)}$ goes to $u_{j,1}$ (controlling the spy), the guard in z_0 goes to $S_{c(j)}$, the guard in $S_{c(i)}$ goes to z_0 and the guard in $u_{i,1}$ goes to $S_{c(i)}$. If the spy goes to $Z_{>r}$ from a vertex not in $Z_{>r}$, then the spy in z_0 goes to z_1 (controlling the spy), the spy in $S_{c(i)}$ goes to z_0 and the spy in $u_{i,1}$ goes to $S_{c(i)}$. Analogously to Z' . If the spy goes from $U_{i,>r}$ to $U_{j,\leq r}$ or $Z_{<r}$ for some j , then the guards occupy the initial configuration: the guard in $u_{i,1}$ goes to $S_{c(i)}$ and the guard in $S_{c(i)}$ goes to z_0 (two guards in z_0), controlling the spy from Proposition 2(a). With this strategy, the guards win the game. \square

Lemma 13. *Given a graph G and an integer K , deciding if $g_{s,d}(G) \leq K$ is NP-hard for every $s \geq 2$ and $d \geq 1$ satisfying Case 5 ($s \leq d + 1$ and $s = 2r + 2$, where $r = d \bmod (s - 1)$).*

Proof. Reduction from SET COVER. Let (\mathcal{S}, c) be an instance of Set Cover. Recall Definition 2 and let $p = p(s, d) = d + \lceil \frac{d+1}{s-1} \rceil$, $q = q(s, d) = d + \lceil \frac{d}{s-1} \rceil$, $G = G_{s,d}(\mathcal{S}, c)$ and $K = K_{s,d}(\mathcal{S}, c) = c + 1$.

First, suppose that there is no cover \mathcal{C} of U with at most c sets in \mathcal{S} . We prove that the spy wins in one step against at most $c + 2$ guards, starting in z_r . Indeed, from Proposition 2(b) on the path $z'_2 - z'_1 - z_0 - z_1 - \dots - z_{p-1}$, we may assume w.l.g. that there is one guard in z_0 . Moreover, since the spy can go in one step to z'_{r+2} (recall that $s = 2r + 2$), we may assume w.l.g. that there is another guard in z'_1 (otherwise the spy wins

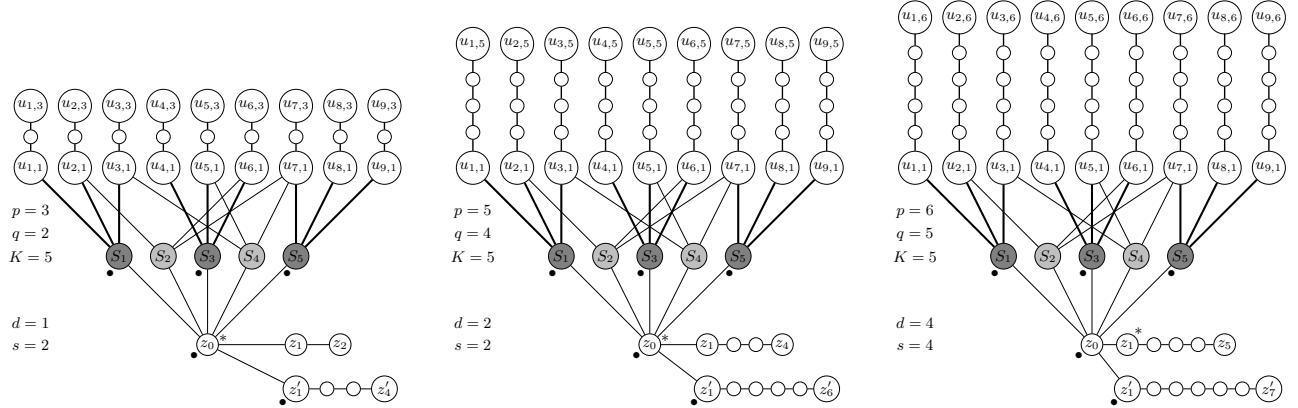


Fig. 9. Case 5 ($s \leq d + 1$ and $s = 2r + 2$). Reduction for Figure 4 Set Cover instance in Lemma 13 proof.

from Proposition 2(b)). Since there are $c + 2$ guards, then there is at most c guards outside $\{z_0, z_1, z'_1, \dots\}$. Since there is no cover of U with c sets in \mathcal{S} , then there exists some $1 \leq i \leq n$ such that there is no guard in $N[U_i]$. Thus, the spy goes from z_r to $u_{i,r+1}$ in one step (note that the distance is $r + (r + 1) + 1 = 2r + 2 = s$) and wins from Proposition 2(b) in the path $z_0 - S_{c(i)} - u_{i,1} - \dots - u_{i,p}$.

Now, suppose that there is a cover $\mathcal{C} = \{S_{j_1}, \dots, S_{j_c}\}$ of U with c sets in \mathcal{S} . As before, we use Proposition 1 to prove that $c + 2$ guards win if they are placed first. The strategy of the guards is as follows. Occupy initially the vertices $z_0, z'_1, S_{j_1}, \dots, S_{j_c}$. Since \mathcal{C} is a cover of U , we can define for any element $u_i \in U$ an index $c(i)$ such that $u_i \in S_{c(i)} \in \mathcal{C}$. If the spy is in a vertex of $U_{i, \leq r}$ for some i , $Z_{\leq r}$ or $Z'_{\leq r+1}$, then the guards occupy the initial vertices, controlling the spy from Proposition 2(b). If the spy moved to a vertex of $U_{i, > r}$ from a vertex not in $U_{i, > r}$, then the guard in $S_{c(i)}$ goes to $u_{i,1}$ (controlling the spy in the path $u_{i,1} - \dots - u_{i,p}$ from Proposition 2(b)), the guard in z_0 goes to $S_{c(i)}$ and the guard in z'_1 goes to z_0 . If the spy goes from $u_{i,r+1}$ to $u_{j,r+1}$ with $c(i) = c(j)$ (recall that $s = 2r + 2$), then the guard in $S_{c(i)}$ goes to $u_{j,1}$ (controlling the spy) and the guard in $u_{i,1}$ goes to $S_{c(i)}$. If the spy goes from $u_{i,r+1}$ to $u_{j,r+1}$ with $c(i) \neq c(j)$, then the guard in $S_{c(j)}$ goes to $u_{j,1}$ (controlling the spy), the guard in z_0 goes to $S_{c(j)}$, the guard in $S_{c(i)}$ goes to z_0 and the guard in $u_{i,1}$ goes to $S_{c(i)}$. Also notice that, if the spy is in a vertex of $U_{i, > r}$, the guard in z_0 controls the paths $z_0 - \dots - z_p$ and $z'_1 - \dots - z'_{p+2}$ from Proposition 2(b), since $s = 2r + 2$ and the spy cannot go from $u_{i,r+1}$ to z'_{p+2} . If the spy goes from a vertex of $U_{i, > r}$ to a vertex of $U_{j, \leq r}$, $Z_{\leq r}$ or $Z'_{\leq r+1}$, then the guards occupy the initial configuration: the guard in z_0 goes to z'_1 , the guard in $S_{c(i)}$ goes to z_0 and the guard in $u_{i,1}$ goes to $S_{c(i)}$. With this strategy, the guards win the game. \square

6 Acknowledgments

This research was supported by Funcap [4543945/2016] Pronem, CNPq [314031/2018-9] Produtividade, CNPq Universal [425297/2016-0] and [437841/2018-9], CAPES [88887.143992/2017-00] DAAD Probral and CAPES [88881.197438/2018-01] STIC AmSud.

References

1. Aigner, M., Fromme, M.: A game of cops and robbers. *Discrete Applied Mathematics* **8**, 1–12 (1984)
2. Alon, N., Mehrabian, A.: On a generalization of Meyniel's conjecture on the cops and robbers game. *The Electronic Journal of Combinatorics* **18**(1) (2011)
3. Alon, N., Moshkovitz, D., Safra, S.: Algorithmic construction of sets for k -restrictions. *ACM Transactions on Algorithms* **2**(2), 153–177 (2006)
4. Babel, L., Olariu, S.: On the structure of graphs with few P_4 's. *Discrete Applied Mathematics* **84**, 1–13 (1998)

5. Balister, P., Bollobás, B., Narayanan, B., Shaw, A.: Catching a fast robber on the grid. *Journal of Combinatorial Theory, Series A* **152**, 341 – 352 (2017)
6. Baumann, S.: A linear algorithm for the homogeneous decomposition of graphs. Zentrum für Mathematik, Technische Universität München pp. Report No. M-9615 (1996)
7. Bonato, A., Chiniforooshan, E., Pralat, P.: Cops and robbers from a distance. *Theoretical Computer Science* **411**(43), 3834–3844 (2010)
8. Bonato, A., Nowakowski, R.: *The game of Cops and Robber on Graphs*. American Mathematical Society (2011)
9. Bouznif, M., Darlay, J., Moncel, J., Preissmann, M.: Exact values for three domination-like problems in circular and infinite grid graphs of small height. *Discrete Mathematics & Theoretical Computer Science* **Vol. 21 no. 3** (2019)
10. Campos, V., Klein, S., Sampaio, R., Silva, A.: Fixed-parameter algorithms for the cocoloring problem. *Discrete Applied Mathematics* **167**, 52–60 (2014)
11. Campos, V., Linhares-Sales, C., Sampaio, R., Maia, A.K.: Maximization coloring problems on graphs with few P_4 's. *Discrete Applied Math.* **164**, 539–546 (2014)
12. Campêlo, M., Huiban, C., Sampaio, R., Wakabayashi, Y.: Hardness and inapproximability of convex recoloring problems. *Theoret Comp Science* **533**, 15–25 (2014)
13. Chalopin, J., Chepoi, V., Nisse, N., Vaxès, Y.: Cop and robber games when the robber can hide and ride. *SIAM Journal on Discrete Math* **25**(1), 333–359 (2011)
14. Cohen, N., Hilaire, M., Martins, N.A., Nisse, N., Pérennes, S.: Spy-Game on Graphs. In: 8th International Conference on Fun with Algorithms (FUN 2016). Leibniz Intern. Proc. in Informatics (LIPIcs), vol. 49, pp. 10:1–10:16 (2016)
15. Cohen, N., Martins, N.A., Mc Inerney, F., Nisse, N., Pérennes, S., Sampaio, R.M.: Spy-game on graphs: Complexity and simple topologies. *Theoretical Computer Science* **725**, 1 – 15 (2018)
16. Cohen, N., Mc Inerney, F., Nisse, N., Pérennes, S.: Study of a combinatorial game in graphs through linear programming. *Algorithmica* **82**, 212 – 244 (2020)
17. Dantas, R., Havet, F., Sampaio, R.M.: Minimum density of identifying codes of king grids. *Discrete Mathematics* **341**(10), 2708–2719 (2018)
18. Fomin, F.V., Golovach, P.A., Kratochvíl, J., Nisse, N., Suchan, K.: Pursuing a fast robber on a graph. *Theoretical Computer Science* **411**(7-9), 1167–1181 (2010)
19. Fomin, F.V., Golovach, P.A., Lokshtanov, D.: Cops and robber game without recharging. In: 12th Scandinavian Symp. and Workshops on Algorithm Theory (SWAT). LNCS, vol. 6139, pp. 273–284. Springer (2010)
20. Fomin, F., Golovach, P.A., Pralat, P.: Cops and robber with constraints. *SIAM Journal on Discrete Mathematics* **26**(2), 571–590 (2012)
21. Goddard, W., Hedetniemi, S., Hedetniemi, S.: Eternal security in graphs. *Journal of Combinatorial Mathematics and Combinatorial Computing* **52** (2005)
22. Goldwasser, J.L., Klostermeyer, W.: Tight bounds for eternal dominating sets in graphs. *Discrete Mathematics* **308**(12), 2589–2593 (2008)
23. Hammack, R., Imrich, W., Klavžar, S.: *Handbook of Product Graphs*. CRC Press (2011)
24. Jamison, B., Olariu, S.: A tree representation for P_4 -sparse graphs. *Discrete Applied Mathematics* **35**, 115–129 (1992)
25. Klostermeyer, W., MacGillivray, G.: Eternal dominating sets in graphs. *Journal of Combinatorial Mathematics and Combinatorial Computing* **68** (2009)
26. Klostermeyer, W., Mynhardt, C.: Graphs with equal eternal vertex cover and eternal domination numbers. *Discrete Mathematics* **311**(14), 1371–1379 (2011)
27. Linhares-Sales, C., Maia, A.K., Martins, N., Sampaio, R.: Restricted coloring problems on graphs with few P_4 's. *Annals of Operations Research* **217**, 385–397 (2014)
28. Moshkovitz, D.: The projection games conjecture and the np-hardness of $\ln n$ -approximating set-cover. *Theory of Computing* **11**(7), 221–235 (2015). <https://doi.org/10.4086/toc.2015.v011a007>
29. Nowakowski, R.J., Winkler, P.: Vertex-to-vertex pursuit in a graph. *Discrete Mathematics* **43**, 235–239 (1983)
30. Pelto, M.: Optimal $(r, \leq 3)$ -locating-dominating codes in the infinite king grid. *Discrete Applied Mathematics* **161**(16), 2597–2603 (2013)
31. Zermelo, E.: Über eine anwendung der mengenlehre auf die theorie des schachspiels. In: Proc. Fifth International Congr. Math. pp. 501–504 (1913)